



Source Water Assessment

A Hydrogeologic Susceptibility and Vulnerability Assessment for Anvik Water System Drinking Water System, Anvik, Alaska

PWSID # 280171.001

April 2004

DRINKING WATER PROTECTION PROGRAM REPORT 1153 Alaska Department of Environmental Conservation

Source Water Assessment for Anvik Water System Drinking Water System Anvik, Alaska

PWSID # 280171.001

DRINKING WATER PROTECTION PROGRAM REPORT 1153

The Drinking Water Protection Program (DWPP) is producing Source Water Assessments in compliance with the Safe Drinking Water Act Amendments of 1996. Each assessment includes a delineation of the source water area, an inventory of potential and existing contaminant sources that may impact the water, a risk ranking for each of these contaminants, and an evaluation of the potential vulnerability of these drinking water sources.

These assessments are intended to provide public water systems owners/operators, communities, and local governments with the best available information that may be used to protect the quality of their drinking water. The assessments combine information obtained from various sources, including the U.S. Environmental Protection Agency, Alaska Department of Environmental Conservation (ADEC), public water system owners/operators, and other public information sources. The results of this assessment are subject to change if additional data becomes available. It is anticipated this assessment will be updated every five years to reflect any changes in the vulnerability and/or susceptibility of public drinking water source. If you have any additional information that may affect the results of this assessment, please contact the Program Coordinator of DWPP, (907) 269-7521.

CONTENTS

EXECUTIVE SUMMARY1 PUBLIC DRINKING WATER SYSTEM1 DRINKING WATER PROTECTION AREA2	INVENTORY OF POTENTIAL AND EXISTING CONTAMINANT SOURCES
TABL	LES
Table 1. Definition of Zones	3
APPENI	DICES
APPENDIX A. Anvik Water System Drinking Water	Protection Area (Map A)
Bacteria and Viruses (Table 2) Contaminant Source Inventory and Ri Nitrates/Nitrites (Table 3) Contaminant Source Inventory and Ri Volatile Organic Chemicals (Table 4) Contaminant Source Inventory and Ri Heavy Metals, Cyanide and Other Ino Contaminant Source Inventory and Ri Synthetic Organic Chemicals (Table 6)	isk Ranking for Anvik Water System – organic Chemicals (Table 5) isk Ranking for Anvik Water System –
C. Anvik Water System Drinking Water and Existing Contaminant Source	
D. Vulnerability Analysis for Contamina System Public Drinking Water Source	ant Source Inventory and Risk Ranking for Anvik Water e (Charts 1 – 14)

Source Water Assessment for Anvik Water System Source of Public Drinking Water, Anvik, Alaska

Drinking Water Protection Program Alaska Department of Environmental Conservation

EXECUTIVE SUMMARY

The Anvik Water System has one Public Water System (PWS) well. The well (PWS No. 280171.001) has been used as a drinking water source since it was drilled in 1985.

The well is a Class A (community and non-transient non-community) water system located on the northwest side of Hawk Bluff in Anvik, Alaska. Available records indicate that there is no secondary storage of drinking water, other than the pressure tank, and that the drinking water source is treated with calcium hypochlorite. This system operates year round and serves approximately 96 residents through three service connections. The wellhead received a susceptibility rating of **Very High** and the aquifer received a susceptibility rating of **Medium**. Combining these two ratings produce a **High** rating for the natural susceptibility of the well.

Identified potential and current sources of contaminants for the public drinking water source include: Laundromats, motor/motor vehicle repair shops, aboveground fuel tanks, a petroleum product bulk station/terminal, an airport, a pipeline, and a landfill. These identified potential and existing sources of contamination are considered as sources of bacteria and viruses, nitrates and/or nitrites, volatile organic chemicals, heavy metals, cyanide and other inorganic chemicals, synthetic organic chemicals, and other organic chemicals contaminant categories.

Overall, the water well received a vulnerability rating of **Medium** for bacteria and viruses, a vulnerability rating of **High** for nitrates and nitrites, and synthetic organic chemicals, and a vulnerability rating of **Very High** for volatile organic chemicals, heavy metals, cyanide and other inorganic chemicals, and other organic chemicals.

PUBLIC DRINKING WATER SYSTEM

The Anvik Water System well is a Class A (community/non-transient/non-community) public water system. The system is located on the northwest side of Hawk Bluff in Anvik, Alaska (Sec. 32, T30N,

R58W, Seward Meridian; see Map A of Appendix A). Anvik is located in Interior Alaska on the Anvik River, west of the Yukon River. The community is 34 miles north of Holy Cross. The community has a population of 108 (ADCED, 2003). Average annual precipitation in Anvik is 21 inches, including approximately 110 inches of snowfall. Temperatures can be as extreme as -60 to 87°F.

The community of Anvik obtains most of their water supply from individual wells. Most households are served by the piped sewage collection system and the remaining households use honey buckets or outhouses (ADCED, 2003). Anvik receives electrical power from AVEC, a REA Cooperative. Power generating facilities are fueled by diesel. Refuse is collected by individuals and transported to the landfill (ADCED, 2003).

According to information supplied by ADEC for the Anvik Water System PWS, the depth of the primary water well is 60 feet below the ground surface. Based on available well construction details for a nearby well, it appears that the well is screened in a confined aquifer. The well is located within a floodplain.

Information acquired from a January 2003 sanitary survey for the public water system indicated that the land surface was sloped away from the well.

Generally, land surfaces that slope away from the wellhead promote surface water drainage, which reduces the potential of contaminant migration down the well casing annulus. The sanitary survey indicates that the well is grouted according to ADEC regulations. Proper grouting provides added protection against contaminants traveling along the well casing annulus and into source waters.

Soils information for the Anvik area is limited. Generally, the soils consist of sandy silt overlying sand and fine gravels. Anvik is located in an area that is considered a discontinuous permafrost zone and the permafrost masses are small, thin and generally isolated (U.S. Department of Health and Human Services, et. al. 1983).

DRINKING WATER PROTECTION AREA

In order to evaluate whether a drinking water source is at risk, we must first evaluate what are the most likely pathways for surface contamination to reach the groundwater. These areas are determined by looking at the characteristics of the soil, groundwater, aquifer, and well.

The most probable area for contamination to reach the drinking water well is the area that contributes water to the well, the groundwater recharge area. This area is designated as the drinking water protection area (DWPA). Because releases of contaminants within the protection area are most likely to impact the drinking water well, this area will serve as the focus for voluntary protection efforts. An analytical calculation was used to determine the size and shape of the DWPA for the Anvik Water System PWS. The input parameters describing the attributes of the aquifer in this calculation were adopted from Groundwater (Freeze and Cherry, 1979). Available geology and groundwater contours were also considered to take into account any uncertainties in groundwater flow and aquifer characteristics to arrive at a meaningful protection

The protection areas established for wells by the ADEC are usually separated into four zones, limited by the watershed. These zones correspond to differences in the time-of-travel (TOT) of the water moving through the aquifer to the well (Please refer to the Guidance Manual for Class A Public Water Systems for additional information).

The time of travel for contaminants within the water varies and is dependent on the physical and chemical characteristics of each contaminant. The following is a summary of the four protection area zones for wells and the calculated time -of-travel for each:

Table 1. Definition of Zones

Zone	Definition
A	¹ / ₄ the distance for the 2-yr. time -of-travel
В	Less than the 2 year time-of-travel
C	Less Than the 5 year time -of-travel
D	Less than the 10 year time -of-travel

The DWPA for the Anvik Water System PWS was determined using an analytical calculation and includes Zones A and D (See Map A of Appendix A).

INVENTORY OF POTENTIAL AND EXISTING CONTAMINANT SOURCES

The Drinking Water Protection Program has completed an inventory of potential and existing sources of contamination within the Anvik Water System DWPA. This inventory was completed through a search of agency records and other publicly available information. Potential sources of contamination to the drinking water aquifer include a wide range of categories and types. Potential drinking water contaminants are found within agricultural, residential, commercial, and industrial areas, but can also occur within areas that have little or no development.

For the basis of all Class A public water system assessments, six categories of drinking water contaminants were inventoried. They include:

- Bacteria and viruses,
- Nitrates and/or nitrites,
- Volatile organic chemicals,
- Heavy metals, cyanide and other inorganic chemicals,
- Synthetic organic chemicals,
- Other organic chemicals.

The sources are displayed on Map C of Appendix C and summarized in Table 1 of Appendix B.

RANKING OF CONTAMINANT RISKS

Once the potential and existing sources of contamination have been identified, they are assigned a ranking according to what type and level of risk they represent. Ranking of contaminant risks for a "potential" or "existing" source of contamination is a function of toxicity and volumes of specific contaminants associated with that source. Rankings include:

- Low.
- Medium,
- High, and
- Very High.

The time-of-travel for contaminants within the water varies and is dependent on the physical and chemical characteristics of each contaminant. Bacteria and Viruses are only inventoried in Zones A and B because of their short life span. Only "Very High" and "High" rankings are inventoried within the outer Zone D due to the probability of contaminant dilution by the time the contaminants get to the well.

Tables 2 through 4 in Appendix B contain the ranking of potential and existing sources of contamination with respect to bacteria and viruses, nitrates and/or nitrites, volatile organic chemicals, heavy metals, cyanide and other inorganic chemicals, synthetic organic chemicals, and other organic chemicals.

VULNERABILITY OF THE DRINKING WATER SYSTEM

Vulnerability of a drinking water source to contamination is a combination of two factors:

- Natural susceptibility, and
- Contaminant risks.

Appendix D contains fourteen charts, which together form the 'Vulnerability Analysis' for a source water assessment for a public drinking water source. Chart 1 analyzes the 'Susceptibility of the Wellhead' to contamination by looking at the construction of the well and its surrounding area. Chart 2 analyzes the 'Susceptibility of the Aquifer' to contamination by looking at the naturally occurring attributes of the water source and influences on the groundwater system that might lead to contamination. Chart 3 analyzes 'Contaminant Risks' for the drinking water source with respect to bacteria and viruses. The 'Contaminant Risks' portion of the analysis considers potential sources of contaminants as well as a review of contamination that has or may have occurred, but has not arrived or been detected at the well. Chart 4 contains the 'Vulnerability Analysis for Bacteria and Viruses'. Charts 5 through 14 contain the Contaminant Risks and Vulnerability Analyses for nitrates and nitrites, volatile organic chemicals, heavy metals, cyanide and other inorganic chemicals, synthetic organic chemicals, and other organic chemicals, respectively.

A score for the Natural Susceptibility is reached by considering the properties of the well and the aquifer.

Susceptibility of the Wellhead (0 – 25 Points) (Chart 1 of Appendix D)

Susceptibility of the Aquifer (0 – 25 Points) (Chart 2 of Appendix D)

Natural Susceptibility (Susceptibility of the Well) (0 - 50 Points)

A ranking is assigned for the Natural Susceptibility according to the point score:

Natural Susceptibility Ratings						
40 to 50 pts	Very High					
30 to < 40 pts	High					
20 to < 30 pts	Medium					
< 20 pts	Low					

The Anvik Water System's water well is in a confined aquifer. Confined aquifers are less susceptible to potential groundwater quality impacts posed by the migration of surface water contaminants downward from the surface. Table 2 shows the susceptibility scores and ratings for this PWS.

Table 2. Susceptibility

	Score	Rating
Susceptibility of the Wellhead	20	Very High
Susceptibility of the Aquifer	11	Medium
Natural Susceptibility	31	High

Contaminant risks to a drinking water source depend on the type, number or density, and distribution of contaminant sources. This score has been derived from an examination of existing and historical contamination that has been detected at the drinking water source through routine sampling. It also evaluates potential sources of contamination. Flow charts are used to assign a point score, and ratings are assigned in the same way as for the natural susceptibility:

Contaminant Risk Ratings						
40 to 50 pts	Very High					
30 to < 40 pts	High					
20 to < 30 pts	Medium					
< 20 pts	Low					

Table 3 summarizes the Contaminant Risks for each category of drinking water contaminants.

Table 3. Contaminant Risks

Category	Score	Rating
Bacteria and Viruses	25	Medium
Nitrates and/or Nitrites	29	Medium

Volatile Organic Chemicals	50	Very High
Heavy Metals, Cyanide and		
Other Inorganic Chemicals	50	Very High
Synthetic Organic Chemicals	29	Medium
Other Organic Chemicals	50	Very High

Finally, an overall vulnerability score is assigned for each water system by combining each of the contaminant risk scores with the natural susceptibility score:

Natural Susceptibility (0 – 50 points)

+

Contaminant Risks (0 – 50 points)

=

Vulnerability of the Drinking Water Source to Contamination (0 – 100).

Again, rankings are assigned according to a point score:

Overall Vulnerability Ratings							
80 to 100 pts	Very High						
60 to < 80 pts	High						
40 to < 60 pts	Medium						
< 40 pts	Low						

Table 4 contains the overall vulnerability scores (0 – 100) and ratings for each of the six categories of drinking water contaminants. Note: scores are rounded off to the nearest five.

Table 4. Overall Vulnerability

		,
Category	Score	Rating
Bacteria and Viruses	55	Medium
Nitrates and Nitrites	60	High
Volatile Organic Chemicals	80	Very High
Heavy Metals, Cyanide and		
Other Inorganic Chemicals	80	Very High
Synthetic Organic Chemicals	60	High
Other Organic Chemicals	80	Very High

Bacteria and Viruses

The contaminant risk for bacteria and viruses is **Medium**. The risk is primarily attributed to the presence of a landfill in Zone D (see Table 2 – Appendix B).

No positive bacteria counts have been reported in recent (within five years) sampling events (See Chart 3 – Contaminant Risks for Bacteria and Viruses in Appendix D). Only a small amount of bacteria and viruses are required to endanger public health.

After combining the contaminant risk for bacteria and viruses with the natural susceptibility of the well, the overall vulnerability of the well to contamination is **Medium**.

Nitrates and Nitrites

The contaminant risk for nitrates and nitrites is **Medium**. The risk to this source of public drinking water is primarily attributed to the presence of a landfill in Zone D (see Table 3 – Appendix B).

Nitrates are very mobile, moving at approximately the same rate as water. The sampling history for this well indicates that nitrates have not been detected in recent sampling events. Nitrate concentrations in uncontaminated groundwater are typically less than 2 mg/L; therefore, nitrate concentrations above 2 mg/L may be indicative of man-made sources (See Chart 5 - Contaminant Risks for Nitrates and/or Nitrites in Appendix D).

After combining the contaminant risk for nitrates and nitrites with the natural susceptibility of the well, the overall vulnerability of the well to nitrate and nitrite contamination is **High.**

Volatile Organic Chemicals

The contaminant risk for volatile organic chemicals is **Very High**. The risk is primarily attributed to the presence of a petroleum product bulk station/terminal, an airport, and a landfill in Zones A and D. Numerous other potential contaminant sources are also found within the protection area (see Table 4 – Appendix B).

No recent sampling data was available for the Anvik Water System (See Chart 7 – Contaminant Risks for Volatile Organic Chemicals in Appendix D).

After combining the contaminant risk for volatile organic chemicals with the natural susceptibility of the well, the overall vulnerability of the well to contamination is **Very High**

Heavy Metals, Cyanide and Other Inorganic Chemicals

The contaminant risk for heavy metals, cyanide and other inorganic chemicals is **Very High**. The risk is primarily attributed to the presence of a landfill in Zone D. Numerous other potential contaminant

sources are also found within the protection area (see Table 5 – Appendix B).

Based on review of recent sampling records for this public water system, moderate levels of thallium have been detected, but have not exceeded the MCL of 0.002 mg/L (see Chart 9 – Contaminant Risks for Heavy Metals, Cyanide, and Other Inorganic Chemicals in Appendix D).

The source of thallium in the drinking water source is unknown. Thallium can be found naturally in pyrite, crooksite, lorandite, and hutchinsonite minerals. However, the absence of thallium in former sampling events suggests that the detection may be attributed to man-made sources.

After combining the contaminant risk for heavy metals, cyanide and other inorganic chemicals with the natural susceptibility of the well, the overall vulnerability of the well to contamination is **Very High**.

Synthetic Organic Chemicals

The contaminant risk for synthetic organic chemicals is **Medium**. The risk is primarily attributed to the presence of a landfill in Zone D (see Table 6 – Appendix B).

No recent sampling data was available in ADEC records for the Anvik Water System (See Chart 11 – Contaminant Risks for Synthetic Organic Chemicals in Appendix D).

After combining the contaminant risk for synthetic organic chemicals with the natural susceptibility of the well, the overall vulnerability of the well to contamination is **High**.

Other Organic Chemicals

The contaminant risk for other organic chemicals is **Very High**. The risk is primarily attributed to the presence of a petroleum product bulk station/terminal, a pipeline, and a landfill in Zones A and D. Several other potential contaminant sources are also found within the protection area (see Table 7 – Appendix B).

No recent sampling data was available in ADEC records for the Anvik Water System (See Chart 13 – Contaminant Risks for Other Organic Chemicals in Appendix D).

After combining the contaminant risk for other organic chemicals with the natural susceptibility of

the well, the overall vulnerability of the well to contamination is **Very High**

Using the Source Water Assessment

This assessment of contaminant risks can be used as a foundation for local voluntary protection efforts as well as a basis for the continuous efforts on the part of the community of Anvik to protect public health. It is anticipated that Source Water Assessments will be updated every five years to reflect any changes in the vulnerability and/or susceptibility of the drinking water source.


REFERENCES

- Alaska Department of Community and Economic Development (ADCED), 2003 [WWW document]. URL: http://www.dced.state.ak.us/cbd/commdb/CF COMDB.htm
- Alaska Department of Environmental Conservation, Contaminated Sites Database, 2003 [WWW database], URL http://www.state.ak.us/dec/dspar/csites/cs_search.htm
- Alaska Department of Environmental Conservation, Leaking Underground Storage Tank Database, 2003 [WWW database], URL http://www.dec.state.ak.us/spar/stp/ust/search/fac_search.asp
- Freeze, R. A., and Cherry, J.A. 1979, Groundwater, Prentice-Hall, Englewood Cliffs, New Jersey
- United States Department of Health and Human Services, et.al, 1983. Final Report, Sanitation Facilities Construction for Aniak, Alaska, Project No. AN-80-222.
- United States Environmental Protection Agency (EPA), 2002 [WWW document]. URL http://www.epa.gov/safewater/mcl.html.

APPENDIX A

Drinking Water Protection Area Location Map (Map A)

Public Water Well System for PWS #280171.001 Anvik Water System

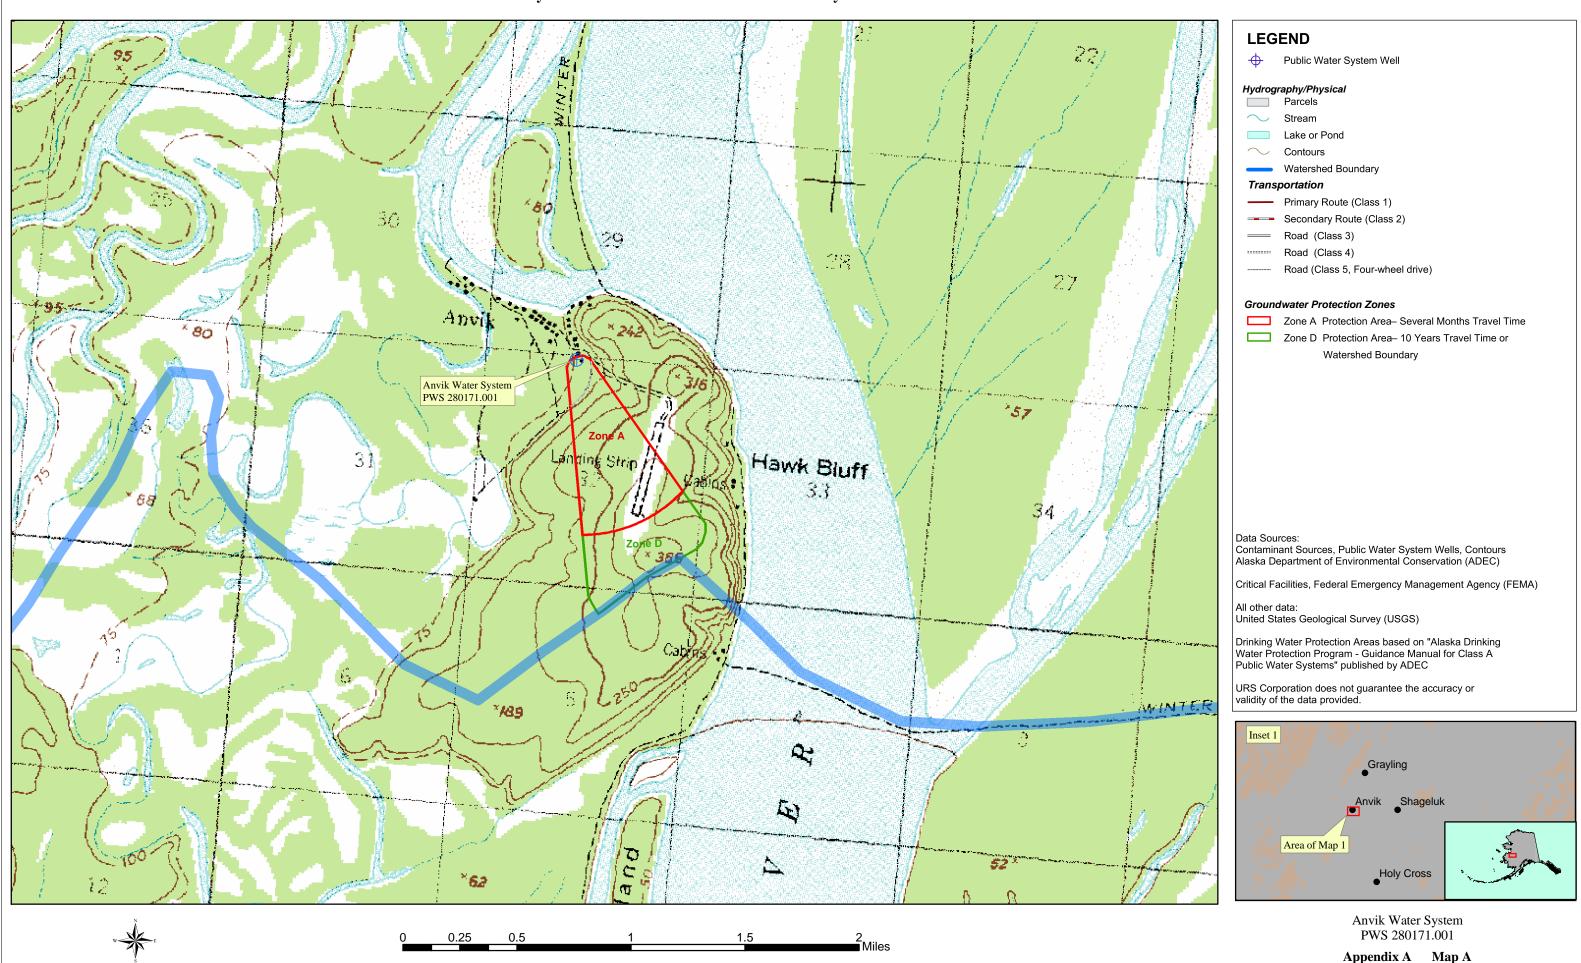

APPENDIX B

Contaminant Source Inventory and Risk Ranking (Tables 1-7)

Contaminant Source Inventory for Anvik Water System

PWSID 280171.001

Contaminant Source Type	Contaminant Source ID	CS ID tag	Zone	Map Number	Comments
Laundromats without dry cleaning	C22	C22-01	A	C	
Motor /motor vehicle repair shops	C31	C31-01	A	С	
Tanks, heating oil, nonresidential (aboveground)	T14	T14-01	A	C	
Tanks, heating oil, nonresidential (aboveground)	T14	T14-02	A	C	
Tanks, heating oil, nonresidential (aboveground)	T14	T14-03	A	C	
Tanks, heating oil, nonresidential (aboveground)	T14	T14-04	A	C	
Tanks, heating oil, nonresidential (aboveground)	T14	T14-05	A	C	
Tanks, heating oil, nonresidential (aboveground)	T14	T14-06	A	C	
Tanks, heating oil, nonresidential (aboveground)	T14	T14-07	A	C	
Tanks, heating oil, nonresidential (aboveground)	T14	T14-08	A	C	
Petroleum product bulk station/terminals	X11	X11-01	A	C	
Airports	X14	X14-01	A	С	
Pipelines (oil and gas)	X28	X28-01	A	С	
Landfills (municipal; Class III)	D51	D51-01	D	С	

Contaminant Source Inventory and Risk Ranking for Anvik Water System Sources of Bacteria and Viruses

Contaminant Source Type	Contaminant Source ID	CS ID tag	Zone	Risk Ranking for Analysis	Map Number	Comments
Laundromats without dry cleaning	C22	C22-01	A	Low	С	
Landfills (municipal; Class III)	D51	D51-01	D	High	С	

Contaminant Source Inventory and Risk Ranking for Anvik Water System Sources of Nitrates/Nitrites

Contaminant Source Type	Contaminant Source ID	CS ID tag	Zone	Risk Ranking for Analysis	Map Number	Comments
Laundromats without dry cleaning	C22	C22-01	A	Low	С	
Airports	X14	X14-01	A	Low	С	
Landfills (municipal; Class III)	D51	D51-01	D	Very High	С	

Contaminant Source Inventory and Risk Ranking for Anvik Water System Sources of Volatile Organic Chemicals

Contaminant Source Type	Contaminant Source ID	CS ID tag	Zone	Risk Ranking for Analysis	Map Number	Comments
Laundromats without dry cleaning	C22	C22-01	A	Low	С	
Motor /motor vehicle repair shops	C31	C31-01	A	Medium	С	
Tanks, heating oil, nonresidential (aboveground)	T14	T14-01	A	Low	С	
Tanks, heating oil, nonresidential (aboveground)	T14	T14-02	A	Low	С	
Tanks, heating oil, nonresidential (aboveground)	T14	T14-03	A	Low	С	
Tanks, heating oil, nonresidential (aboveground)	T14	T14-04	A	Low	С	
Tanks, heating oil, nonresidential (aboveground)	T14	T14-05	A	Low	С	
Tanks, heating oil, nonresidential (aboveground)	T14	T14-06	A	Low	С	
Tanks, heating oil, nonresidential (aboveground)	T14	T14-07	A	Low	С	
Tanks, heating oil, nonresidential (aboveground)	T14	T14-08	A	Low	С	
Petroleum product bulk station/terminals	X11	X11-01	A	Very High	С	
Airports	X14	X14-01	A	High	С	
Pipelines (oil and gas)	X28	X28-01	A	Medium	С	
Landfills (municipal; Class III)	D51	D51-01	D	High	С	

Table 5 Contaminant Source Inventory and Risk Ranking for Anvik Water System

Sources of Heavy Metals, Cyanide and Other Inorganic Chemicals

Contaminant Source Type	Contaminant Source ID	CS ID tag	Zone	Risk Ranking for Analysis	Map Number	Comments
Motor /motor vehicle repair shops	C31	C31-01	A	Medium	С	
Tanks, heating oil, nonresidential (aboveground)	T14	T14-01	A	Low	C	
Tanks, heating oil, nonresidential (aboveground)	T14	T14-02	A	Low	С	
Tanks, heating oil, nonresidential (aboveground)	T14	T14-03	A	Low	С	
Tanks, heating oil, nonresidential (aboveground)	T14	T14-04	A	Low	С	
Tanks, heating oil, nonresidential (aboveground)	T14	T14-05	A	Low	С	
Tanks, heating oil, nonresidential (aboveground)	T14	T14-06	A	Low	С	
Tanks, heating oil, nonresidential (aboveground)	T14	T14-07	A	Low	С	
Tanks, heating oil, nonresidential (aboveground)	T14	T14-08	A	Low	С	
Petroleum product bulk station/terminals	X11	X11-01	A	Low	С	
Airports	X14	X14-01	A	Low	С	
Pipelines (oil and gas)	X28	X28-01	A	Low	С	
Landfills (municipal; Class III)	D51	D51-01	D	High	С	

Contaminant Source Inventory and Risk Ranking for Anvik Water System Sources of Synthetic Organic Chemicals

Contaminant Source Type	Contaminant Source ID	CS ID tag	Zone	Risk Ranking for Analysis	Map Number	Comments
Petroleum product bulk station/terminals	X11	X11-01	A	Low	С	
Airports	X14	X14-01	A	Medium	С	
Landfills (municipal; Class III)	D51	D51-01	D	Very High	С	


Contaminant Source Inventory and Risk Ranking for Anvik Water System Sources of Other Organic Chemicals

Contaminant Source Type	Contaminant Source ID	CS ID tag	Zone	Risk Ranking for Analysis	Map Number	Comments
Motor /motor vehicle repair shops	C31	C31-01	A	Medium	C	
Petroleum product bulk station/terminals	X11	X11-01	A	High	C	
Airports	X14	X14-01	A	Medium	С	
Pipelines (oil and gas)	X28	X28-01	A	High	С	
Landfills (municipal; Class III)	D51	D51-01	D	Very High	С	

APPENDIX C

Drinking Water Protection Area and Potential and Existing Contaminant Sources (Map C)

Public Water Well System for PWS #280171.001 Anvik Water System Showing Potential and Existing Sources of Contamination

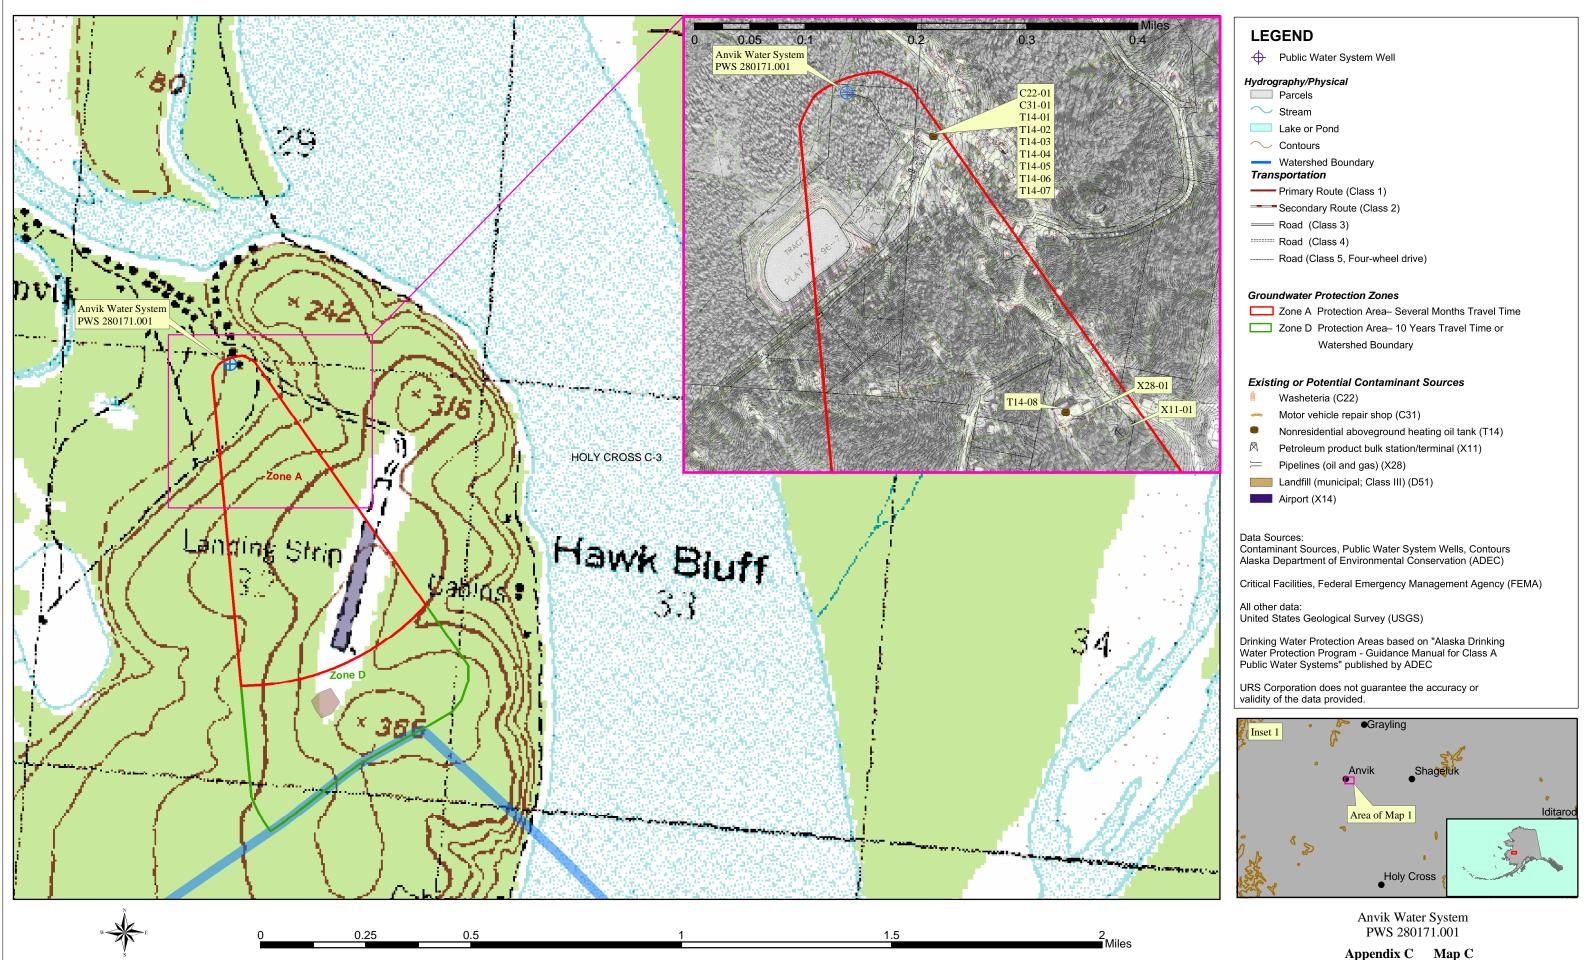

APPENDIX D

Vulnerability Analysis for Public Drinking Water Source (Charts 1-14)

Susceptibility initially assumed to be low. Susceptibility of wellhead = 0 pts Lithology and well construction details are assumed based on old washeteria well log. Is the well Increase susceptibility 5 pts + 0 pts properly grouted? Is the well Increase susceptibility 20 pts 0 pts capped? YES YES Very High Susceptibility of wellhead 20 pts Increase susceptibility: YES Is the well 10 pts: suspected floodplain + 20 pts within a Wellhead Susceptibility Ratings 20 pts: known floodplain floodplain? 20 to 25 pts very high 15 to < 20 pts 10 to < 15 pts medium NO < 10 pts low Is the land surface sloped Increase susceptibility 5 pts 0 pts away from the

Chart 1. Susceptibility of the wellhead - Anvik Water System (PWS No. 280171.001)

Chart 2. Susceptibility of the aquifer Anvik Water System (PWS No. 280171.001)

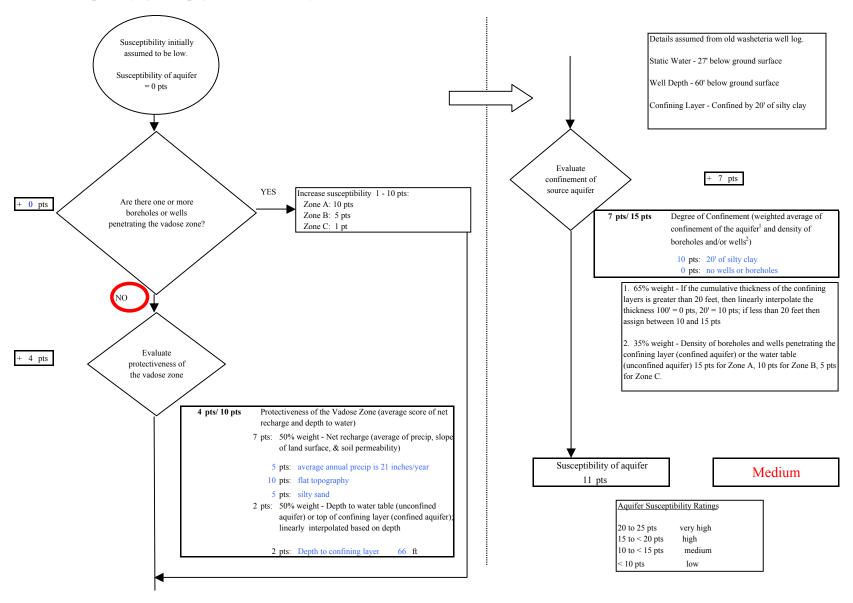


Chart 3. Contaminant risks for Anvik Water System (PWS No. 280171.001) - Bacteria & Viruses

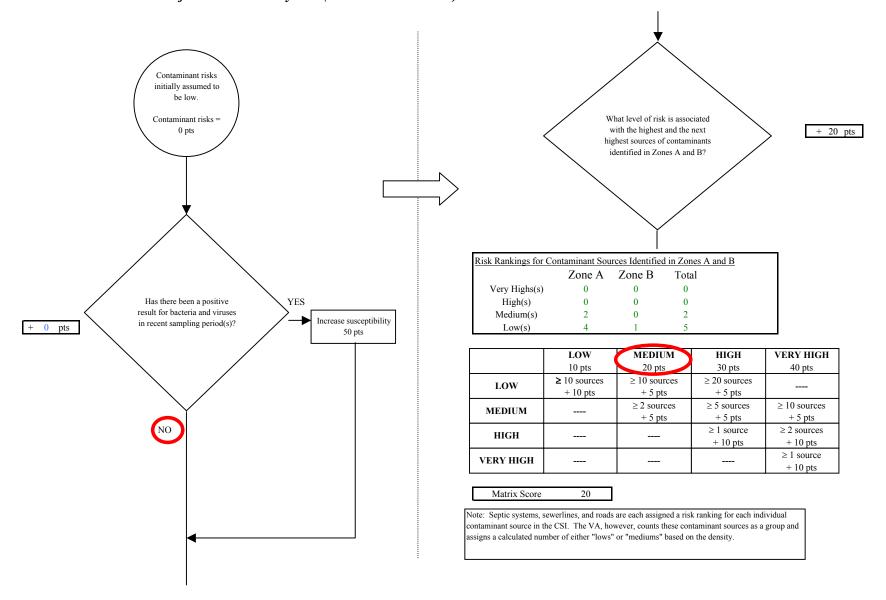


Chart 3. Contaminant risks for Anvik Water System (PWS No. 280171.001) - Bacteria & Viruses NO Are there sufficient Initial assessment of risk posed by Risk unchanged controls, conditions, or potential sources of contamination monitoring to warrant = 20 pts downgrading risk? Are any YES significant Risk unchanged contaminant Reduce risk 1 - 10 pts sources within - 0 pts Zone A? The number and magnitude of Risk posed by potential sources of contaminant sources in YES contamination with controls Zone A determines a risk increase. See Table 2 for 25 5 pts Increase risk 1 - 10 pts inventory. Existing Risk due to existing 0 pts contamination Are there any conditions that Risk unchanged Risk posed by potential sources warrant upgrading Potential of contamination with controls risk? 25 pts Contaminant risks Contaminant Risk YES 25 pts Increase risk 1 - 10 pts + 0 pts Contaminant risks* * Truncate risk at 50 pts 25 Contaminant Risk Ratings Risk posed by potential sources of contamination very high 40 to 50 pts 30 to < 40 ptshigh Medium $20 \text{ to} \le 30 \text{ pts}$

Page 4 of 25

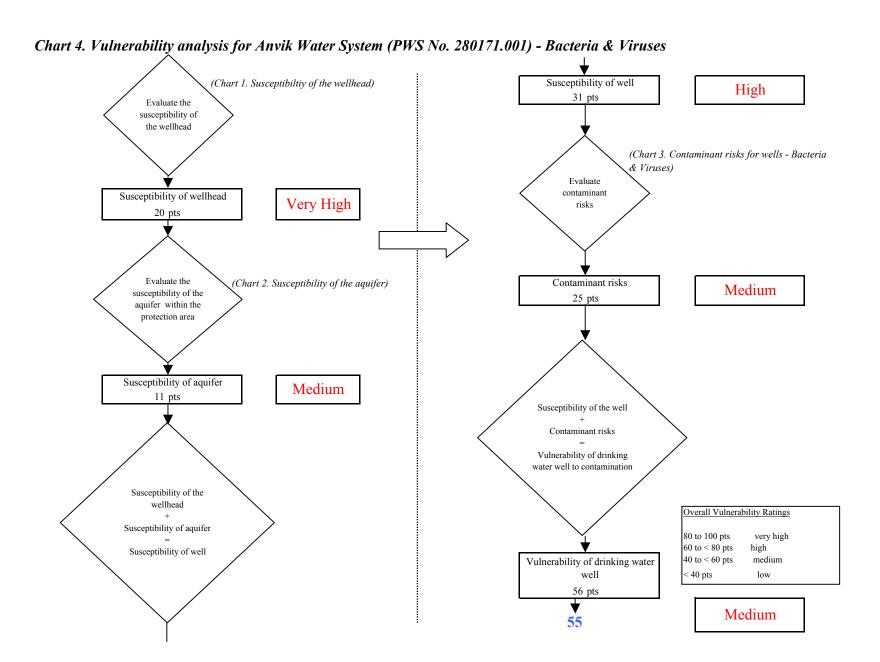


Chart 5. Contaminant risks for Anvik Water System (PWS No. 280171.001) - Nitrates and Nitrites Contaminant risks initially assumed to be low. Current level of Evaluate the level of Contaminant risks background contamination due to man-= 0 ptscontamination from made source(s) natural sources 0 pts Is the concentration of NO Has nitrates and/or the contaminant nitrites been detected in increasing, decreasing, the source waters in or staying the same? recent sampling period(s)? Recent Nitrate Sampling Results (mg/L) 1/26/1999 The nitrate concentration is assumed to be natural if less than 2 mg/L (20%), or Increasing: risk up 1 - 10 pts attributed to man made YES Decreasing: risk down 1 - 5 pts sources if greater than 2 + 0 pts Same: risk unchanged mg/L. Maximum Contaminant Level (MCL) = 10 mg/LDetected Nitrate Level = Existing contamination points based on Risk due to existing man-Risk due to natural linear interpolation of most recent detect sources made sources [MCL = 50 pts; detect = 0 pts]0 pts Risk due to existing contamination 0 pts Was the source of Evaluate the level of NO. contamination contamination from natural? man-made sources YES

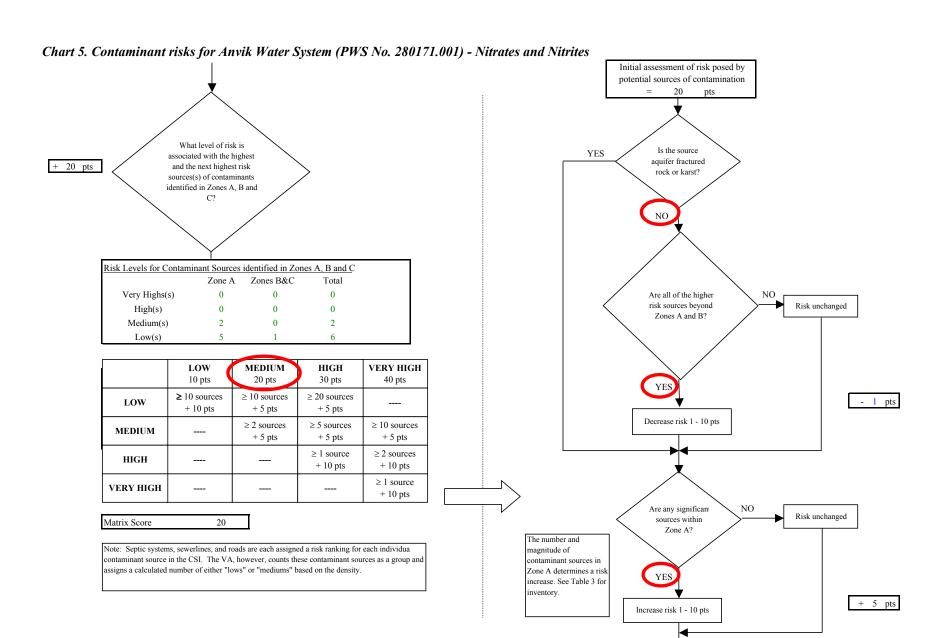



Chart 5. Contaminant risks for Anvik Water System (PWS No. 280171.001) - Nitrates and Nitrites Existing Are there conditions NO 0 pts Risk unchanged that warrant upgrading risk? Risk due to existing Potential contamination 29 pts The number and magnitude of Risk posed by potential sources contaminant sources in of contamination with controls Contaminant Risk Zone D determines a risk YES 29 pts increase. See Table 3 for Contaminant risks inventory. 5 pts Increase risk 1 - 10 pts Risk posed by potential sources of contamination 29 pts *Truncate risk at 50 pts Contaminant risks* 29 Are there sufficient Contaminant Risk Ratings **Medium** controls, conditions, NO. Risk unchanged or monitoring to 40 to 50 pts very high warrant downgrading 30 to < 40 pts high 20 to < 30 pts risk? medium < 20 pts low YES 0 pts Decrease risk 1 - 10 pts Risk posed by potential sources of contamination with controls

Page 8 of 25

Chart 6. Vulnerability analysis for Anvik Water System (PWS No. 280171.001) - Nitrates and Nitrites (Chart 1. Susceptibiltiy of the wellhead) Susceptibility of well High 31 pts Evaluate the susceptibility of the wellhead (Chart 5. Contaminant risks for wells - Nitrates and Nitrites) Evaluate Susceptibility of wellhead contaminant risks Very High 20 pts Evaluate the (Chart 2. Susceptibility of the aquifer) Contaminant risks Medium susceptibility of the 29 pts aquifer within the protection area Susceptibility of aquifer Medium 11 pts Susceptibility of the well Contaminant risks Vulnerability of drinking water well to contamination Susceptibility of the wellhead Overall Vulnerability Ratings Susceptibility of aquifer 80 to 100 pts very high Susceptibility of well 60 to < 80 pts high 40 to < 60 pts medium Vulnerability of drinking water well < 40 pts 60 pts High **60**

Chart 7. Contaminant risks for Anvik Water System (PWS No. 280171.001) - Volatile Organic Chemicals Contaminant risks initially assumed to be Current level of Evaluate the level of Contaminant risks contamination due to manbackground =0 pts contamination from made source(s) natural sources 0 pts Is the concentration of the NO contaminant increasing, Have volatile organic decreasing, or staying the chemicals been detected ir same? the source waters in recent sampling period(s)? Recent VOC Sampling Results (mg/L) No recent VOC sampling data was available in ADEC records for this PWSID Increasing: risk up 1 - 10 pts YES Decreasing: risk down 1 - 5 pts + 0 pts Same: risk unchanged Risk due to existing man-Risk due to natural Existing contamination points based on linear interpolation of most recent detect [MCL = 50 pts; detect = 0 pts] sources made sources 0 pts 0 pts Risk due to existing contamination 0 pts Was the source of Evaluate the level of contamination contamination from mannatural? made sources YES

Chart 7. Contaminant risks for Anvik Water System (PWS No. 280171.001) - Volatile Organic Chemicals



	Zone A	Zones B&C	Total
ery Highs(s)	1	0	1
High(s)	1	0	1
Medium(s)	7	0	7
Low(s)	14	1	15

	LOW 10 pts	MEDIUM 20 pts	HIGH 30 pts	VERY HIGH 40 pts
LOW	≥ 10 sources + 10 pts	≥ 10 sources + 5 pts	≥ 20 sources + 5 pts	
MEDIUM		≥ 2 sources + 5 pts	≥ 5 sources + 5 pts	≥ 10 sources + 5 pts
нідн			≥ 1 source + 10 pts	≥ 2 sources + 10 pts
VERY HIGH				≥ 1 source + 10 pts

Matrix Score 40

Note: Septic systems, sewerlines, and roads are each assigned a risk ranking for each individual contaminant source in tl CSI. The VA, however, counts these contaminant sources as a group and assigns a calculated number of either "lows" or "mediums" based on the density.

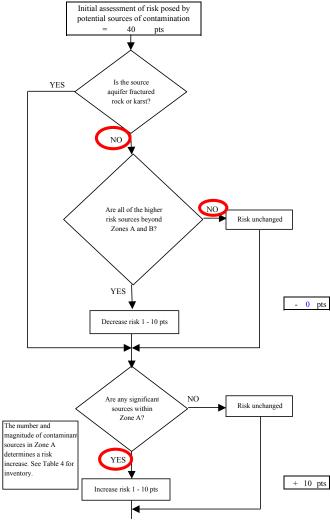



Chart 7. Contaminant risks for Anvik Water System (PWS No. 280171.001) - Volatile Organic Chemicals Existing NO Are there conditions 0 pts Risk unchanged that warrant upgrading Risk due to existing risk? Potential contamination 52 pts The number and magnitude of Risk posed by potential sources contaminant sources in of contamination with controls Contaminant Risk Zone D determines a risk YES increase. See Table 4 for 52 pts Contaminant risks inventory. + 2 pts Increase risk 1 - 10 pts Risk posed by potential sources of contamination 52 pts *Truncate risk at 50 pts Contaminant risks* Contaminant Risk Ratings Very High Are there sufficient NO , controls, conditions, or Risk unchanged 40 to 50 pts very high monitoring to warrant 30 to < 40 pts high downgrading risk? 20 to < 30 pts medium < 20 pts YES 0 pts Decrease risk 1 - 10 pts Risk posed by potential sources of contamination with controls 52 pts

Chart 8. Vulnerability analysis for Anvik Water System (PWS No. 280171.001) - Volatile Organic Chemicals Susceptibility of well (Chart 1. Susceptibiltiy of the wellhead) High 31 pts Evaluate the susceptibility of the wellhead (Chart 7. Contaminant risks for wells - Volatile Organic Chemicals) Evaluate Susceptibility of wellhead contaminant risks Very High 20 pts Evaluate the (Chart 2. Susceptibility of the aquifer) Contaminant risks Very High susceptibility of the 50 pts aquifer within the protection area Susceptibility of aquifer Medium 11 pts Susceptibility of the well Contaminant risks Vulnerability of drinking water well to contamination Susceptibility of the wellhead Overall Vulnerability Ratings Susceptibility of aquifer 80 to 100 pts very high Susceptibility of well 60 to < 80 pts high 40 to < 60 pts medium Vulnerability of drinking water well < 40 pts 81 pts Very High **80**

Page 13 of 25

Chart 9. Contaminant risks for Anvik Water System (PWS No. 280171.001) - Heavy Metals, Cyanide and Other Inorganic Chemicals Contaminant risks initially assumed to be low. Current level of Evaluate the level of Contaminant risks contamination due to manbackground = 0 ptscontamination from made source(s) natural sources 25 pts The source of thallium in the drinking water source is unknown. NO or Is the concentration of Have heavy metals, UNKNOWN the contaminant Thallium can be found cyanide or other inorganic increasing, decreasing, naturally in pyrite, chemicals been detected or staying the same? crooksite, lorandite, and in the source waters in hutchinsonite minerals. recent sampling period(s)? However, the absence of Recent Metals Sampling Results (mg/L) thallium in former Thallium 1/26/1999 0.001 sampling events suggests that the detection may be attributed to man-made sources. YES Increasing: risk up 1 - 10 pts Decreasing: risk down 1 - 5 pts + 0 pts Same: risk unchanged Maximum Contaminant Although other inorganic compounds have Level (MCL) (mg/L) % of MCI been detected in previous sampling events, Thallium= 0.002 thallium has reported as the highest percent MCL values in the past 5 years. Risk due to existing man-Risk due to natural Existing contamination points based on linear sources made sources interpolation of most recent detect [MCL = 50 pts; 0 pts 25 pts detect = 0 ptsRisk due to existing contamination 25 pts Evaluate the level Was the source of NO. of contamination contamination from man-made natural? sources YES

Page 14 of 25

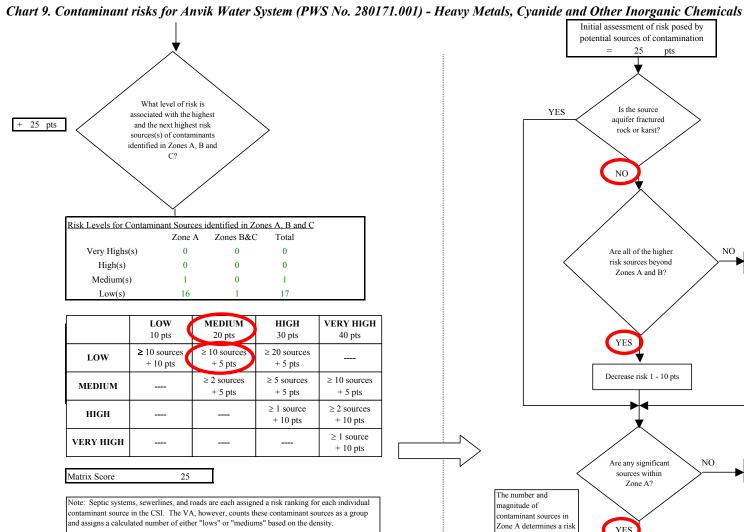

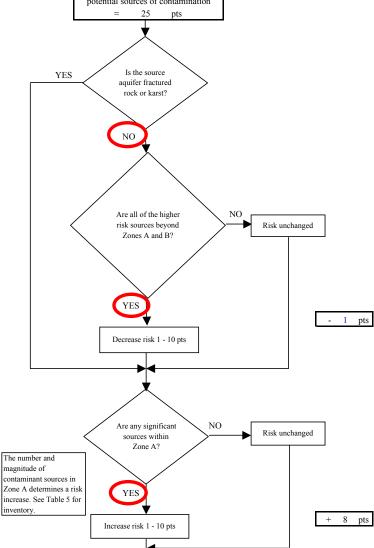


Chart 9. Contaminant risks for Anvik Water System (PWS No. 280171.001) - Heavy Metals, Cyanide and Other Inorganic Chemicals Existing Are there conditions 25 pts Risk unchanged upgrading risk? Risk due to existing Potential contamination 34 pts The number and magnitude of Risk posed by potential sources contaminant sources in of contamination with controls Contaminant Risk Zone D determines a YES 59 pts risk increase. See Table Contaminant risks 5 for inventory. 2 pts Increase risk 1 - 10 pts Risk posed by potential sources of contamination 34 pts Contaminant risks* *Truncate risk at 50 pts 50 Contaminant Risk Ratings Are there sufficient **Very High** NQ controls, conditions, Risk unchanged 40 to 50 pts very high or monitoring to 30 to < 40 pts warrant downgrading high risk? 20 to < 30 pts medium < 20 pts low YES 0 pts Decrease risk 1 - 10 pts Risk posed by potential sources of contamination with controls 34 pts

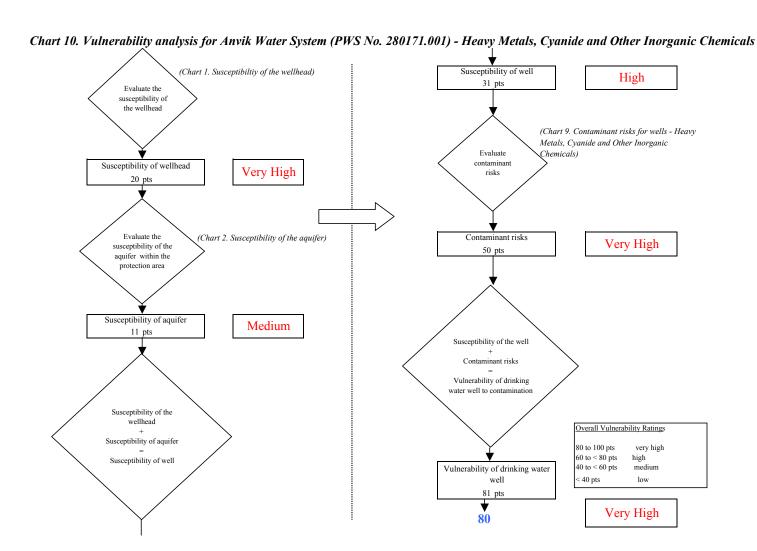


Chart 11. Contaminant risks for Anvik Water System (PWS No. 280171.001) - Synthetic Organic Chemicals Contaminant risks initially assumed to be low. Current level of Evaluate the level of Contaminant risks background contamination due to man-= 0 ptscontamination from made source(s) natural sources 0 pts NO or Is the concentration of Have synthetic organic UNKNOWN the contaminant chemicals been detected increasing, decreasing, in the source waters in or staying the same? recent sampling period(s)? Recent SOC Sampling Results (mg/L) No recent SOC sampling data was available in ADEC records for this PWSID Increasing: risk up 1 - 10 pts YES Decreasing: risk down 1 - 5 pts + 0 pts Same: risk unchanged Existing contamination points based on linear interpolation of most recent detect [MCL = 50 pts; detect = 0 pts]Risk due to natural Risk due to existing mansources made sources 0 pts 0 pts Risk due to existing contamination 0 pts Was the source of Evaluate the level of NO. contamination contamination from man-made sources YES

Page 18 of 25


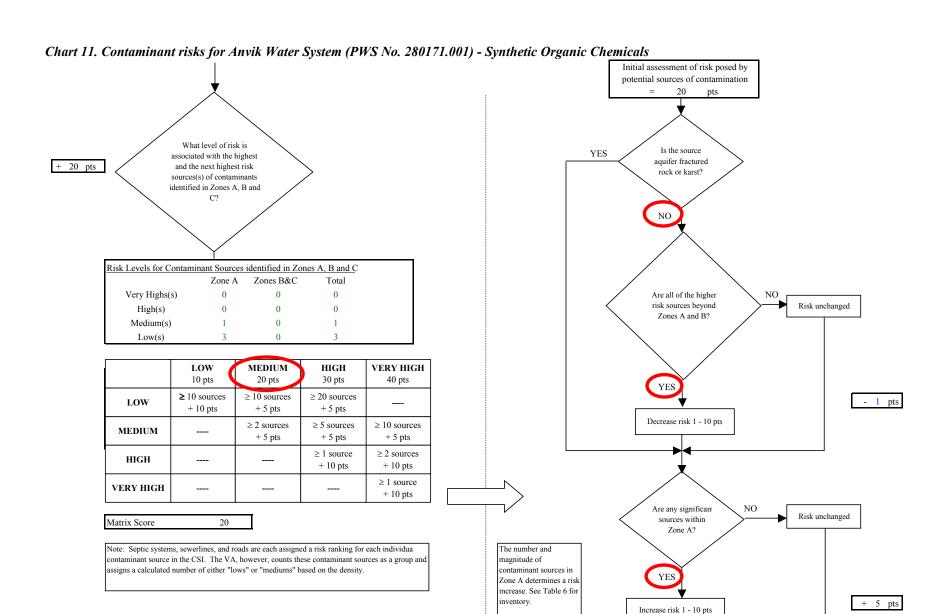


Chart 11. Contaminant risks for Anvik Water System (PWS No. 280171.001) - Synthetic Organic Chemicals Existing NO Are there conditions 0 pts Risk unchanged that warrant upgrading risk? Risk due to existing Potential contamination 29 pts The number and magnitude of Risk posed by potential sources contaminant sources in of contamination with controls Contaminant Risk Zone D determines a risk YES 29 pts increase. See Table 6 for Contaminant risks inventory. 5 pts Increase risk 1 - 10 pts Risk posed by potential sources of contamination 29 pts *Truncate risk at 50 pts Contaminant risks* 29 Are there sufficient Contaminant Risk Ratings **Medium** controls, conditions, NO. Risk unchanged or monitoring to 40 to 50 pts very high warrant downgrading 30 to < 40 pts high 20 to < 30 pts risk? medium < 20 pts low YES 0 pts Decrease risk 1 - 10 pts Risk posed by potential sources of contamination with controls

Page 20 of 25

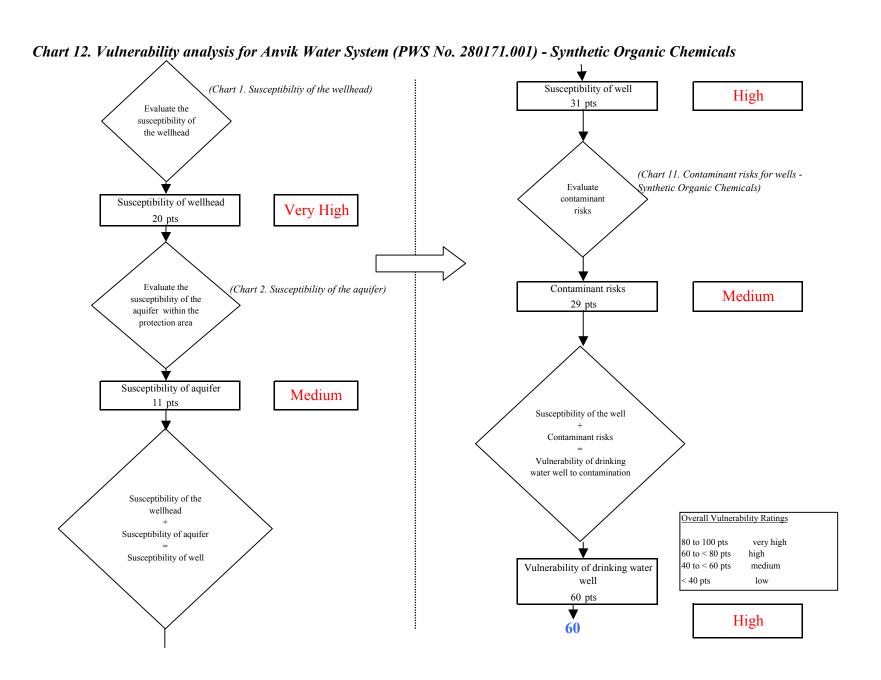

Page 21 of 25

Chart 13. Contaminant risks for Anvik Water System (PWS No. 280171.001) - Other Organic Chemicals Contaminant risks initially assumed to be low. Current level of Evaluate the level of Contaminant risks background contamination due to man-= 0 ptscontamination from made source(s) natural sources NO or Is the concentration of Have other organic UNKNOWN the contaminant chemicals been detected increasing, decreasing, in the source waters in or staying the same? recent sampling period(s)? Recent OOC Sampling Results (mg/L) No recent OOC sampling data was available in ADEC records for this PWSID Increasing: risk up 1 - 10 pts YES Decreasing: risk down 1 - 5 pts + 0 pts Same: risk unchanged Existing contamination points based on linear interpolation of most recent detect [MCL = 50 pts; detect = 0 pts]Risk due to natural Risk due to existing mansources made sources 0 pts 0 pts Risk due to existing contamination 0 pts Was the source of Evaluate the level of NO. contamination from natural? man-made sources YES

Page 22 of 25

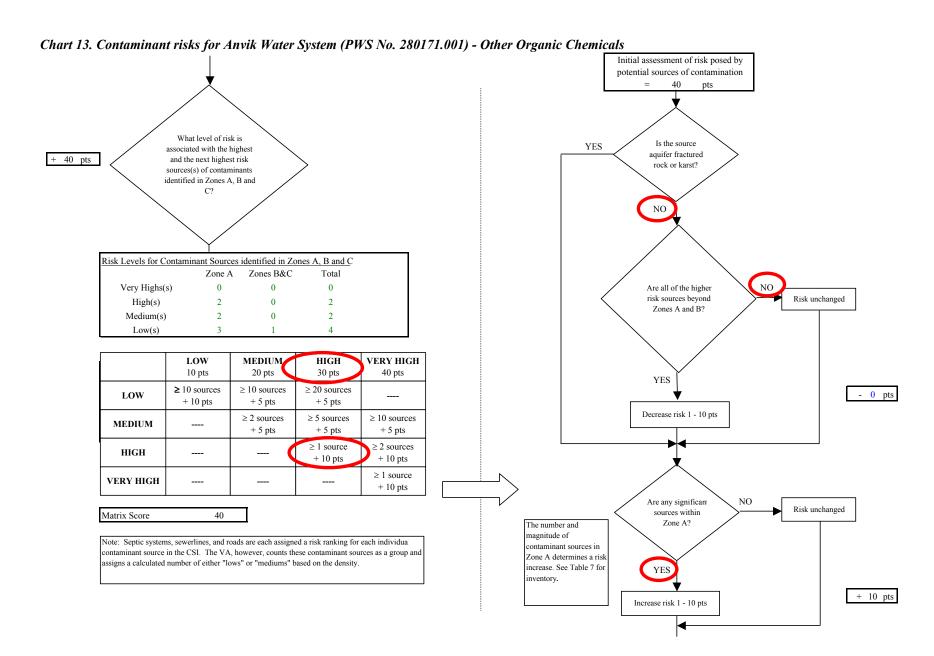


Chart 13. Contaminant risks for Anvik Water System (PWS No. 280171.001) - Other Organic Chemicals Existing NO Are there conditions 0 pts Risk unchanged that warrant upgrading risk? Risk due to existing Potential contamination 55 pts The number and magnitude of Risk posed by potential sources contaminant sources in of contamination with controls Contaminant Risk Zone D determines a risk YES 55 pts increase. See Table 7 for Contaminant risks inventory. 5 pts Increase risk 1 - 10 pts Risk posed by potential sources of contamination 55 pts *Truncate risk at 50 pts Contaminant risks* 50 Are there sufficient Contaminant Risk Ratings Very High controls, conditions, NO. Risk unchanged or monitoring to 40 to 50 pts very high warrant downgrading 30 to < 40 pts high 20 to < 30 pts medium < 20 pts low YES 0 pts Decrease risk 1 - 10 pts Risk posed by potential sources of contamination with controls

