



Source Water Assessment

A Hydrogeologic Susceptibility and Vulnerability Assessment for Naknek Marine Center Drinking Water System, Naknek, Alaska

PWSID # 262474.001 March 2004

DRINKING WATER PROTECTION PROGRAM REPORT 1199
Alaska Department of Environmental Conservation

Source Water Assessment for Naknek Marine Center Drinking Water System Naknek, Alaska

PWSID # 262474.001

DRINKING WATER PROTECTION PROGRAM REPORT 1199

The Drinking Water Protection Program (DWPP) is producing Source Water Assessments in compliance with the Safe Drinking Water Act Amendments of 1996. Each assessment includes a delineation of the source water area, an inventory of potential and existing contaminant sources that may impact the water, a risk ranking for each of these contaminants, and an evaluation of the potential vulnerability of these drinking water sources.

These assessments are intended to provide public water systems owners/operators, communities, and local governments with the best available information that may be used to protect the quality of their drinking water. The assessments combine information obtained from various sources, including the U.S. Environmental Protection Agency, Alaska Department of Environmental Conservation (ADEC), public water system owners/operators, and other public information sources. The results of this assessment are subject to change if additional data becomes available. It is anticipated this assessment will be updated every five years to reflect any changes in the vulnerability and/or susceptibility of public drinking water source. If you have any additional information that may affect the results of this assessment, please contact the Program Coordinator of DWPP, (907) 269-7521.

CONTENTS

NAKNEK MARINE C WATER SYSTEM NAKNEK MARINE C	ARY	INVENTORY OF POTENTIAL AND EXISTING CONTAMINANT SOURCES
	TAB	LES
Table 2. Susceptibility Table 3. Contaminant	rRisks	
	APPEN	DICES
APPENDIX A. N	Vaknek Marine Center Drinking Wa	ter Protection Area (Map A)
C	Bacteria and Viruses (Table 2) Contaminant Source Inventory and F Nitrates/Nitrites (Table 3)	Risk Ranking for Naknek Marine Center – Risk Ranking for Naknek Marine Center – Risk Ranking for Naknek Marine Center –
C. N	Naknek Marine Center Drinking Wa and Existing Contaminant Source	
D. V		ant Source Inventory and Risk Ranking for brinking Water Source (Charts 1 – 8)

Source Water Assessment for Naknek Marine Center Source of Public Drinking Water, Naknek, Alaska

Drinking Water Protection Program Alaska Department of Environmental Conservation

EXECUTIVE SUMMARY

Naknek Marine Center has two Public Water System (PWS) wells. The well (PWSID# 262474.001) has been used as a drinking water source since it was drilled in 1985. This source water assessment report is exclusively limited to PWSID #262474.001.

The well is a Class B (transient/non-community) water system that is located approximately 600 feet from the Naknek River on Mile 3 of the Alaska Peninsula Highway in Naknek, Alaska. Available records indicate that there is no secondary storage of drinking water, other than the pressure tank, and the untreated drinking water source is derived directly from the wellhead. Both wells are plumbed into a common distribution line; however, each PWSID can be isolated from the drinking water system. This system operates year-round and serves approximately 3 residents and 300 non-residents through ten service connections. The wellhead received a susceptibility rating of Very High and the aquifer received a susceptibility rating of Very High. Combining these two ratings produce a Very High rating for the natural susceptibility of the well. Identified potential and current sources of contaminants for the primary public drinking water source include: Laundromats, domestic wastewater collection systems, aboveground fuel tanks, water supply wells, boat yards and marinas, and roads. These identified potential and existing sources of contamination are considered as sources of bacteria and viruses, nitrates and/or nitrites, and volatile organic chemicals. Overall, the water well received a vulnerability rating of High for the bacteria and viruses, a vulnerability rating of High for nitrates and nitrites, and a vulnerability rating of **High** for volatile organic chemicals contaminant categories.

NAKNEK MARINE CENTER PUBLIC DRINKING WATER SYSTEM

The Naknek Marine Center water well is a Class B (transient/non-community) public water system. The system consists of two wells. PWSID #262474.001 is located approximately 600 feet from the Naknek

River in Naknek, Alaska (Sec. 33, T16S, R46W, Seward Meridian; see Map A of Appendix A). Naknek is the primary fishery center in Bristol Bay, located about 12 miles northwest of King Salmon and 300 miles southwest of Anchorage. The community has a population of 642 (ADCED, 2003). Average annual precipitation in Naknek is 20 inches, including approximately 45 inches of snowfall. Temperatures range from 42 to 63°F in summer and -4 to 16°F in winter. Temperatures can be as extreme as -46 to 88°F.

The community of Naknek gets most of their water supply from individual wells. Most households are served by the piped sewage collection system operated by the Borough and the remaining households have individual septic tanks (ADCED, 2003). Naknek receives electrical power from the Naknek Electric Association operated by the REA Cooperative. Power generating facilities are fueled by diesel. Refuse is collected by the Patterson Sanitation Company and trucked to the Borough operated landfill located five miles outside of the community (ADCED, 2003).

According to information supplied by ADEC for an adjacent PWS well (PWSID #262068.001), the depth of the PWS at the Naknek Marine Center is assumed to be approximately 156 feet below the ground surface. Well construction details are unknown; however, based on surrounding well information, it is assumed the well is screened in a confined aquifer. Confined aquifers are likely less susceptible to groundwater impacts resulting from the downward migration of surface contaminants. The well is located in a floodplain.

Information acquired from a May 1999 sanitary survey for the public water system indicated that the land surface is sloped away from the well. Generally, land surfaces that slope away from the wellhead promote surface water drainage, which reduces potential of contaminant migration down the well casing annulus. The well is not grouted according to ADEC regulations. Proper grouting provides added protection against contaminants traveling along the well casing annulus and into source waters.

Naknek is located in an area that has been mapped as being underlain by isolated masses of permafrost; predominantly fine-grained deposits. Permafrost is usually found either at a considerable depth as relict permafrost or near the surface as thin lenses of small extent where ground insulation is high or low. The terrain in this area consists of low hills with many shallow lakes. The lakes resulted from the delayed melting of buried ice blocks (ADOT&PF, 1982).

NAKNEK MARINE CENTER DRINKING WATER PROTECTION AREA

In order to evaluate whether a drinking water source is at risk, we must first evaluate what are the most likely pathways for surface contamination to reach the groundwater. These areas are determined by looking at the characteristics of the soil, groundwater, aquifer, and well.

The most probable area for contamination to reach the drinking water well is the area that contributes water to the well, the groundwater recharge area. This area is designated as the drinking water protection area (DWPA). Because releases of contaminants within the protection area are most likely to impact the drinking water well, this area will serve as the focus for voluntary protection efforts. An analytical calculation was used to determine the size and shape of the DWPA for the Naknek Marine Center PWS. The input parameters describing the attributes of the aquifer in this calculation were adopted from Groundwater (Freeze and Cherry, 1979). Available geology and groundwater contours were also considered to take into account any uncertainties in groundwater flow and aquifer characteristics to arrive at a meaningful protection

The protection areas established for wells by the ADEC are usually separated into four zones, limited by the watershed. These zones correspond to differences in the time-of-travel (TOT) of the water moving through the aquifer to the well (Please refer to the Guidance Manual for Class B Public Water Systems for additional information).

The time of travel for contaminants within the water varies and is dependent on the physical and chemical characteristics of each contaminant. The following is a summary of the four protection area zones for wells and the calculated time-of-travel for each:

Table 1. Definition of Zones

Zone Definition

A	½ the distance for the 2-yr. time-of-travel
В	Less than the 2 year time-of-travel
C	Less Than the 5 year time-of-travel
D	Less than the 10 year time-of-travel

The DWPA for the Naknek Marine Center PWS was determined using an analytical calculation and includes Zones A, B, and D (See Map A of Appendix A).

INVENTORY OF POTENTIAL AND EXISTING CONTAMINANT SOURCES

The Drinking Water Protection Program has completed an inventory of potential and existing sources of contamination within the Naknek Marine Center DWPA. This inventory was completed through a search of agency records and other publicly available information. Potential sources of contamination to the drinking water aquifer include a wide range of categories and types. Potential drinking water contaminants are found within agricultural, residential, commercial, and industrial areas, but can also occur within areas that have little or no development.

For the basis of all Class B public water system assessments, three categories of drinking water contaminants were inventoried. They include:

- Bacteria and viruses,
- Nitrates and/or nitrites,
- Volatile organic chemicals.

The sources are displayed on Map C of Appendix C and summarized in Table 1 of Appendix B.

RANKING OF CONTAMINANT RISKS

Once the potential and existing sources of contamination have been identified, they are assigned a ranking according to what type and level of risk they represent. Ranking of contaminant risks for a "potential" or "existing" source of contamination is a function of toxicity and volumes of specific contaminants associated with that source. Rankings include:

- Low,
- Medium,
- High, and
- Very High.

The time-of-travel for contaminants within the water varies and is dependent on the physical and chemical

characteristics of each contaminant. Bacteria and Viruses are only inventoried in Zones A and B because of their short life span. Only "Very High" and "High" rankings are inventoried within the outer Zone D due to the probability of contaminant dilution by the time the contaminants get to the well.

Tables 2 through 4 in Appendix B contain the ranking of potential and existing sources of contamination with respect to bacteria and viruses, nitrates and/or nitrites, and volatile organic chemicals.

VULNERABILITY OF THE NAKNEK MARINE CENTER DRINKING WATER SYSTEM

Vulnerability of a drinking water source to contamination is a combination of two factors:

- Natural susceptibility, and
- Contaminant risks.

Appendix D contains eight charts, which together form the 'Vulnerability Analysis' for a source water assessment for a public drinking water source. Chart 1 analyzes the 'Susceptibility of the Wellhead' to contamination by looking at the construction of the well and its surrounding area. Chart 2 analyzes the 'Susceptibility of the Aquifer' to contamination by looking at the naturally occurring attributes of the water source and influences on the groundwater system that might lead to contamination. Chart 3 analyzes 'Contaminant Risks' for the drinking water source with respect to bacteria and viruses. The 'Contaminant Risks' portion of the analysis considers potential sources of contaminants as well as a review of contamination that has or may have occurred, but has not arrived or been detected at the well. Lastly, Chart 4 contains the 'Vulnerability Analysis for Bacteria and Viruses'. Charts 5 through 8 contain the Contaminant Risks and Vulnerability Analyses for nitrates and nitrites and volatile organic chemicals, respectively.

A score for the Natural Susceptibility is reached by considering the properties of the well and the aquifer.

Susceptibility of the Wellhead (0 – 25 Points) (Chart 1 of Appendix D)

Susceptibility of the Aquifer (0 – 25 Points) (Chart 2 of Appendix D)

Natural Susceptibility (Susceptibility of the Well) (0-50 Points)

A ranking is assigned for the Natural Susceptibility according to the point score:

Natural Susceptibility Ratings						
40 to 50 pts	Very High					
30 to < 40 pts	High					
20 to < 30 pts	Medium					
< 20 pts	Low					

The Naknek Marine Center water well (PWSID #262474.001) is assumed to be in a confined aquifer. Confined aquifers are less susceptible to potential groundwater quality impacts posed by the migration of surface water contaminants downward from the surface. Table 2 shows the Susceptibility scores and ratings for both wells in this PWS.

Table 2. Susceptibility

	Score	Rating
Susceptibility of the	25	Very High
Wellhead		
Susceptibility of the	23	Very High
Aquifer		
Natural Susceptibility	48	Very High

Contaminant risks to a drinking water source depend on the type, number or density, and distribution of contaminant sources. This score has been derived from an examination of existing and historical contamination that has been detected at the drinking water source through routine sampling. It also evaluates potential sources of contamination. Flow charts are used to assign a point score, and ratings are assigned in the same way as for the natural susceptibility:

Contaminant Risk Ratings					
40 to 50 pts	Very High				
30 to < 40 pts	High				
20 to < 30 pts	Medium				
< 20 pts	Low				

Table 3 summarizes the Contaminant Risks for each category of drinking water contaminants.

Table 3. Contaminant Risks

Category	Score	Rating
Bacteria and Viruses	25	Medium

Nitrates and/or Nitrites	24	Medium
Volatile Organic Chemicals	24	Medium

Finally, an overall vulnerability score is assigned for each water system by combining each of the contaminant risk scores with the natural susceptibility score:

> Natural Susceptibility (0 - 50 points)+ Contaminant Risks (0 - 50 points)

Vulnerability of the Drinking Water Source to Contamination (0 - 100).

Again, rankings are assigned according to a point score:

Overall Vulnerability Ratings						
80 to 100 pts	Very High					
60 to < 80 pts	High					
40 to < 60 pts	Medium					
< 40 pts	Low					

Table 4 contains the overall vulnerability scores (0 – 100) and ratings for each of the three categories of drinking water contaminants. Note: scores are rounded off to the nearest five.

Table 4. Overall Vulnerability

Category	Score	Rating
Bacteria and Viruses	75	High
Nitrates and Nitrites	70	High
Volatile Organic Chemicals	70	High

Bacteria and Viruses

The contaminant risk for bacteria and viruses is **Medium**. The risk is primarily attributed to the presence of domestic wastewater collection systems in Zone A.

A positive bacteria count has not been reported in recent (within five years) sampling events. Only a small amount of bacteria and viruses are required to endanger public health.

After combining the contaminant risk for bacteria and viruses with the natural susceptibility of the well, the

overall vulnerability of the well to contamination is **High**.

Nitrates and Nitrites

The contaminant risk for nitrates and nitrites is **Medium**. The risk to this source of public drinking water is attributed to the presence of domestic wastewater collection systems in Zone A.

Nitrates are very mobile, moving at approximately the same rate as water. The sampling history for this well indicates that no nitrates have been detected in the water. Nitrate concentrations in uncontaminated groundwater are typically less than 2 mg/L; therefore, nitrate concentrations above 2 mg/L may be indicative of man-made sources (See Chart 5 - Contaminant Risks for Nitrates and/or Nitrites in Appendix D).

Nitrate levels are often derived from the decomposition of organic matter in soils. After combining the contaminant risk for nitrates and nitrites with the natural susceptibility of the well, the overall vulnerability of the well to nitrate and nitrite contamination is **High.**

Volatile Organic Chemicals

The contaminant risk for volatile organic chemicals is **Medium**. The risk is primarily attributed to the presence of above ground storage tanks (diesel and gasoline) in Zone A (see Table 4 – Appendix B).

No recent sampling data was available in ADEC records for the Naknek Marine Center (See Chart 7 – Contaminant Risks for Volatile Organic Chemicals in Appendix D).

After combining the contaminant risk for volatile organic chemicals with the natural susceptibility of the well, the overall vulnerability of the well to contamination is **High**.

Using the Source Water Assessment

This assessment of contaminant risks can be used as a foundation for local voluntary protection efforts as well as a basis for the continuous efforts on the part of the Nakenk Marine Center and the community of Naknek to protect public health. It is anticipated that Source Water Assessments will be updated every five years to reflect any changes in the vulnerability and/or susceptibility of the drinking water source.


REFERENCES

- Alaska Department of Community and Economic Development (ADCED), 2003 [WWW document]. URL: http://www.dced.state.ak.us/cbd/commdb/CF COMDB.htm
- Alaska Department of Environmental Conservation, Contaminated Sites Database, 2003 [WWW database], URL http://www.state.ak.us/dec/dspar/csites/cs_search.htm
- Alaska Department of Environmental Conservation, Leaking Underground Storage Tank Database, 2003 [WWW database], URL http://www.dec.state.ak.us/spar/stp/ust/search/fac_search.asp
- Alaska Department of Transportation and Public Facilities (ADOT&PF), 1982, Engineering Geology and Soils Report, North Naknek Materials Investigation.
- Freeze, R. A., and Cherry, J.A. 1979, Groundwater, Prentice-Hall, Englewood Cliffs, New Jersey
- United States Environmental Protection Agency (EPA), 2002 [WWW document]. URL http://www.epa.gov/safewater/mcl.html.

APPENDIX A

Drinking Water Protection Area Location Map (Map A)

Public Water Well System for PWS #262474.001 Naknek Marine Center **Showing Potential and Existing Sources of Contamination**

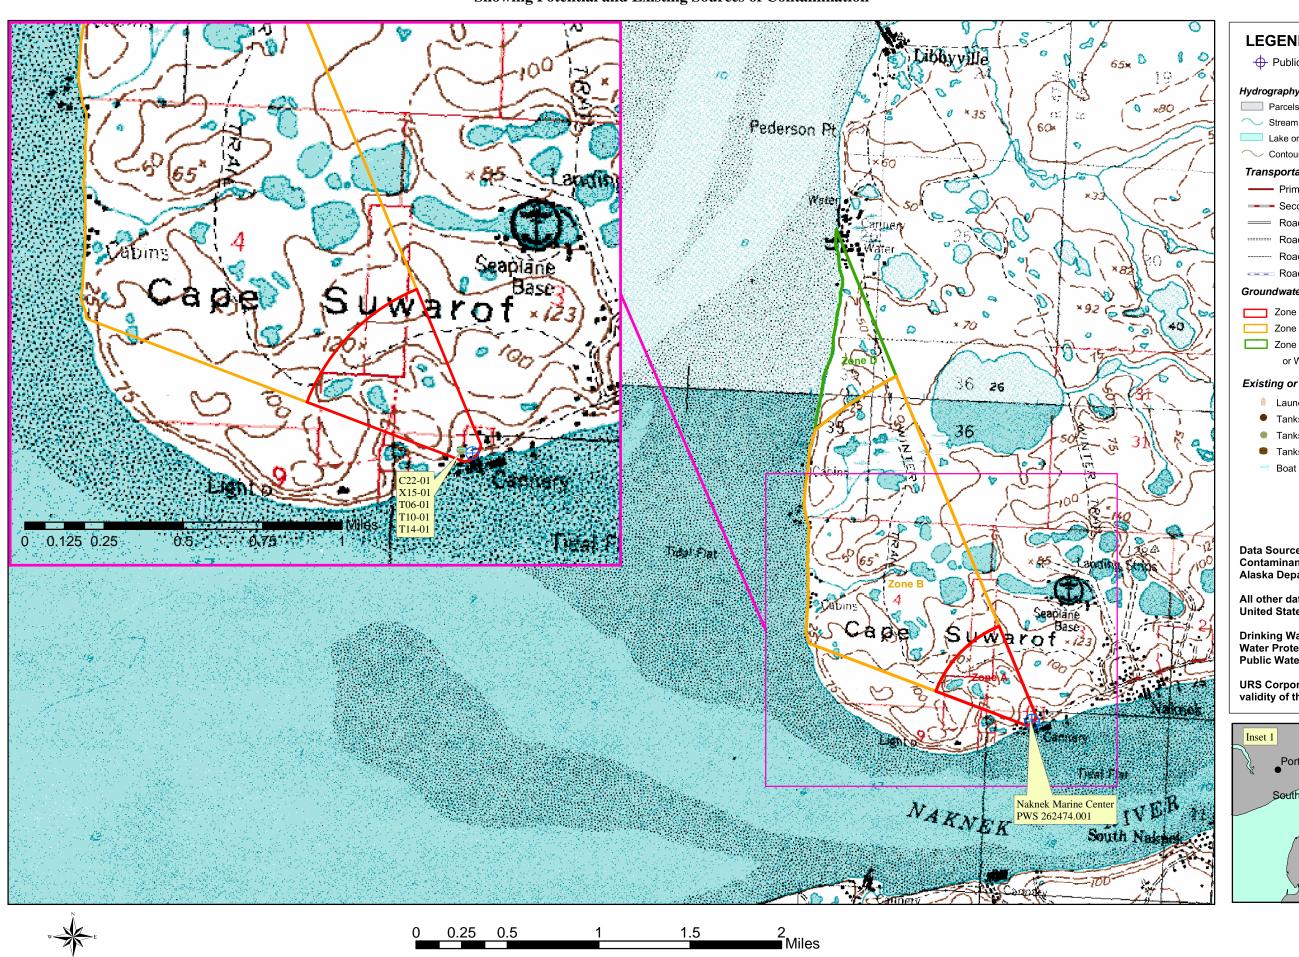



Public Water System Well

Hydrography/Physical

Parcels

Lake or Pond

Contours

Transportation

---- Primary Route (Class 1)

Secondary Route (Class 2)

= Road (Class 3)

----- Road (Class 4)

----- Road (Class 5, Four-wheel drive)

Road Ferry Crossing

Groundwater Protection Zones

Zone A Protection Area– Several Months Travel Time

Zone B Protection Area 2 Years Travel Time

Zone D Protection Area- 10 Years Travel Time

or Watershed Boundary

Existing or Potential Contaminant Sources

Laundromats without Dry Cleaning (C22)

Tanks, Diesel (above ground) (T06)

Tanks, Gasoline (above ground) (T10)

Tanks, Heating Oil, Nonresidential (above ground) (T14)

Boat Yards and Marinas (X15)


Contaminant Sources, Public Water System Wells, Contours Alaska Department of Environmental Conservation (ADEC)

All other data:

United States Geological Survey (USGS)

Drinking Water Protection Areas based on "Alaska Drinking Water Protection Program - Guidance Manual for Class B Public Water Systems" published by ADEC

URS Corporation does not guarantee the accuracy or validity of the data provided.

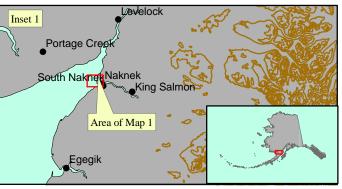

Naknek Marine Center PWS 262474.001

Appendix C Map C

APPENDIX B

Contaminant Source Inventory and Risk Rankings (Tables 1-4)

Contaminant Source Inventory for Naknek Marine Center

Contaminant Source Type	Contaminant Source ID	CS ID tag	Zone	Map Number	Comments
Laundromats without dry cleaning	C22	C22-01	A	C	
Domestic wastewater collection systems (sewer lines or lift stati-	D01	D10-01	A	С	Assumed to be 1 to 10 sewer lines in Zone A
Tanks, diesel (above ground)	T06	T06-01	A	С	
Tanks, gasoline (above ground)	T10	T10-01	A	С	
Tanks, heating oil, nonresidential (aboveground)	T14	T14-01	A	С	
Water supply wells	W09	W09-01	A	С	
Boat yards and marinas	X15	X15-01	A	С	
Highways and roads, dirt/gravel	X24	X24-01	A	С	

Contaminant Source Inventory and Risk Ranking for Naknek Marine Center Sources of Bacteria and Viruses

Contaminant Source Type	Contaminant Source ID	CS ID tag	Zone	Risk Ranking for Analysis	Map Number	Comments
Laundromats without dry cleaning	C22	C22-01	A	Low	С	
Domestic wastewater collection systems (sewer line or lift stations)	D01	D10-01	A	Medium	С	Assumed to be 1 to 10 sewer lines in Zone A
Highways and roads, dirt/gravel	X24	X24-01	A	Low	С	

Contaminant Source Inventory and Risk Ranking for Naknek Marine Center Sources of Nitrates/Nitrites

Contaminant Source Type	Contaminant Source ID	CS ID tag	Zone	Risk Ranking for Analysis	Map Number	Comments
Laundromats without dry cleaning	C22	C22-01	A	Low	C	
Domestic wastewater collection systems (sewer line or lift stations)	D01	D10-01	A	Medium	С	Assumed to be 1 to 10 sewer lines in Zone A
Highways and roads, dirt/gravel	X24	X24-01	A	Low	С	


Contaminant Source Inventory and Risk Ranking for Naknek Marine Center Sources of Volatile Organic Chemicals

Contaminant Source Type	Contaminant Source ID	CS ID tag	Zone	Risk Ranking for Analysis	Map Number	Comments
Laundromats without dry cleaning	C22	C22-01	A	Low	С	
Domestic wastewater collection systems (sewer line or lift stations)	D01	D10-01	A	Low	С	Assumed to be 1 to 10 sewer lines in Zone A
Tanks, diesel (above ground)	T06	T06-01	A	Medium	C	
Tanks, gasoline (above ground)	T10	T10-01	A	Medium	С	
Tanks, heating oil, nonresidential (aboveground)	T14	T14-01	A	Low	С	
Boat yards and marinas	X15	X15-01	A	Low	С	
Highways and roads, dirt/gravel	X24	X24-01	A	Low	С	

APPENDIX C

Drinking Water Protection Area and Potential and Existing Contaminant Sources (Map C)

Public Water Well System for PWS #262474.001 Naknek Marine Center **Showing Potential and Existing Sources of Contamination**

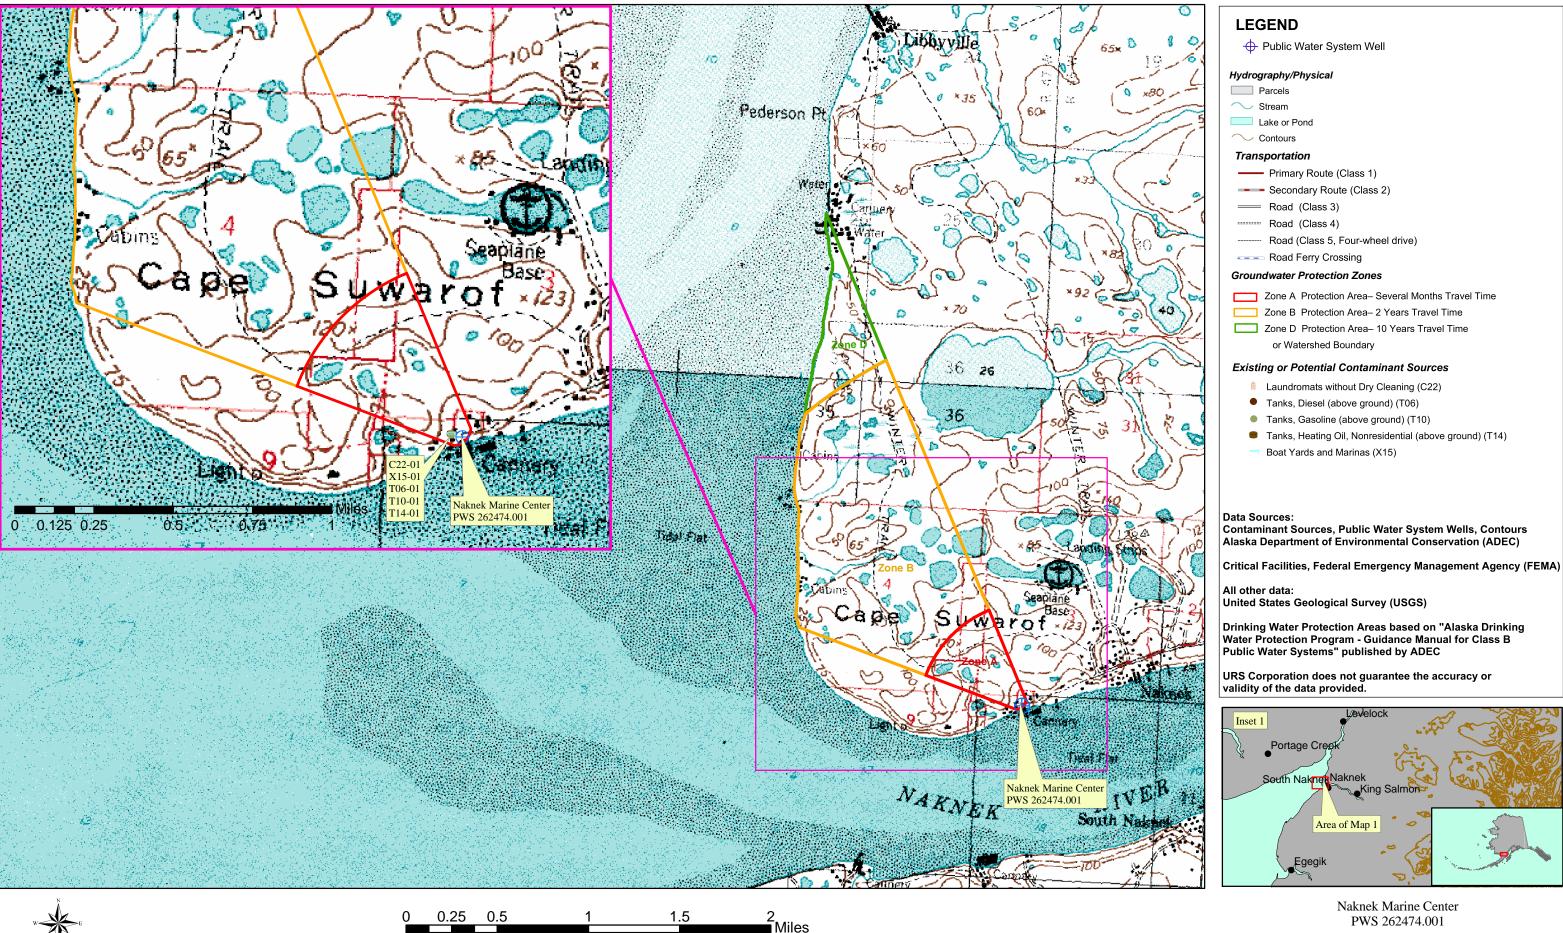

Naknek Marine Center PWS 262474.001

Appendix C Map C

APPENDIX D

Vulnerability Analysis for Public Drinking Water Source (Charts 1-8)

Susceptibility initially assumed to be low. Susceptibility of wellhead = 0 pts NO Is the well Increase susceptibility 5 pts + 5 pts properly grouted? Is the well Increase susceptibility 20 pts 0 pts capped? YES YES Very High Susceptibility of wellhead 25 pts YES Increase susceptibility: Is the well 10 pts: suspected floodplain + 20 pts within a Wellhead Susceptibility Ratings 20 pts: known floodplain floodplain? 20 to 25 pts very high 15 to < 20 pts 10 to < 15 pts medium NO < 10 pts low Is the land surface sloped Increase susceptibility 5 pts 0 pts away from the

Chart 1. Susceptibility of the wellhead - Naknek Marine Center (262474.001)

Chart 2. Susceptibility of the aquifer - Naknek Marine Center (262474.001)

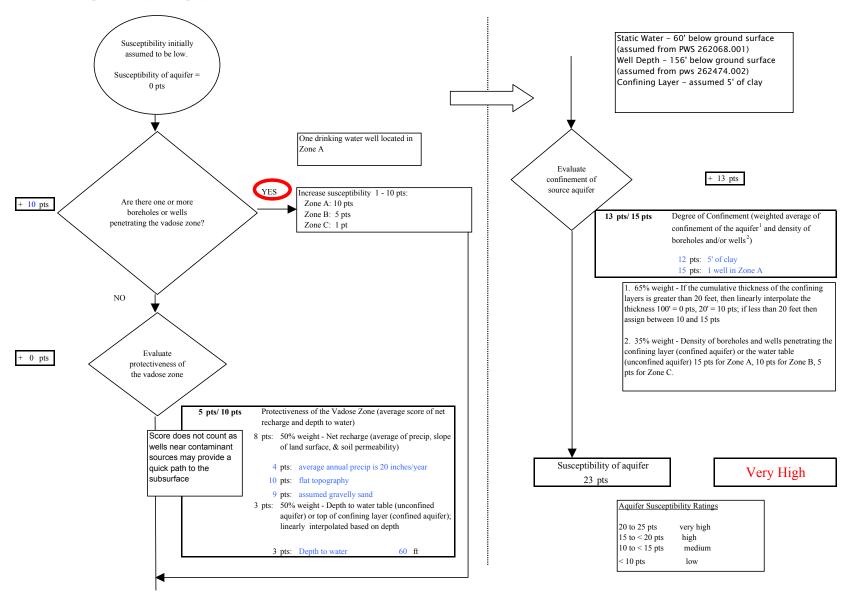


Chart 3. Contaminant risks for Naknek Marine Center (262474.001) - Bacteria & Viruses

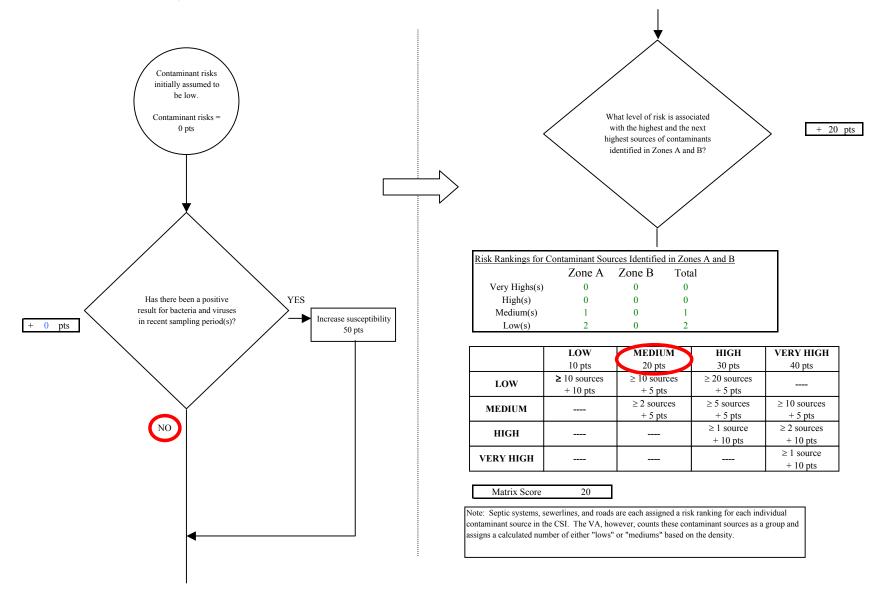


Chart 3. Contaminant risks for Naknek Marine Center (262474.001) - Bacteria & Viruses NO Are there sufficient Initial assessment of risk posed by Risk unchanged controls, conditions, or potential sources of contamination monitoring to warrant = 20 pts downgrading risk? Are any YES significant Risk unchanged contaminant Reduce risk 1 - 10 pts sources within - 0 pts Zone A? The number and magnitude of Risk posed by potential sources of contaminant sources YES contamination with controls in Zone A 25 determines a risk 5 pts Increase risk 1 - 10 pts increase. See Table 2 for inventory. Existing Risk due to existing 0 pts contamination Are there any conditions that Risk unchanged Risk posed by potential sources warrant upgrading Potential of contamination with controls risk? 25 pts Contaminant risks Contaminant Risk YES 25 pts Increase risk 1 - 10 pts + 0 pts Contaminant risks* * Truncate risk at 50 pts 25 Contaminant Risk Ratings Risk posed by potential sources of contamination very high 40 to 50 pts = 25 30 to < 40 pts high Medium $20 \text{ to} \le 30 \text{ pts}$

Page 4 of 13



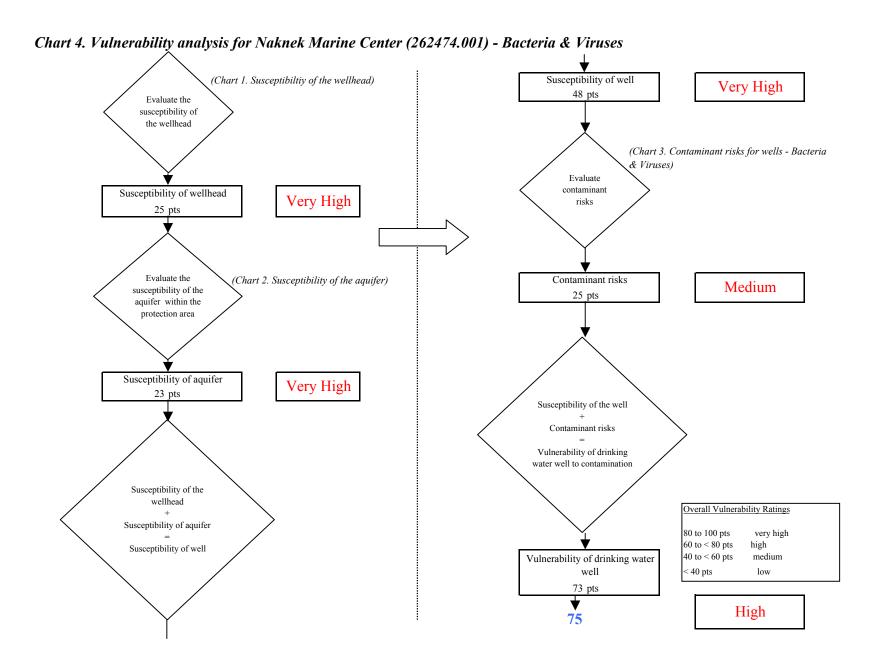


Chart 5. Contaminant risks for Naknek Marine Center (262474.001) - Nitrates and Nitrites Contaminant risks initially assumed to be low. Current level of Evaluate the level of Contaminant risks background contamination due to man-= 0 ptscontamination from made source(s) natural sources 0 pts Is the concentration of Has nitrates and/or the contaminant nitrites been detected in increasing, decreasing, the source waters in or staying the same? recent sampling period(s)? Recent Nitrate Sampling Results (mg/L) 5/12/2003 6/14/2000 ND 11/29/1999 ND 6/29/1998 ND Increasing: risk up 1 - 10 pts YES Decreasing: risk down 1 - 5 pts + 0 pts Same: risk unchanged Maximum Contaminant Level (MCL) = 10 mg/LDetected Nitrate Level = Existing contamination points based on Risk due to existing man-Risk due to natural linear interpolation of most recent detect sources made sources [MCL = 50 pts; detect = 0 pts]0 pts Risk due to existing contamination 0 pts Was the source of Evaluate the level of NO. contamination contamination from natural? man-made sources YES

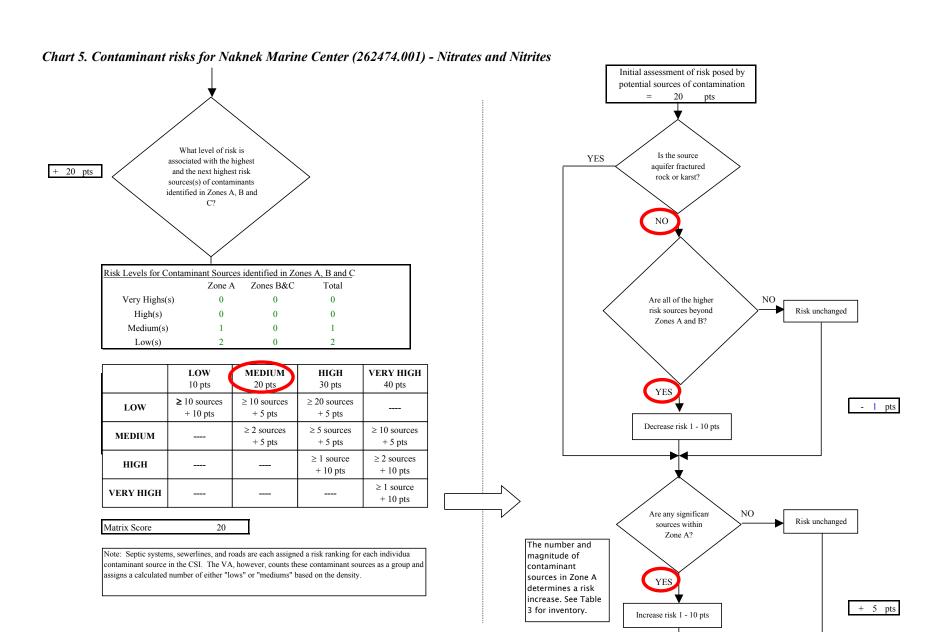

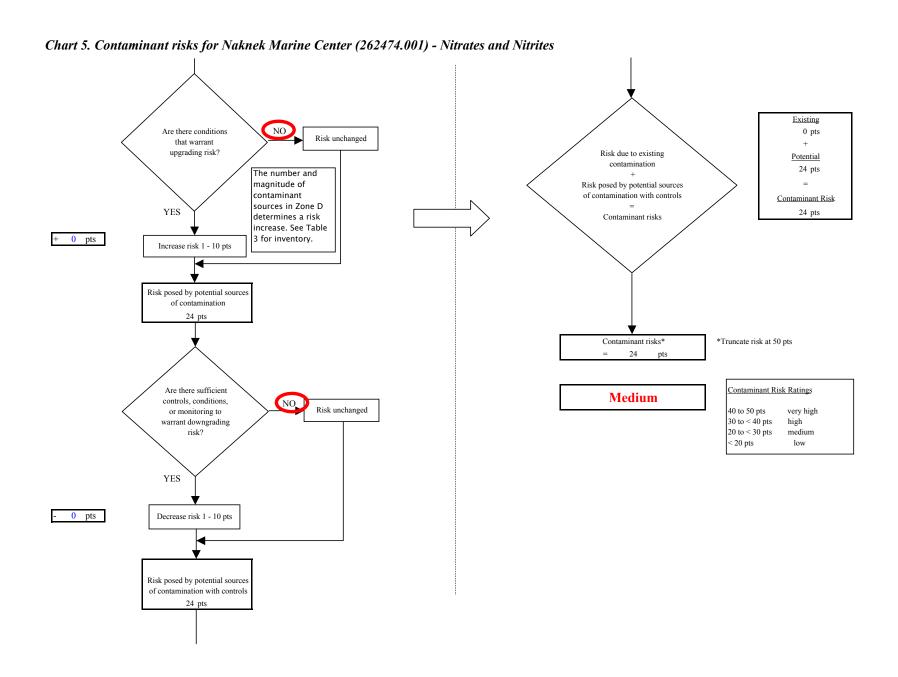


Page 8 of 13

Chart 6. Vulnerability analysis for Naknek Marine Center (262474.001) - Nitrates and Nitrites (Chart 1. Susceptibiltiy of the wellhead) Susceptibility of well Very High 48 pts Evaluate the susceptibility of the wellhead (Chart 5. Contaminant risks for wells - Nitrates and Nitrites) Evaluate Susceptibility of wellhead contaminant risks Very High 25 pts Evaluate the (Chart 2. Susceptibility of the aquifer) Contaminant risks Medium susceptibility of the 24 pts aquifer within the protection area Susceptibility of aquifer Very High 23 pts Susceptibility of the well Contaminant risks Vulnerability of drinking water well to contamination Susceptibility of the wellhead Overall Vulnerability Ratings Susceptibility of aquifer 80 to 100 pts very high Susceptibility of well 60 to < 80 pts high 40 to < 60 pts medium Vulnerability of drinking water well < 40 pts 72 pts High **70**

Chart 7. Contaminant risks for Naknek Marine Center (262474.001) - Volatile Organic Chemicals Contaminant risks initially assumed to be low. Current level of Evaluate the level of Contaminant risks background contamination due to man-= 0 ptscontamination from made source(s) natural sources NO or Is the concentration of Have volatile organic UNKNOWN the contaminant chemicals been detected increasing, decreasing, in the source waters in or staying the same? recent sampling Recent VOC Sampling period(s)? Results (mg/L) No recent VOC sampling data was available in ADEC records for this Increasing: risk up 1 - 10 pts PWSID YES Decreasing: risk down 1 - 5 pts + 0 pts Same: risk unchanged Existing contamination points based on Risk due to existing man-Risk due to natural linear interpolation of most recent detect made sources sources [MCL = 50 pts; detect = 0 pts]0 pts Risk due to existing contamination 0 pts Was the source of Evaluate the level of contamination contamination from natural? man-made sources YES

Page 10 of 13

Chart 7. Contaminant risks for Naknek Marine Center (262474.001) - Volatile Organic Chemicals

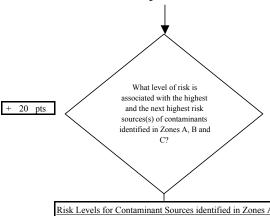

Risk Levels for Contaminant Sources identified in Zones A, B and C								
	Zone A	Zones B&C	Total					
Very Highs(s)	0	0	0					
High(s)	0	0	0					
Medium(s)	2	0	2					
Low(s)	5	0	5					
Medium(s)	0 2 5	0 0	0 2 5					

	LOW 10 pts	MEDIUM 20 pts	HIGH 30 pts	VERY HIGH 40 pts
LOW	≥ 10 sources + 10 pts	≥ 10 sources + 5 pts	≥ 20 sources + 5 pts	
MEDIUM		≥ 2 sources + 5 pts	≥ 5 sources + 5 pts	≥ 10 sources + 5 pts
HIGH			≥ 1 source + 10 pts	≥ 2 sources + 10 pts
VERY HIGH				≥ 1 source + 10 pts

Matrix Score 20

Note: Septic systems, sewerlines, and roads are each assigned a risk ranking for each individua contaminant source in the CSI. The VA, however, counts these contaminant sources as a group and assigns a calculated number of either "lows" or "mediums" based on the density.

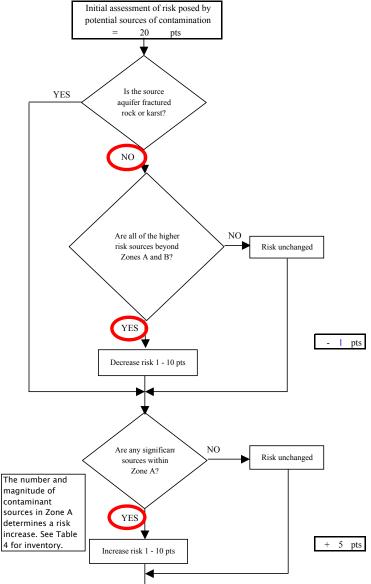


Chart 7. Contaminant risks for Naknek Marine Center (262474.001) - Volatile Organic Chemicals Existing Are there conditions 0 pts Risk unchanged that warrant upgrading risk? Risk due to existing Potential contamination The number and 24 pts magnitude of Risk posed by potential sources contaminant of contamination with controls Contaminant Risk sources in Zone D YES determines a risk 24 pts Contaminant risks increase. See Table 4 for inventory. 0 pts Increase risk 1 - 10 pts Risk posed by potential sources of contamination 24 pts *Truncate risk at 50 pts Contaminant risks* 24 Contaminant Risk Ratings Are there sufficient **Medium** controls, conditions, NO. Risk unchanged or monitoring to 40 to 50 pts very high warrant downgrading 30 to < 40 pts high 20 to < 30 pts risk? medium < 20 pts low YES 0 pts Decrease risk 1 - 10 pts Risk posed by potential sources of contamination with controls 24 pts

Page 12 of 13

Chart 8. Vulnerability analysis for Naknek Marine Center (262474.001) - Volatile Organic Chemicals (Chart 1. Susceptibiltiy of the wellhead) Susceptibility of well Very High 48 pts Evaluate the susceptibility of the wellhead (Chart 7. Contaminant risks for wells - Volatile Organic Chemicals) Evaluate contaminant Susceptibility of wellhead Very High risks 25 pts Evaluate the (Chart 2. Susceptibility of the aquifer) Contaminant risks Medium susceptibility of the 24 pts aquifer within the protection area Susceptibility of aquifer Very High 23 pts Susceptibility of the well Contaminant risks Vulnerability of drinking water well to contamination Susceptibility of the wellhead Overall Vulnerability Ratings Susceptibility of aquifer 80 to 100 pts very high 60 to < 80 pts high Susceptibility of well Vulnerability of drinking water 40 to < 60 ptsmedium well < 40 pts low 72 pts High **70**

Page 13 of 13