



Source Water Assessment

A Hydrogeologic Susceptibility and Vulnerability Assessment for Red Dog Inn Drinking Water System, Naknek, Alaska

PWSID # 260749.001 March 2004

DRINKING WATER PROTECTION PROGRAM REPORT 1160
Alaska Department of Environmental Conservation

Source Water Assessment for Red Dog Inn Drinking Water System Naknek, Alaska

PWSID # 2607492.001

DRINKING WATER PROTECTION PROGRAM REPORT 1160

The Drinking Water Protection Program (DWPP) is producing Source Water Assessments in compliance with the Safe Drinking Water Act Amendments of 1996. Each assessment includes a delineation of the source water area, an inventory of potential and existing contaminant sources that may impact the water, a risk ranking for each of these contaminants, and an evaluation of the potential vulnerability of these drinking water sources.

These assessments are intended to provide public water systems owners/operators, communities, and local governments with the best available information that may be used to protect the quality of their drinking water. The assessments combine information obtained from various sources, including the U.S. Environmental Protection Agency, Alaska Department of Environmental Conservation (ADEC), public water system owners/operators, and other public information sources. The results of this assessment are subject to change if additional data becomes available. It is anticipated this assessment will be updated every five years to reflect any changes in the vulnerability and/or susceptibility of public drinking water source. If you have any additional information that may affect the results of this assessment, please contact the Program Coordinator of DWPP, (907) 269-7521.

CONTENTS

EXECUTIVE SUMMARY RED DOG INN PUBLIC DRINKING WATER SYSTEM RED DOG INN DRINKING WATER PROTECTION AREA			1	INVENTORY OF POTENTIAL AND EXISTING CONTAMINANT SOURCES
			TAB	LES
Table 2. Susce Table 3. Conta	eptibil amina	itynt Riskslnerability		
APPENDIX	A.	Red Dog Inn Drinking Wate	r Protect	ion Area (Map A)
	В.	Bacteria and Viruses (T Contaminant Source Invento Nitrates/Nitrites (Table	ory and R Table 2) ory and R 3) ory and R	Lisk Ranking for Red Dog Inn – Lisk Ranking for Red Dog Inn – Lisk Ranking for Red Dog Inn –
	C.	Red Dog Inn Drinking Wate and Existing Contamina		
	D.			ant Source Inventory and Risk Ranking for fater Source (Charts 1 – 8)

Source Water Assessment for Red Dog Inn Source of Public Drinking Water, Naknek, Alaska

Drinking Water Protection Program Alaska Department of Environmental Conservation

EXECUTIVE SUMMARY

The Red Dog Inn has one Public Water System (PWS) well. The well (PWSID# 260749.001) has been used as a drinking water source since it was drilled in 1963.

The well is a Class B (transient/non-community) water system located approximately 100 yards from Kylie Creek, on Monsen Drive in Naknek, Alaska. Available records indicate that there is no secondary storage of drinking water, other than the pressure tanks, and that the untreated water is derived directly from the wellhead. This system operates year round and serves approximately 300 non-residents through three service connections. The wellhead received a susceptibility rating of Low and the aquifer received a susceptibility rating of High. Combining these two ratings produce a **Medium** rating for the natural susceptibility of the well. Identified potential and current sources of contaminants for the primary public drinking water source include: domestic wastewater collection systems, a domestic wastewater treatment plant, aboveground fuel tanks, water supply wells, a cemetery, airports, firehouses, a medical/veterinary facility, and roads. These identified potential and existing sources of contamination are considered as sources of bacteria and viruses, nitrates and/or nitrites, and volatile organic chemicals. Overall, the water well received a vulnerability rating of **High** for the bacteria and viruses, a vulnerability rating of High for nitrates and nitrites, and a vulnerability rating of High for volatile organic chemicals contaminant categories.

RED DOG INN PUBLIC DRINKING WATER SYSTEM

The Red Dog Inn water well is a Class B (transient/non-community) public water system. The system consists of one well located approximately 100 yards from Kylie Creek on Monsen Drive in Naknek, Alaska (Sec. 3, T17S, R47W, Seward Meridian; see Map A of Appendix A). Naknek is the primary fishery center in Bristol Bay, located about 12 miles northwest of King Salmon and 300 miles

southwest of Anchorage. The community has a population of 642 (ADCED, 2003). Average annual precipitation for Naknek is 20 inches, including approximately 45 inches of snowfall. Temperatures range from 42 to 63°F in summer and -4 to 16°F in winter. Temperatures can be as extreme as -46 to 88°F.

The community of Naknek gets most of their water supply from individual wells. Most households are served by the piped sewage collection system operated by the Borough and the remaining households have individual septic tanks (ADCED, 2003). Naknek receives electrical power from the Naknek Electric Association operated by the REA Cooperative. Power generating facilities are fueled by diesel. Refuse is collected by the Patterson Sanitation Company and trucked to the Borough operated landfill located five miles outside of the community (ADCED, 2003).

According to information supplied by ADEC for the Red Dog Inn PWS, depth of the water well is 65 feet below the ground surface. Based on available construction details for an adjacent PWS (PWSID #262862.01), the well is assumed to be screened in gravelly-sandy material in a confined aquifer. Confined aquifers are likely less susceptible to groundwater impacts resulting from the downward migration of surface contaminants. The well is not located in a floodplain.

Information acquired from a May 1999 sanitary survey for the public water system indicated that the land surface was sloped away from the well. Generally, land surfaces that slope away from the wellhead promote surface water drainage, which reduces potential of contaminant migration down the well casing annulus. Well construction details are not available and based on the date of construction (1963); it is assumed that the well is not grouted according to ADEC regulations. Proper grouting provides added protection against contaminants traveling along the well casing annulus and into source waters.

Naknek is located in an area that has been mapped as being underlain by isolated masses of permafrost; predominantly fine-grained deposits. Permafrost is usually found either at a considerable depth as relict permafrost or near the surface as thin lenses of small extent where ground insulation is high or low. The terrain in this area consists of low hills with many shallow lakes. The lakes resulted from the delayed melting of buried ice blocks (ADOT&PF, 1982).

RED DOG INN DRINKING WATER PROTECTION AREA

In order to evaluate whether a drinking water source is at risk, we must first evaluate what are the most likely pathways for surface contamination to reach the groundwater. These areas are determined by looking at the characteristics of the soil, groundwater, aquifer, and well.

The most probable area for contamination to reach the drinking water well is the area that contributes water to the well, the groundwater recharge area. This area is designated as the drinking water protection area (DWPA). Because releases of contaminants within the protection area are most likely to impact the drinking water well, this area will serve as the focus for voluntary protection efforts. An analytical calculation was used to determine the size and shape of the DWPA for the Red Dog Inn PWS. The input parameters describing the attributes of the aquifer in this calculation were adopted from Groundwater (Freeze and Cherry, 1979). Available geology and groundwater contours were also considered to take into account any uncertainties in groundwater flow and aquifer characteristics to arrive at a meaningful protection area.

The protection areas established for wells by the ADEC are usually separated into four zones, limited by the watershed. These zones correspond to differences in the time-of-travel (TOT) of the water moving through the aquifer to the well (Please refer to the Guidance Manual for Class B Public Water Systems for additional information).

The time of travel for contaminants within the water varies and is dependent on the physical and chemical characteristics of each contaminant. The following is a summary of the four protection area zones for wells and the calculated time-of-travel for each:

Table 1. Definition of Zones

Zone	Definition
A	¹ / ₄ the distance for the 2-yr. time-of-travel
В	Less than the 2 year time-of-travel

C	Less Than the 5 year time-of-travel
D	Less than the 10 year time-of-travel

The DWPA for the Red Dog Inn PWS was determined using an analytical calculation and includes Zone A, B and D (See Map A of Appendix A).

INVENTORY OF POTENTIAL AND EXISTING CONTAMINANT SOURCES

The Drinking Water Protection Program has completed an inventory of potential and existing sources of contamination within the Red Dog Inn DWPA. This inventory was completed through a search of agency records and other publicly available information. Potential sources of contamination to the drinking water aquifer include a wide range of categories and types. Potential drinking water contaminants are found within agricultural, residential, commercial, and industrial areas, but can also occur within areas that have little or no development.

For the basis of all Class B public water system assessments, three categories of drinking water contaminants were inventoried. They include:

- Bacteria and viruses,
- Nitrates and/or nitrites,
- Volatile organic chemicals.

The sources are displayed on Map C of Appendix C and summarized in Table 1 of Appendix B.

RANKING OF CONTAMINANT RISKS

Once the potential and existing sources of contamination have been identified, they are assigned a ranking according to what type and level of risk they represent. Ranking of contaminant risks for a "potential" or "existing" source of contamination is a function of toxicity and volumes of specific contaminants associated with that source. Rankings include:

- Low,
- Medium,
- High, and
- Very High.

The time-of-travel for contaminants within the water varies and is dependent on the physical and chemical characteristics of each contaminant. Bacteria and Viruses are only inventoried in Zones A and B because of their short life span. Only "Very High"

and "High" rankings are inventoried within the outer Zone D due to the probability of contaminant dilution by the time the contaminants get to the well.

Tables 2 through 4 in Appendix B contain the ranking of potential and existing sources of contamination with respect to bacteria and viruses, nitrates and/or nitrites, and volatile organic chemicals.

VULNERABILITY OF THE RED DOG INN DRINKING WATER SYSTEM

Vulnerability of a drinking water source to contamination is a combination of two factors:

- Natural susceptibility, and
- Contaminant risks.

Appendix D contains eight charts, which together form the 'Vulnerability Analysis' for a source water assessment for a public drinking water source. Chart 1 analyzes the 'Susceptibility of the Wellhead' to contamination by looking at the construction of the well and its surrounding area. Chart 2 analyzes the 'Susceptibility of the Aquifer' to contamination by looking at the naturally occurring attributes of the water source and influences on the groundwater system that might lead to contamination. Chart 3 analyzes 'Contaminant Risks' for the drinking water source with respect to bacteria and viruses. The 'Contaminant Risks' portion of the analysis considers potential sources of contaminants as well as a review of contamination that has or may have occurred, but has not arrived or been detected at the well. Lastly, Chart 4 contains the 'Vulnerability Analysis for Bacteria and Viruses'. Charts 5 through 8 contain the Contaminant Risks and Vulnerability Analyses for nitrates and nitrites and volatile organic chemicals, respectively.

A score for the Natural Susceptibility is reached by considering the properties of the well and the aquifer.

Susceptibility of the Wellhead (0 – 25 Points) (Chart 1 of Appendix D)

+

Susceptibility of the Aquifer (0 – 25 Points) (Chart 2 of Appendix D)

=

Natural Susceptibility (Susceptibility of the Well) (0-50 Points)

A ranking is assigned for the Natural Susceptibility according to the point score:

Natural Susceptibility Ratings						
40 to 50 pts	Very High					
30 to < 40 pts	High					
20 to < 30 pts	Medium					
< 20 pts	Low					

The Red Dog Inn water well is in a confined aquifer. Confined aquifers are less susceptible to potential groundwater quality impacts posed by the migration of surface water contaminants downward from the surface. Table 2 shows the Susceptibility scores and ratings for both wells in this PWS.

Table 2. Susceptibility

	Score	Rating
Susceptibility of the	5	Low
Wellhead		
Susceptibility of the	22	High
Aquifer		
Natural Susceptibility	27	Medium

Contaminant risks to a drinking water source depend on the type, number or density, and distribution of contaminant sources. This score has been derived from an examination of existing and historical contamination that has been detected at the drinking water source through routine sampling. It also evaluates potential sources of contamination. Flow charts are used to assign a point score, and ratings are assigned in the same way as for the natural susceptibility:

Contaminant Risk Ratings							
40 to 50 pts 30 to < 40 pts 20 to < 30 pts < 20 pts	Very High High Medium Low						

Table 3 summarizes the Contaminant Risks for each category of drinking water contaminants.

Table 3. Contaminant Risks

Category	Score	Rating
Bacteria and Viruses	40	Very High
Nitrates and/or Nitrites	50	Very High
Volatile Organic Chemical	ls 49	Very High

Finally, an overall vulnerability score is assigned for each water system by combining each of the contaminant risk scores with the natural susceptibility score:

Natural Susceptibility
$$(0 - 50 \text{ points})$$

+
Contaminant Risks $(0 - 50 \text{ points})$

Vulnerability of the Drinking Water Source to Contamination (0 - 100).

Again, rankings are assigned according to a point score:

Overall Vulnerability Ratings							
80 to 100 pts	Very High						
60 to < 80 pts	High						
40 to < 60 pts	Medium						
< 40 pts	Low						

Table 4 contains the overall vulnerability scores (0 – 100) and ratings for each of the three categories of drinking water contaminants. Note: scores are rounded off to the nearest five.

Table 4. Overall Vulnerability

Category	Score	Rating
Bacteria and Viruses	65	High
Nitrates and Nitrites	75	High
Volatile Organic Chemicals	75	High

Bacteria and Viruses

The contaminant risk for bacteria and viruses is **Very High**. The risk is primarily attributed to the presence of a domestic wastewater treatment plant, domestic wastewater collection systems and medical/veterinary facility in Zone A.

A positive bacteria count has not been reported in recent (within five years) sampling events. Only a small amount of bacteria and viruses are required to endanger public health.

After combining the contaminant risk for bacteria and viruses with the natural susceptibility of the well, the overall vulnerability of the well to contamination is **High**.

Nitrates and Nitrites

The contaminant risk for nitrates and nitrites is **Very High**. The risk to this source of public drinking water is attributed to the presence of a domestic wastewater treatment plant, domestic wastewater collection systems, and a cemetery in Zone A.

Nitrates are very mobile, moving at approximately the same rate as water. The sampling history for this well indicates that low levels of nitrates have been detected in recent sampling events. However, the reported concentrations of nitrates do not exceed the maximum contaminant level (MCL) of 10 mg/L. Nitrate concentrations in uncontaminated groundwater are typically less than 2 mg/L; therefore, nitrate concentrations above 2 mg/L may be indicative of man-made sources (See Chart 5 - Contaminant Risks for Nitrates and/or Nitrites in Appendix D).

Nitrate levels are often derived from the decomposition of organic matter in soils. Although the nitrate source is unknown, such occurrences may be attributed to septic systems or other sources. After combining the contaminant risk for nitrates and nitrites with the natural susceptibility of the well, the overall vulnerability of the well to nitrate and nitrite contamination is **High**.

Volatile Organic Chemicals

The contaminant risk for volatile organic chemicals is **Very High**. The risk is primarily attributed to the presence of airports in Zones A and B (see Table 4 – Appendix B).

No recent sampling data was available in ADEC records for the Red Dog Inn (See Chart 7 – Contaminant Risks for Volatile Organic Chemicals in Appendix D).

After combining the contaminant risk for volatile organic chemicals with the natural susceptibility of the well, the overall vulnerability of the well to contamination is **High**.

Using the Source Water Assessment

This assessment of contaminant risks can be used as a foundation for local voluntary protection efforts as well as a basis for the continuous efforts on the part of the Red Dog Inn and the community of Naknek to protect public health. It is anticipated that Source Water Assessments will be updated every five years to reflect any changes in the vulnerability and/or susceptibility of the drinking water source.


REFERENCES

- Alaska Department of Community and Economic Development (ADCED), 2003 [WWW document]. URL: http://www.dced.state.ak.us/cbd/commdb/CF COMDB.htm
- Alaska Department of Environmental Conservation, Contaminated Sites Database, 2003 [WWW database], URL http://www.state.ak.us/dec/dspar/csites/cs_search.htm
- Alaska Department of Environmental Conservation, Leaking Underground Storage Tank Database, 2003 [WWW database], URL http://www.dec.state.ak.us/spar/stp/ust/search/fac_search.asp
- Alaska Department of Transportation and Public Facilities (ADOT&PF), 1982, Engineering Geology and Soils Report, North Naknek Materials Investigation.
- Freeze, R. A., and Cherry, J.A. 1979, Groundwater, Prentice-Hall, Englewood Cliffs, New Jersey
- United States Environmental Protection Agency (EPA), 2002 [WWW document]. URL http://www.epa.gov/safewater/mcl.html.

APPENDIX A

Drinking Water Protection Area Location Map (Map A)

Public Water Well System for PWS #260749.001 Red Dog Inn

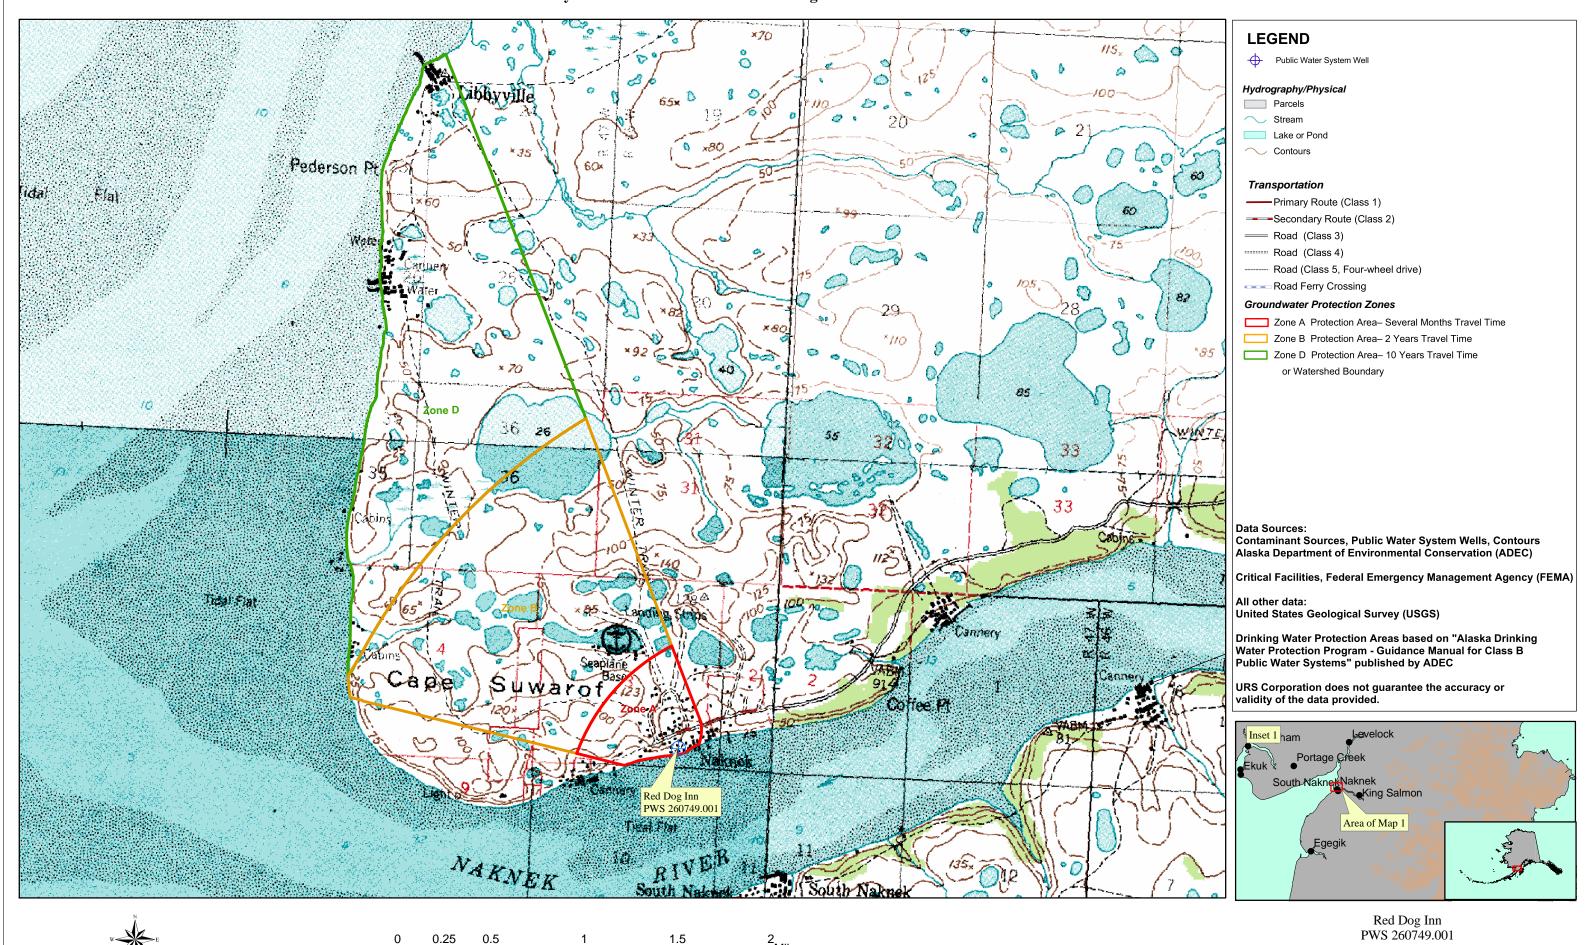

Appendix A Map A

APPENDIX B

Contaminant Source Inventory and Risk Rankings (Tables 1-4)

Contaminant Source Inventory for Red Dog Inn

Contaminant Source Type	Contaminant Source ID	CS ID tag	Zone	Map Number	Comments
Domestic wastewater collection systems (sewer lines or lift stati-	D01	D01-01	A	С	
Domestic wastewater treatment plant disposal ponds/lagoons	D02	D02-01	A	C	Naknek
Tanks, heating oil, nonresidential (aboveground)	T14	T14-01	A	C	Naknek
Tanks, heating oil, nonresidential (aboveground)	T14	T14-02	A	С	Naknek
Tanks, heating oil, nonresidential (aboveground)	T14	T14-03	A	С	Naknek
Tanks, heating oil, nonresidential (aboveground)	T14	T14-04	A	С	Naknek
Tanks, heating oil, nonresidential (aboveground)	T14	T14-05	A	С	Naknek
Tanks, heating oil, nonresidential (aboveground)	T14	T14-06	A	С	Naknek
Tanks, heating oil, nonresidential (aboveground)	T14	T14-07	A	С	Naknek
Tanks, heating oil, nonresidential (aboveground)	T14	T14-08	A	С	Naknek
Tanks, heating oil, nonresidential (aboveground)	T14	T14-09	A	С	Naknek
Tanks, heating oil, nonresidential (aboveground)	T14	T14-10	A	С	Naknek
Tanks, heating oil, nonresidential (aboveground)	T14	T14-11	A	С	Naknek
Tanks, heating oil, nonresidential (aboveground)	T14	T14-12	A	С	Naknek
Tanks, heating oil, nonresidential (aboveground)	T14	T14-13	A	С	Naknek
Water supply wells	W09	W09-01	A	С	Naknek
Cemeteries	X01	X01-01	A	С	Naknek
Airports	X14	X14-01	A	С	Naknek
Highways and roads, dirt/gravel	X24	X24-01	A	С	Assumed that 1 to 20 roads exist in Zone A
Firehouses	X38	X38-01	A	С	Naknek
Firehouses	X38	X38-02	A	С	Naknek
Medical/veterinary facilities (doctor or dentist offices, hospitals nursing homes)	X40	X40-01	A	С	Naknek
Airports	X14	X14-02	В	C	

Contaminant Source Inventory and Risk Ranking for Red Dog Inn Sources of Bacteria and Viruses

Contaminant Source Type	Contaminant Source ID	CS ID tag	Zone	Risk Ranking for Analysis	Map Number	Comments
Domestic wastewater collection systems (sewer line or lift stations)	D01	D01-01	A	Medium	С	
Domestic wastewater treatment plant disposal ponds/lagoons	D02	D02-01	A	High	С	Naknek
Highways and roads, dirt/gravel	X24	X24-01	A	Low	C	Assumed that 1 to 20 roads exist in Zone A
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-01	A	Medium	C	Naknek

Contaminant Source Inventory and Risk Ranking for Red Dog Inn Sources of Nitrates/Nitrites

Contaminant Source Type	Contaminant Source ID	CS ID tag	Zone	Risk Ranking for Analysis	Map Number	Comments
Domestic wastewater collection systems (sewer line or lift stations)	D01	D01-01	A	Medium	С	
Domestic wastewater treatment plant disposal ponds/lagoons	D02	D02-01	A	High	С	Naknek
Cemeteries	X01	X01-01	A	Medium	С	Naknek
Airports	X14	X14-01	A	Low	С	Naknek
Highways and roads, dirt/gravel	X24	X24-01	A	Low	С	Assumed that 1 to 20 roads exist in Zone A
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-01	A	Low	С	Naknek
Airports	X14	X14-02	В	Low	С	


Contaminant Source Inventory and Risk Ranking for Red Dog Inn Sources of Volatile Organic Chemicals

Contaminant Source Type	Contaminant Source ID	CS ID tag	Zone	Risk Ranking for Analysis	Map Number	Comments
Domestic wastewater collection systems (sewer line or lift stations)	D01	D01-01	A	Low	С	
Domestic wastewater treatment plant disposal ponds/lagoons	D02	D02-01	A	Low	С	Naknek
Tanks, heating oil, nonresidential (aboveground)	T14	T14-01	A	Low	C	Naknek
Tanks, heating oil, nonresidential (aboveground)	T14	T14-02	A	Low	C	Naknek
Tanks, heating oil, nonresidential (aboveground)	T14	T14-03	A	Low	C	Naknek
Tanks, heating oil, nonresidential (aboveground)	T14	T14-04	A	Low	C	Naknek
Tanks, heating oil, nonresidential (aboveground)	T14	T14-05	A	Low	С	Naknek
Tanks, heating oil, nonresidential (aboveground)	T14	T14-06	A	Low	С	Naknek
Tanks, heating oil, nonresidential (aboveground)	T14	T14-07	A	Low	С	Naknek
Tanks, heating oil, nonresidential (aboveground)	T14	T14-08	A	Low	С	Naknek
Tanks, heating oil, nonresidential (aboveground)	T14	T14-09	A	Low	С	Naknek
Tanks, heating oil, nonresidential (aboveground)	T14	T14-10	A	Low	С	Naknek
Tanks, heating oil, nonresidential (aboveground)	T14	T14-11	A	Low	С	Naknek
Tanks, heating oil, nonresidential (aboveground)	T14	T14-12	A	Low	С	Naknek
Tanks, heating oil, nonresidential (aboveground)	T14	T14-13	A	Low	С	Naknek
Airports	X14	X14-01	A	High	С	Naknek
Highways and roads, dirt/gravel	X24	X24-01	A	Low	С	Assumed that 1 to 20 roads exist in Zone A
Firehouses	X38	X38-01	A	Low	С	Naknek
Firehouses	X38	X38-02	A	Low	С	Naknek
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-01	A	Low	С	Naknek
Airports	X14	X14-02	В	High	C	

APPENDIX C

Drinking Water Protection Area and Potential and Existing Contaminant Sources (Map C)

Public Water Well System for PWS #260749.001 Red Dog Inn Showing Potential and Existing Sources of Contamination

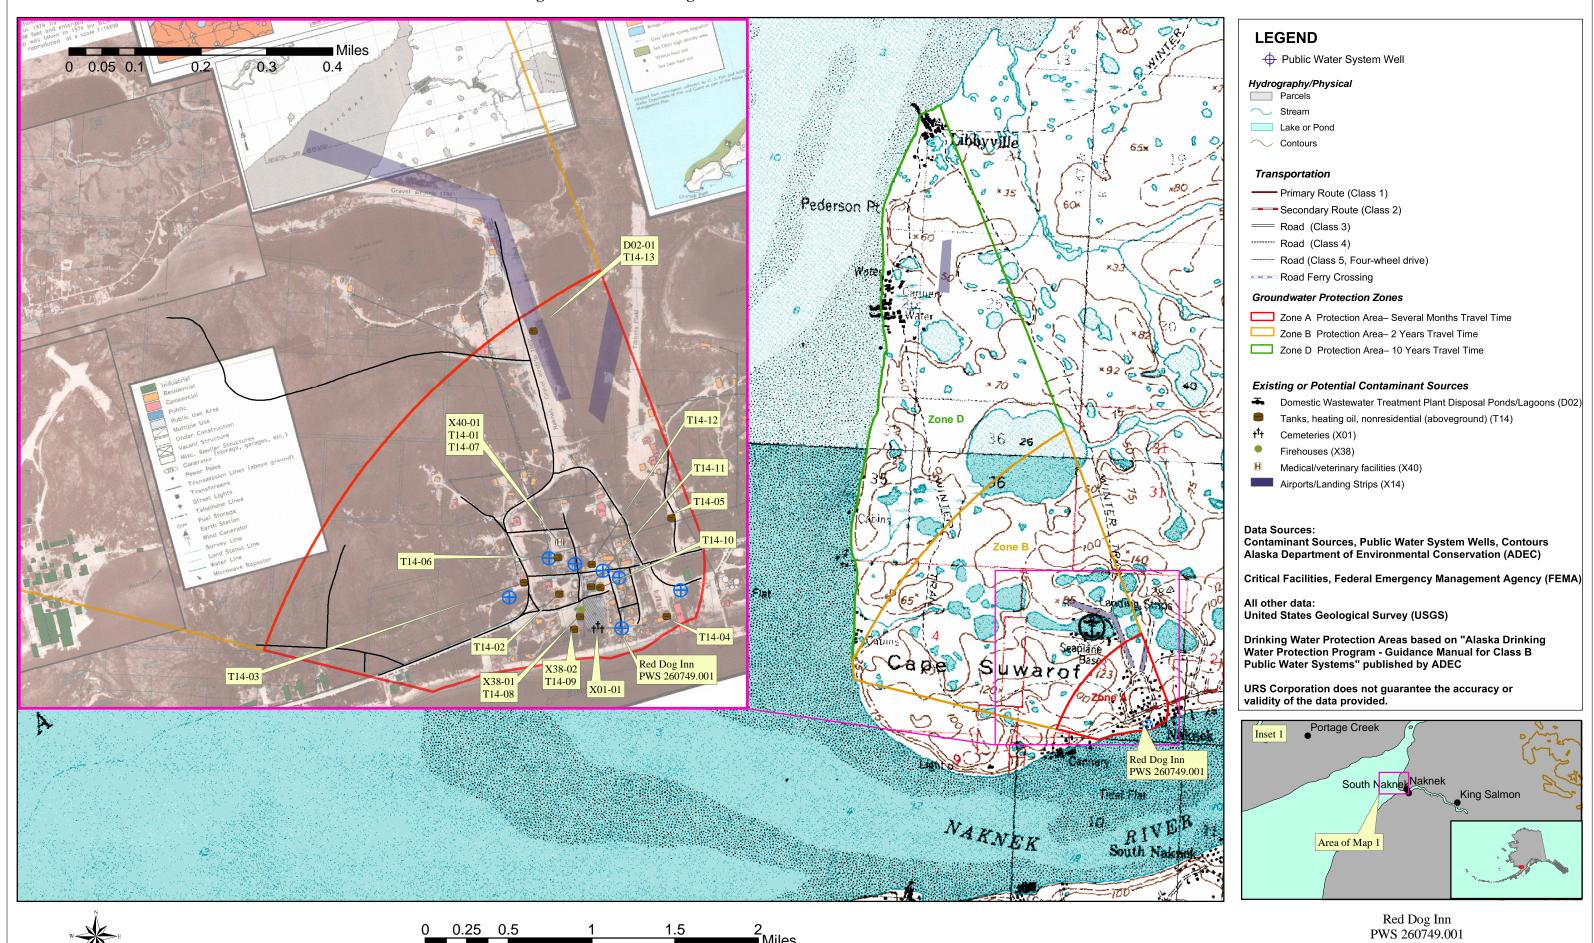

Appendix C Map C

APPENDIX D

Vulnerability Analysis for Public Drinking Water Source (Charts 1-8)

Chart 1. Susceptibility of the wellhead - Red Dog Inn (PWS No. 260749.001) Susceptibility initially assumed to be low. Susceptibility of wellhead = 0 ptsIs the well Increase susceptibility 5 pts properly + 5 pts NO Increase susceptibility 20 pts grouted? Is the well 0 pts capped? Unknown if well is grouted; well is assumed not grouted based on date of well construction (1963) YES YES Susceptibility of wellhead Low 5 pts YES Increase susceptibility: 10 pts: suspected floodplain + 0 pts Wellhead Susceptibility Ratings 20 pts: known floodplain floodplain? 20 to 25 pts very high 15 to < 20 pts high 10 to < 15 pts medium NO. < 10 pts low Is the land surface sloped Increase susceptibility 5 pts + 0 pts away from the

Chart 2. Susceptibility of the aquifer Red Dog Inn (PWS No. 260749.001)



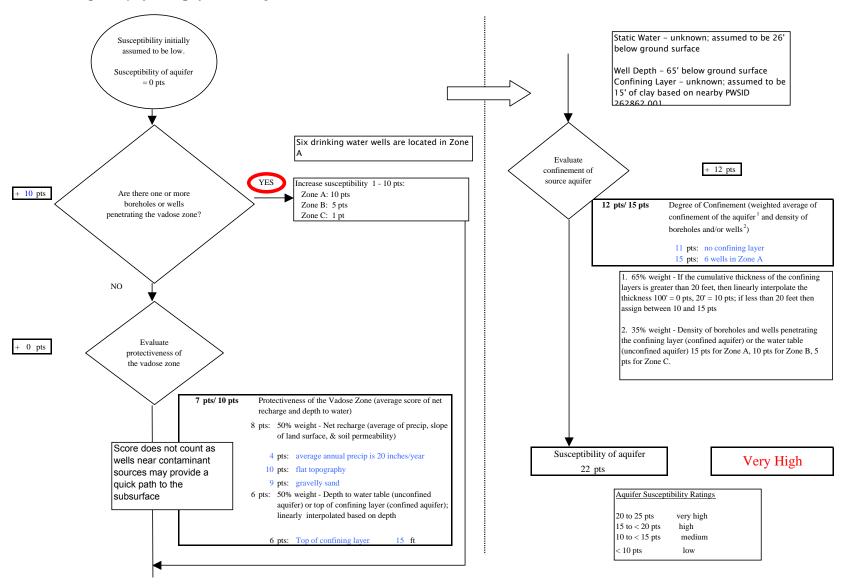


Chart 3. Contaminant risks for Red Dog Inn (PWS No. 260749.001) - Bacteria & Viruses

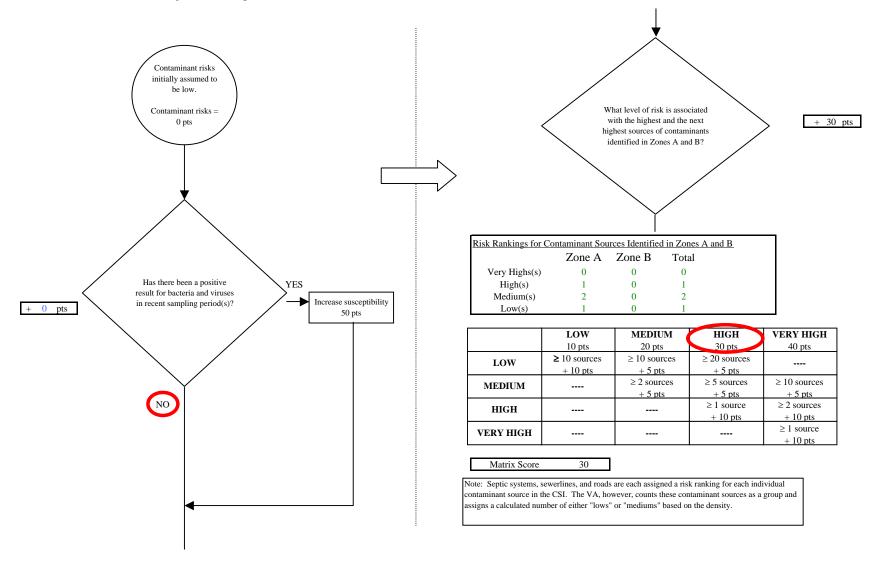

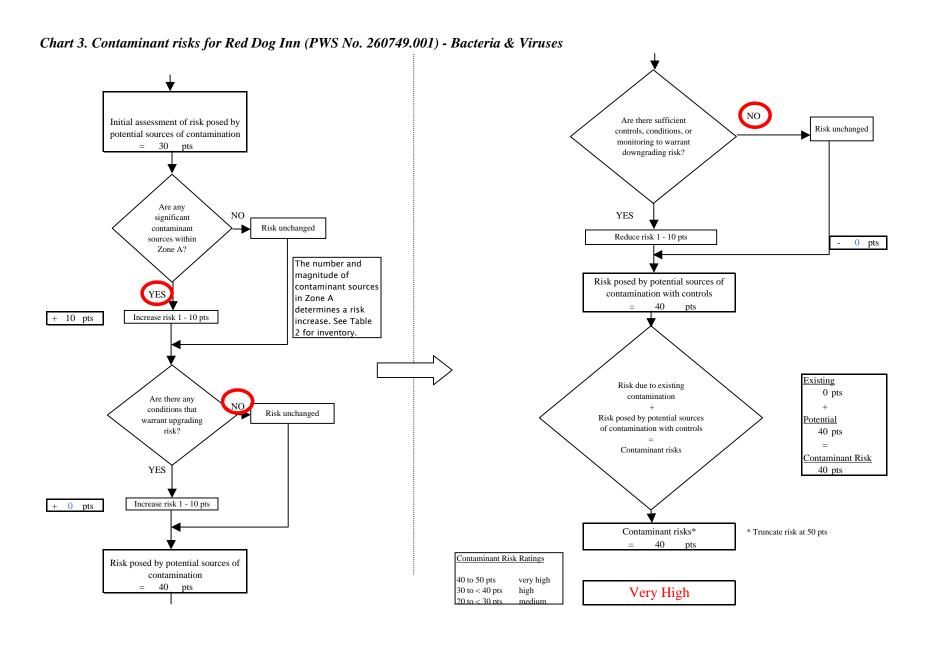

Page 4 of 13

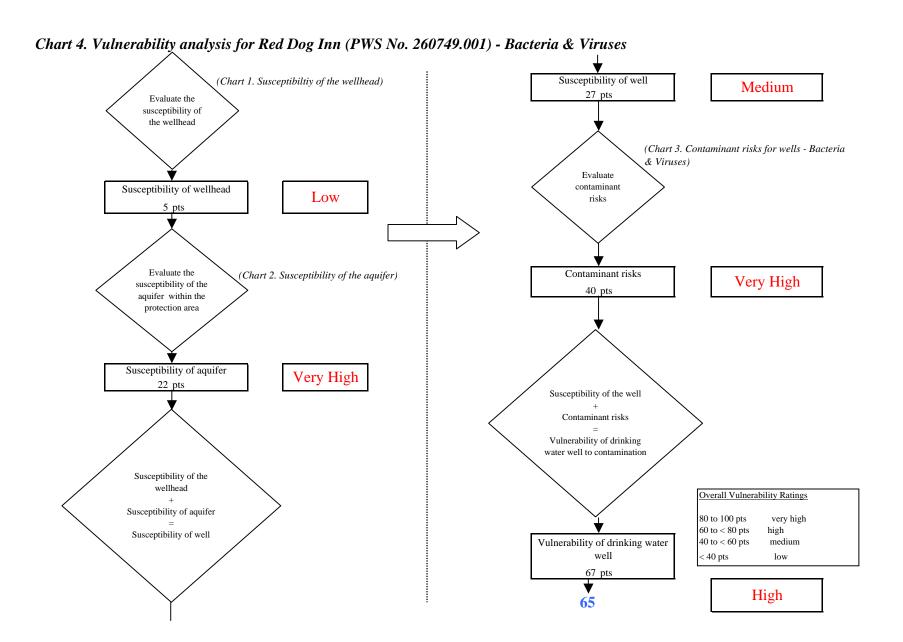
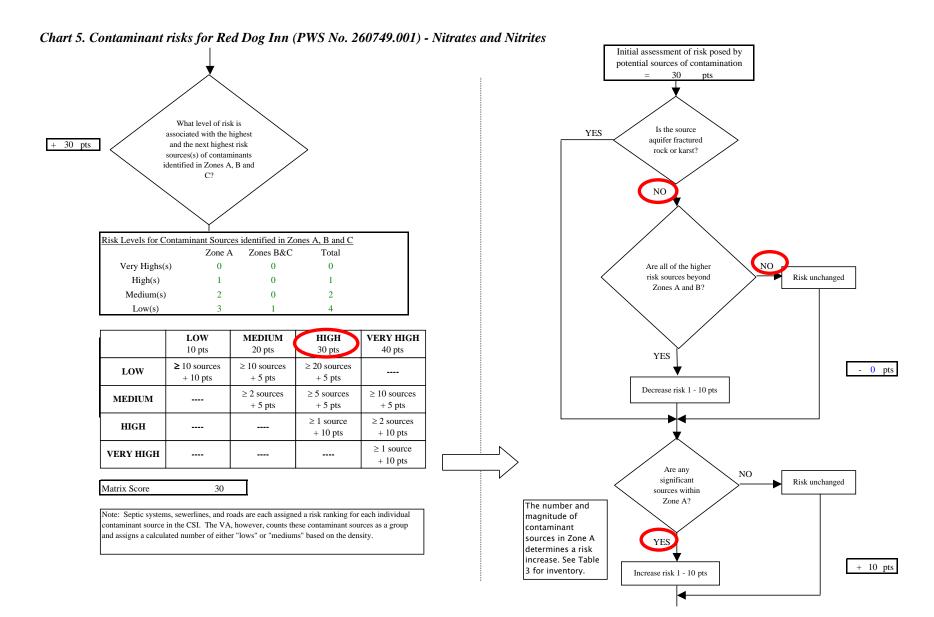


Chart 5. Contaminant risks for Red Dog Inn (PWS No. 260749.001) - Nitrates and Nitrites Contaminant risks initially assumed to be low. Current level of Evaluate the level of Contaminant risks contamination due to manbackground = 0 ptscontamination from made source(s) natural sources 13 pts Is the concentration of Has nitrates and/or the contaminant NO nitrites been detected in increasing, decreasing, the source waters in or staying the same? recent sampling period(s)? Recent Nitrate Sampling Results (mg/L) 6/21/2000 3/18/1996 3.09 The nitrate concentration is assumed to be natural if less than 2 mg/L (20%) Increasing: risk up 1 - 10 pts YES Decreasing: risk down 1 - 5 pts + 0 pts Same: risk unchanged Maximum Contaminant Level (MCL) = 10 mg/LDetected Nitrate Level = Existing contamination points based on Risk due to existing man-Risk due to natural linear interpolation of most recent detect made sources sources [MCL = 50 pts; detect = 0 pts]0 pts 13 pts Risk due to existing contamination 13 pts Was the source of Evaluate the level of contamination contamination from natural? man-made sources YES






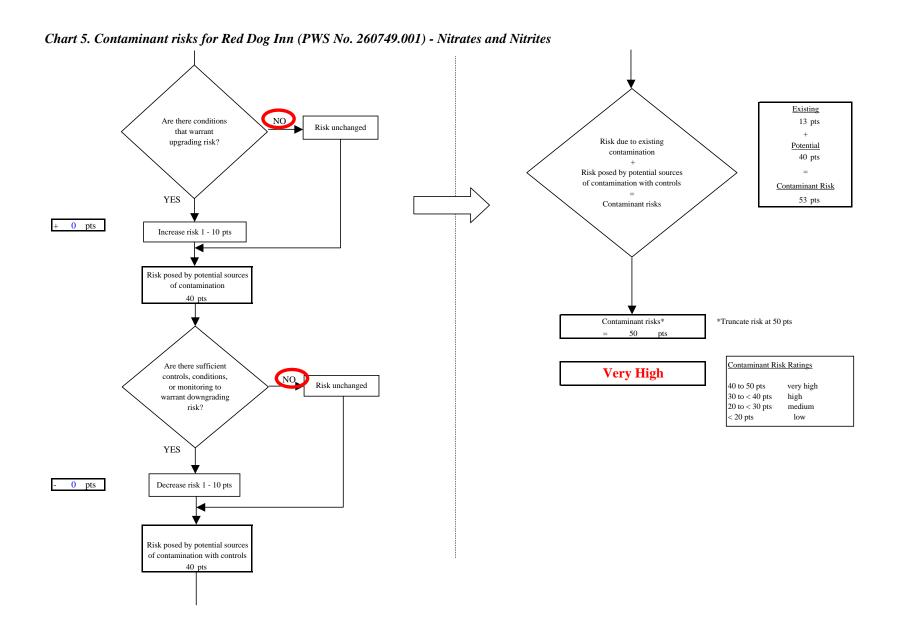


Chart 6. Vulnerability analysis for Red Dog Inn (PWS No. 260749.001) - Nitrates and Nitrites Susceptibility of well (Chart 1. Susceptibiltiy of the wellhead) Medium 27 pts Evaluate the susceptibility of the wellhead (Chart 5. Contaminant risks for wells - Nitrates and Nitrites) Evaluate contaminant Susceptibility of wellhead Low risks Evaluate the Contaminant risks (Chart 2. Susceptibility of the aquifer) Very High susceptibility of the 50 pts aquifer within the protection area Susceptibility of aquifer Very High Susceptibility of the well Contaminant risks Vulnerability of drinking water well to contamination Susceptibility of the wellhead Overall Vulnerability Ratings Susceptibility of aquifer 80 to 100 pts very high 60 to < 80 pts high Susceptibility of well Vulnerability of drinking water 40 to < 60 pts medium well < 40 pts 77 pts High **75**

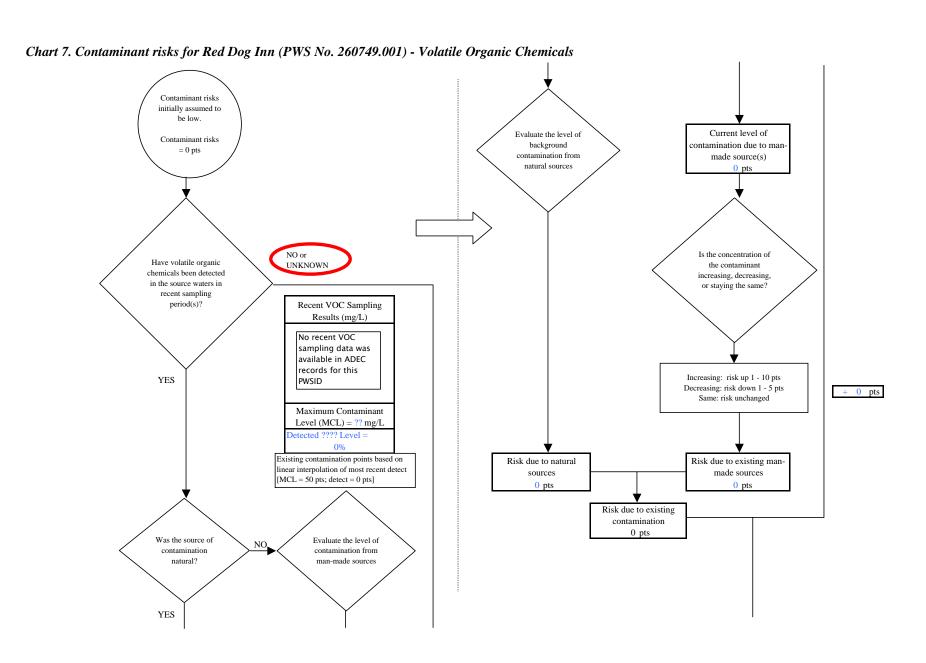

Page 10 of 13

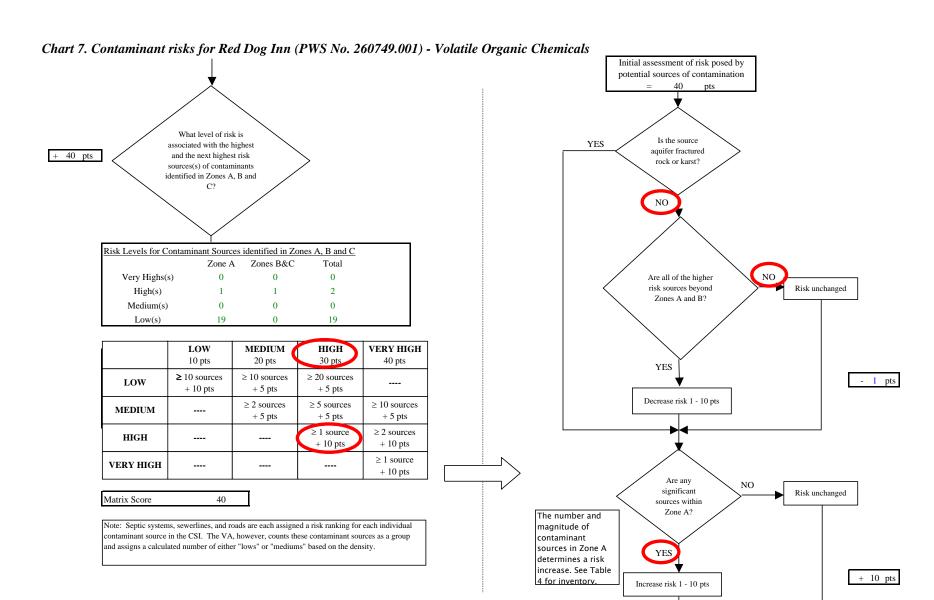

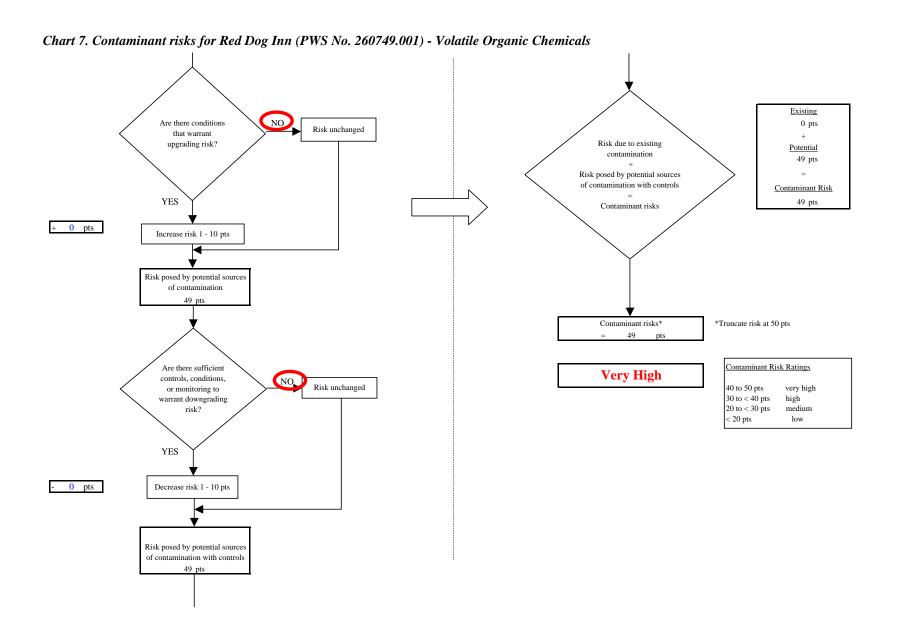

Page 12 of 13

Chart 8. Vulnerability analysis for Red Dog Inn (PWS No. 260749.001) - Volatile Organic Chemicals Susceptibility of well (Chart 1. Susceptibiltiy of the wellhead) Medium 27 pts Evaluate the susceptibility of the wellhead (Chart 7. Contaminant risks for wells - Volatile Organic Chemicals) Evaluate contaminant Susceptibility of wellhead Low risks Evaluate the Contaminant risks (Chart 2. Susceptibility of the aquifer) Very High susceptibility of the aquifer within the protection area Susceptibility of aquifer Very High Susceptibility of the well Contaminant risks Vulnerability of drinking water well to contamination Susceptibility of the wellhead Overall Vulnerability Ratings Susceptibility of aquifer 80 to 100 pts very high 60 to < 80 pts high Susceptibility of well Vulnerability of drinking water 40 to < 60 pts medium well < 40 pts 76 pts High **75**

Page 13 of 13