



Source Water Assessment

A Hydrogeologic Susceptibility and Vulnerability
Assessment for
Paxson Inn & Lodge
Drinking Water System,
Paxson area, Alaska
PWSID # 370659

DRINKING WATER PROTECTION PROGRAM REPORT #952

Alaska Department of Environmental Conservation

November 2003

Source Water Assessment for Paxson Inn & Lodge Drinking Water System Paxson area, Alaska PWSID# 370659

DRINKING WATER PROTECTION PROGRAM REPORT #952

The Drinking Water Protection Program (DWPP) is producing Source Water Assessments in compliance with the Safe Drinking Water Act Amendments of 1996. Each assessment includes a delineation of the source water area, an inventory of potential and existing contaminant sources that may impact the water, a risk ranking for each of these contaminants, and an evaluation of the potential vulnerability of these drinking water sources.

These assessments are intended to provide public water systems owners/operators, communities, and local governments with the best available information that may be used to protect the quality of their drinking water. The assessments combine information obtained from various sources, including the U.S. Environmental Protection Agency, Alaska Department of Environmental Conservation (ADEC), public water system owners/operators, and other public information sources. The results of this assessment are subject to change if additional data becomes available. It is anticipated this assessment will be updated every five years to reflect any changes in the vulnerability and/or susceptibility of public drinking water source. If you have any additional information that may affect the results of this assessment, please contact the Program Coordinator of DWPP, (907) 269-7521.

November 2003

CONTENTS

Executive Summary.....	1
Introduction	1
Paxson Inn & Lodge Public Drinking Water System	1
Paxson Inn & Lodge Drinking Water Protection Area (DWPA).....	2
Inventory of Potential and Existing Contaminant Sources	2
Ranking of Contaminant Risks.....	2
Vulnerability of Paxson Inn & Lodge Drinking Water System.....	3

TABLES

Table 1. Definition of Zones.....	2
Table 2. Susceptibility	3
Table 3. Contaminant Risks.....	4
Table 4. Overall Vulnerability.....	4

APPENDICES

Appendix A.	Paxson Inn & Lodge Drinking Water Protection Area (Map 1)
Appendix B.	Contaminant Source Inventory for Paxson Inn & Lodge (Table 1) Contaminant Source Inventory and Risk Ranking for Paxson Inn & Lodge– Bacteria and Viruses (Table 2) Contaminant Source Inventory and Risk Ranking for Paxson Inn & Lodge– Nitrates/Nitrites (Table 3) Contaminant Source Inventory and Risk Ranking for Paxson Inn & Lodge– Volatile Organic Chemicals (Table 4)
Appendix C.	Paxson Inn & Lodge Drinking Water Protection Area and Potential and Existing Contaminant Sources (Map 2)
Appendix D.	Vulnerability Analysis for Contaminant Source Inventory and Risk Ranking for Paxson Inn & Lodge Public Drinking Water Source (Charts 1 – 8)

Source Water Assessment for Paxson Inn & Lodge Source of Public Drinking Water

Paxson area, Alaska

Drinking Water Protection Program Alaska Department of Environmental Conservation

EXECUTIVE SUMMARY

The public water system for Paxson Inn & Lodge is a Class B (transient/non-community) water system consisting of one well in the Paxson area, Alaska. The wellhead received a susceptibility rating of **Low** and the aquifer received a susceptibility rating of **High**. Combining these two ratings produces a **Medium** rating for the natural susceptibility of the well. Identified potential and current sources of contaminants for Paxson Inn & Lodge public drinking water source include: a gasoline station, a large-capacity septic system injection well, an inactive underground mine, underground fuel storage tanks, a leaking underground storage tank site, roads, the Paxson airstrip, and the Trans-Alaska pipeline. These identified potential and existing sources of contamination are considered sources of bacteria and viruses, nitrates and/or nitrites, and volatile organic chemicals. Overall, the public water source for Paxson Inn & Lodge received a vulnerability rating of **High** for bacteria and viruses, **High** for nitrates and nitrites, and **High** for volatile organic chemicals. This assessment of contaminant risks can be used as a foundation for local voluntary protection efforts, as well as a basis for the continuing efforts on the part of the system owner/operator to protect public health.

INTRODUCTION

The Alaska Department of Environmental Conservation (ADEC) is completing source water assessments for all public drinking water sources in the State of Alaska. The purpose of this assessment is to provide the owner/operator of Paxson Inn & Lodge, communities, and local governments with information they can use to preserve the quality of Alaska's public drinking water supplies. The results of this source water assessment can be used to decide where voluntary protection efforts are needed and feasible, and also what efforts will be most effective in reducing contaminant risks to your water system. Ecology & Environment, Inc. has been contracted to perform these assessments under the supervision of ADEC.

This source water assessment combines a review of the natural conditions at the site and the potential and existing contaminant risks. These are combined to determine the overall vulnerability of the drinking water source to contamination.

PAXSON INN & LODGE PUBLIC DRINKING WATER SYSTEM

Paxson Inn & Lodge public water system is a Class B (transient/non-community) water system. The system consists of one well located at mile 185 Richardson Highway (see Map 1 of Appendix A). The community of Paxson is located at the junction of the Richardson and Denali Highways (see the inset of Map 1 in Appendix A for location). It has an estimated population of 33 residents (ADCED 2003).

Residents in the area rely on individual wells and septic systems, or haul water. Approximately half of the residences are fully plumbed (ADCED 2003). Private generators are used to provide electricity. Refuse is transported to the Glennallen landfill. Many of the homes in the area are used only seasonally (ADCED 2003).

The geology of the Paxson area generally comprises unconsolidated glacial sediments of Cenozoic age. Permafrost is found discontinuously throughout the area and may intrude the silt, sand, and gravel sediments (ADOT&PF 1982).

Drainage patterns and groundwater flow in the area may be somewhat complicated by the presence of discontinuous glacial deposits. The most likely flow direction is off the hills towards the many lakes that dot the area. Average annual snowfall is approximately 110 inches, while annual precipitation totals 20.7 inches (WRCC 2003).

The depth of the Paxson Inn & Lodge well is approximately 69 feet below ground surface.

The most recent Sanitary Survey (11/12/2000) for the water system indicates the land surface is appropriately sloped away from the well. Sloping of the ground surface around the well provides drainage of surface water away from the well casing. Also, the well is not grouted according to ADEC regulations. Proper grouting provides added protection against contaminants traveling along the well casing and into source waters. It generally is assumed that wells drilled prior to 1993 are not grouted, unless otherwise stated in the well log.

This system operates year-round and serves approximately 6 residents and 30 non-residents.

PAXSON INN & LODGE DRINKING WATER PROTECTION AREA (DWPA)

In order to evaluate whether a drinking water source is at risk, we must first evaluate what are the most likely pathways for surface contamination to reach the groundwater. These areas are determined by looking at the characteristics of the soil, groundwater, aquifer, and well.

The most probable area for contamination to reach the drinking water well is the area that contributes water to the well, the groundwater recharge area. This area is designated as the drinking water protection area. Because releases of contaminants within the protection area are most likely to impact the drinking water well, this area will serve as the focus for voluntary protection efforts.

The protection areas established for wells by the ADEC are usually separated into four zones, limited by the watershed. These zones correspond to differences in the time-of-travel (TOT) of the water moving through the aquifer to the well. An analytical calculation was used to determine the size and shape of the protection area. The input parameters describing the attributes of the aquifer in this calculation were derived from Freeze and Cherry (1979), and from a review of well logs in the area found in the Alaska Department of Natural Resources and United States Geological Survey databases. Additional methods were considered to take into account any uncertainties in groundwater flow and aquifer characteristics to arrive at a meaningful protection area. (Please refer to the Guidance Manual for Class B Public Water Systems for additional information).

The time of travel for contaminants within the water varies and is dependent on the physical and chemical characteristics of each contaminant. The following is a summary of the four protection area zones for wells and the calculated time-of-travel for each:

Table 1. Definition of Zones

Zone	Definition
A	¼ the distance for the 2-yr. time-of-travel
B	Less than the 2 year time-of-travel
C	Less Than the 5 year time-of-travel
D	Less than the 10 year time-of-travel

The DWPA may be limited by its immediate watershed and therefore may not include all four zones (See Map 1 of Appendix A).

INVENTORY OF POTENTIAL AND EXISTING CONTAMINANT SOURCES

The Drinking Water Protection Program has completed an inventory of potential and existing sources of contamination within the Paxson Inn & Lodge DWPA. This inventory was completed through a search of agency records and other publicly available information. Potential sources of contamination to the drinking water aquifer include a wide range of categories and types. Potential drinking water contaminants are found within agricultural, residential, commercial, and industrial areas, but can also occur within areas that have little or no development.

For the basis of all Class B public water system assessments, three categories of drinking water contaminants were inventoried. They include:

- Bacteria and viruses;
- Nitrates and/or nitrites;
- Volatile organic chemicals

The sources are displayed on Map 2 of Appendix C and summarized in Table 1 of Appendix B.

RANKING OF CONTAMINANT RISKS

Once the potential and existing sources of contamination have been identified, they are assigned a ranking according to what type and level of risk they represent. Ranking of contaminant risks for a “potential” or “existing” source of contamination is a function of toxicity and volumes of specific contaminants associated with that source. Rankings include:

- Low;
- Medium;
- High; and
- Very High.

The time-of-travel for contaminants within the water varies and is dependent on the physical and chemical

characteristics of each contaminant. Bacteria and Viruses are only inventoried in Zones A and B because of their short life span. Only “Very High” and “High” rankings are inventoried within the outer Zone D due to the probability of contaminant dilution by the time the contaminants get to the well.

Tables 2 through 4 in Appendix B contain the ranking of potential and existing sources of contamination with respect to bacteria and viruses, nitrates and/or nitrites, and volatile organic chemicals.

VULNERABILITY OF PAXSON INN & LODGE DRINKING WATER SYSTEM

Vulnerability of a drinking water source to contamination is a combination of two factors:

- Natural susceptibility; and
- Contaminant risks.

Appendix D contains eight charts, which together form the ‘Vulnerability Analysis’ for a source water assessment for a public drinking water source. Chart 1 analyzes the ‘Susceptibility of the Wellhead’ to contamination by looking at the construction of the well and its surrounding area. Chart 2 analyzes the ‘Susceptibility of the Aquifer’ to contamination by looking at the naturally occurring attributes of the water source and influences on the groundwater system that might lead to contamination. Chart 3 analyzes ‘Contaminant Risks’ for the drinking water source with respect to bacteria and viruses. The ‘Contaminant Risks’ portion of the analysis considers potential sources of contaminants as well as a review of contamination that has or may have occurred, but has not arrived or been detected at the well. Lastly, Chart 4 contains the ‘Vulnerability Analysis for Bacteria and Viruses’. Charts 5 through 8 contain the Contaminant Risks and Vulnerability Analyses for nitrates and nitrites and volatile organic chemicals, respectively.

A score for the Natural Susceptibility is reached by considering the properties of the well and the aquifer.

Susceptibility of the Wellhead (0 – 25 Points)
(Chart 1 of Appendix D)

+

Susceptibility of the Aquifer (0 – 25 Points)
(Chart 2 of Appendix D)

=

Natural Susceptibility (Susceptibility of the Well)
(0 – 50 Points)

A ranking is assigned for the Natural Susceptibility according to the point score:

Natural Susceptibility Ratings	
40 to 50 pts	Very High
30 to < 40 pts	High
20 to < 30 pts	Medium
< 20 pts	Low

The well for Paxson Inn & Lodge is completed in an unconfined aquifer. Because unconfined aquifers are recharged by surface water and precipitation that migrates downward from the surface, contaminants at the surface have the potential to impact this aquifer adversely. Table 2 shows the Susceptibility scores and ratings for Paxson Inn & Lodge.

Table 2. Susceptibility

	Score	Rating
Susceptibility of the Wellhead	5	Low
Susceptibility of the Aquifer	15	High
Natural Susceptibility	20	Medium

Contaminant risks to a drinking water source depend on the type, number or density, and distribution of contaminant sources. This score has been derived from an examination of existing and historical contamination that has been detected at the drinking water source through routine sampling. It also evaluates potential sources of contamination. Flow charts are used to assign a point score, and ratings are assigned in the same way as for the natural susceptibility:

Contaminant Risk Ratings	
40 to 50 pts	Very High
30 to < 40 pts	High
20 to < 30 pts	Medium
< 20 pts	Low

Table 3 summarizes the Contaminant Risks for each category of drinking water contaminants.

Table 3. Contaminant Risks

Category	Score	Rating
Bacteria and Viruses	50	Very High
Nitrates and/or Nitrites	40	Very High
Volatile Organic Chemicals	50	Very High

Finally, an overall vulnerability score is assigned for each water system by combining each of the contaminant risk scores with the natural susceptibility score:

$$\begin{array}{r}
 \text{Natural Susceptibility (0 – 50 points)} \\
 + \\
 \text{Contaminant Risks (0 – 50 points)} \\
 = \\
 \text{Vulnerability of the} \\
 \text{Drinking Water Source to Contamination (0 – 100).}
 \end{array}$$

Again, rankings are assigned according to a point score:

Overall Vulnerability Ratings	
80 to 100 pts	Very High
60 to < 80 pts	High
40 to < 60 pts	Medium
< 40 pts	Low

Table 4 contains the overall vulnerability scores (0 – 100) and ratings for each of the three categories of drinking water contaminants. Note: scores are rounded off to the nearest five.

Table 4. Overall Vulnerability

Category	Score	Rating
Bacteria and Viruses	70	High
Nitrates and/or Nitrites	60	High
Volatile Organic Chemicals	70	High

Bacteria and Viruses

The contaminant risk for bacteria and viruses is Very High, with the large-capacity septic system injection well representing the greatest risk to the drinking water well (see Chart 3 – Contaminant Risks for Bacteria and Viruses in Appendix D).

Residents and businesses in the area generally dispose of wastewater in private septic systems. Although this report does not address such systems (unless their location is known), they can pose a risk of

bacteria/virus and nitrate/nitrite contamination to drinking water sources. Proper design and maintenance of septic systems is the best safeguard against such contamination. Only a small amount of bacteria and viruses are required to endanger public health. Due to the detection of bacteria and viruses during recent water sampling, the score on Chart 2 is the maximum score. However, that score has been downgraded to reflect that the last positive test occurred in 2002/2003, and that subsequent tests have showed nondetectable concentrations of bacteria and viruses.

After combining the contaminant risk for bacteria and viruses with the natural susceptibility of the well, the overall vulnerability of the well to contamination by bacteria and viruses is High.

Nitrates and Nitrites

The contaminant risk for nitrates and nitrites is Very High, with the large-capacity septic system injection well representing the highest risk to this source of public drinking water (see Chart 5 - Contaminant Risks for Nitrates and/or Nitrites in Appendix D). Nitrates are very mobile, moving at approximately the same rate as water.

The last five years’ sampling history for Paxson Inn & Lodge public water source indicates the most recent concentration detected was 0.000 mg/L on 5/21/2002, which represents 0.0% of the Maximum Contaminant Level (MCL). While nitrates and nitrites can occur naturally in groundwater, a level of 20% of the MCL or more is considered to be due to manmade sources. Water with levels of nitrates and nitrites below 100% of the MCL is considered safe to drink by the U.S. Environmental Protection Agency (EPA 2003). After combining the contaminant risk for nitrates and nitrites with the natural susceptibility of the well, the overall vulnerability of the well to contamination by nitrates and nitrites is High.

Volatile Organic Chemicals

The contaminant risk for volatile organic chemicals is Very High, with the gasoline station and underground fuel storage tanks representing the highest risk for volatile organic chemicals (see Chart 7 – Contaminant Risks for Volatile Organic Chemicals in Appendix D).

Residents in the area typically heat their homes with various types of on-site fuel sources, including propane and heating oil stored in aboveground or underground storage tanks. Although this report does not address heating oil tanks (unless their location is known), they can pose a risk of volatile organic chemical contamination to drinking water sources. The most common causes of fuel leaks of these heating oil

systems are overfilling the tank, ruptured fuel lines, leaking storage tanks, damaged or faulty valves and vandalism. Secondary containment around the tank and regular system maintenance can help prevent many of these harmful fuel leaks and help protect the drinking water supply.

Class B water systems generally are not required to test for volatile organic chemicals. After combining the potential contaminant risk for volatile organic chemicals with the natural susceptibility of the well, the overall vulnerability of the well to contamination by volatile organic chemicals is High.

REFERENCES

Alaska Department of Community and Economic Development (ADCED), 2003, Alaska Community Database [WWW database]. URL http://www.dced.state.ak.us/cbd/commdb/CF_BLOCK.cfm

Alaska Department of Transportation and Public Facilities (ADOT&PF), 1982, *Environmental Assessment: Big Timber to Paxson, Mile 129-186 Richardson Highway*.

Freeze, R.A. and Cherry, J.A., 1979, *Groundwater*, Upper Saddle River, NJ: Prentice Hall, Inc.


United States Environmental Protection Agency (EPA), 2003, Consumer Fact Sheet on Nitrates/Nitrites, http://www.epa.gov/OGWDW/contaminants/dw_contamfs/nitrates.html.

Western Regional Climate Center (WRCC), 2003, *Alaska Climate Summaries: Paxson*, <http://www.wrcc.dri.edu/cgi-bin/cliMAIN.pl?akpaxs>.



APPENDIX A

Paxson Inn & Lodge Drinking Water Protection Area Location Map (Map 1)

Drinking Water Protection Area for Paxson Inn & Lodge

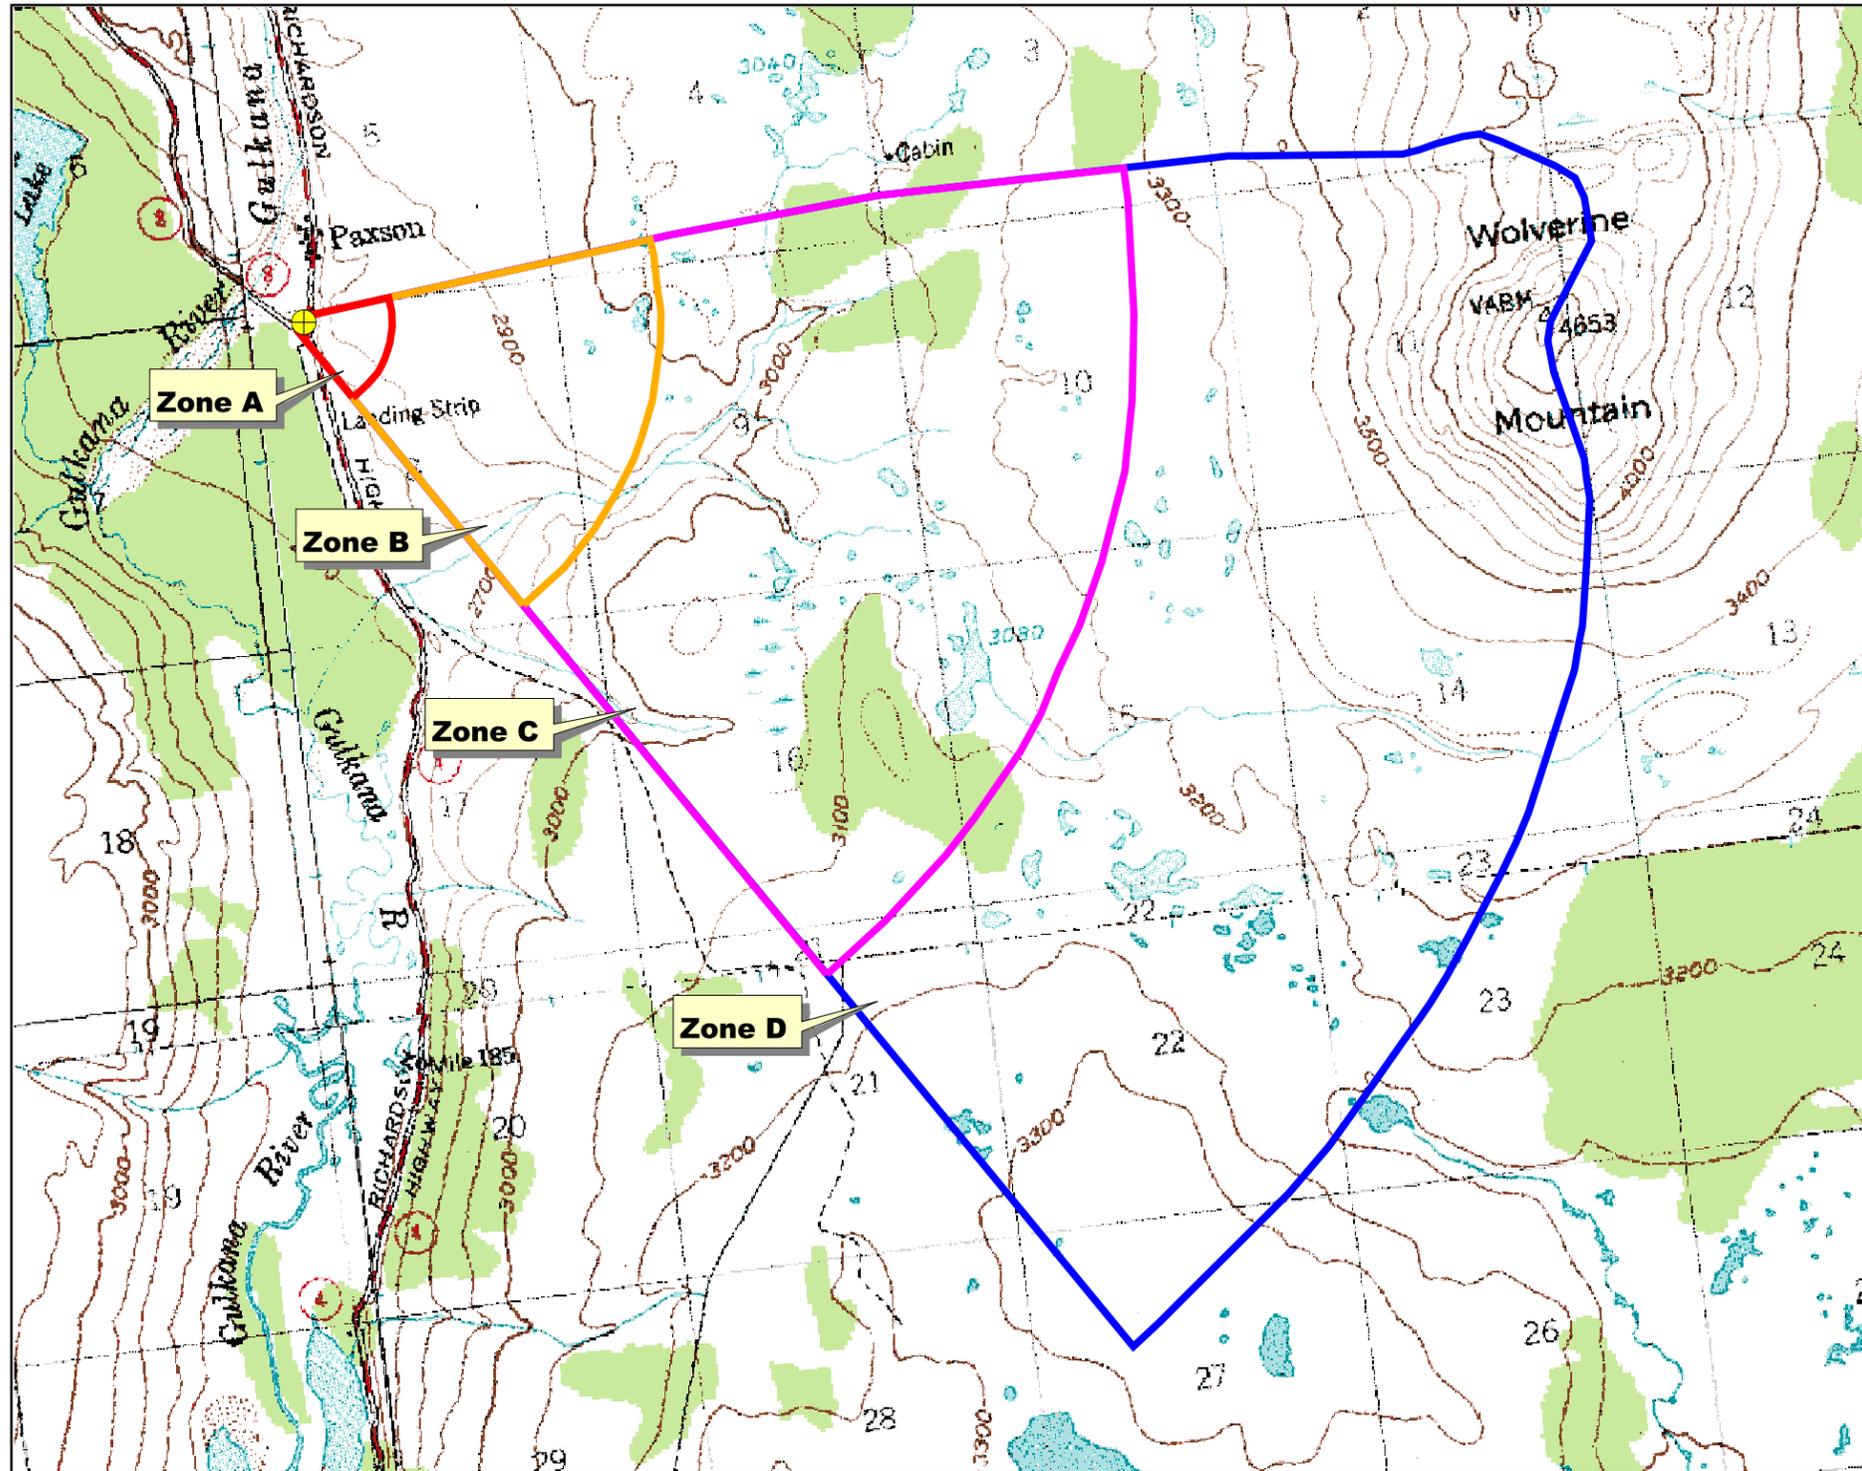

- Paxson Inn & Lodge Well
- ▭ Zone A (Few Months Travel Time)
- ▭ Zone B (Less Than 2 Years Travel Time)
- ▭ Zone C (Less Than 5 Years Travel Time)
- ▭ Zone D (Less Than 10 Years Travel Time)

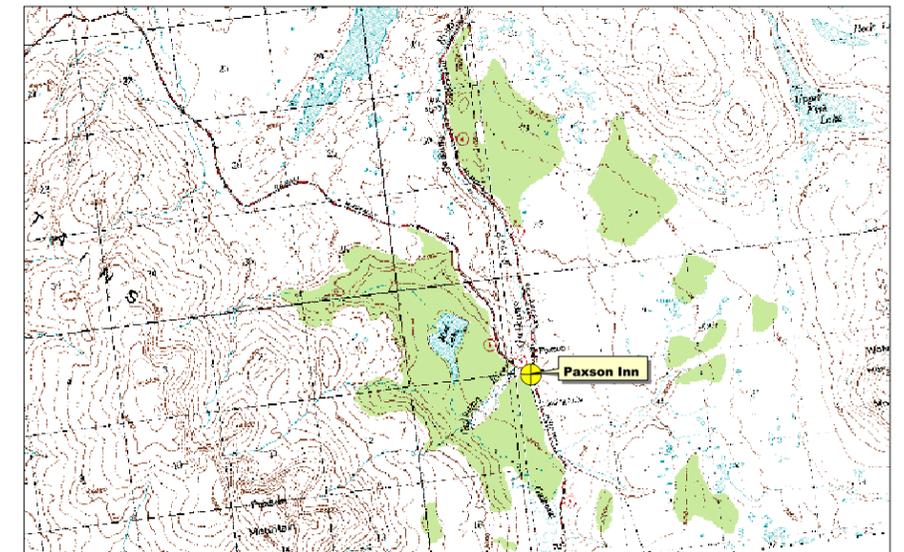

APPENDIX B

Contaminant Source Inventory and Risk Ranking for Paxson Inn & Lodge (Tables 1-4)

Table 1

**Contaminant Source Inventory for
Paxson Inn & Lodge**

PWSID 370659.001

Contaminant Source Type	Contaminant Source ID	CS ID tag	Zone	Map Number	Comments
Gasoline stations (without repair shop)	C15	C15-1	A	2	Paxson Inn & Lodge
Injection wells (Class V) Large-Capacity Septic System (Drainfield Disposal Method)	D10	D10-1	A	2	Paxson Inn & Lodge
Metals mining, underground (inactive)	E05	E5-1	A	2	Paxson Pit
Tanks, diesel (underground)	T08	T8-1	A	2	Paxson Inn & Lodge
Tanks, gasoline (underground)	T12	T12-1	A	2	Paxson Inn & Lodge
Open Leaking Underground Fuel Storage Tank (LUST) Sites	U07	U7-1	A	2	Paxson Inn & Lodge
Airports	X14	X14-1	A	2	Paxson Landing Strip
Highways and roads, paved (cement or asphalt)	X20	X20-1	A	2	Denali Highway
Highways and roads, paved (cement or asphalt)	X20	X20-2	A	2	Richardson Highway
Pipelines (oil and gas)	X28	X28-1	C	2	Trans-Alaska Pipeline

Table 2

*Contaminant Source Inventory and Risk Ranking for
Paxson Inn & Lodge
Sources of Bacteria and Viruses*

PWSID 370659.001

<i>Contaminant Source Type</i>	<i>Contaminant Source ID</i>	<i>CS ID tag</i>	<i>Zone</i>	<i>Risk Ranking for Analysis</i>	<i>Map Number</i>	<i>Comments</i>
Injection wells (Class V) Large-Capacity Septic System (Drainfield Disposal Method)	D10	D10-1	A	High	2	Paxson Inn & Lodge
Open Leaking Underground Fuel Storage Tank (LUST) Sites	U07	U7-1	A	low	2	Paxson Inn & Lodge
Highways and roads, paved (cement or asphalt)	X20	X20-1	A	Low	2	Denali Highway
Highways and roads, paved (cement or asphalt)	X20	X20-2	A	Low	2	Richardson Highway

Table 3

*Contaminant Source Inventory and Risk Ranking for
Paxson Inn & Lodge
Sources of Nitrates/Nitrites*

PWSID 370659.001

<i>Contaminant Source Type</i>	<i>Contaminant Source ID</i>	<i>CS ID tag</i>	<i>Zone</i>	<i>Risk Ranking for Analysis</i>	<i>Map Number</i>	<i>Comments</i>
Injection wells (Class V) Large-Capacity Septic System (Drainfield Disposal Method)	D10	D10-1	A	High	2	Paxson Inn & Lodge
Open Leaking Underground Fuel Storage Tank (LUST) Sites	U07	U7-1	A	low	2	Paxson Inn & Lodge
Airports	X14	X14-1	A	Low	2	Paxson Landing Strip
Highways and roads, paved (cement or asphalt)	X20	X20-1	A	Low	2	Denali Highway
Highways and roads, paved (cement or asphalt)	X20	X20-2	A	Low	2	Richardson Highway

Table 4

*Contaminant Source Inventory and Risk Ranking for
Paxson Inn & Lodge
Sources of Volatile Organic Chemicals*


PWSID 370659.001

<i>Contaminant Source Type</i>	<i>Contaminant Source ID</i>	<i>CS ID tag</i>	<i>Zone</i>	<i>Risk Ranking for Analysis</i>	<i>Map Number</i>	<i>Comments</i>
Gasoline stations (without repair shop)	C15	C15-1	A	High	2	Paxson Inn & Lodge
Injection wells (Class V) Large-Capacity Septic System (Drainfield Disposal Method)	D10	D10-1	A	Low	2	Paxson Inn & Lodge
Metals mining, underground (inactive)	E05	E5-1	A	Medium	2	Paxson Pit
Tanks, gasoline (underground)	T12	T12-1	A	High	2	Paxson Inn & Lodge
Tanks, diesel (underground)	T08	T8-1	A	High	2	Paxson Inn & Lodge
Open Leaking Underground Fuel Storage Tank (LUST) Sites	U07	U7-1	A	medium	2	Paxson Inn & Lodge
Airports	X14	X14-1	A	High	2	Paxson Landing Strip
Highways and roads, paved (cement or asphalt)	X20	X20-1	A	Low	2	Denali Highway
Highways and roads, paved (cement or asphalt)	X20	X20-2	A	Low	2	Richardson Highway
Pipelines (oil and gas)	X28	X28-1	C	Medium	2	Trans-Alaska Pipeline


APPENDIX C

Paxson Inn & Lodge Drinking Water Protection Area and Potential and Existing Contaminant Sources (Map 2)

Drinking Water Protection Area for Paxson Inn & Lodge and Potential and Existing Sources of Contamination

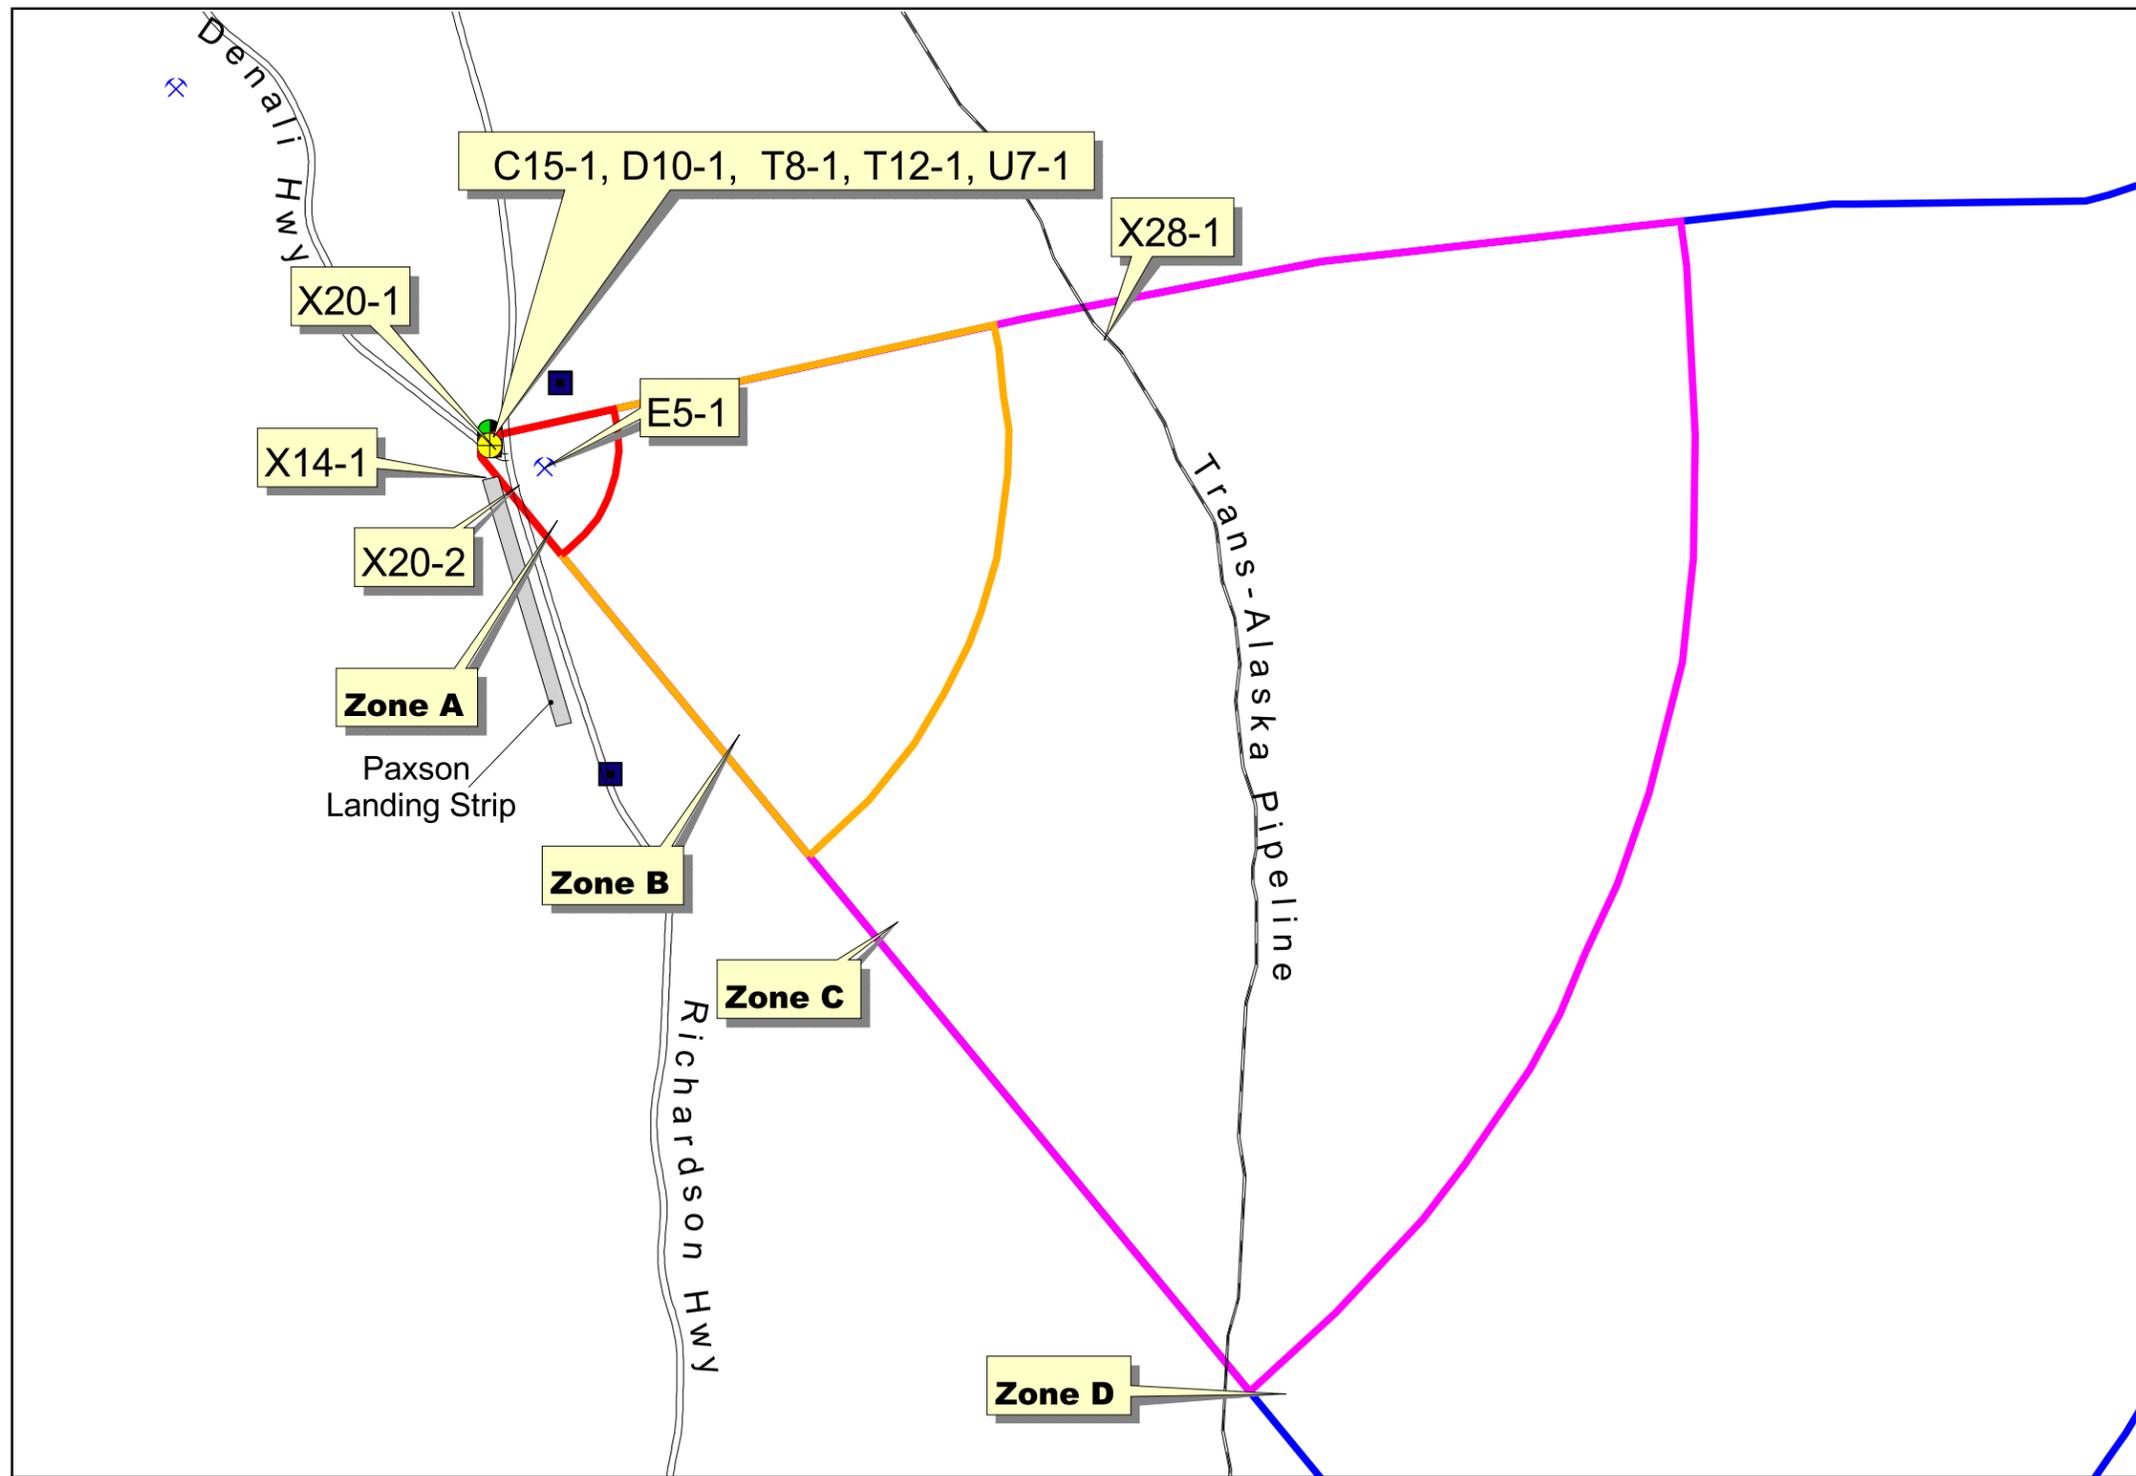

- Paxson Inn & Lodge Well
- Underground Fuel Tank
T8-Diesel
T12-Gasoline
- Gasoline Station-C15
- Large Capacity Septic System-D10
- Contaminated Site-U7
- Mines-E5
- Pipeline-X28
- Roads-X20
- Airports-X14
- Zone A (Few Months Travel Time)
- Zone B (Less Than 2 Years Travel Time)
- Zone C (Less Than 5 Years Travel Time)
- Zone D (Less Than 10 Years Travel Time)




PWSID 370659.001

Map 2

APPENDIX D

Vulnerability Analysis for Paxson Inn & Lodge Public Drinking Water Source (Charts 1-8)

Chart 1. Susceptibility of the wellhead - Paxson Inn & Lodge

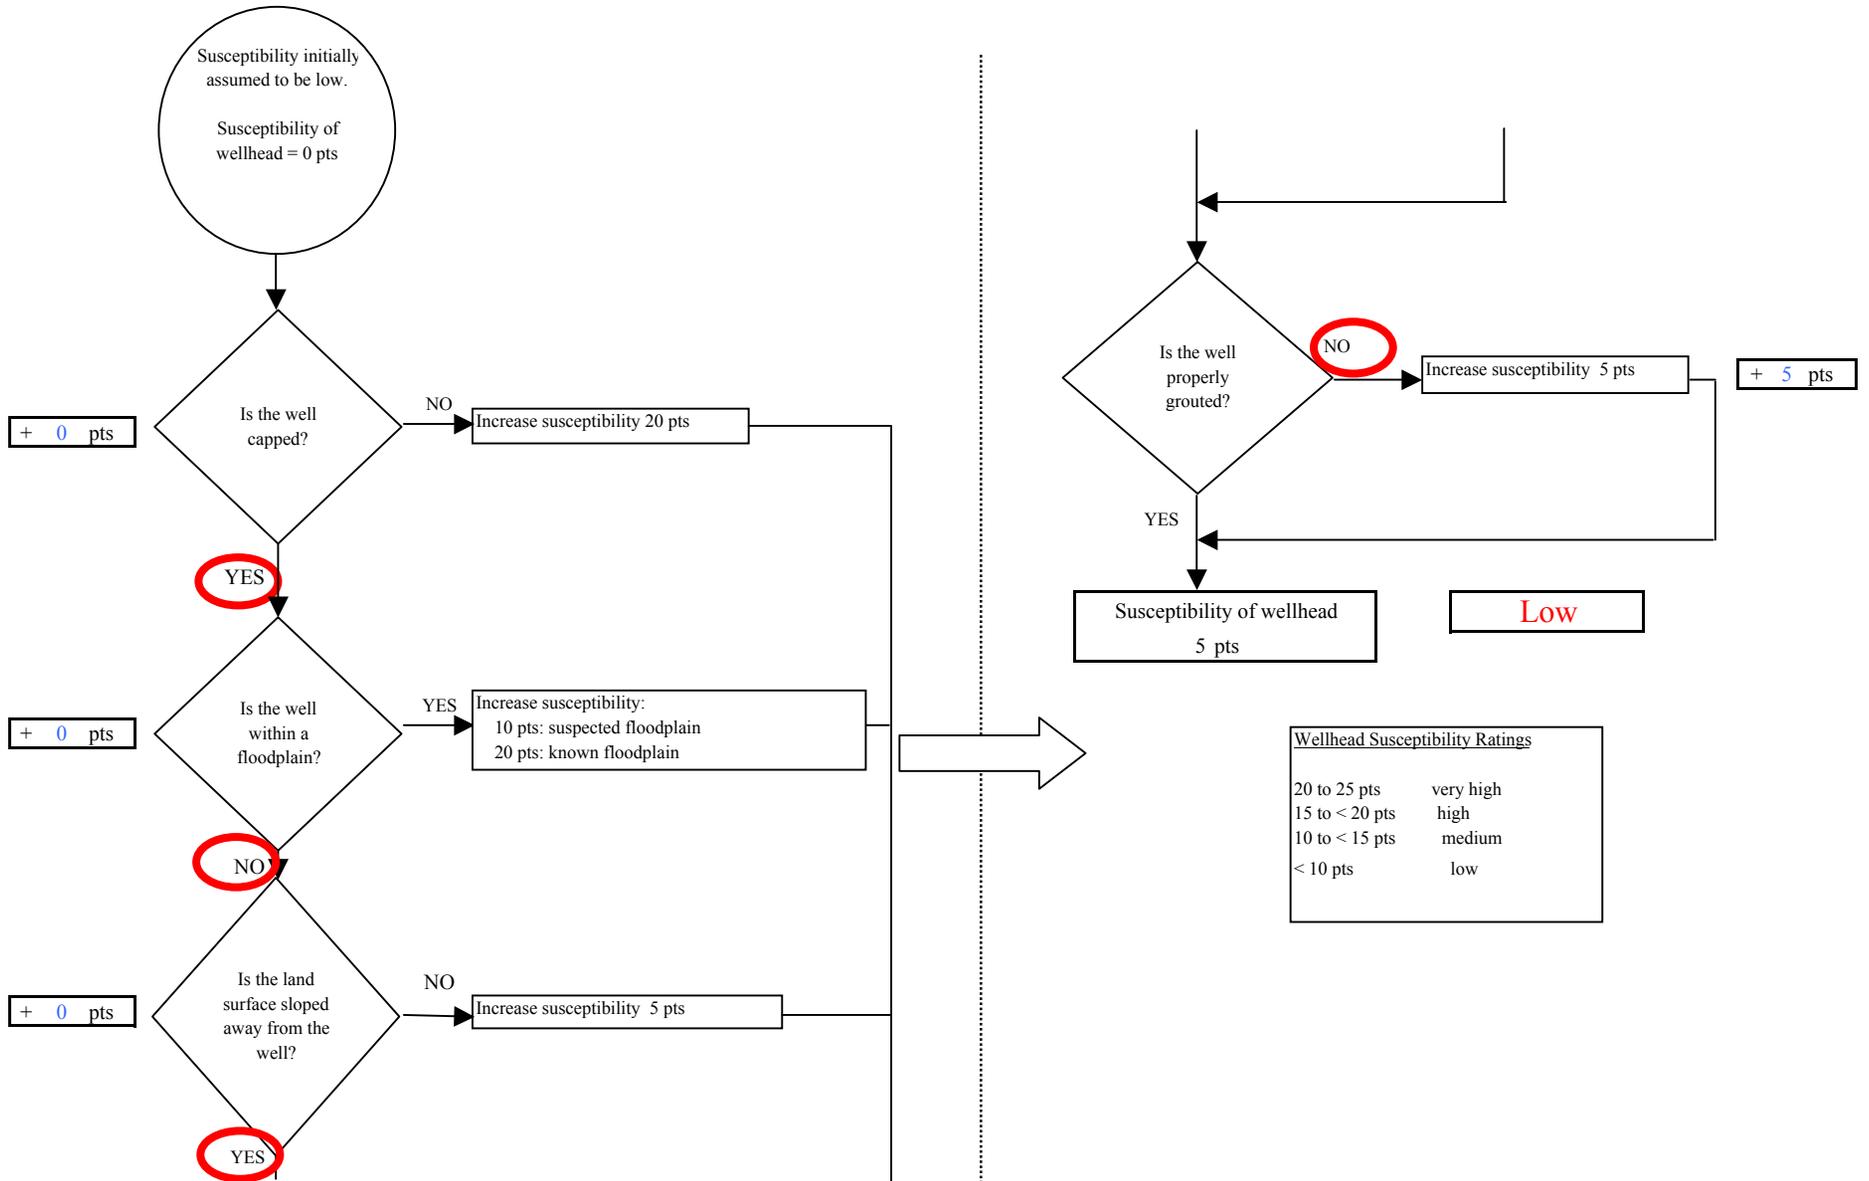

Wellhead Susceptibility Ratings	
20 to 25 pts	very high
15 to < 20 pts	high
10 to < 15 pts	medium
< 10 pts	low

Chart 2. Susceptibility of the aquifer - Paxson Inn & Lodge




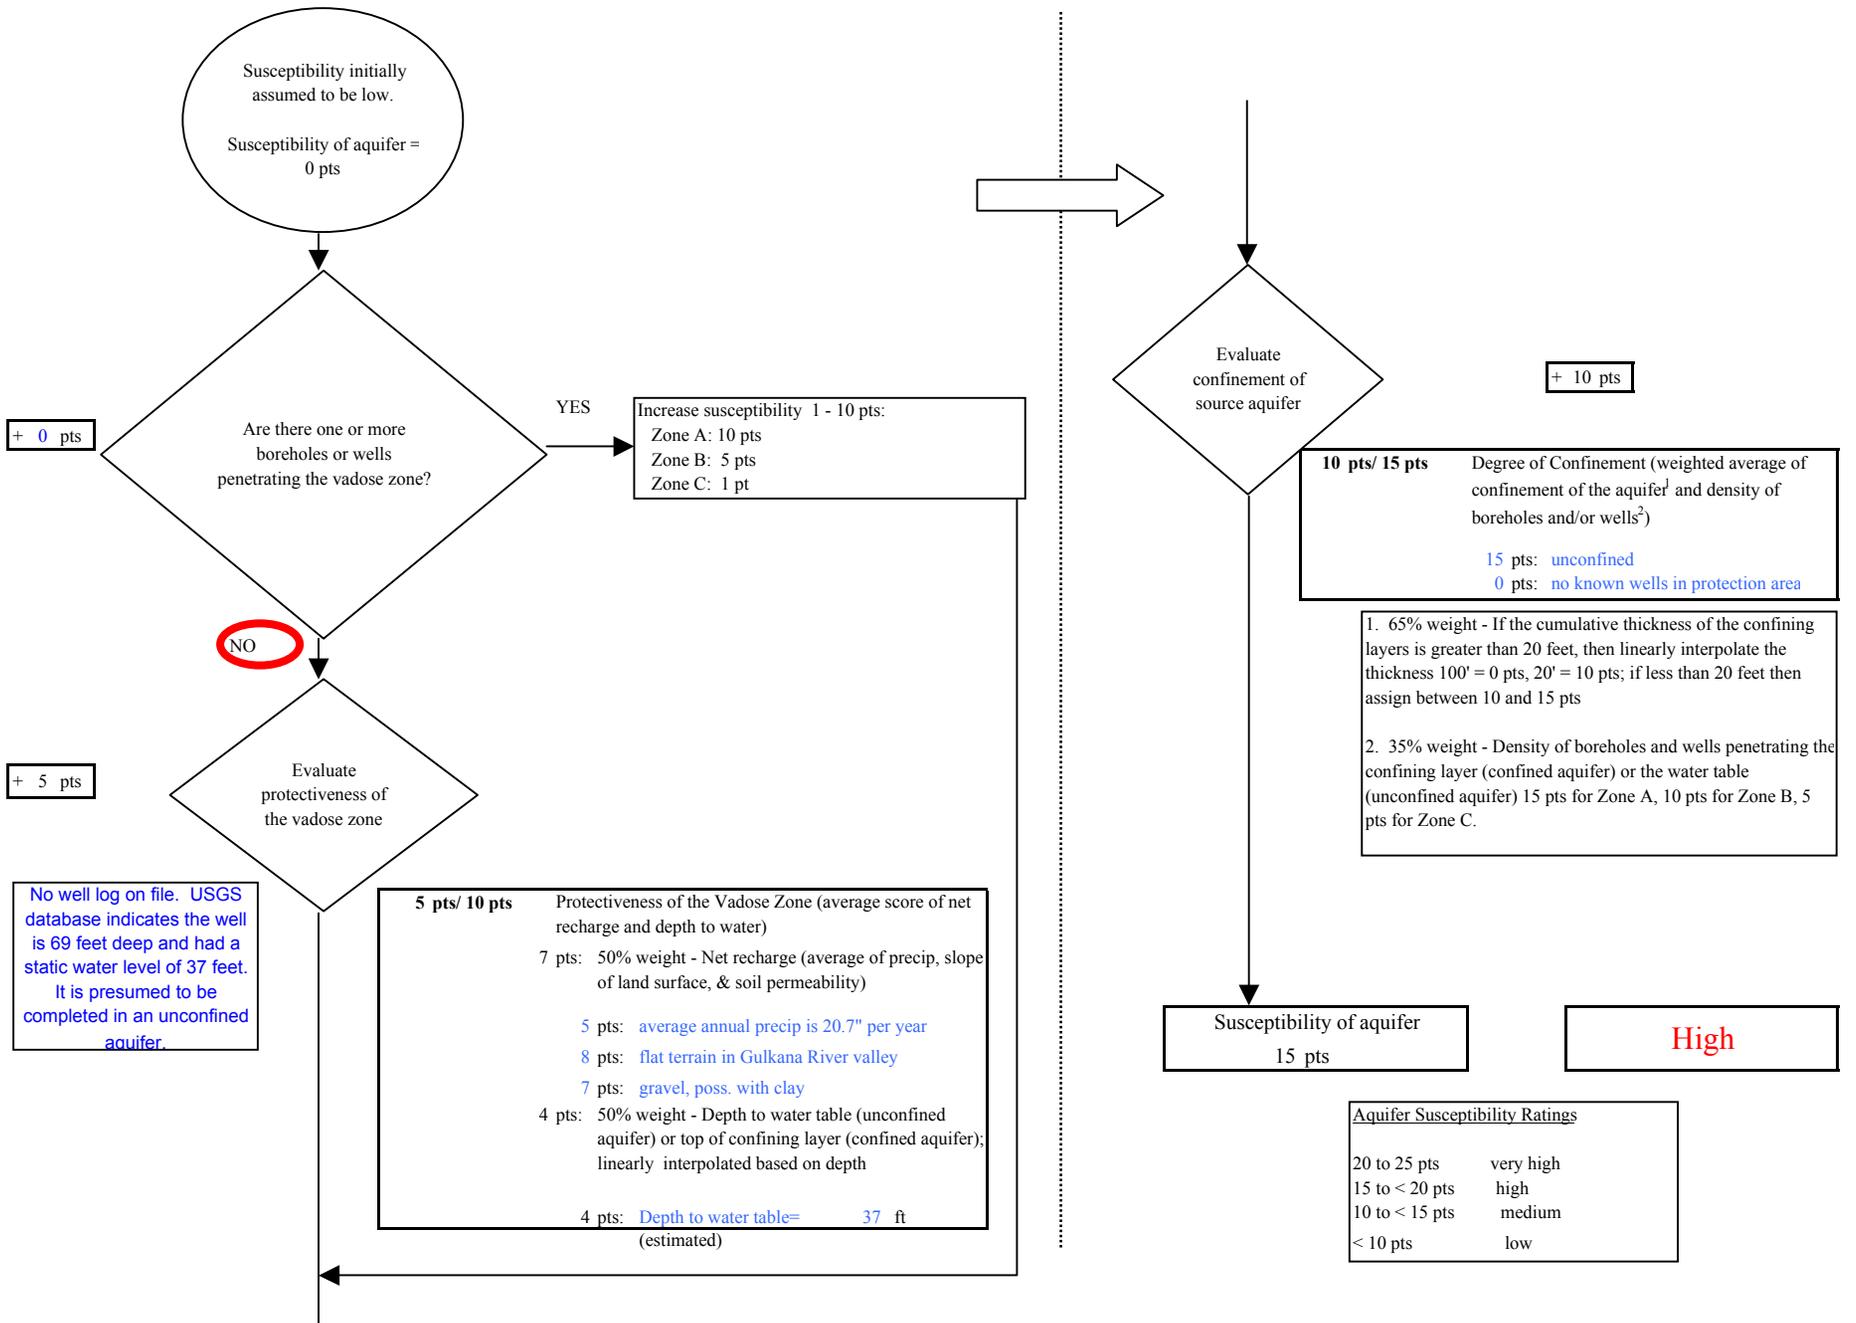


Chart 3. Contaminant risks for Paxson Inn & Lodge - Bacteria & Viruses

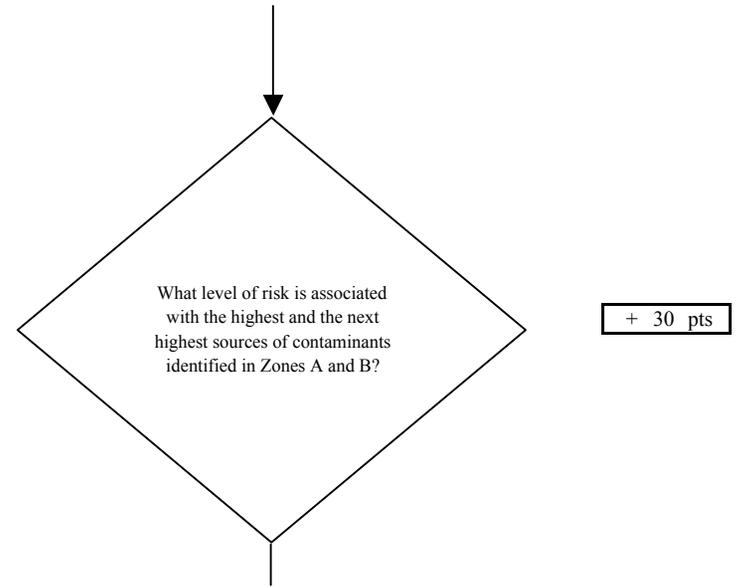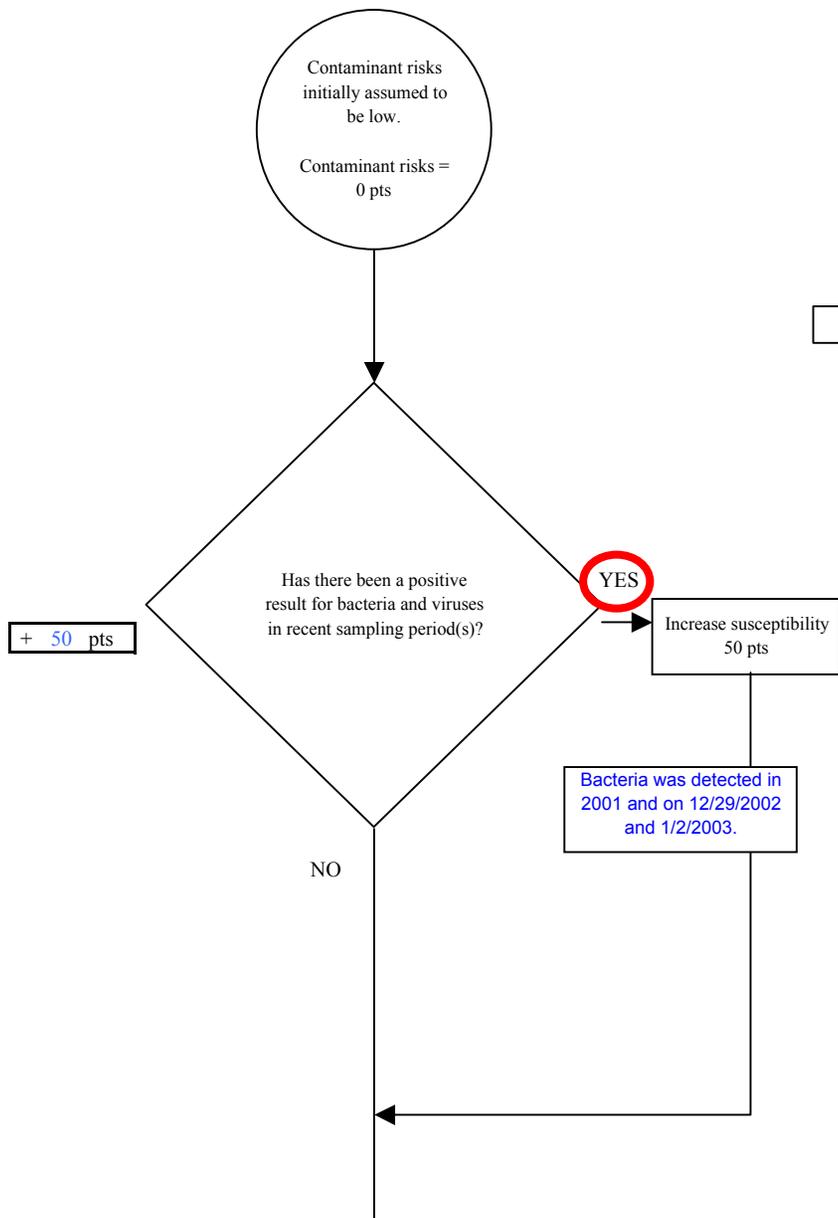

Risk Rankings for Contaminant Sources Identified in Zones A and B



	Zone A	Zone B	Total
Very High(s)	0	0	0
High(s)	1	0	1
Medium(s)	0	0	0
Low(s)	2	0	2

	LOW 10 pts	MEDIUM 20 pts	HIGH 30 pts	VERY HIGH 40 pts
LOW	≥ 10 sources + 10 pts	≥ 10 sources + 5 pts	≥ 20 sources + 5 pts	----
MEDIUM	----	≥ 2 sources + 5 pts	≥ 5 sources + 5 pts	≥ 10 sources + 5 pts
HIGH	----	----	≥ 1 source + 10 pts	≥ 2 sources + 10 pts
VERY HIGH	----	----	----	≥ 1 source + 10 pts

Matrix Score 30

Note: Septic systems, sewerlines, and roads are each assigned a risk ranking for each individual contaminant source in the CSI. The VA, however, counts these contaminant sources as a group and assigns a calculated number of either "lows" or "mediums" based on the density.

Chart 3. Contaminant risks for Paxson Inn & Lodge - Bacteria & Viruses

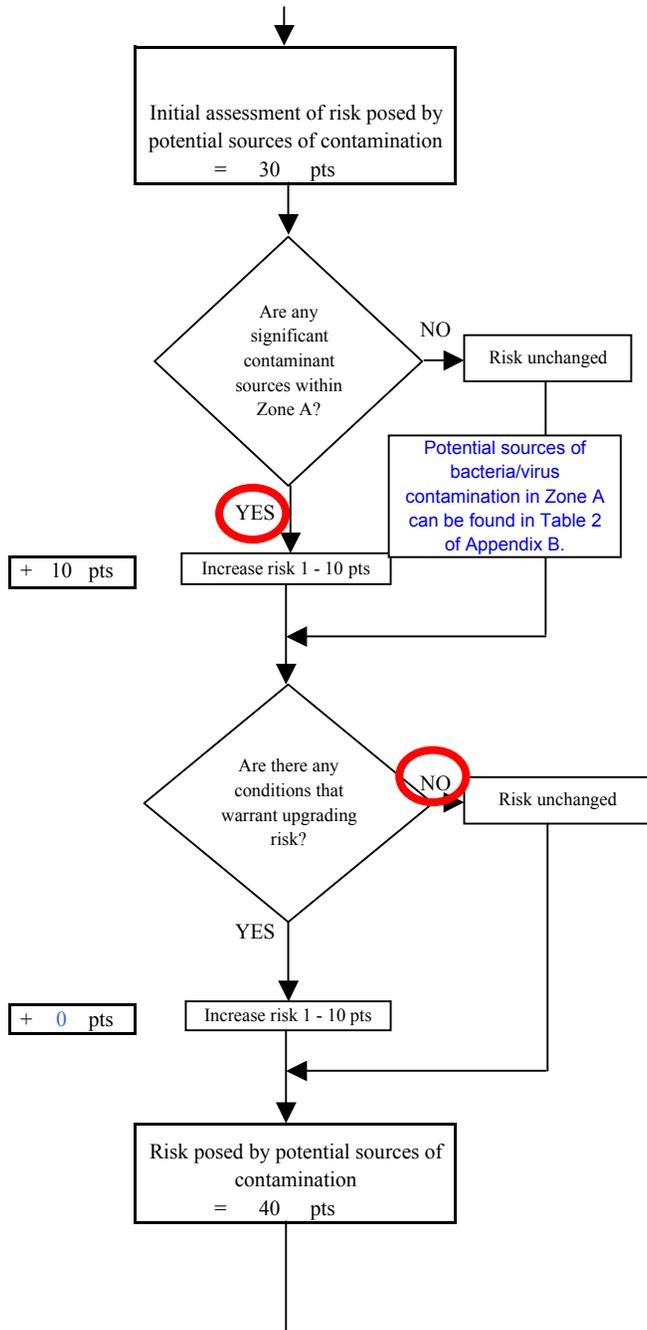

Contaminant Risk Ratings	
40 to 50 pts	very high
30 to < 40 pts	high
20 to < 30 pts	medium
< 20 pts	low

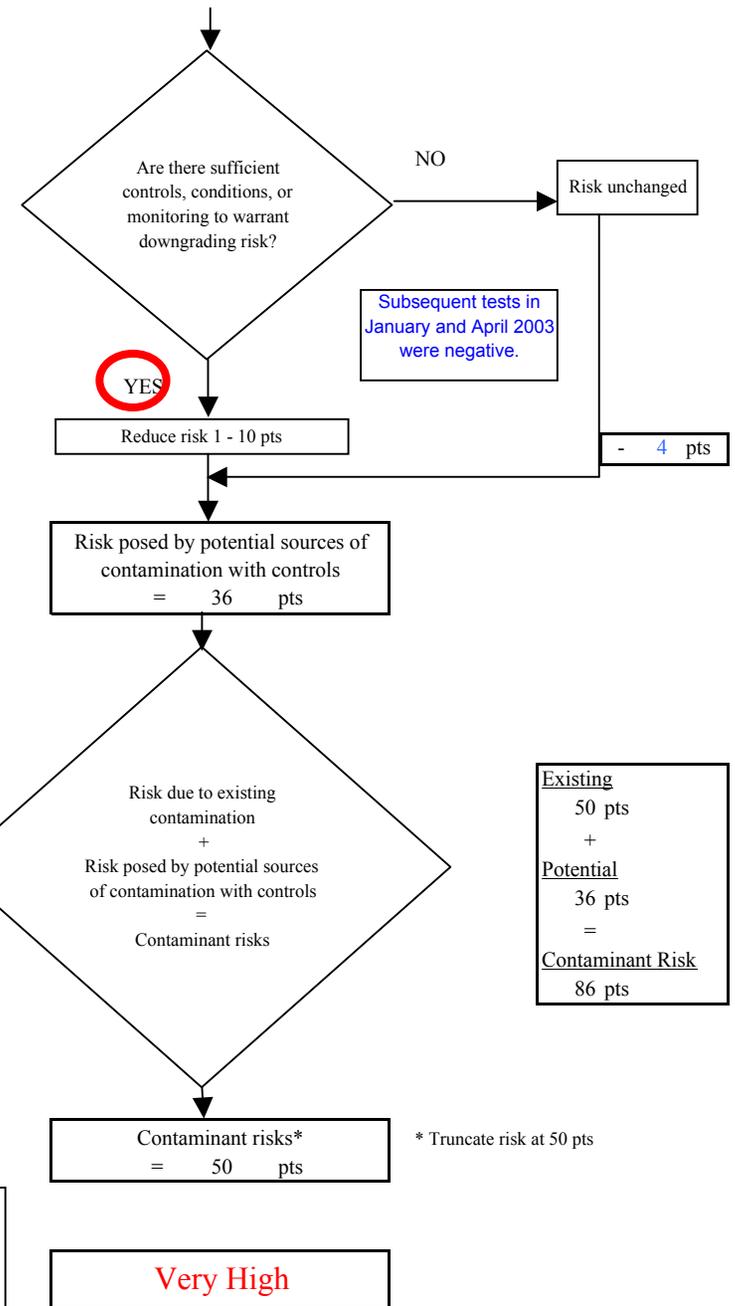


Chart 4. Vulnerability analysis for Paxson Inn & Lodge - Bacteria & Viruses

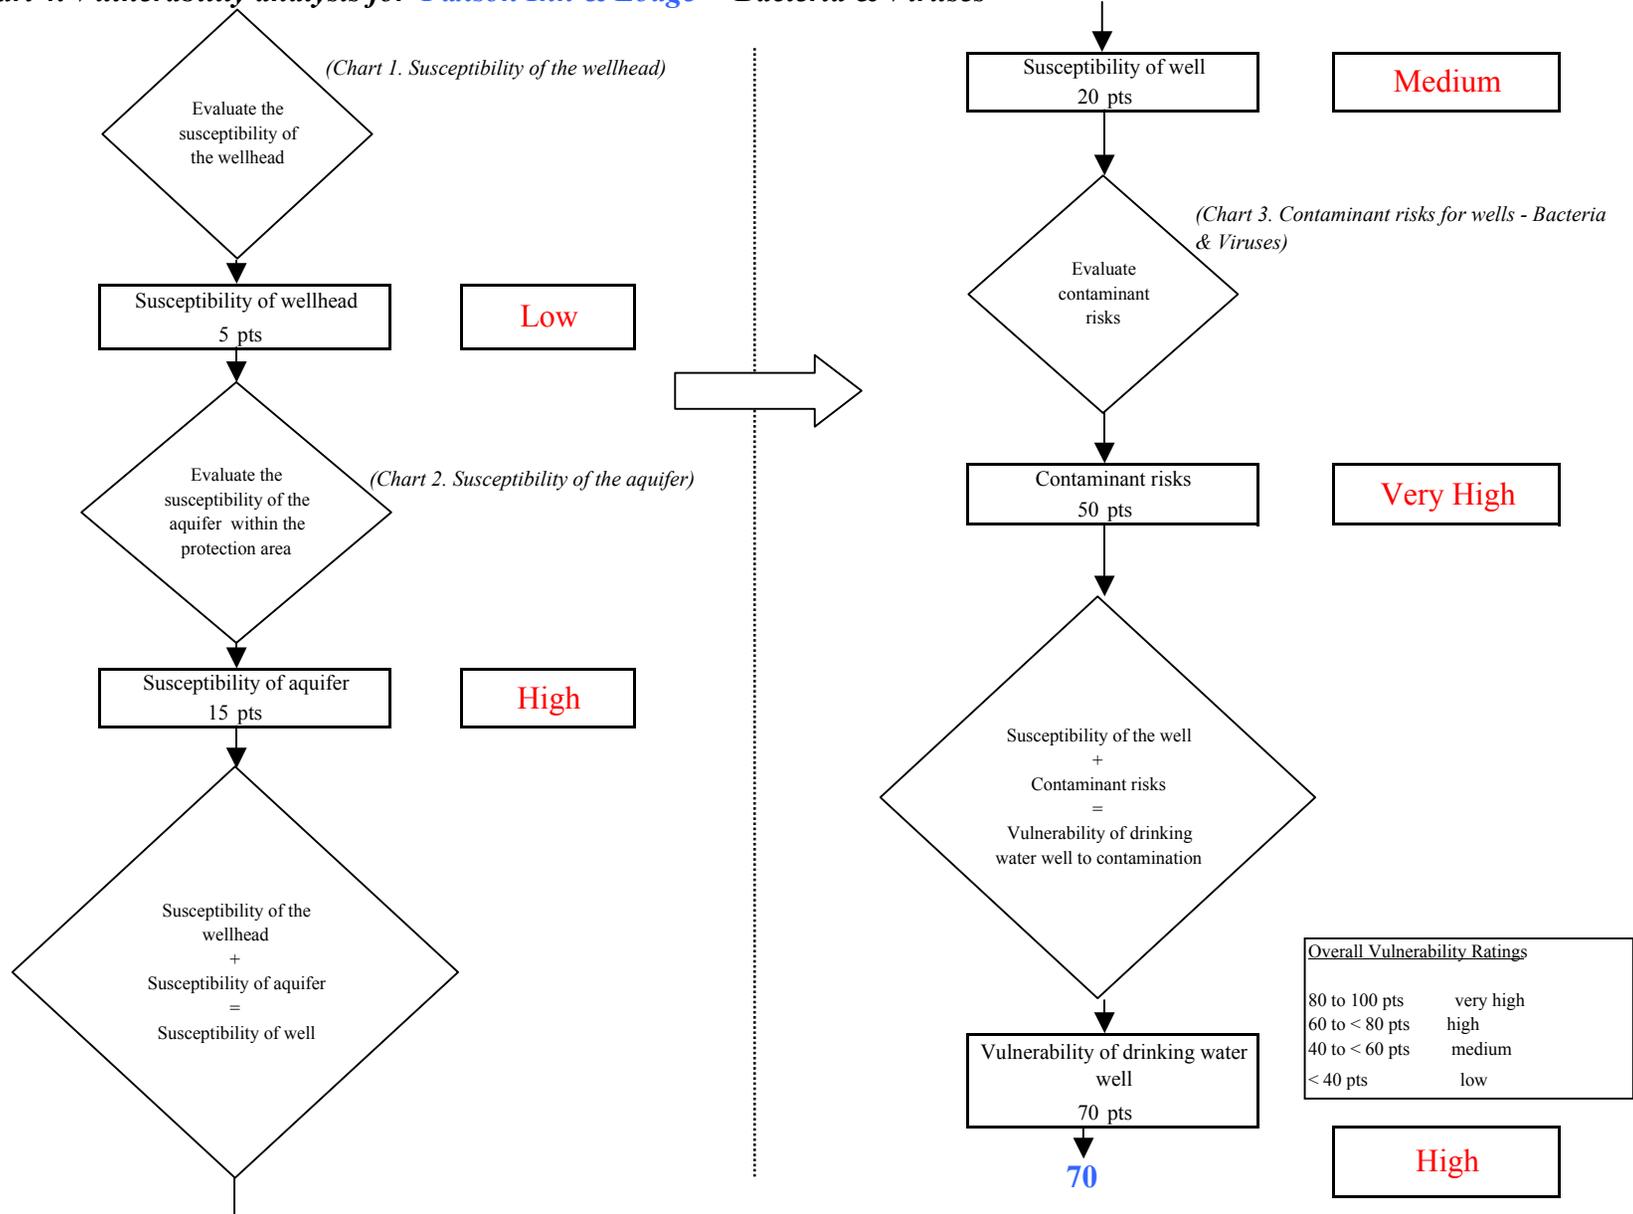


Chart 5. Contaminant risks for Paxson Inn & Lodge - Nitrates and Nitrites



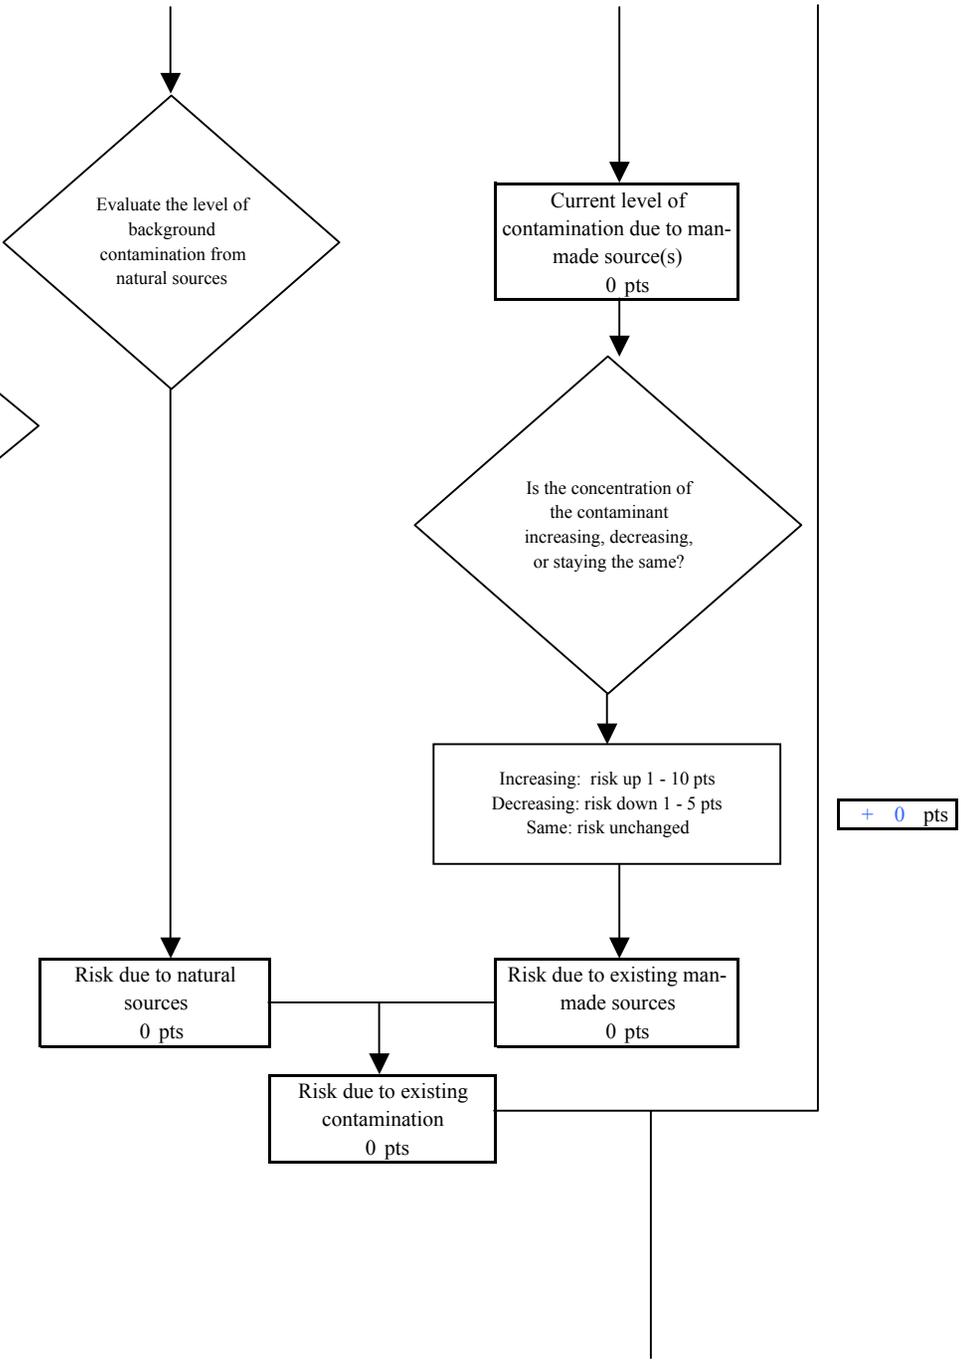


Chart 5. Contaminant risks for Paxson Inn & Lodge - Nitrates and Nitrites

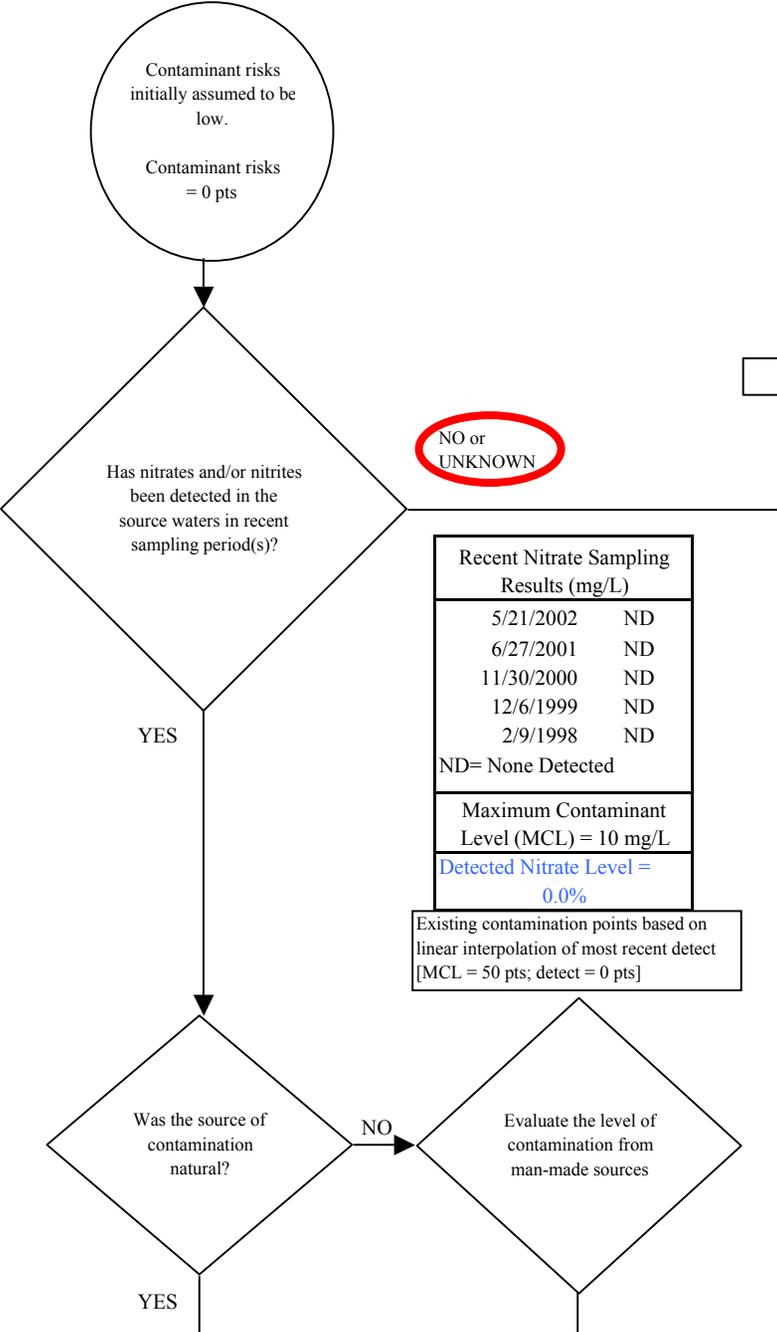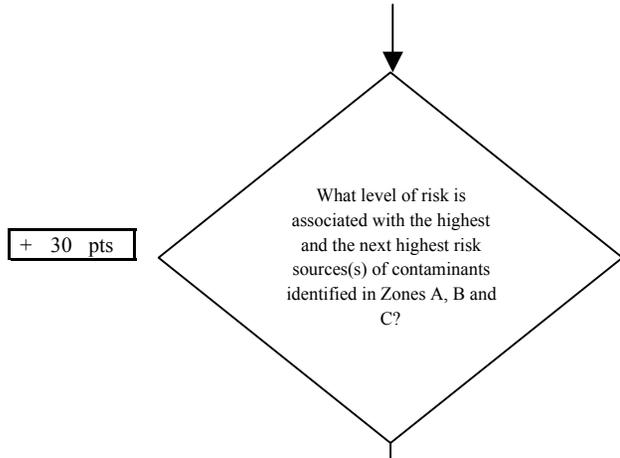

Risk Levels for Contaminant Sources identified in Zones A, B and C			
	Zone A	Zones B&C	Total
Very High(s)	0	0	0
High(s)	1	0	1
Medium(s)	0	0	0
Low(s)	3	0	3

	LOW 10 pts	MEDIUM 20 pts	HIGH 30 pts	VERY HIGH 40 pts
LOW	≥ 10 sources + 10 pts	≥ 10 sources + 5 pts	≥ 20 sources + 5 pts	----
MEDIUM	----	≥ 2 sources + 5 pts	≥ 5 sources + 5 pts	≥ 10 sources + 5 pts
HIGH	----	----	≥ 1 source + 10 pts	≥ 2 sources + 10 pts
VERY HIGH	----	----	----	≥ 1 source + 10 pts

Matrix Score 30

Note: Septic systems, sewerlines, and roads are each assigned a risk ranking for each individual contaminant source in the CSI. The VA, however, counts these contaminant sources as a group and assigns a calculated number of either "lows" or "mediums" based on the density.

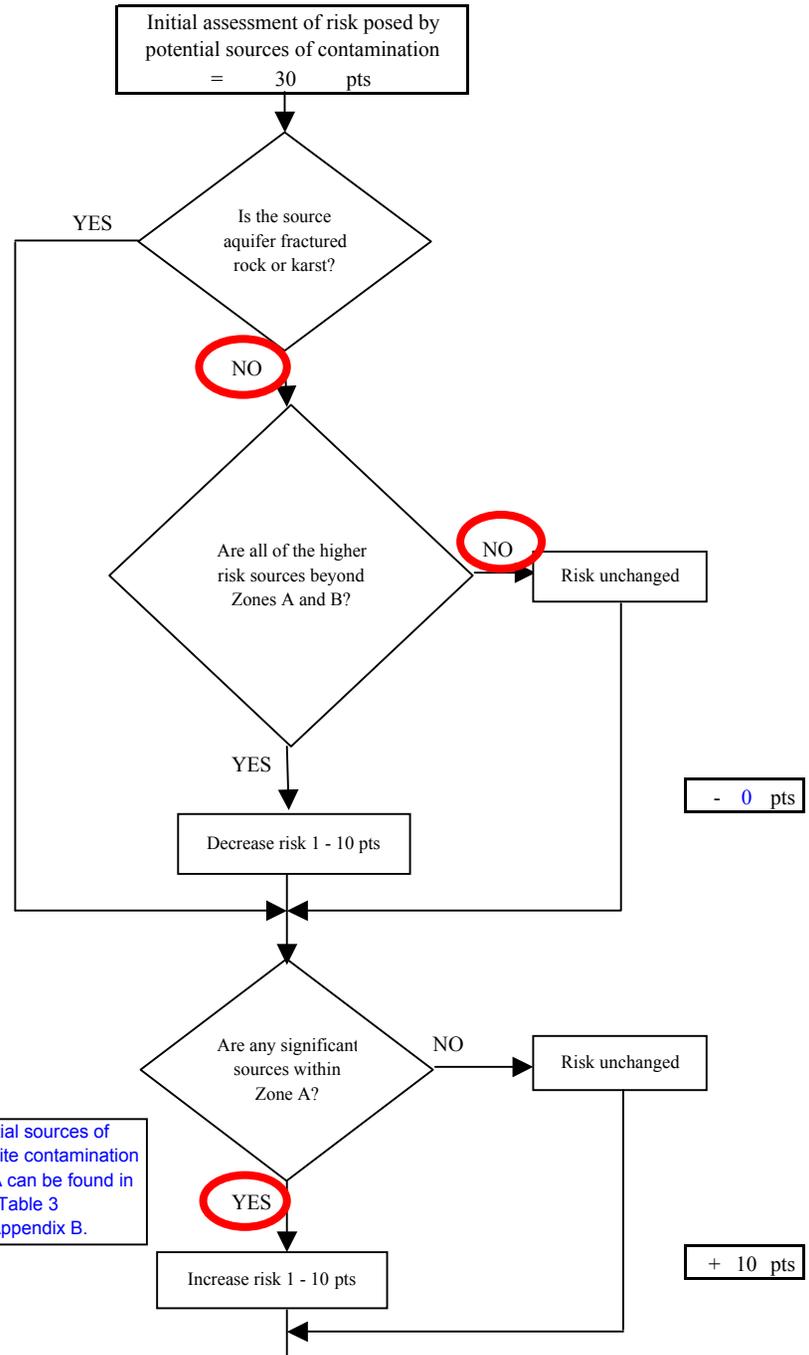



Chart 5. Contaminant risks for Paxson Inn & Lodge - Nitrates and Nitrites

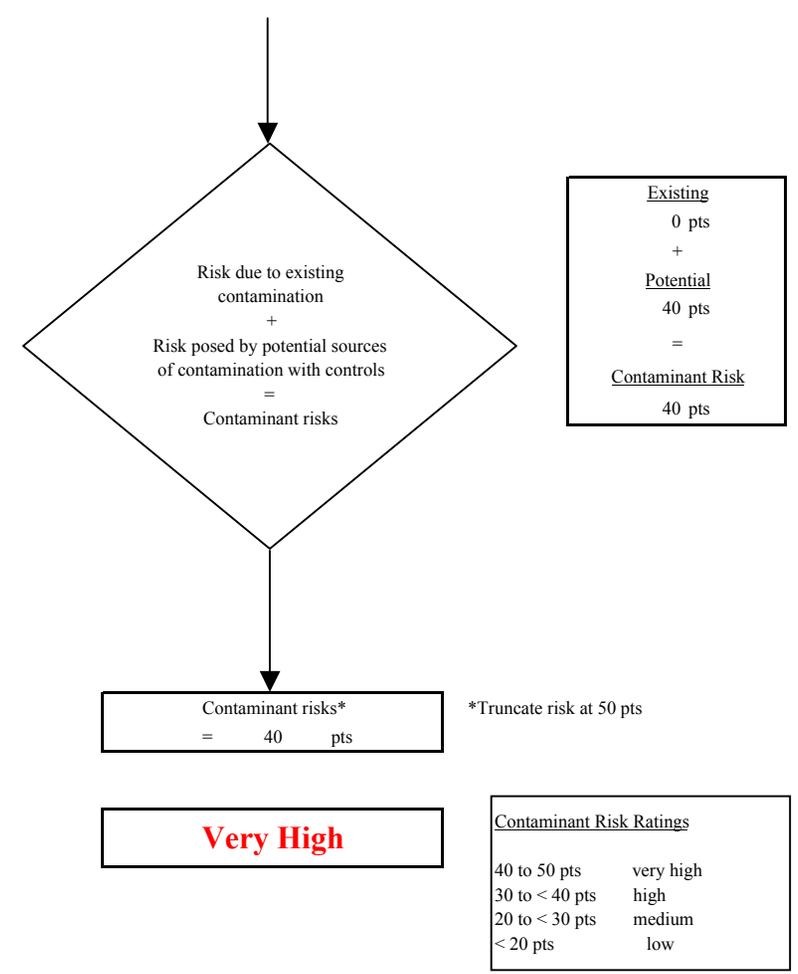

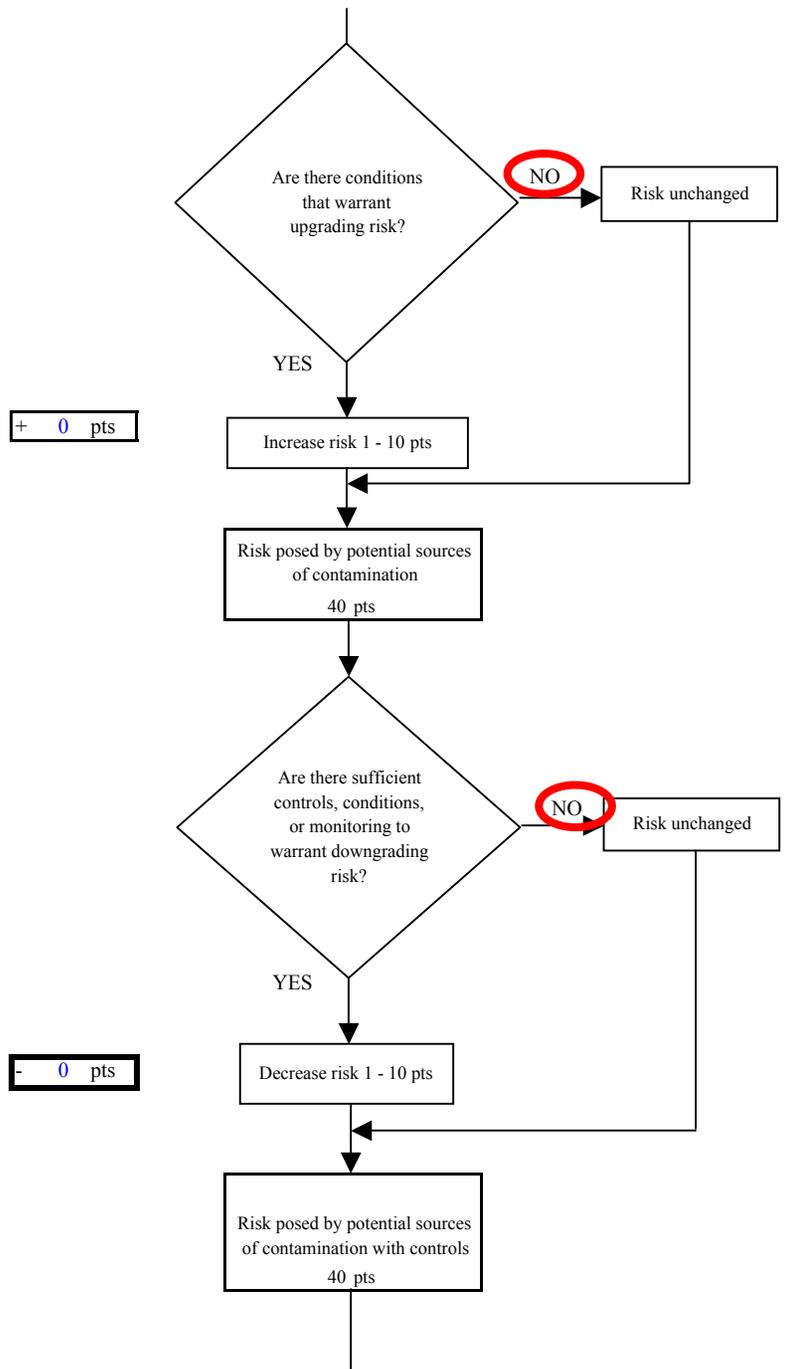


Chart 6. Vulnerability analysis for Paxson Inn & Lodge - Nitrates and Nitrites

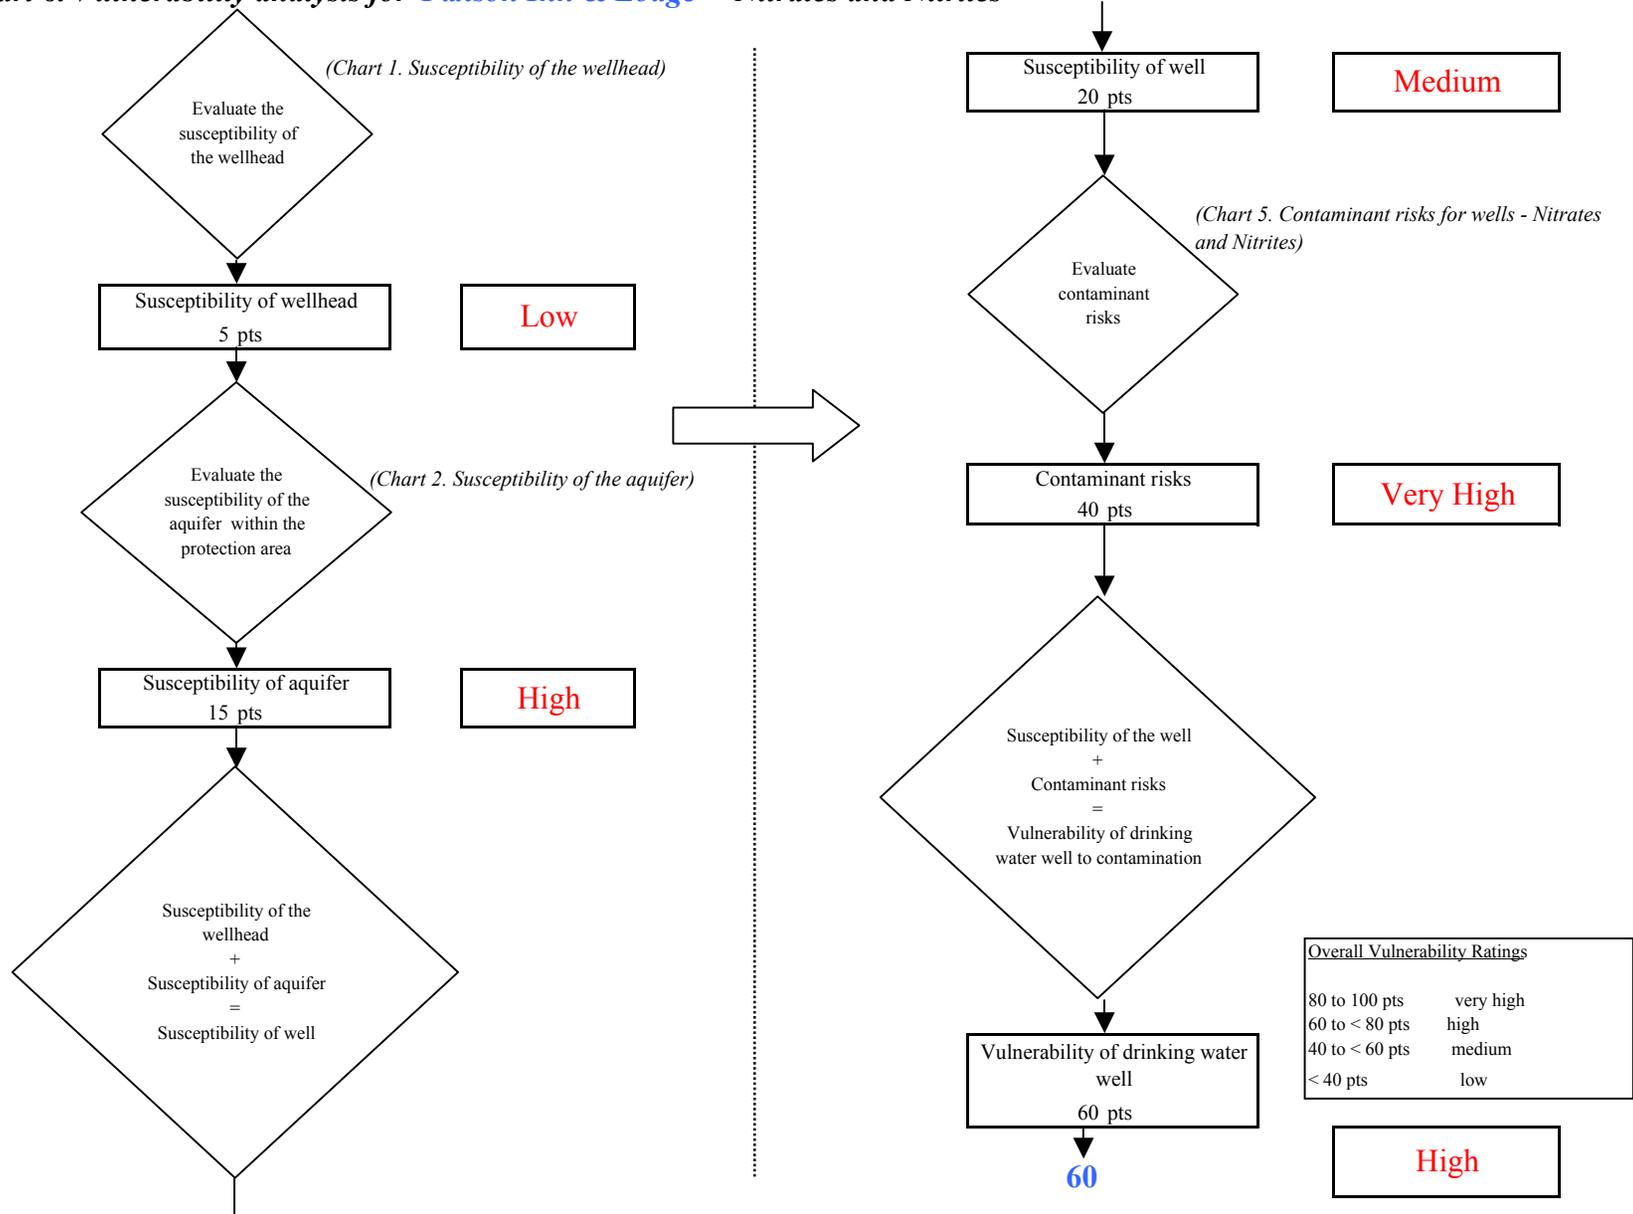


Chart 7. Contaminant risks for Paxson Inn & Lodge - Volatile Organic Chemicals

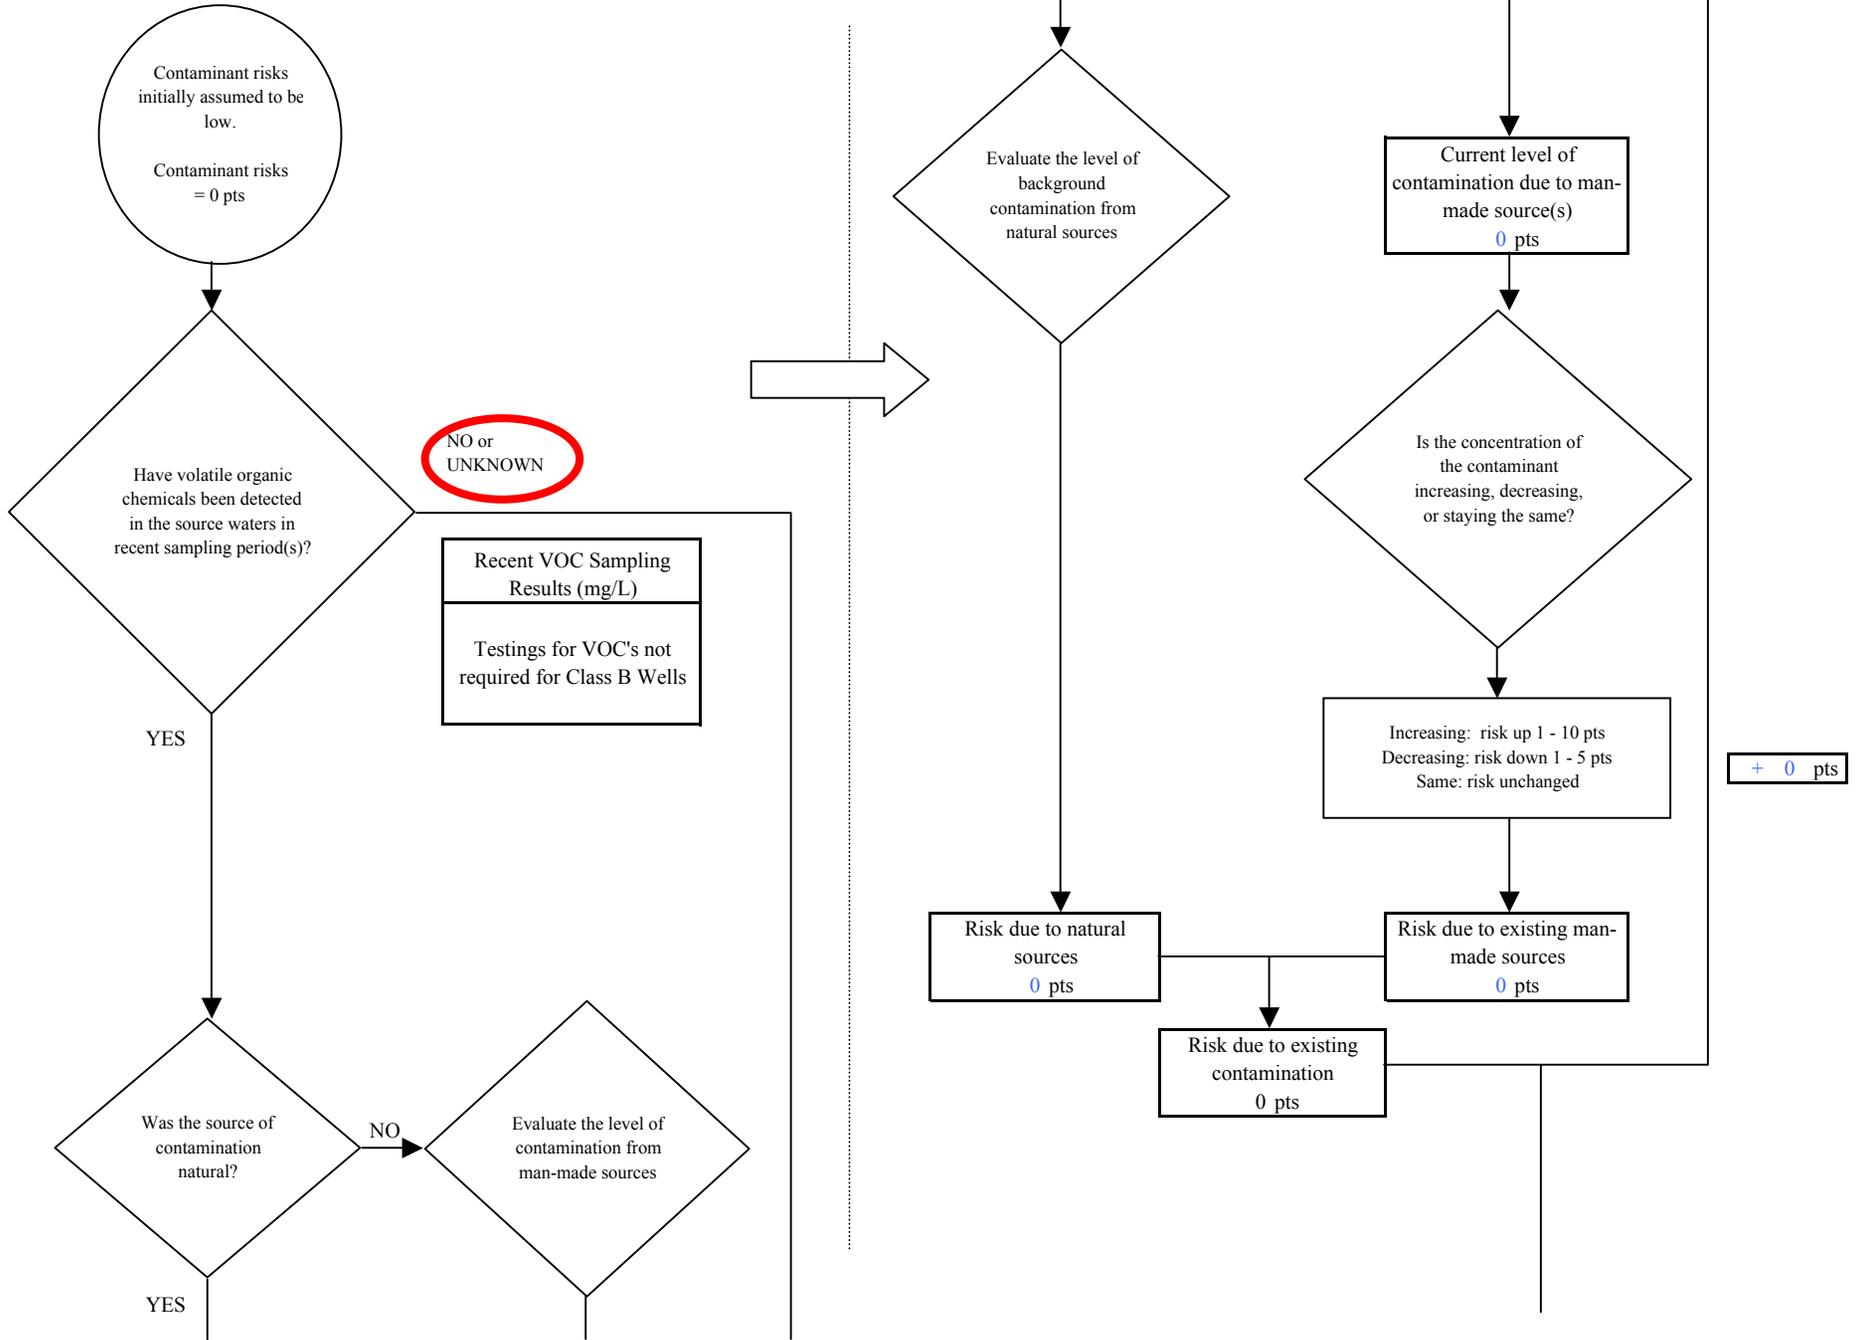


Chart 7. Contaminant risks for Paxson Inn & Lodge - Volatile Organic Chemicals

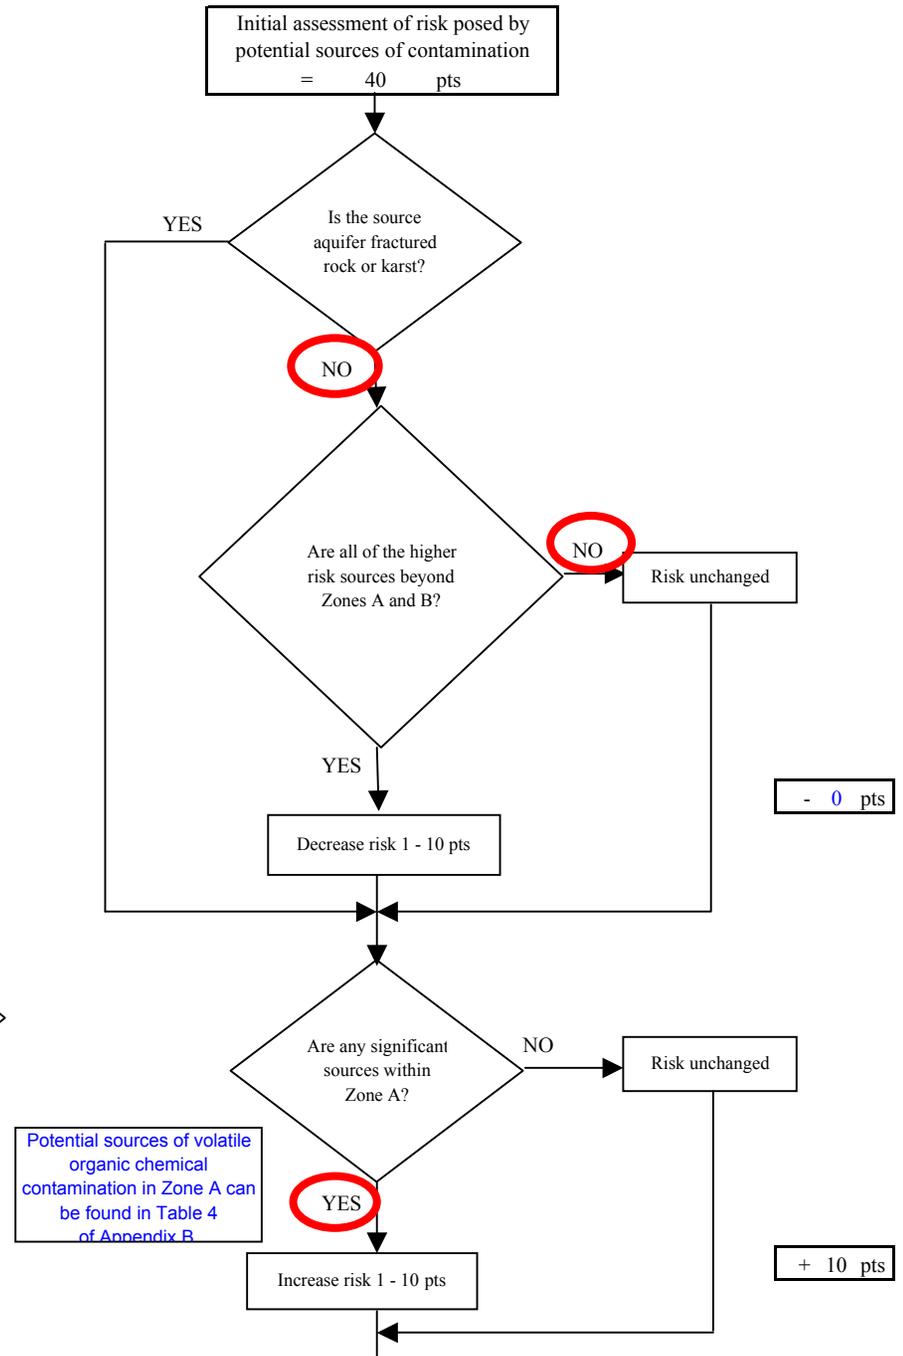
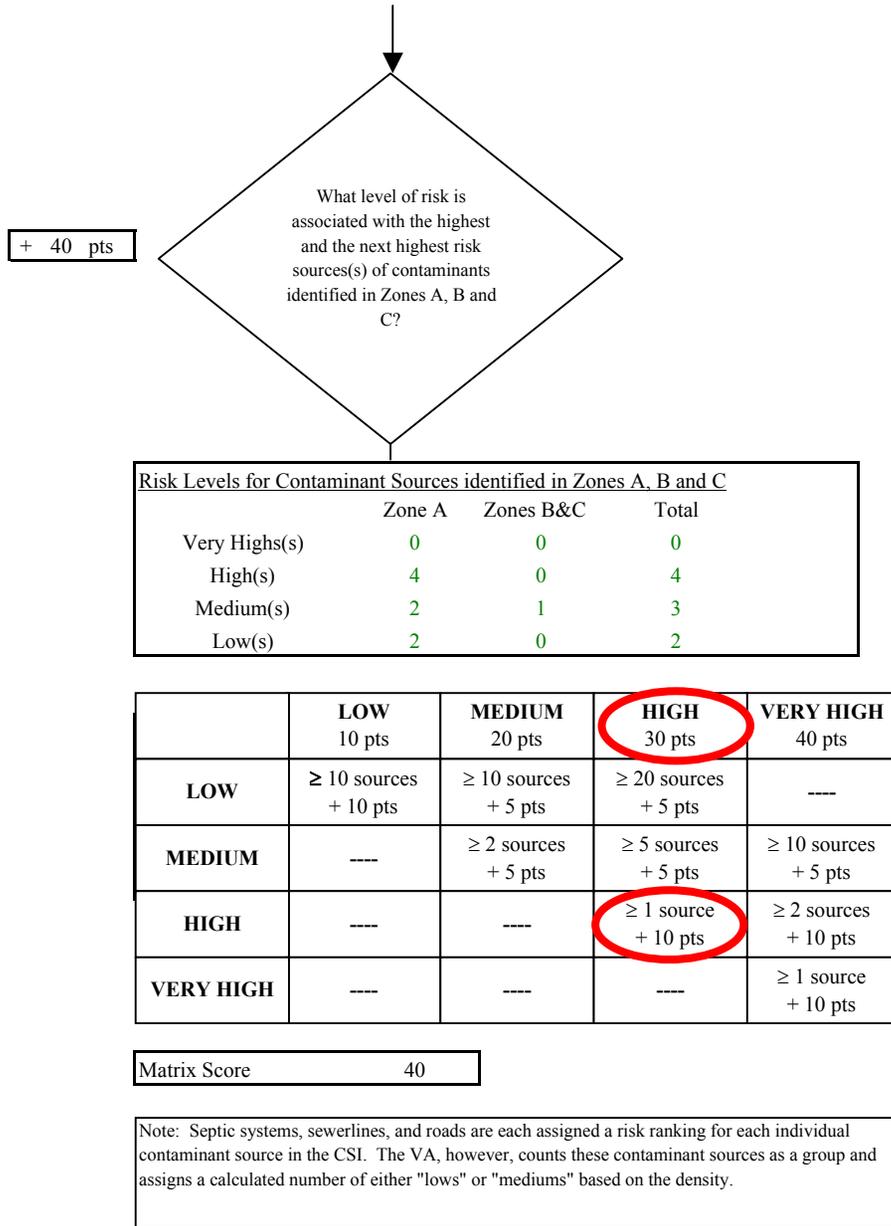


Chart 7. Contaminant risks for Paxson Inn & Lodge - Volatile Organic Chemicals

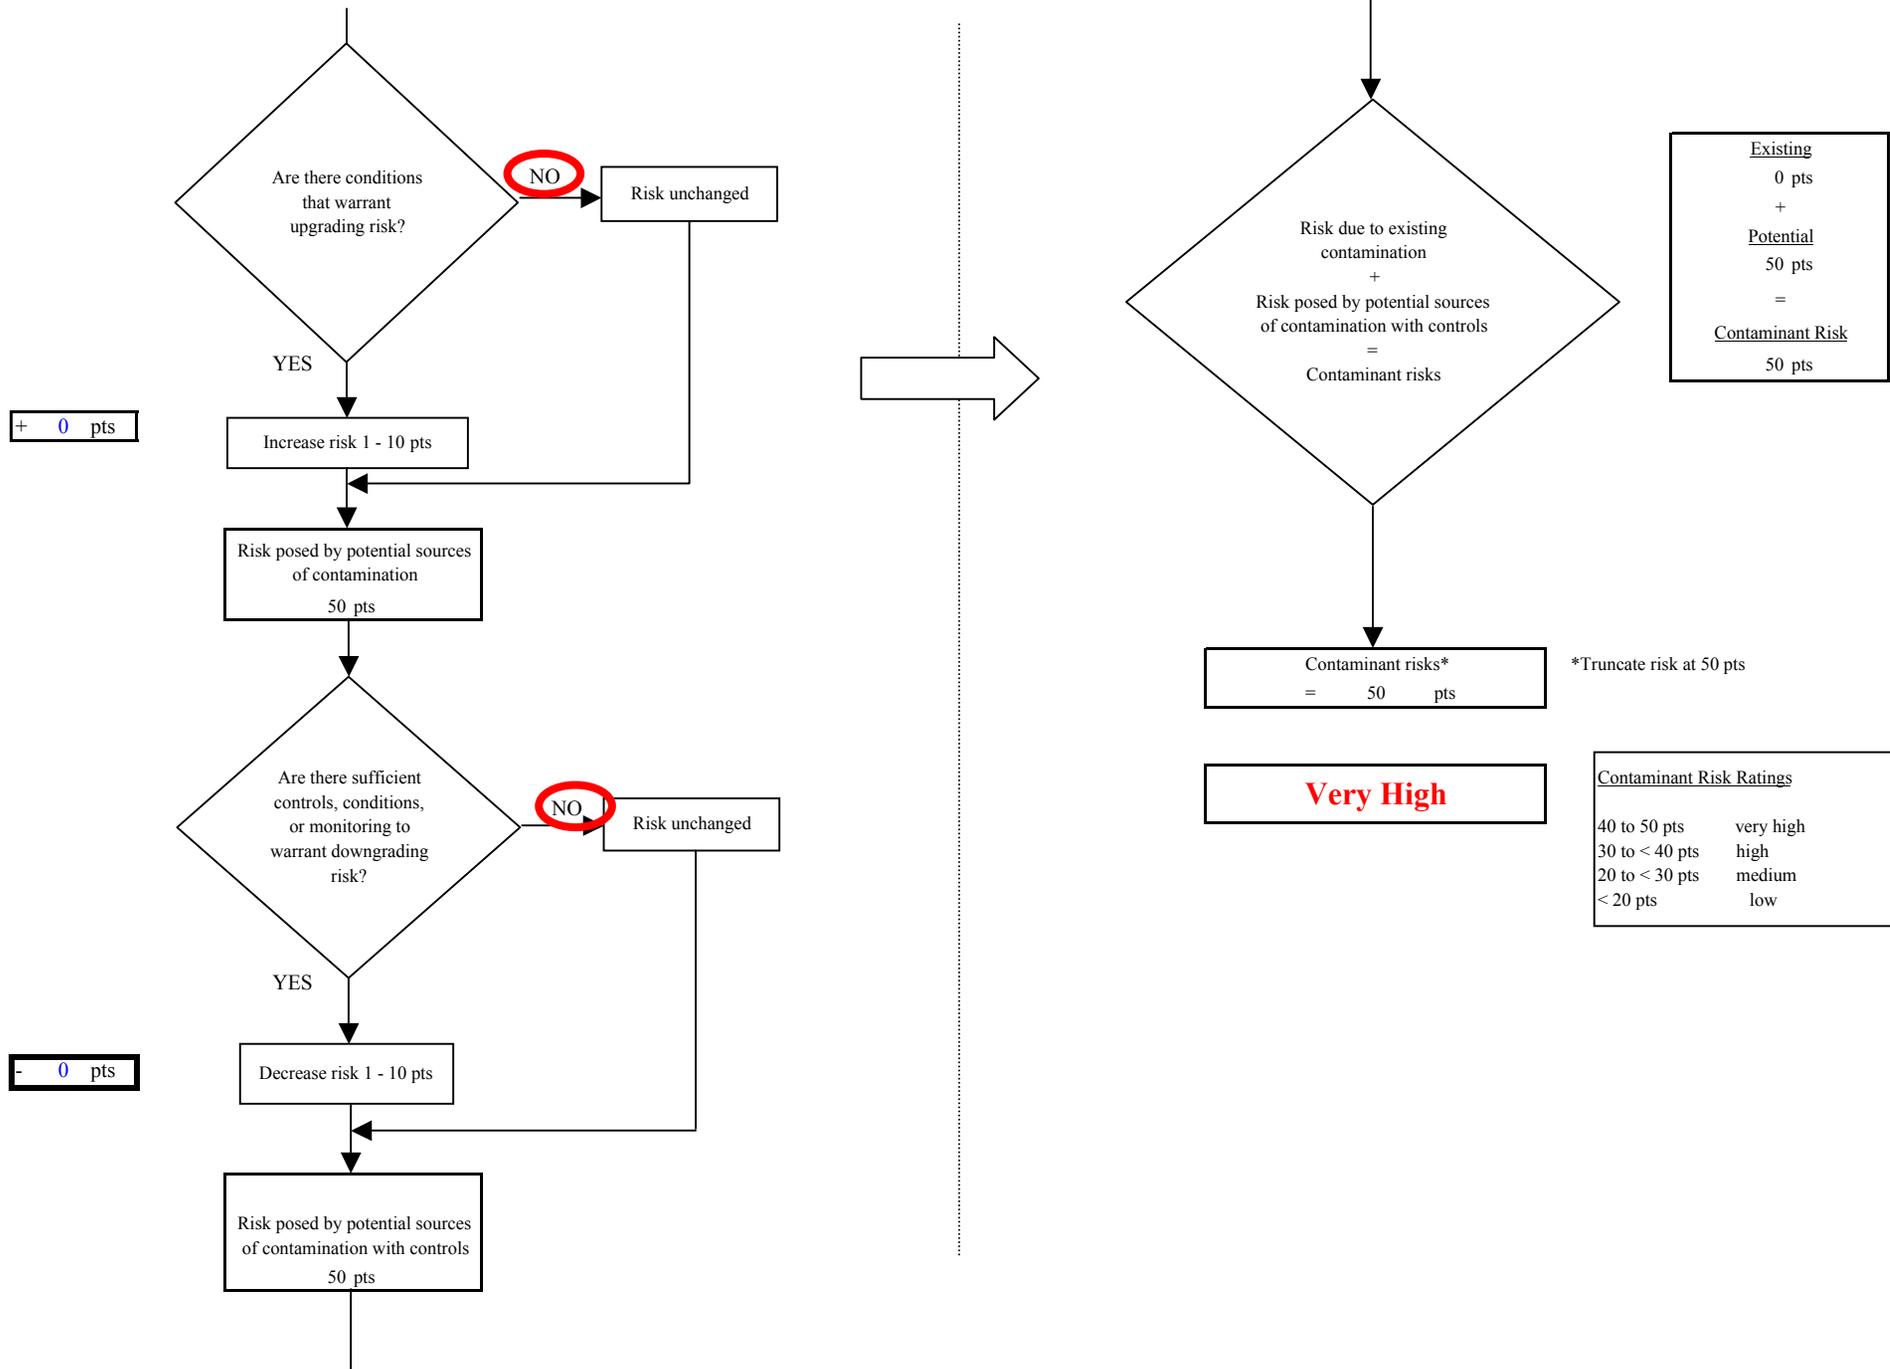


Chart 8. Vulnerability analysis for Paxson Inn & Lodge - Volatile Organic Chemicals

