

SUMMARY OF HYDRAULIC CONDITIONS
AND HABITAT FORECASTS AT
1984 MIDDLE RIVER STUDY SITES

DRAFT REPORT

Prepared for:
ALASKA POWER AUTHORITY

Prepared by:
N. Diane Hilliard
Shelley Williams
E. Woody Trihey
R. Curt Wilkinson
Cleveland R. Steward, III

May 1985

TABLE OF CONTENTS

	<u>Page</u>
LIST OF FIGURES.....	vi
LIST OF TABLES.....	xii
LIST OF PLATES.....	xiii
ACKNOWLEDGEMENTS.....	xv
I. INTRODUCTION.....	I-1
II. RELATIONSHIPS BETWEEN MAINSTEM DISCHARGE, SITE FLOW AND WATER SURFACE ELEVATION.....	II-1
INTRODUCTION.....	II-1
METHODS.....	II-3
Staff Gage Location and Installation.....	II-3
Data Collection.....	II-6
Analysis.....	II-7
RESULTS.....	II-9
Site 101.2R.....	II-10
Site 101.5L.....	II-10
Site 101.7L.....	II-11
Site 105.8L.....	II-11
Site 112.6L.....	II-11
Site 114.1R.....	II-12
Site 115.0R.....	II-12
Site 118.9L.....	II-12
Site 119.1L.....	II-12
Site 119.2R.....	II-12
Site 125.2R.....	II-12
Site 130.2R.....	II-12
Site 131.3L.....	II-13
Site 131.7L.....	II-13
Site 132.6L.....	II-13
Site 133.8R.....	II-13
Site 136.0L.....	II-13
Site 137.5R.....	II-14
Site 139.7L.....	II-14
Site 139.0L.....	II-14
Site 139.4L.....	II-14
Site 147.1L.....	II-14
DISCUSSION.....	II-35

<u>TABLE OF CONTENTS (Continued)</u>	<u>Page</u>
III. CALIBRATION AND APPLICATION OF IFG HYDRAULIC MODELS.....	III-1
INTRODUCTION.....	III-1
METHODS.....	III-11
Site Installation and Data Collection.....	III-11
General Techniques for Hydraulic Model Calibration.....	III-14
General Techniques for Hydraulic Model Verification.....	III-18
General Techniques for Hydraulic Model Application.....	III-26
RESULTS.....	III-32
Site 101.2R.....	III-32
Site Description.....	III-32
Calibration.....	III-36
Verification.....	III-41
Application.....	III-41
Site 101.5L.....	III-45
Site Description.....	III-45
Calibration.....	III-49
Verification.....	III-52
Application.....	III-52
Site 112.6L.....	III-55
Site Description.....	III-55
Calibration.....	III-61
Verification.....	III-64
Application.....	III-4
Site 119.2R.....	III-68
Site Description.....	III-68
Calibration.....	III-72
Verification.....	III-73
Application.....	III-76
Site 131.7L.....	III-79
Site Description.....	III-79
Calibration.....	III-82
Verification.....	III-87
Application.....	III-91

<u>TABLE OF CONTENTS (Continued)</u>	<u>Page</u>
Site 132.6L.....	III-93
Site Description.....	III-93
Calibration.....	III-95
Verification.....	III-102
Application.....	III-102
Site 136.0L.....	III-105
Site Description.....	III-105
Calibration.....	III-109
Verification.....	III-111
Application.....	III-111
Site 147.1L.....	III-117
Site Description.....	III-117
Calibration.....	III-120
Verification.....	III-121
Application.....	III-121
IV. CALIBRATION AND APPLICATION OF DIHAB MODELS.....	
INTRODUCTION.....	
METHODS.....	
Site Installation and Data Collection.....	
General Techniques for DIHAB Model Calibration.....	
General Techniques for DIHAB Model Application.....	
RESULTS.....	
Site 101.7L.....	
Site Description.....	
Calibration.....	
Application.....	
Site 105.8L.....	
Site Description.....	
Calibration.....	
Application.....	
Site 114.1R.....	
Site Description.....	
Calibration.....	
Application.....	

TABLE OF CONTENTS (Continued)

Page

Site 115.0R.....	
Site Description.....	
Calibration.....	
Application.....	
Site 118.9L.....	
Site Description.....	
Calibration.....	
Application.....	
Site 119.1L.....	
Site Description.....	
Calibration.....	
Application.....	
Site 125.2R.....	
Site Description.....	
Calibration.....	
Application.....	
Site 130.2R.....	
Site Description.....	
Calibration.....	
Application.....	
Site 131.3L.....	
Site Description.....	
Calibration.....	
Application.....	
Site 133.8R.....	
Site Description.....	
Calibration.....	
Application.....	
Site 137.5R.....	
Site Description.....	
Calibration.....	
Application.....	

TABLE OF CONTENTS (Continued)Page

Site 138.7L.....

 Site Description.....
 Calibration.....
 Application.....

Site 139.0L.....

 Site Description.....
 Calibration.....
 Application.....

Site 139.4L.....

 Site Description.....
 Calibration.....
 Application.....

REFERENCES.....

APPENDICES

Appendix A - Summary of site-specific data collected to develop relationships between mainstem discharge, site flow and water surface elevation

Appendix B - Data supporting calibration and application of IFG hydraulic models

Appendix C - Data supporting calibration and application of DIHAB models

LIST OF FIGURES

		<u>Page</u>
Figure II-1.	Middle river study sites.....	II-2
Figure II-2.	Flow durations curves for June, July, August, and September, based on mean daily Susitna River discharges at Gold Creek, 1950-1984 and corresponding flow exceedence values for mean monthly discharges, 1981-1984.....	II-4
Figure II-3.	Relationships between mainstem discharge, site flow and water surface elevation for cross section 8 at site 101.2R.....	II-15
Figure II-4.	Relationships between mainstem discharge, site flow and water surface elevation for cross section 1 at site 101.5L.....	II-16
Figure II-5.	Stage discharge curves for cross sections 1, 3 and 4 at site 101.7L.....	II-17
Figure II-6.	Stage discharge curves for cross sections 1 and 4 at site 105.8L.....	II-19
Figure II-7.	Relationships between mainstem discharge, site flow and water surface elevation for cross section 7 at site 112.6L.....	II-20
Figure II-8.	Stage discharge curve for cross section 2 at site 114.1R.....	II-21
Figure II-9.	Stage discharge curve for cross section 1 at site 115.0R.....	II-21
Figure II-10.	Stage discharge curve for cross section 2 at site 118.9L.....	II-22
Figure II-11.	Stage discharge curve for cross section 2 at site 119.1L.....	II-22
Figure II-12.	Relationships between mainstem discharge, site flow and water surface elevation for cross section 3 at site 119.2R.....	II-23
Figure II-13.	Stage discharge curve for cross section 1 and relationships between mainstem discharge, site flow and water surface elevation for cross section 2 at site 125.2R.....	II-24
Figure II-14.	Stage discharge curve for cross section 2 at site 130.2R.....	II-26

LIST OF FIGURES (Continued)Page

Figure II-15.	Stage discharge curve for cross sections 1 and 3 at site 131.3L.....	II-26
Figure II-16.	Relationships between mainstem discharge, site flow and water surface elevation for cross section 3 at site 131.7L.....	II-27
Figure II-17.	Relationships between mainstem discharge, site flow and water surface elevation for cross section 4 at site 132.6L.....	II-28
Figure II-18.	Stage discharge curve for cross section 3 at site 133.8R.....	II-29
Figure II-19.	Relationships between mainstem discharge, site flow and water surface elevation for cross section 4 at site 136.0L.....	II-30
Figure II-20.	Stage discharge curves for cross sections 1 and 2 at site 137.5R.....	II-31
Figure II-21.	Stage discharge curve for cross section 2 at site 138.7L.....	II-32
Figure II-22.	Stage discharge curve for cross section 2 at site 139.0L.....	II-32
Figure II-23.	Stage discharge curve for cross section 2 at site 139.4L.....	II-33
Figure II-24.	Relationships between mainstem discharge, site flow and water surface elevation for cross section 4 at site 147.1L.....	II-34
Figure III-1.	Middle river IFG and DIHAB modeling sites.....	III-1
Figure III-2.	Juvenile chinook salmon suitability criteria for depth applicable to clear and turbid water habitats. Source: Schmidt et al. 1984.....	III-27
Figure III-3.	Juvenile chinook salmon suitability criteria for velocity applicable to clear and turbid water habitats. Source: Schmidt et al. 1984, EWT&A and WCC 1985.....	III-28
Figure III-4.	Cover suitability criteria recommended for use in modeling juvenile chinook habitat under clear and turbid water conditions. Sources: Schmidt et al. 1984, EWT&A and WCC 1985.....	III-29

LIST OF FIGURES (Continued)

Figure III-5.	Cross sections for 101.2R study site depicting water surface elevations at calibration discharges of 25 and 279 cfs.....	III-34
Figure III-6.	Comparison between measured and adjusted cross sections 1, 3 and 4 at 101.2R study site.....	III-38
Figure III-7.	Comparison of observed and predicted water surface profiles from calibrated model at 101.2R study site.....	III-39
Figure III-8.	Comparison between water surface elevations forecast by the calibrated hydraulic models and the stage-flow relationship for 101.2R cross section 8.....	III-40
Figure III-9.	Projections of gross surface area and WUA of juvenile chinook salmon habitat as a function of discharge for the 101.2R modeling site.....	III-42
Figure III-10.	Time series plots of juvenile chinook salmon WUA as a function of discharge from May 20 to September 15, 1984 for 101.2R modeling site.....	III-46
Figure III-11.	Cross sections for 101.5L study site depicting water surface elevations at calibration discharges of 1696 and 4500 cfs.....	III-48
Figure III-12.	Comparison of observed and predicted water surface profiles from calibrated model at 101.5L study site.....	III-51
Figure III-13.	Projections of gross surface area and WUA of juvenile chinook salmon habitat as a function of discharge for the 101.5L modeling site.....	III-54
Figure III-14.	Time series plots of juvenile chinook salmon WUA as a function of discharge from May 20 to September 15, 1984 for 101.5L modeling site.....	III-56
Figure III-15.	Cross sections for 112.6L study site depicting water surface elevations at calibration discharges of 215, 355, 721 and 1430 cfs.....	III-59
Figure III-16.	Comparison between measured and adjusted cross sections 2, and 8 at 112.6L study site.....	III-63
Figure III-17.	Comparison of observed and predicted water surface profiles from calibrated models at 112.6L study site.....	III-65

LIST OF FIGURES (Continued)

- Figure III-18. Projections of gross surface area and WUA of juvenile chinook salmon habitat as a function of discharge for the 112.6L modeling site..... III-67
- Figure III-19. Time series plots of juvenile chinook salmon WUA as a function of discharge from May 20 to September 15, 1984 for 112.6L modeling site..... III-69
- Figure III-20. Cross sections for 119.2R study site depicting water surface elevations at calibration discharge of 316 cfs..... III-71
- Figure III-21. Comparison between measured and adjusted cross sections 1, 2 and 3 at 119.2R study site..... III-74
- Figure III-22. Comparison of observed and predicted water surface profiles from calibrated model at 119.2R study site..... III-75
- Figure III-23. Projections of gross surface area and WUA of juvenile chinook salmon habitat as a function of discharge for the 119.2R modeling site..... III-77
- Figure III-24. Time series plots of juvenile chinook salmon WUA as a function of discharge from May 20 to September 15, 1984 for 119.2R modeling site..... III-80
- Figure III-25. Cross sections for 131.7L study site depicting water surface elevations at calibration discharges of 18, 55, 150 and 240 cfs..... III-83
- Figure III-26. Comparison between measured and adjusted cross sections 2, 6 and 7 at 131.7L study site..... III-88
- Figure III-27. Comparison of observed and predicted water surface profiles from calibrated model at 131.7L study site..... III-89
- Figure III-28. Comparison between water surface elevations forecast by the calibrated hydraulic model and the stage-flow relationship for 131.7L cross section 3..... III-90
- Figure III-29. Projections of gross surface area and WUA of juvenile chinook salmon habitat as a function of discharge for the 131.7L modeling site..... III-92
- Figure III-30. Time series plots of juvenile chinook salmon WUA as a function of discharge from May 20 to September 15, 1984 for 131.7L modeling site..... III-94

LIST OF FIGURES (Continued)

- Figure III-31. Cross sections for 132.6L study site depicting water surface elevations at calibration discharges of 27 and 141 cfs..... III-96
- Figure III-32. Comparison between measured and adjusted cross section 9 at 132.6L study site..... III-99
- Figure III-33. Comparison of observed and predicted water surface profiles from calibrated model at 132.6L study site..... III-100
- Figure III-34. Comparison between water surface elevations forecast by the calibrated hydraulic model and the stage-flow relationship for 132.6L cross section 3..... III-101
- Figure III-35. Projections of gross surface area and WUA of juvenile chinook salmon habitat as a function of discharge for the 132.6L modeling site..... III-104
- Figure III-36. Time series plots of juvenile chinook salmon WUA as a function of discharge from May 20 to September 15, 1984 for 132.6L modeling site..... III-106
- Figure III-37. Cross sections for 136.0L study site depicting water surface elevations at calibration discharges of 81, 153 and 265 cfs..... III-108
- Figure III-38. Comparison of observed and predicted water surface profiles from calibrated model at 136.0L study site..... III-110
- Figure III-39. Comparison between water surface elevations forecast by the calibrated hydraulic model and the stage-flow relationship for 136.0L cross section 4..... III-114
- Figure III-41. Projections of gross surface area and WUA of juvenile chinook salmon habitat as a function of discharge for the 136.0L modeling site..... III-115
- Figure III-42. Time series plots of juvenile chinook salmon WUA as a function of discharge from May 20 to September 15, 1984 for 136.0L modeling site..... III-116

LIST OF FIGURES (Continued)

- Figure III-43. Cross sections for 147.1L study site depicting water surface elevations at calibration discharges of 1907 and 5600 cfs..... III-119
- Figure III-44. Comparison of observed and predicted water surface profiles from calibrated model at 147.1L study site..... III-122
- Figure III-45. Projections of gross surface area and WUA of juvenile chinook salmon habitat as a function of discharge for the 147.1L modeling site..... III-124
- Figure III-46. Time series plots of juvenile chinook salmon WUA as a function of discharge from May 20 to September 15, 1984 for 147.1L modeling site..... III-126

<u>LIST OF TABLES</u>		<u>Page</u>
Table II-1.	Identification codes for staff gages.....	II-6
Table III-1.	Description of habitat transformation categories. Source: Aaserude et al. 1985.....	III-4
Table III-2.	Types of hydraulic models applied at 1984 middle river modeling sites for rearing chinook.....	III-3
Table III-3.	Substrate code classification.....	III-12
Table III-4.	Cover code classification.....	III-12
Table III-5.	Cover suitability criteria recommended for use in modeling juvenile chinook habitat under clear and turbid water conditions. Source: Schmidt et al. 1984 and EWT&A and WCC 1985.....	III-30
Table III-6.	Hydraulic data available to calibrate IFG-4 model for site 101.2R.....	III-37
Table III-7.	Hydraulic data available to calibrate IFG-2 model for site 101.5L.....	III-49
Table III-8.	Hydraulic data available to calibrate the IFG-2 model for site 112.6L.....	III-61
Table III-9.	Hydraulic data available to calibrate the IFG-4 model for site 119.2R.....	III-72
Table III-10.	Hydraulic data available to calibrate the IFG-4 model for site 131.7L.....	III-86
Table III-11.	Hydraulic data available to calibrate the IFG-4 model for site 132.6L.....	III-98
Table III-12.	Hydraulic data available to calibrate the IFG-4 model for site 136.0L.....	III-109
Table III-13.	Hydraulic data available to calibrate the IFG-2 model for site 147.1L.....	III-120

<u>LIST OF PLATES</u>		<u>Page</u>
Plate III-1.	Modeling site 101.2R on June 1, 1982 at mainstem discharge: 23,000 cfs.....	III-33
Plate III-2.	Modeling site 101.5L on June 1, 1982 at mainstem discharge: 23,000 cfs.....	III-47
Plate III-3.	Modeling site 112.6L on September 6, 1983 at mainstem discharge: 16,000 cfs.....	III-57
Plate III-4.	Modeling site 119.2R on June 1, 1982 at mainstem discharge: 23,000 cfs.....	III-70
Plate III-5.	Modeling site 131.7L on June 1, 1982 at mainstem discharge: 23,000 cfs.....	III-81
Plate III-6.	Modeling site 132.6L on June 1, 1982 at mainstem discharge: 23,000 cfs.....	III-85
Plate III-7.	Modeling site 136.0L on June 1, 1982 at mainstem discharge: 23,000 cfs.....	III-107
Plate III-8.	Modeling site 147.1L on June 1, 1982 at mainstem discharge: 23,000 cfs.....	III-118
Plate IV-1.	Modeling site 101.7L on June 1, 1982 at mainstem discharge: 23,000 cfs.....	
Plate IV-2.	Modeling site 105.8L on June 1, 1982 at mainstem discharge: 23,000 cfs.....	
Plate IV-3.	Modeling site 114.1R on June 1, 1982 at mainstem discharge: 23,000 cfs.....	
Plate IV-4.	Modeling site 115.0R on June 1, 1982 at mainstem discharge: 23,000 cfs.....	
Plate IV-5.	Modeling sites 118.9L and 119.1L on June 1, 1982 at mainstem discharge: 23,000 cfs.....	
Plate IV-6.	Modeling site 125.2R on June 1, 1982 at mainstem discharge: 23,000 cfs.....	
Plate IV-7.	Modeling site 130.2R on September 6, 1983 at mainstem discharge: 16,000 cfs.....	
Plate IV-8.	Modeling site 131.3L on June 1, 1982 at mainstem discharge: 23,000 cfs.....	

LIST OF PLATES (Continued)

Page

Plate IV-9.	Modeling site 133.8R on June 1, 1982 at mainstem discharge: 23,000 cfs.....
Plate IV-10.	Modeling site 137.5R on June 1, 1982 at mainstem discharge: 23,000 cfs.....
Plate IV-11.	Modeling sites 138.7L, 139.0L and 139.4L on June 1, 1982 at mainstem discharge: 23,000 cfs.....

ACKNOWLEDGEMENTS

Preparation of this report was funded by the Alaska Power Authority as part of the licensing studies for the proposed Susitna Hydroelectric Project. The engineering and environmental studies being conducted to support the Application for License are directed by Harza-Ebasco Susitna Joint Venture.

ADF&G Su Hydro provided essential support for the successful completion of the field studies, rating curve analysis and model calibration. In addition ADF&G had lead responsibility for data base management and preparation of the three appendices which accompany the main text. The ADF&G Su Hydro staff who participated in the field studies, analyses, and report preparation are listed below:

Andy Hoffmann
Karen Meier
John McConaughy
Kathy Sheehan
Dan Kingsley
Mary Shiffer

Sheryl Salasky
Kathy Johnson
Jim Anderson
Jeff Bigler
Allen Bingham
Donna Buckholtz
Alice Freeman

John McConaughy developed and applied numerous computer programs which facilitated data reduction and model calibration. In addition he produced the site specific WUA and time series plots. Allen Bingham selected the statistical analyses and assembled the data base necessary to test the degree to which models were calibrated. Special recognition is given Karen Meier for completing the rating curve analysis and drafting section II of this report as well as coordinating the ADF&G effort which supported the preparation of this work.

PART I

INTRODUCTION

This report presents data reduction methods and results of the 1984 field studies conducted by E. Woody Trihey and Associates (EWT&A) and the Alaska Department of Fish and Game Su Hydro Aquatic Studies Group (ADF&G Su Hydro) in the Talkeetna-to-Devil Canyon segment of the Susitna River (Middle River). Although field studies and analyses described in this report were completed by a joint EWT&A and ADF&G Su Hydro study team, the primary responsibility for the field study design, hydraulic model calibration and preparation of this report rests with EWT&A. Thus the information and technical interpretations in this report are the responsibility of EWT&A and do not necessarily represent the opinion of the Alaska Department of Fish and Game.

The response of fish habitat to naturally occurring variations in streamflow could not be cost-effectively evaluated solely by monitoring a system as large as the middle Susitna River. Therefore, at the onset of the 1982 field studies the U.S. Fish and Wildlife Service's Instream Flow Incremental Methodology (IFIM) (Bovee 1982) was selected as a means of quantifying the response of aquatic habitats to changes in streamflow. PHABSIM is a collection of computer programs associated with the IFIM which can be applied to simulate instream hydraulic conditions and the corresponding amount of available fish habitat for selected species/life stage. The PHABSIM modeling system is intended for use in those situations where the flow regime and channel structure are the major factors influencing the availability of fish habitat (Trihey 1979). The PHABSIM computer programs include the IFG-2

and IFG-4 hydraulic models, and the HABTAT program. The HABTAT program integrates hydraulic model output with species specific habitat suitability criteria to calculate weighted usable areas (WUA), an index value representing the availability of potential fish habitat as a function of streamflow. Habitat modeling results presented in this report are limited to juvenile chinook salmon (Oncorhynchus tshawytscha) and spawning chum salmon (O. keta). These species/life stages have been identified as primary evaluation species for the Middle River (EWT&A and WCC 1985). Habitat variables important to rearing fish differ significantly from those of adult spawners. Therefore, different modeling concepts and combinations of physical habitat variables are used to evaluate the response of spawning and rearing habitats to incremental changes in streamflow.

The IFG-2 and IFG-4 hydraulic models were calibrated for eight side channels of the Middle River and linked with the HABTAT program to forecast the influence of incremental changes in streamflow on juvenile chinook rearing habitat. A modified version of the HABTAT program (DIHAB) was developed by EWT&A to calculate WUA directly from measured depths and velocities at observed streamflows thereby eliminating the need for hydraulic simulation models in those instances where the WUA response is principally determined by flow effects on depth. The DIHAB model was applied at 14 mainstem margin and backwater areas to evaluate the influence of mainstem discharge on chum salmon spawning habitat.

This report consists of an introduction and three technical sections, each supported by a technical appendix, which describe the field data and analytical procedures used to model the response of juvenile chinook and

spawning chum habitat to incremental changes in streamflow. The first technical section (Part II) describes the stage-discharge and site flow analysis which presents various relationships between mainstem discharge, site-specific flow, and water surface elevation that are extensively used in subsequent analyses to: appraise the accuracy of calibrated IFG models, estimate site-specific water surface elevations at modeling sites for different mainstem discharges, and convert the mainstem hydrograph into a site-specific flow hydrograph.

In Part III of this report, calibration procedures for the eight IFG hydraulic models are described in detail and WUA forecasts obtained by linking the calibrated hydraulic models to the HABTAT model are presented for juvenile chinook. Suitable rearing conditions for juvenile chinook are dependent on cover and low to moderate velocities. The Susitna River conveys glacial runoff during the summer growing season, and the associated turbidities provide cover for rearing chinook (Schmidt et al. 1984). Therefore, under natural conditions, object cover (such as provided by substrate, debris, or overhanging vegetation) is generally not as important a factor to juvenile chinook in turbid water habitats of the middle river as it would be in a large non glacial river. Habitat suitability criteria for cover, velocity and depth used in this report are based upon data collected in Middle River habitats (Schmidt et al. 1984) have been derived as described in EWT&A and WCC 1985. Rearing habitat for juvenile chinook at each study site is expressed as the relationship between WUA and mainstem discharge. In addition, time series WUA plots based on the 1984 USGS record of average daily streamflows for the Susitna River at Gold Creek are provided to indicate the temporal stability of

rearing conditions at the study sites throughout the open water growing season (May 20 - September 15).

Part IV of this report presents the evaluation of chum spawning habitat using the direct input habitat model (DIHAB) developed by EWT&A. The availability of chum salmon spawning habitat is highly dependent upon the presence of upwelling and suitable substrate (Estes and Vincent-Lang 1984). Although the location of upwelling areas is generally fixed, use of these areas by spawning chum is influenced by mainstem discharge. High velocities may periodically limit the availability of upwelling areas, or abnormally low mainstem discharges during the spawning season may dewater or limit access to upwelling areas.

Since most of the reported chum spawning in side channel and mainstem habitats occurs along shoreline margins or in backwater areas (Barrett et al. 1984), depth is the principal variable influencing the response of the WUA curve to variation in discharge. Hence the direct input habitat model (DIHAB) which can utilize site-specific stage-discharge relationships as input data was chosen over the IFG hydraulic models which also require detailed measurement of velocity for proper calibration.

Habitat suitability criteria for spawning chum salmon used with the direct input model are based on data collected in the middle river (Estes and Vincent-Lang 1984), and review of pertinent literature (Steward 1985). Chum spawning habitat is described at each study site as a relationship between WUA and mainstem discharge, as well as by time series plots based on 1984 average daily streamflow records for the Susitna River at Gold Creek.

PART II
RELATIONSHIPS BETWEEN MAINSTEM DISCHARGE,
SITE FLOW AND WATER SURFACE ELEVATION

INTRODUCTION

The proposed Susitna hydroelectric project would alter the natural flow regime of the middle Susitna River, thereby influencing the mainstem water surface elevation (stage) which in turn affects stage and flow in side channel areas. During the 1984 field season, staff gages were installed to monitor changes in water surface elevations at 22 mainstem and side channel study sites (Figure II-1). Site specific data were collected to develop relationships between mainstem discharge, site flow and water surface elevation. Generally, these relationships can be described by discontinuous linear regression equations using logarithmic transformed variables.

The objective of this portion of the 1984 middle river modeling studies was to monitor water surface elevation at mainstem and side channel study sites and obtain site-specific flow measurements to develop quantitative relationships between: a) mainstem stage and mainstem discharge (WSEL vs. Q); b) site flow and stage (q vs. WSEL); and c) site flow and mainstem discharge (q vs. Q). These relationships are extensively used in the calibration and application of models used to evaluate chinook rearing habitat (Part III of this report), and in the application of direct input habitat models for chum salmon spawning (Part IV of this report).

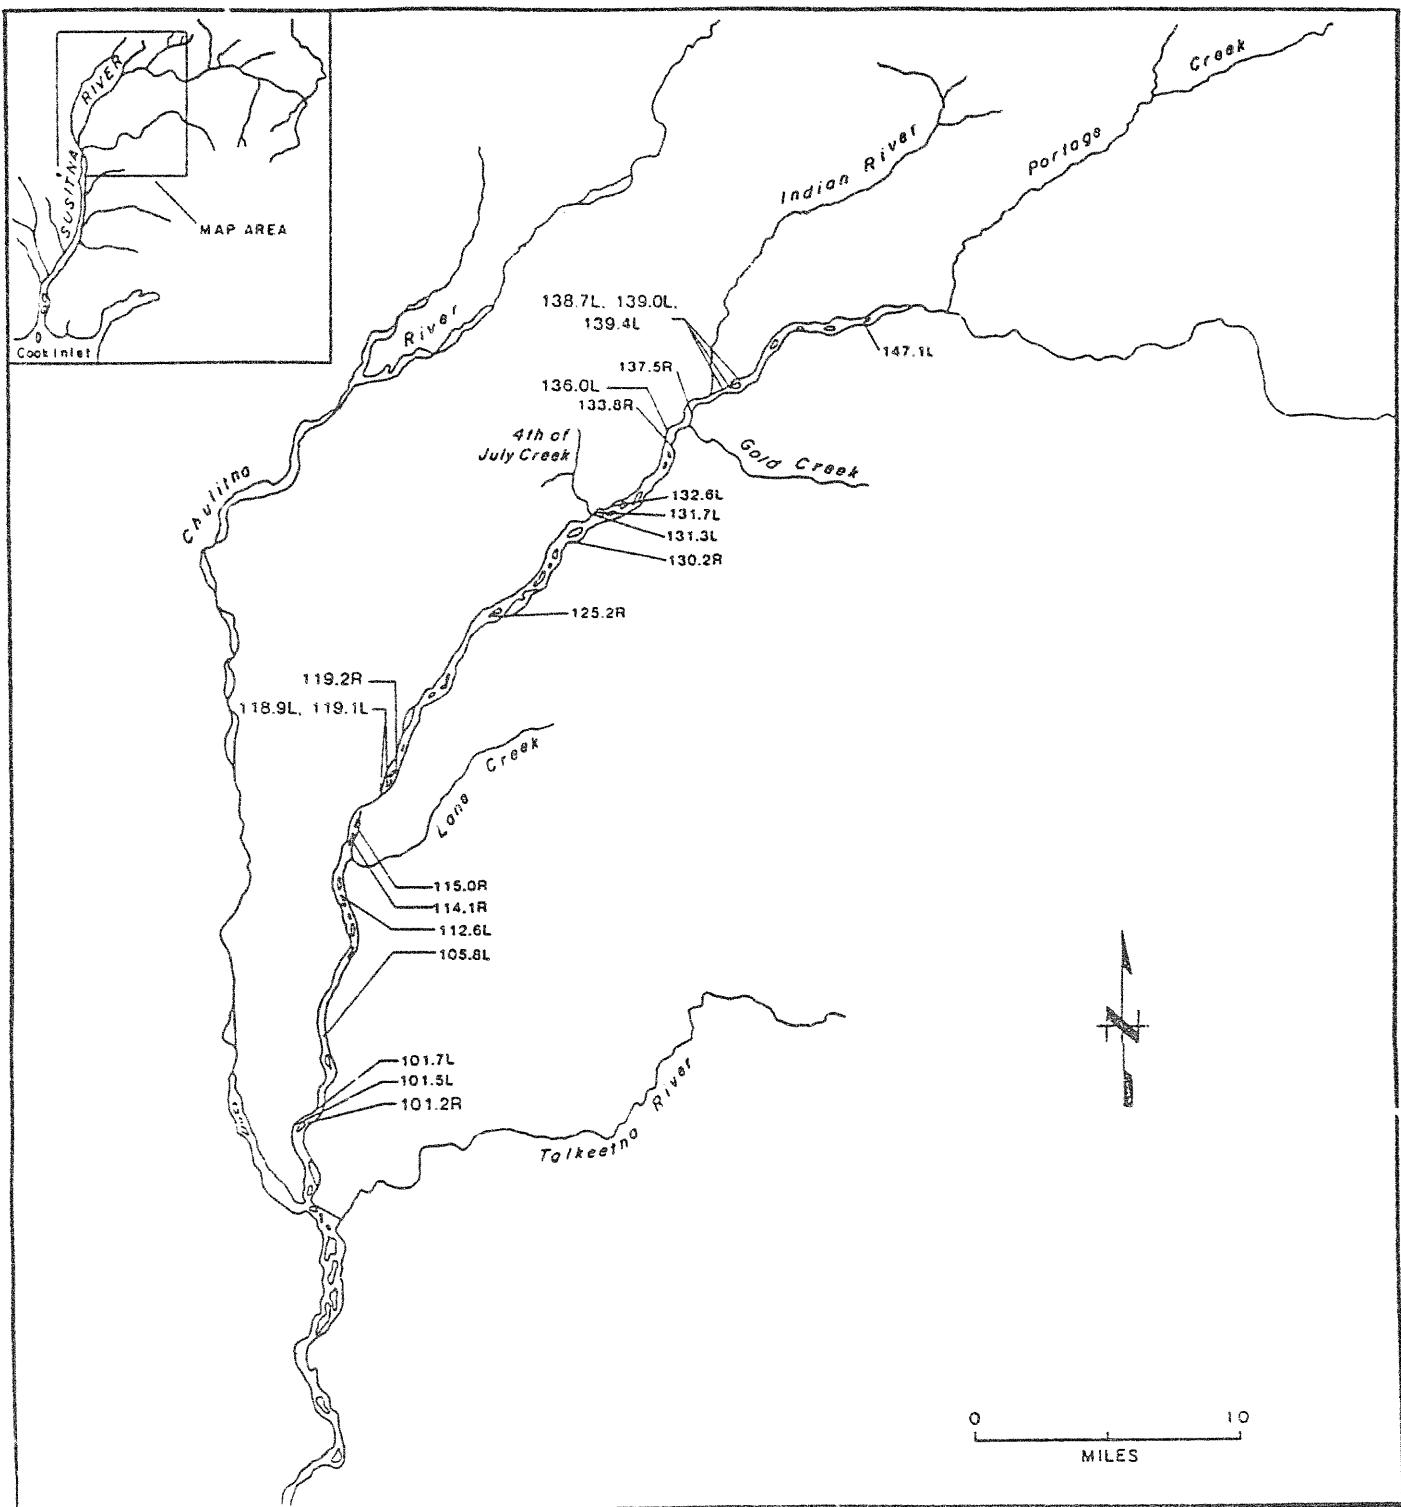


Figure II-1. Middle river study sites.


Flow duration analyses are useful in comparing discharge magnitudes of a particular year to those occurring over the historical period of record. Figure II-2 shows the range of mean daily discharges at Gold Creek between 1950 and 1984 for the months of June, July, August, and September, as well as the percent of time flows were equalled or exceeded.

The 50-percent exceedence value represents a typical medium discharge, the 90-percent, a typical low discharge, and the 10-percent, a typical high. The exceedence value corresponding to the mean monthly discharges during the years 1981, 1982, 1983, and 1984 are also shown in Figure II-2.

METHODS

Staff gage location and installation: Leopold and Stevens staff gages graduated in 0.01 foot increments from zero to 3.33 feet were installed at all modeling sites during August 1984. Staff gages were located on each cross section within the IFG study sites to facilitate obtaining water surface elevations without surveying long distances when collecting multiple sets of calibration data from the hydraulic models. Often as many as three tiered staff gages were installed per cross section to span the variations in WSEL which was associated within the range of mainstem discharges being monitored. Each staff gage was surveyed to a known elevation (project datum) previously established throughout the middle river by R&M Consultants, Inc. from 1980 through 1982. This allowed conversion of site-specific water surface elevation readings to a common elevation throughout the middle river.

June

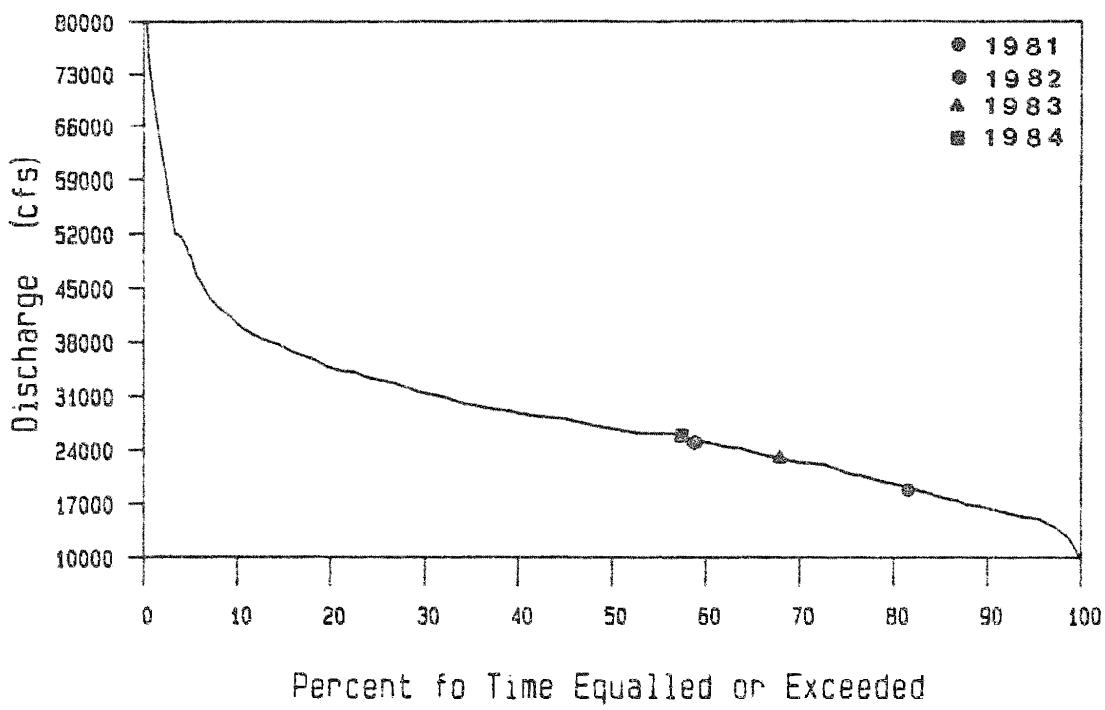

July


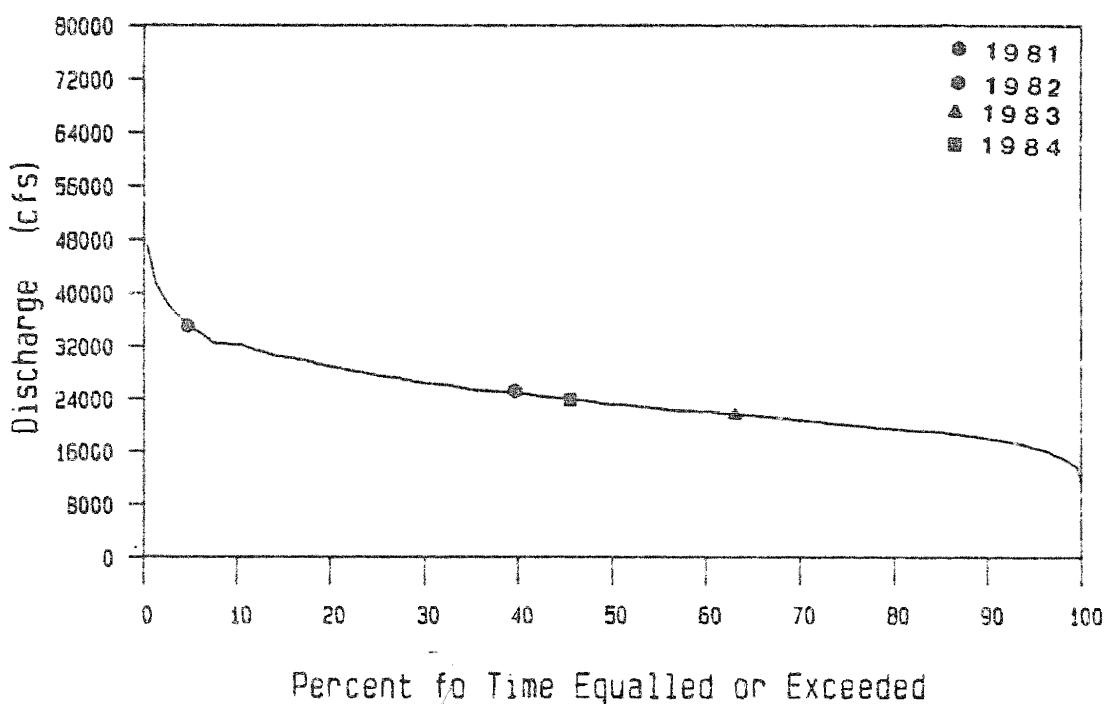


Figure II-2. Flow durations curves for June, July, August, and September, based on mean daily Susitna River discharges at Gold Creek, 1950-1984 and corresponding flow exceedence values for mean monthly discharges, 1981-1984.

August

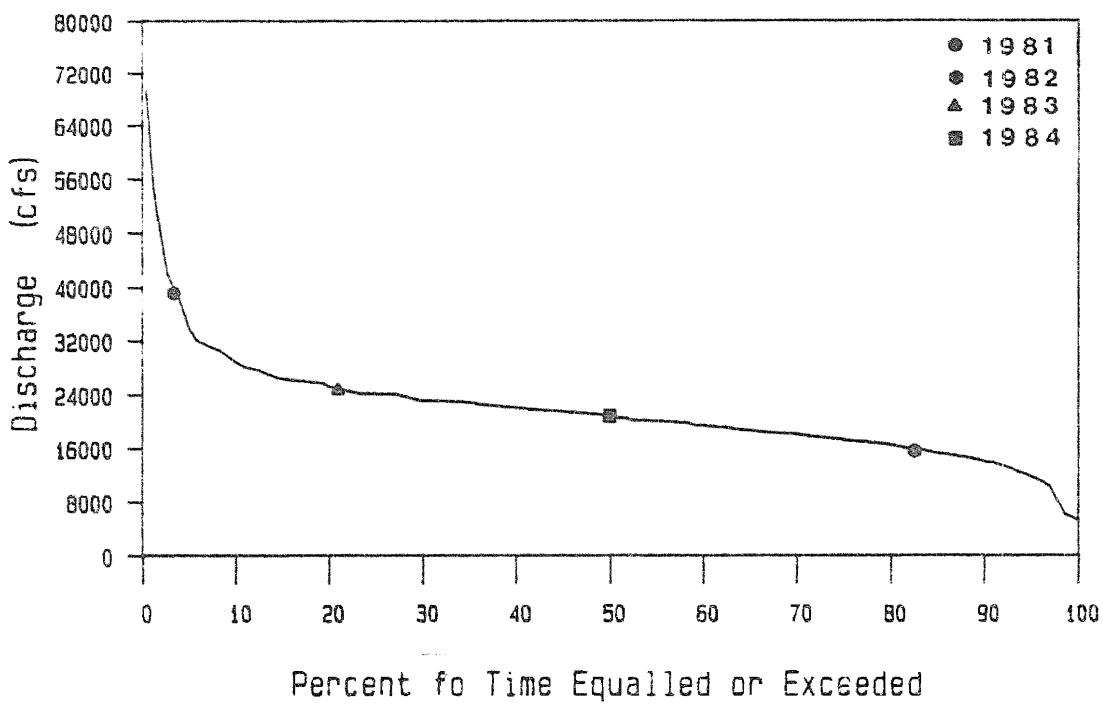

September

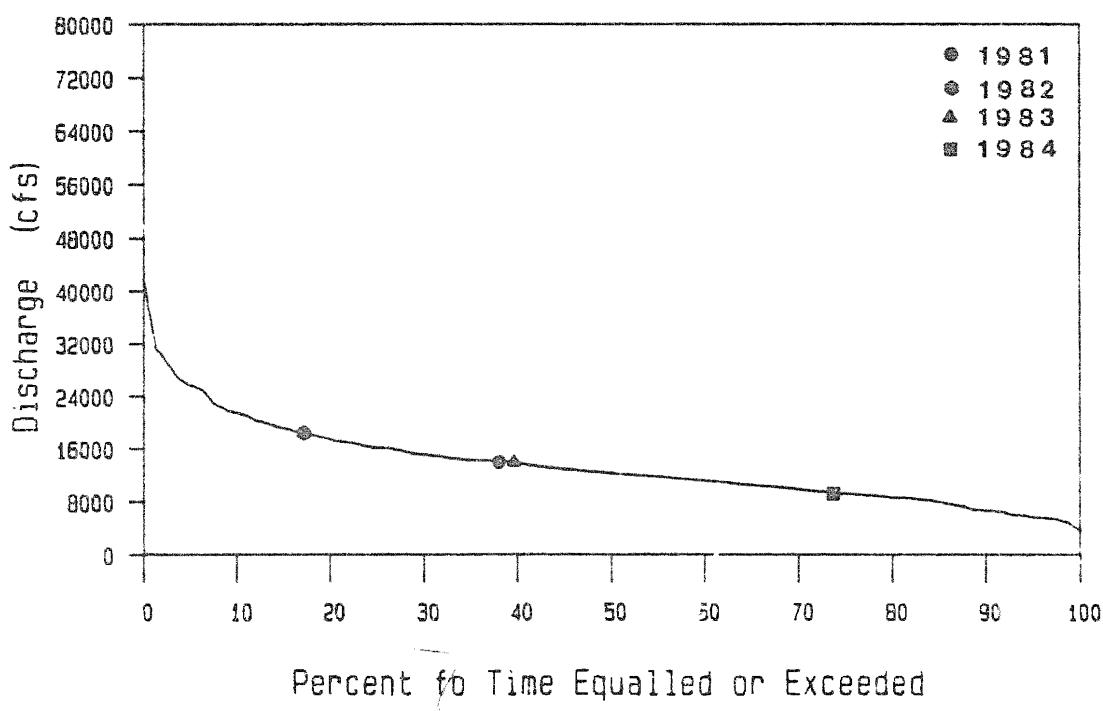


Figure II-2. Flow durations curves for June, July, August, and September, based on mean daily Susitna River discharges at Gold Creek, 1950-1984 and corresponding flow exceedence values for mean monthly discharges, 1981-1984.

Staff gage locations were identified by river mile (RM), location within the site, position relative to flow level (high, medium, low) and the associated cross section number (Table II-1).

Table II-1. Identification codes for staff gages.

Location in Site	Code	Flow Level	Code
Mainstem	M	High	A
Side Channel	S	Medium	B
Side Channel Mouth	W	Low	C
Side Channel Head	H		
Other	X		
Spawning Sites	P		

Low water gages were typically installed and surveyed to a known elevation in September when the medium flow gages were about to be dewatered because of receding streamflows.

Data Collection: Staff gage readings were obtained at three to five different mainstem discharge levels during the August through October field season. Gage height was read to the nearest 0.01 ft. Water surface elevations were surveyed by differential leveling to the nearest 0.01 ft if the staff gages were dewatered, and during cross section and thalweg surveys.

Site-specific flow measurements were obtained at one cross section in each IFG model site at a minimum of three different mainstem discharges. The discharge

cross section was located in a stable portion of the study site where the velocity distribution remained relatively constant over a range of flows. Most discharge cross sections were located at the head of a riffle or in the transition zone between a riffle and run.

Flow measurements were obtained using a top-set wading rod and Marsh-McBirney electronic flow meters, or Price AA meters. Depth and velocity measurements were taken across each cross section at 20 to 25 points (verticals) in accordance with standard methods of the U.S. Geological Survey. If the flow velocity was not perpendicular to the cross section, the flow angle was recorded. Site flow was calculated with a hand calculator or an Epson HX-20 portable computer using the formula:

$$q = \sum_{i=1}^n (d_i) \times (w_i) \times (V_i) \times \alpha_i$$

where:

d_i = depth of cell i

w_i = width of cell i

V_i = velocity of cell i

α_i = flow angle of cell i

More detailed procedures for staff gage location and streamflow measurement may be found in the FY84 ADF&G Su Hydro Aquatic Studies Procedures Manual (ADF&G Su Hydro 1984).

Average daily streamflows for the Susitna River at Gold Creek were obtained from the U.S. Geological Survey gaging station located at Gold Creek (USGS 15292000). Instantaneous discharges were calculated from a time-lag analysis

in those instances when rapidly rising or falling mainstem discharges complicated use of mean daily values.

Analysis: Streamflow and water surface elevation data were tabulated in a Wordstar file using an IBM PC XT and transferred to a Lotus file for graphing as log/log plots. Water surface elevation (y-axis) was plotted against mean daily discharge at Gold Creek (x-axis) for the 22 study sites. Plots of water surface elevation at the site and site flow versus mainstem discharge were also prepared for the eight IFG model sites. Each plot was visually inspected for outliers and, if necessary, the erroneous data points were corrected. Least squares regression equations describing relationships between the dependent and independent variables were calculated for each staff gage using a programmable HP 41 CF calculator. Extrapolation limits of the regression equations were established based on several factors: the number of data points, channel geometry, and breaching or controlling mainstem discharge. The breaching flow for each side channel study site was determined from field data or inspection of aerial photographs taken at several different mainstem discharges (Klinger-Kingsley 1985). The reviewed data were transferred to the Boeing mainframe computer for final analysis to confirm regression equations and for final plotting.

The relationship between side channel flow or stage and mainstem discharge is dependent upon the location of the staff gage in the side channel (head or mouth) and whether the side channel is breached or not breached. Observations regarding the breached or non-breached condition of the side channel were recorded with each staff gage reading. This information was used to interpret the computer graphics and identify the influence of mainstem stage on breaching the head of the side channel or causing a backwater at the mouth. Obser-

vations regarding breached and non-breached conditions also assisted with identifying the mainstem discharge above which side channel flow was "controlled" by mainstem discharge.⁷ An inflection point on the site flow versus mainstem discharge plot identifies the transition from non-controlled to controlled flow conditions in the side channel. In general, the controlling mainstem discharge is equal to or slightly greater than the breaching discharge depending upon the shape of the channel cross section at the head of the side channel (Aaserude et al. 1985).

RESULTS

Site specific flow and water surface elevations were monitored from August through October 1984, spanning the range of mainstem discharges of 4,000 to 34,200 cfs, as measured at Gold Creek. Whenever the mainstem discharge was sufficient to breach the side channel study sites (generally 8,000 to 10,000 cfs), direct relationships between mainstem discharge and side channel flow and water surface elevations were obtained. When channels were unbreached, their water surface elevations were influenced by local inflow, channel geometry and mainstem backwater. The site flow was influenced by upwelling, tributary inflow or local runoff. Hence relationships were not determined for these conditions.

Mainstem discharges at Gold Creek in 1984 were similar or slightly lower than typical discharges determined from the 35 year record (Figure II-2). Mean monthly discharges for June, July, August, and September corresponded to flow exceedence values of 50, 29, 52, and 73 percent, respectively.

Three relationships (site-specific water surface elevation versus mainstem discharge, site flow versus site-specific water surface elevation, and site flow versus mainstem discharge) are presented on one page for each IFG model site. The relationships between site-specific water surface elevations and mainstem discharge are presented for each of the 14 direct input model sites (Figures II-3 to II-24). Figures A-1.1 to A-1.7 present the water surface elevation versus discharge plots for all IFG cross sections with the exception of the discharge cross sections. Tables A-1.1 through A-1.22 present the data used in all plots and in the development of regression equations.

Site 101.2R
Site 101.2R: As indicated by inflection points in Figure III-3, the side channel breaches at 9,200 cfs and becomes controlled at 10,300 cfs. Staff gages at cross sections 2 and 5 are located in the right channel which becomes active at 14,000 cfs. The gravel bar which separates the main and right channels becomes submerged near 18,000 cfs and consequently, the same water surface elevation occurs in both channels above that flow.

Site 101.5L: The channel is controlled by the mainstem at discharges greater than 5,000 cfs. A large backwater area is present at the mouth of the channel. As mainstem discharge increases, the effect of mainstem backwater on stage extends further upstream. This is reflected in the inflection points for the stage-discharge curves which occur at increasingly higher mainstem discharge with increasing distance from the mouth of the channel (Figure II-4).

Three relationships (site-specific water surface elevation versus mainstem discharge, site flow versus site-specific water surface elevation, and site flow versus mainstem discharge) are presented on one page for each IFG model site. The relationships between site-specific water surface elevations and mainstem discharge are presented for each of the 14 direct input model sites (Figures II-3 to II-24). Figures A-1.1 to A-1.7 present the water surface elevation versus discharge plots for all IFG cross sections with the exception of the discharge cross sections. Tables A-1.1 through A-1.22 present the data used in all plots and in the development of regression equations.

Site 101.2R
Site 101.2R: As indicated by inflection points in Figure III-3, the side channel breaches at 9,200 cfs and becomes controlled at 10,300 cfs. Staff gages at cross sections 2 and 5 are located in the right channel which becomes active at 14,000 cfs. The gravel bar which separates the main and right channels becomes submerged near 18,000 cfs and consequently, the same water surface elevation occurs in both channels above that flow.

Site 101.5L: The channel is controlled by the mainstem at discharges greater than 5,000 cfs. A large backwater area is present at the mouth of the channel. As mainstem discharge increases, the effect of mainstem backwater on stage extends further upstream. This is true for the stage-discharge curves which occur at increasing discharge with increasing distance from the mouth (Figure II-4).

Site 101.7L: A backwater area extends from below cross section 1 upstream to cross section 2 at mainstem discharges of 9,600 cfs or less. A gravel bar extends from the head to cross section 1 along the right side of the channel which is overtopped at 9,600 cfs. The amount of flow over the gravel bar determines the flow at cross section 1. Cross sections 2 through 4 are only affected by backwater above 9,600 cfs until the head of the site is breached at discharges greater than 23,000 cfs (Figure II-5).

Site 105.8L: The mainstem channel shape is constant below a discharge of 24,000 cfs. As indicated by the inflection points in Figure II-6, the water surface elevation associated with 24,000 cfs is coincident with a change in cross sectional geometry.

Site 112.6L: The channel is controlled by the mainstem at discharges greater than 5,000 cfs. At the discharge cross section, a linear curve describes the relationship between discharge and water surface elevation for the entire mainstem range of 5,000 to 35,000 cfs (Figure II-7). When developing the relationship between site flow and mainstem discharge, a high correlation was found to exist between the lower four data points. Including the fifth data point, resulted in a much lower correlation, suggesting an inflection point exists in the relationship. The physical explanation for the change in slope is probably the head berm geometry. Near 10,800 cfs the water surface elevation at the head berm may coincide with a cross sectional grade break at the channel entrance.

Site 114.1R: Flow enters the study site at discharges greater than 5,000 and at 10,000 cfs through two channels. The flow in the channel is controlled above 8,800 cfs (Figure II-8).

Site 115.0R: Backwater from the mouth of the side channel extends upstream to cross section 1 at all discharges greater than 10,400 cfs (Figure II-9). Below 10,400 cfs, low flow is maintained by upwelling. Two heads direct flow into the site and breach at 12,000 and 23,000 cfs.

Sites 118.9L and 119.1L: The mainstem channel shape is constant throughout the range of available data (Figures II-10 and II-11).

Site 119.2R: The side channel is controlled by the mainstem at all discharges greater than 10,000 cfs (Figure II-12). Above 23,000 cfs, the left bank is inundated and a change in the flow-discharge relationship can be expected. The lower half of the side channel, described by cross sections 1, 2, and 3, persists as a backwater area throughout the mainstem range of 5,000 to 23,000 cfs. The upper half of the side channel, represented by cross sections 4 and 5, is dry at discharges less than 10,000 cfs.

Site 125.2R: The side channel is breached at discharges greater than 4,300 cfs and becomes controlled at 6,210 cfs (Figure II-13).

Site 130.2R: Below a mainstem discharge of 16,100 cfs, flow is maintained throughout the study site by upwelling and is somewhat influenced by backwater (Figure II-14). Above 16,100 cfs the sand bar which separates the channel from the side channel is overtopped.

Site 131.3L: Flow enters the channel through two locations at 9,000 and 10,700 cfs. At 9,000 cfs, flow enters between cross sections 2 and 3. Flow through the head is controlled at all cross sections at discharges greater than 10,700 cfs (Figure II-15).

Site 131.7L: The three heads that direct flow into the channel breach at discharges of 5,000, 10,000 and 14,500 cfs. The study site is first breached at 5,000 cfs and controlled by the mainstem at discharges greater than 7,470 cfs (Figure II-16).

Site 132.6L: The two heads which direct flow into the side channel breach at discharges of 10,000 and 14,500 cfs. Ponded water is present between cross sections 5 through 9 at 10,000 cfs and dries up near 8,000 cfs. The channel flow is controlled by the mainstem at 11,900 cfs (Figure II-17). Above 23,100 cfs the water surface elevation at the lower two cross sections is influenced by backwater from the mainstem.

Site 133.8R: The mainstem channel shape is constant below a discharge of 15,600 cfs. The water surface elevation associated with 15,600 cfs is coincident with a change in cross sectional geometry as indicated by the inflection point in Figure II-18.

Site 136.0L: The channel is controlled by the mainstem at discharges greater than 5,000 cfs. Even at extremely high discharges, it remains distinctly separate from the mainstem; water does not flow across the island constituting the right bank, nor are there any overflow channels which might direct or

divert water into or from the side channel at high flows. The cross sectional geometry is relatively constant throughout the site. Thus, the relationships developed are valid throughout the mainstem range of 5,000 to 35,000 cfs (Figure II-19).

Site 137.5R: Below 11,800 cfs the flow is maintained by upwelling throughout the study site. At discharges greater than 11,800 cfs, a backwater extends upstream throughout the site (Figure II-20). Flow begins entering the channel over the gravel bar at 23,000 cfs but is not significant enough to change the stage-discharge relationship for the site.

Site 138.7L: The mainstem channel shape is constant throughout the range of available data (Figure II-21).

Site 139.0L: Flow is maintained throughout the study site at discharges below 12,000 cfs. Above 12,000 cfs, the gravel bar separating the channel from the mainstem is overtopped. This overtopping discharge is reflected by a change in the WSEL versus Q relationship in Figure II-22.

Site 139.4L: The mainstem channel shape is constant throughout the range of available data (Figure II-23).

Site 147.1L: This large side channel is controlled by the mainstem at discharges greater than 5,000 cfs. Like site 136.0L, the side channel is not influenced by overflow channels or cross flow from the mainstem, even at high discharges. The relationships between site flow, mainstem discharge, and water surface elevation are valid throughout the mainstem range of 5,000 to 35,000 cfs (Figure II-24).

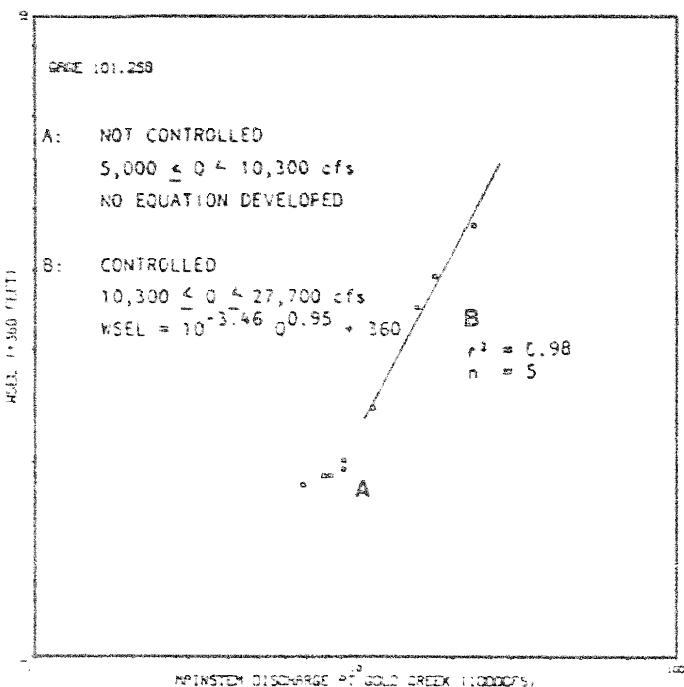
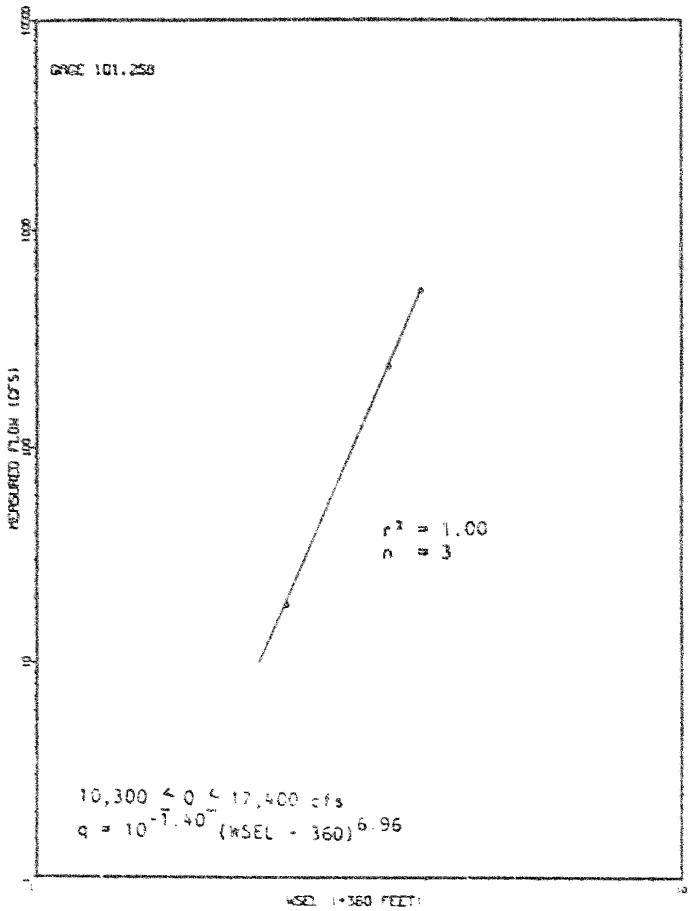
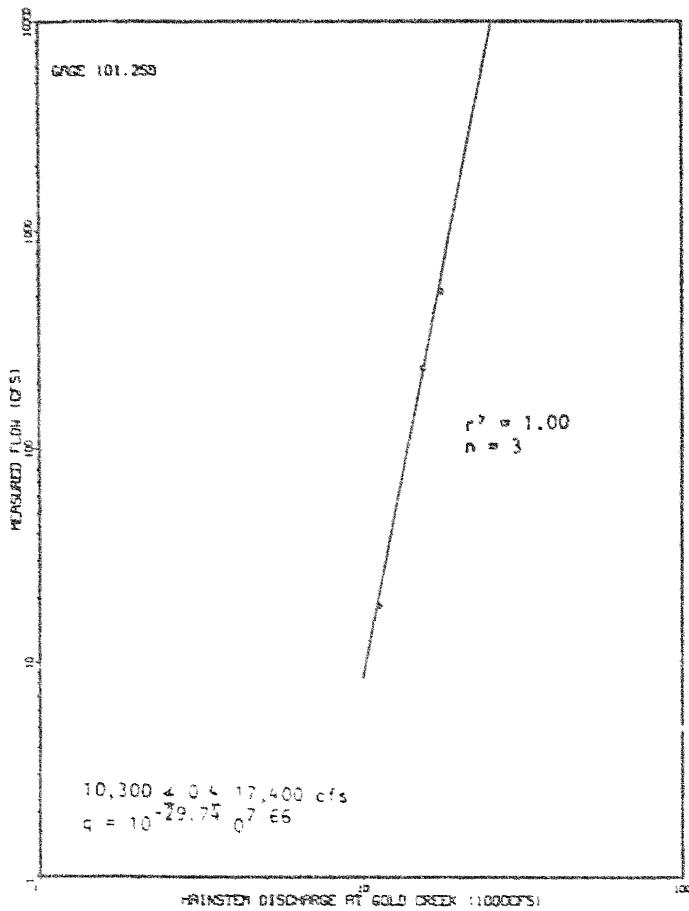


Figure II-3.

Relationships between mainstem discharge, site flow and water surface elevation for cross section 8 at site 101.2R.

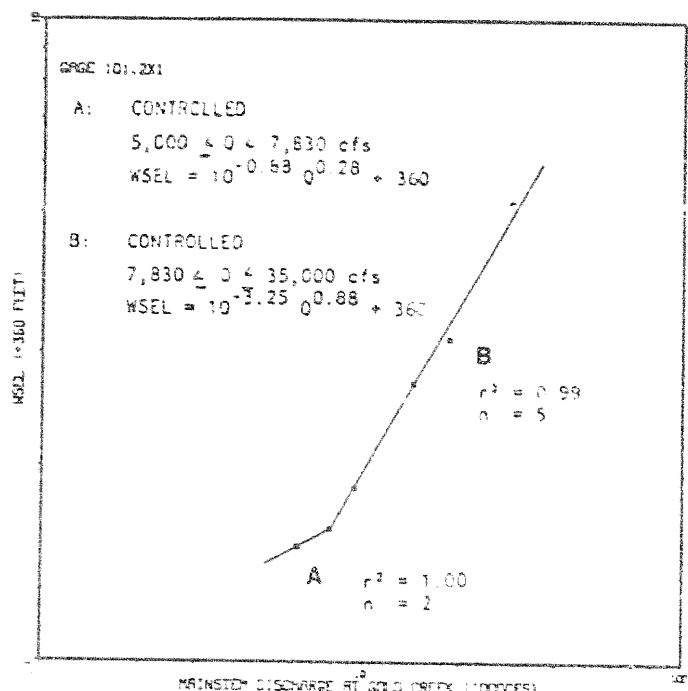
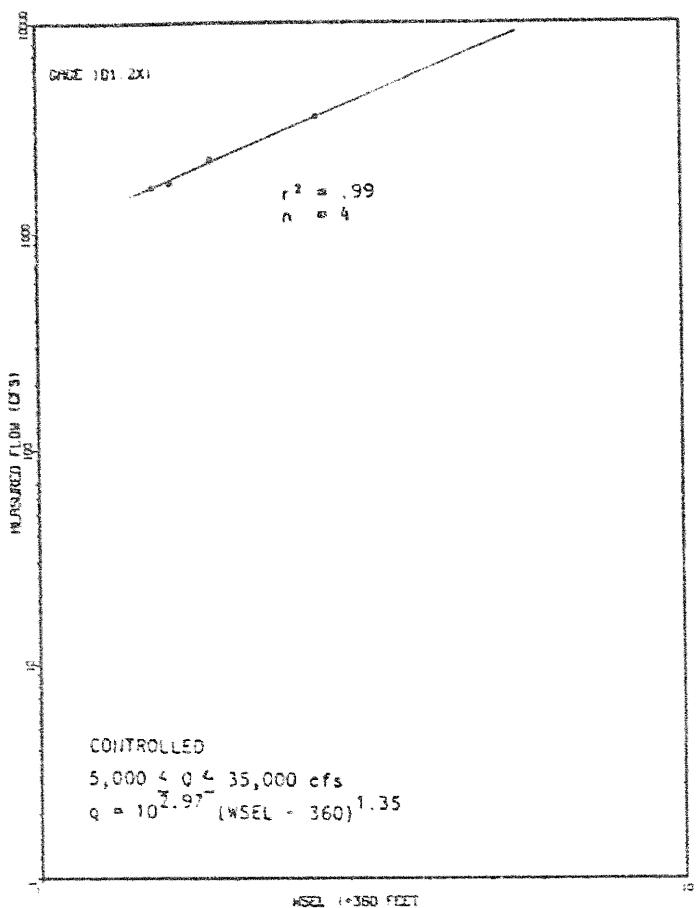
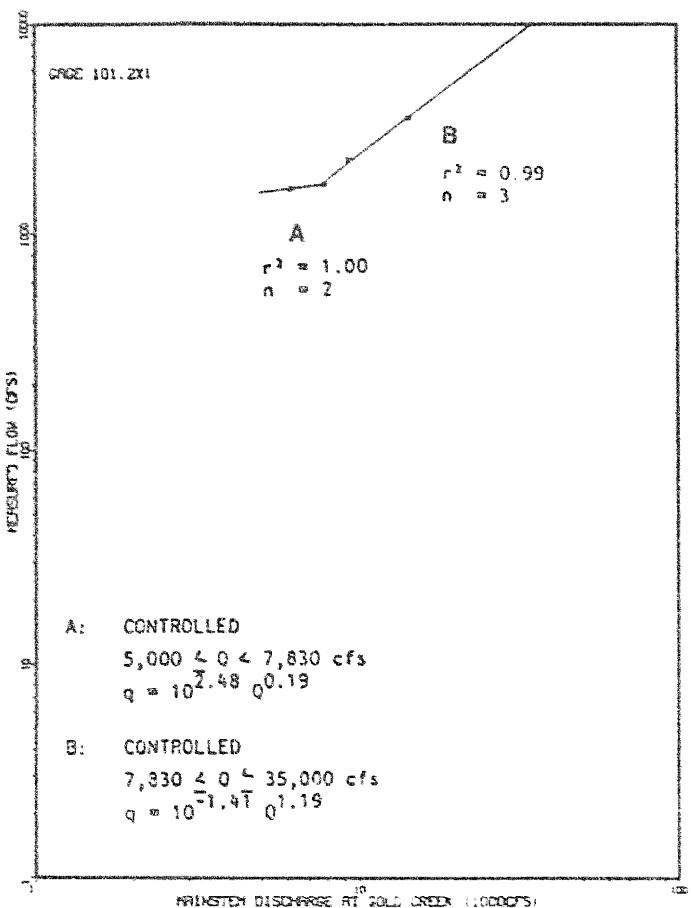


Figure II-4. Relationships between mainstem discharge, site flow and water surface elevation for cross section 1 at site 101.5L.

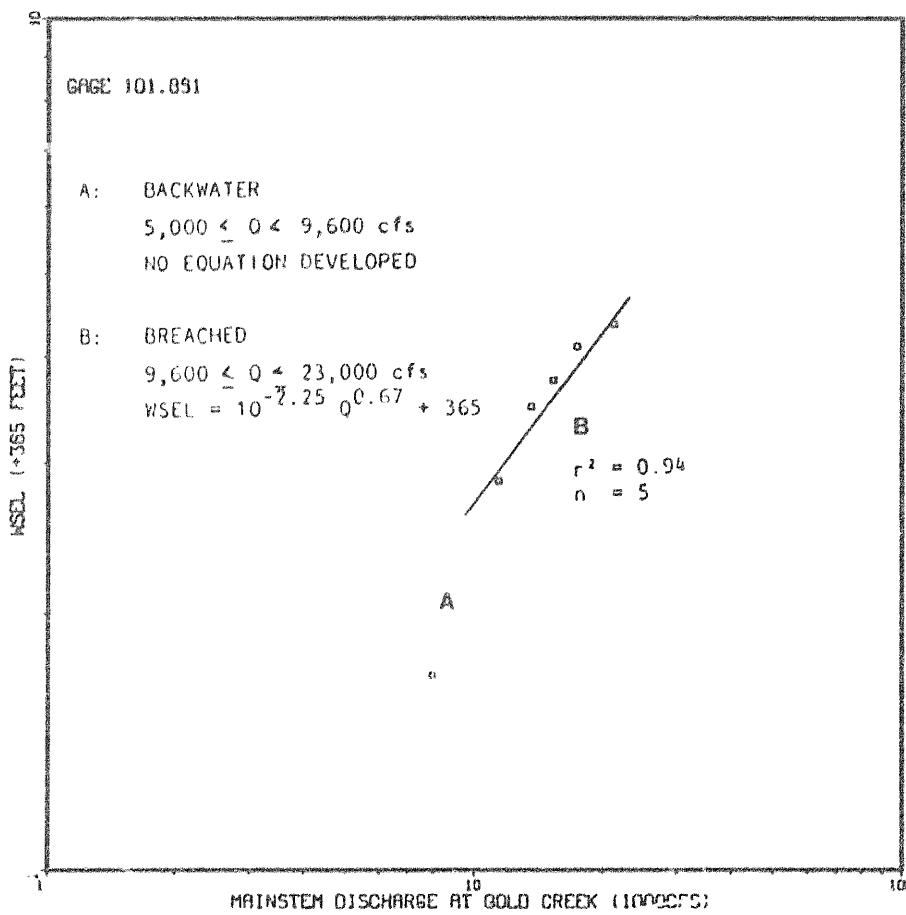


Figure II-5. Stage discharge curves for cross sections 1, 3 and 4 at site 101.7L.

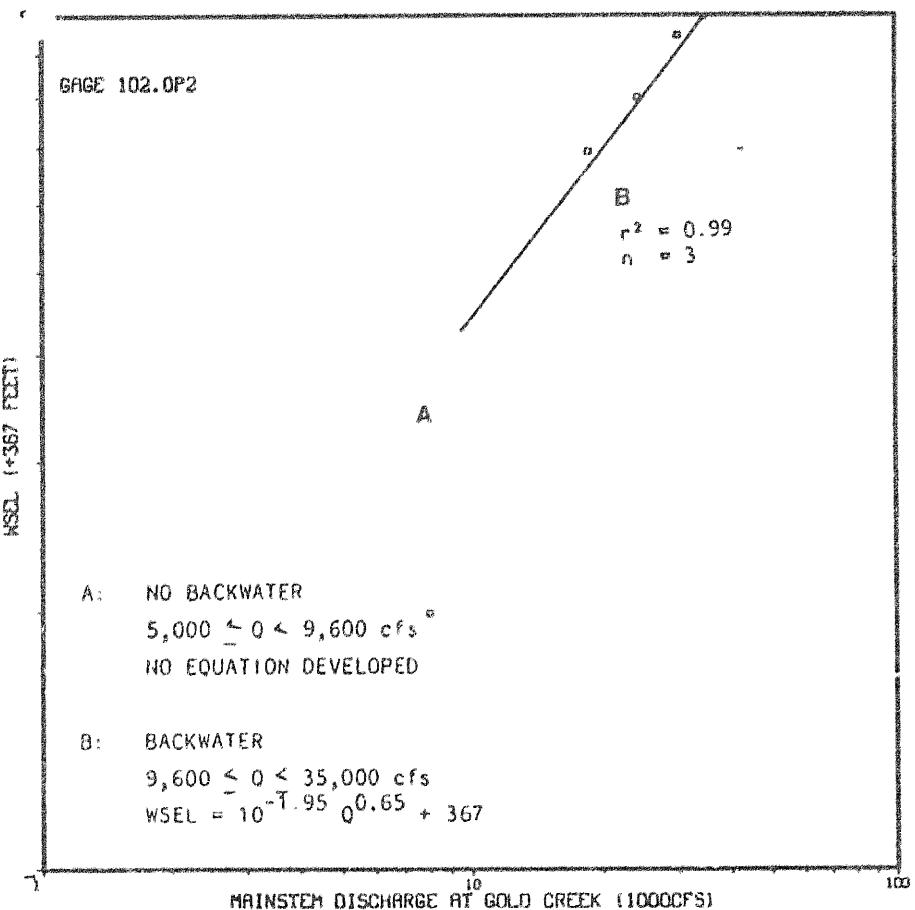
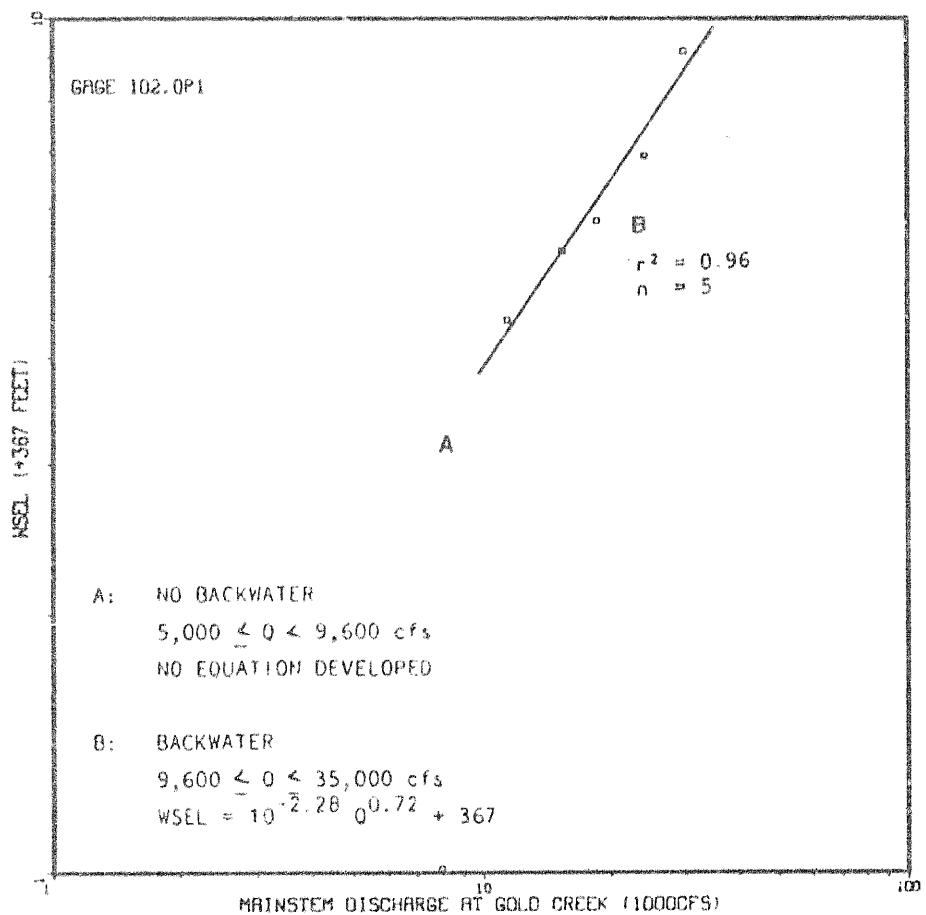


Figure II-5. Stage discharge curves for cross sections 1, 3 and 4 at site 101.7L.

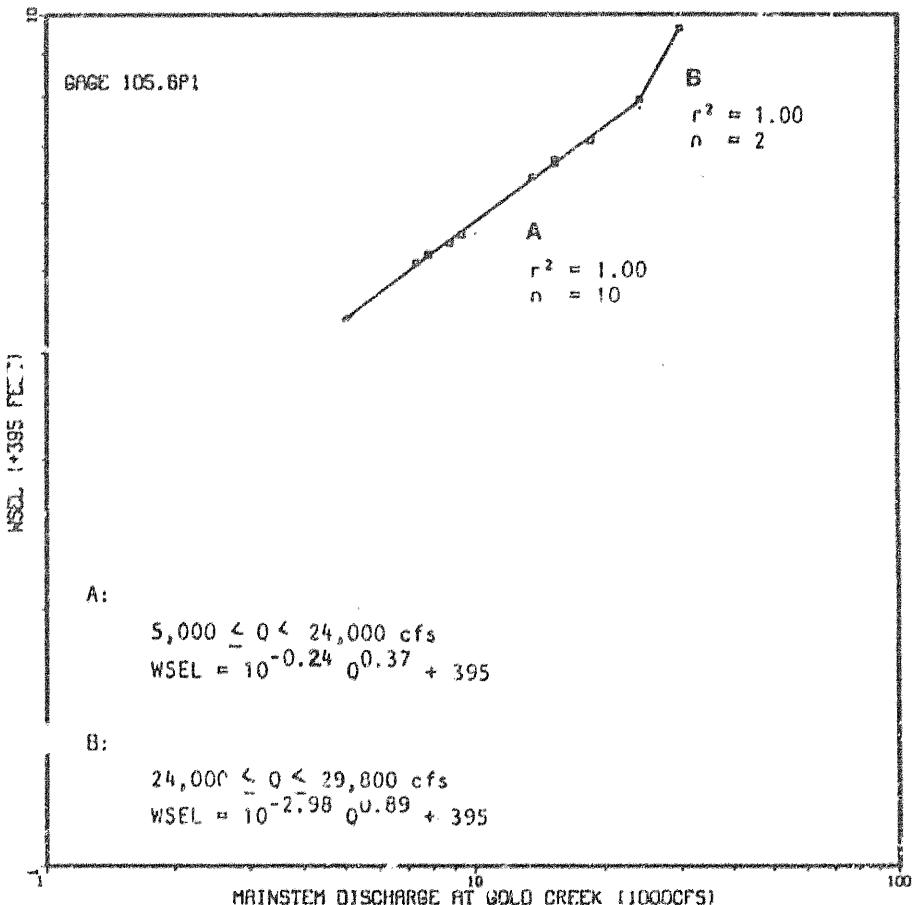
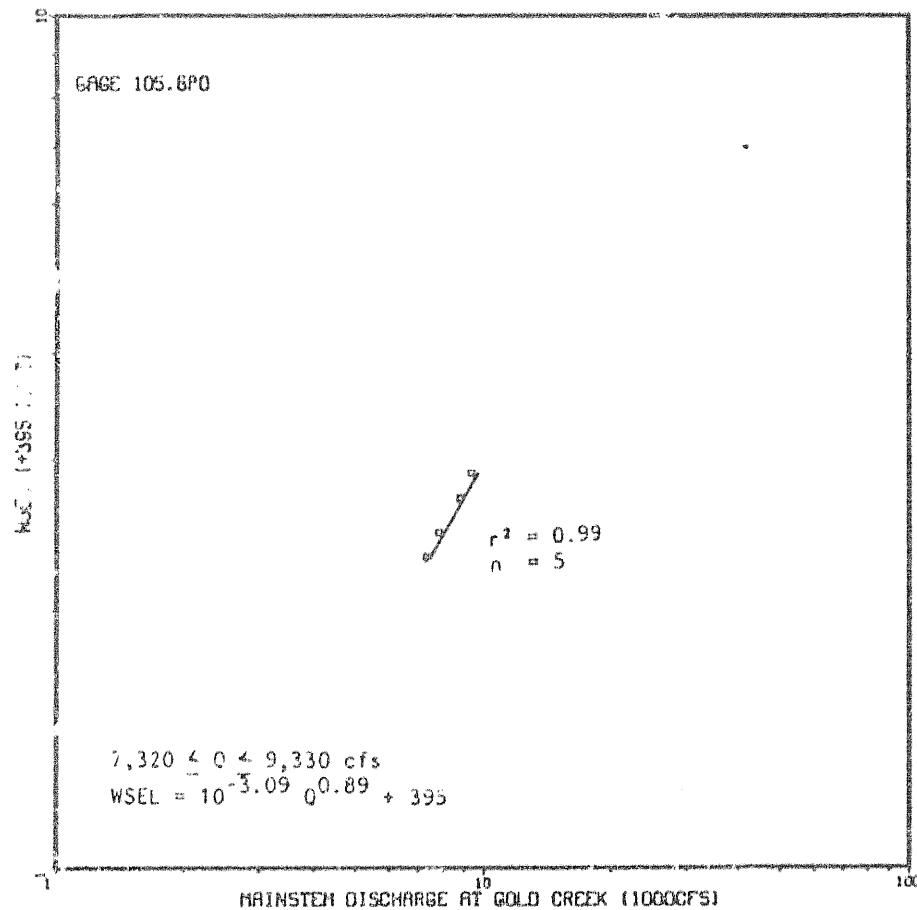


Figure II-6. Stage discharge curves for cross sections 1 and 4 at site 105.8L.

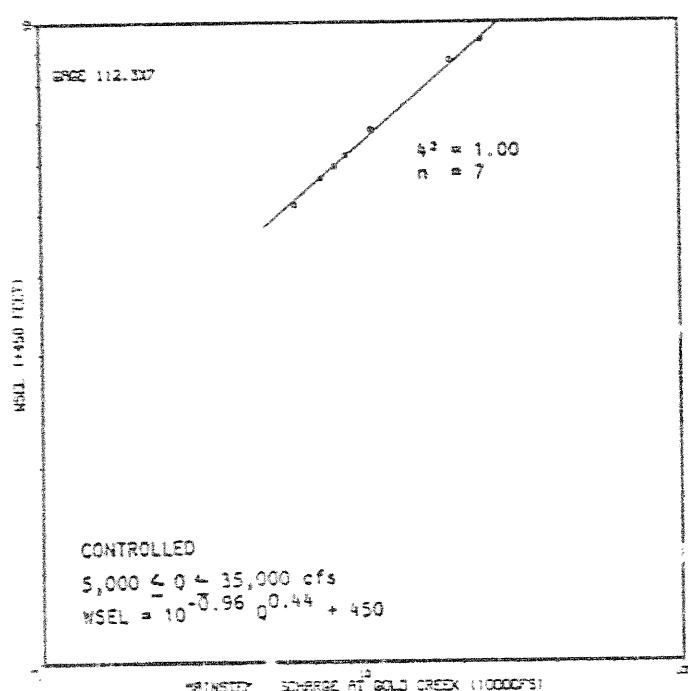
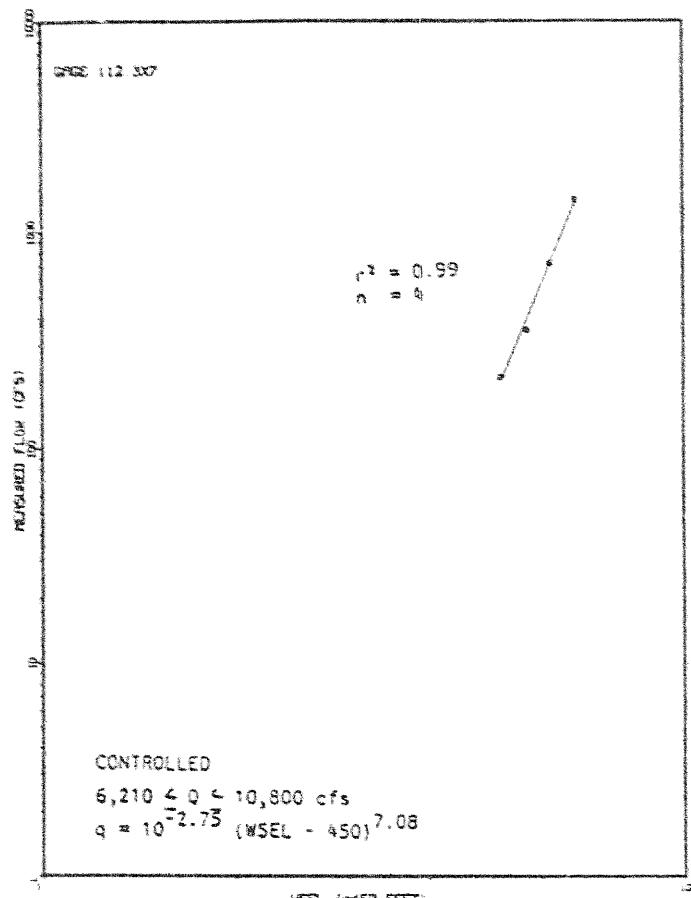
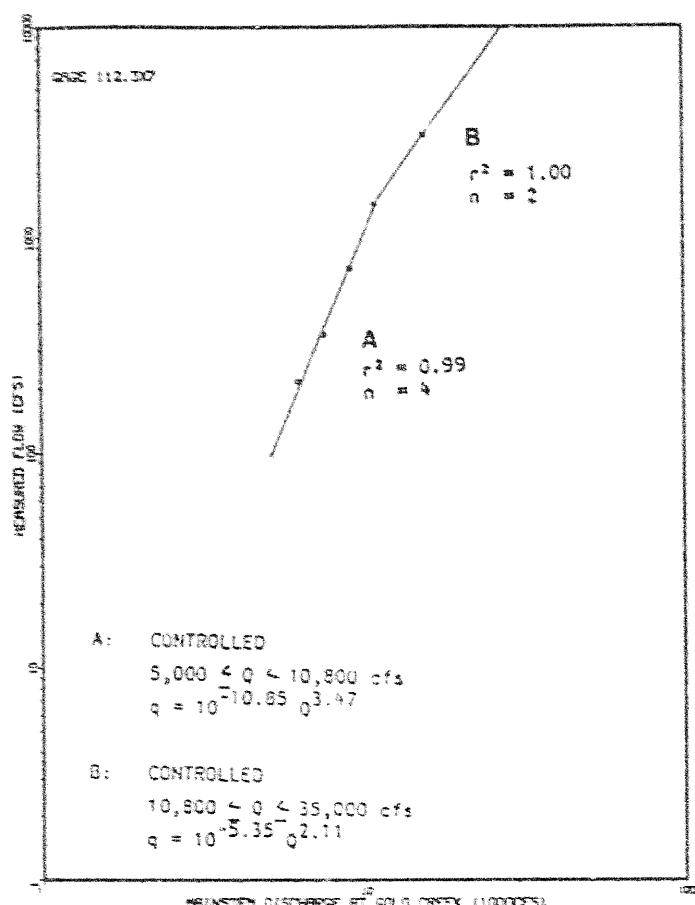


Figure II-7. Relationships between mainstem discharge, site flow and water surface elevation for cross section 7 at site 112.6L.

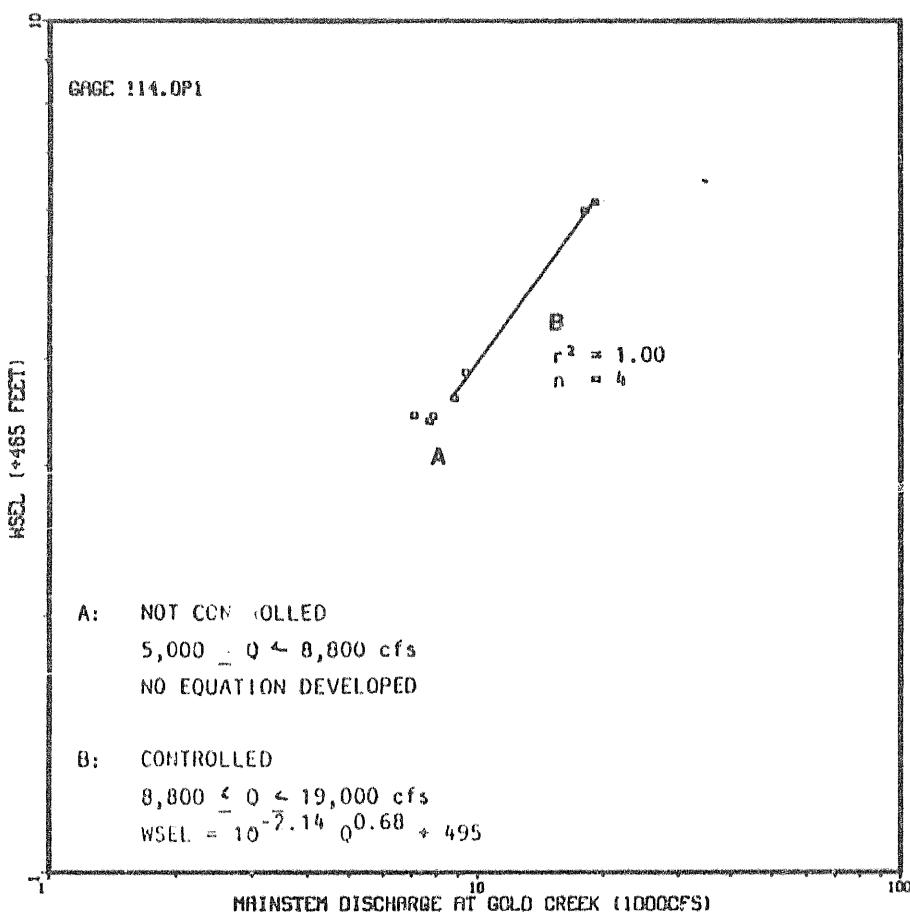


Figure II-8. Stage discharge curve for cross section 2 at site 114.1R.

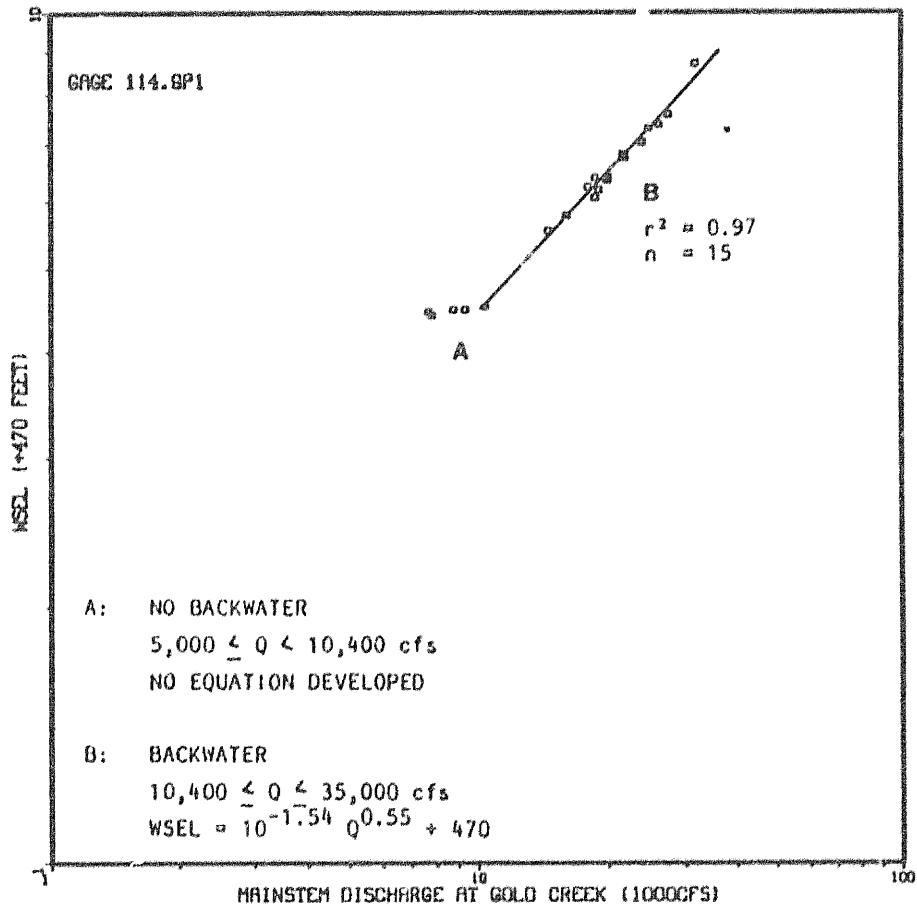


Figure II-9. Stage discharge curve for cross section 1 at site 115.0R.

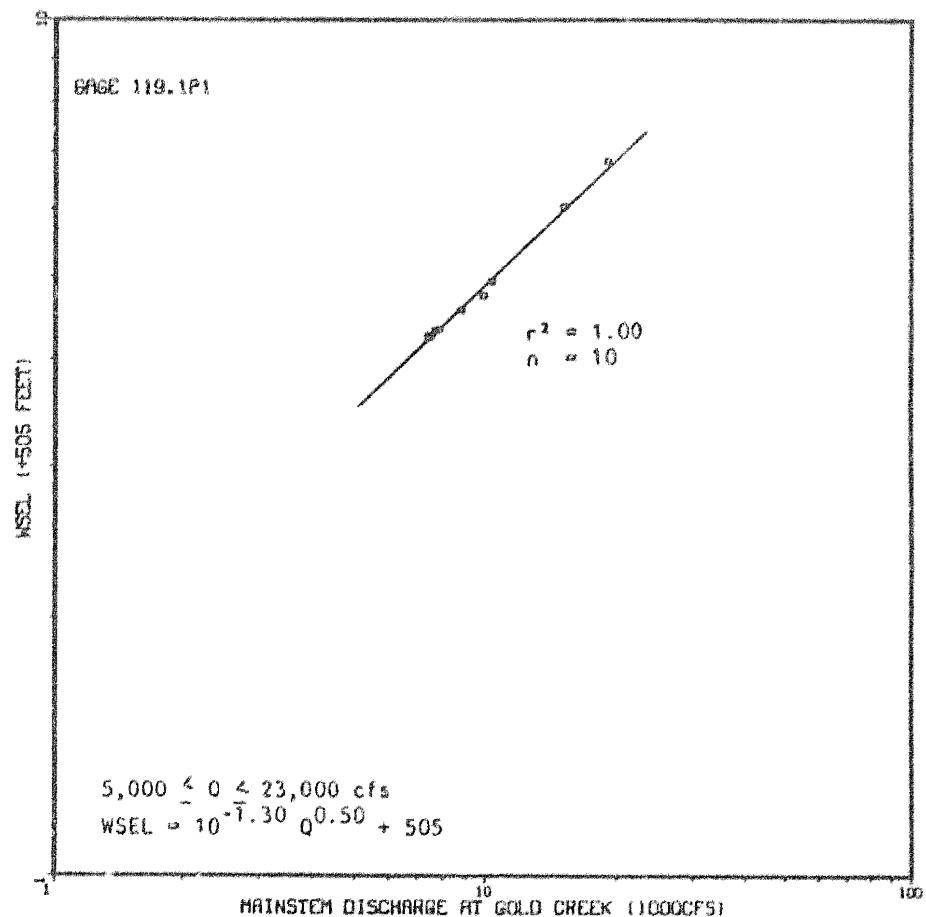
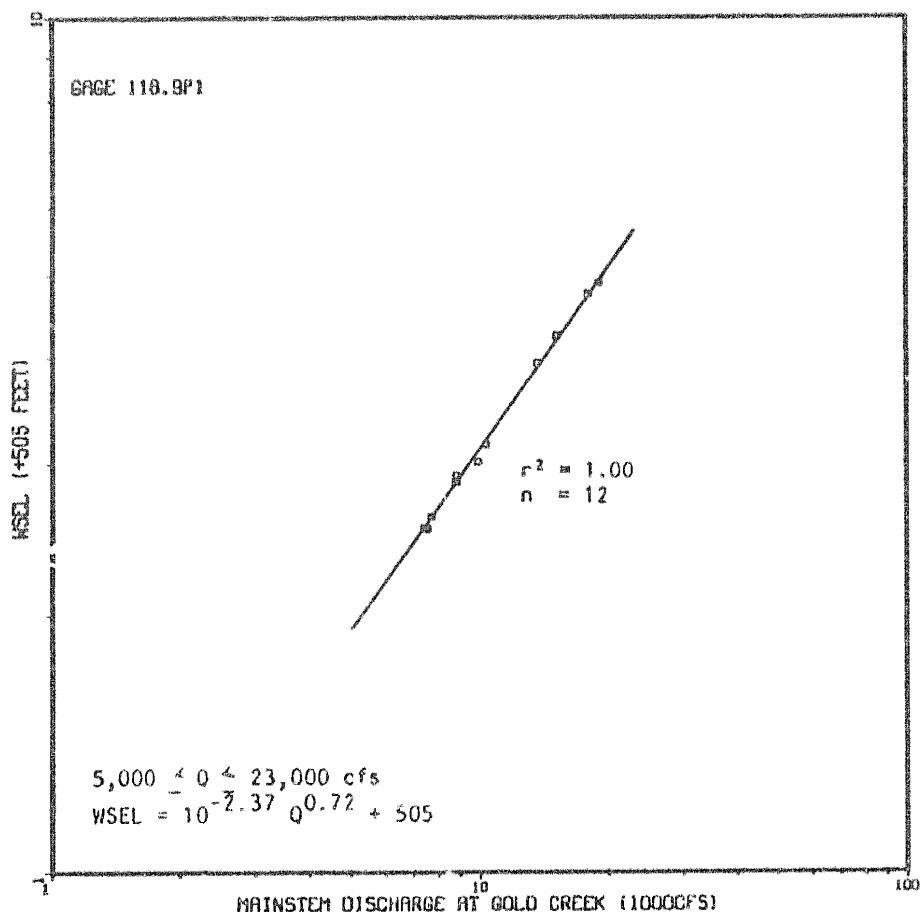


Figure II-10. Stage discharge curve for cross section 2 at site 118.9L.

Figure II-11. Stage discharge curve for cross section 2 at site 119.1L.

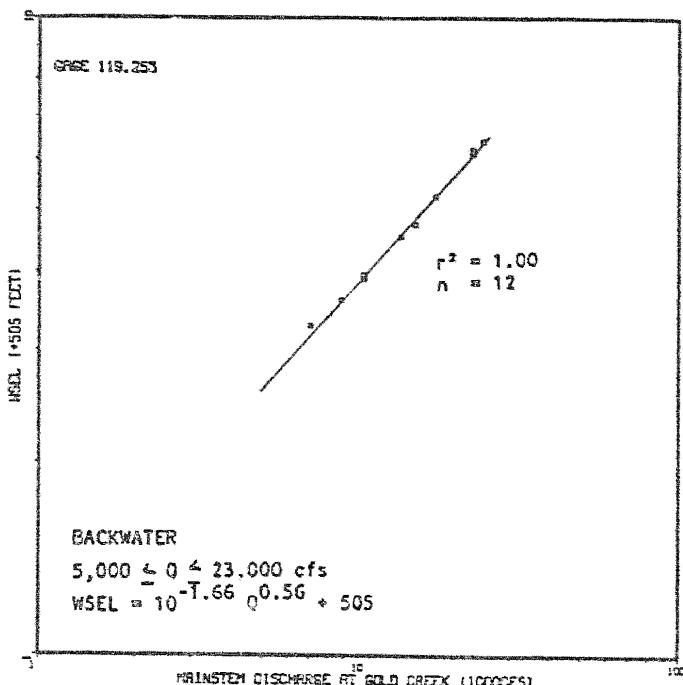
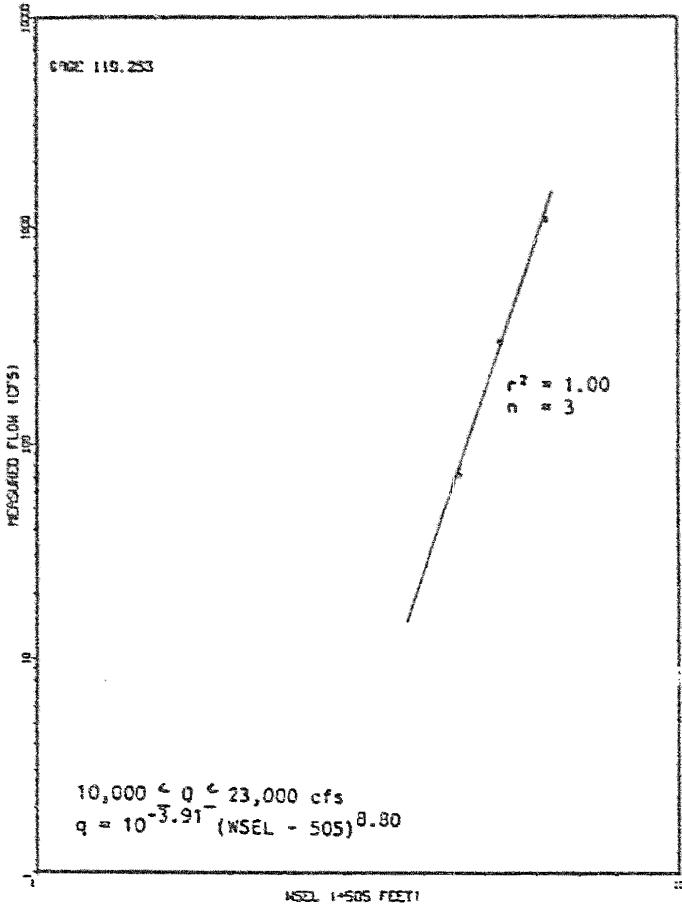
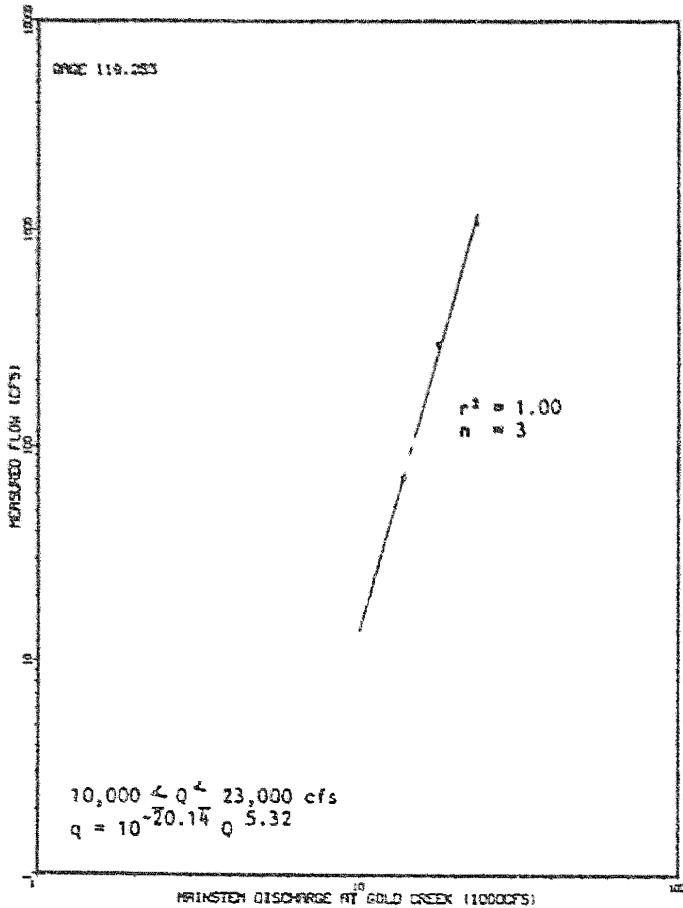


Figure II-12. Relationships between mainstem discharge, site flow and water surface elevation for cross section 3 at site 119.2R.

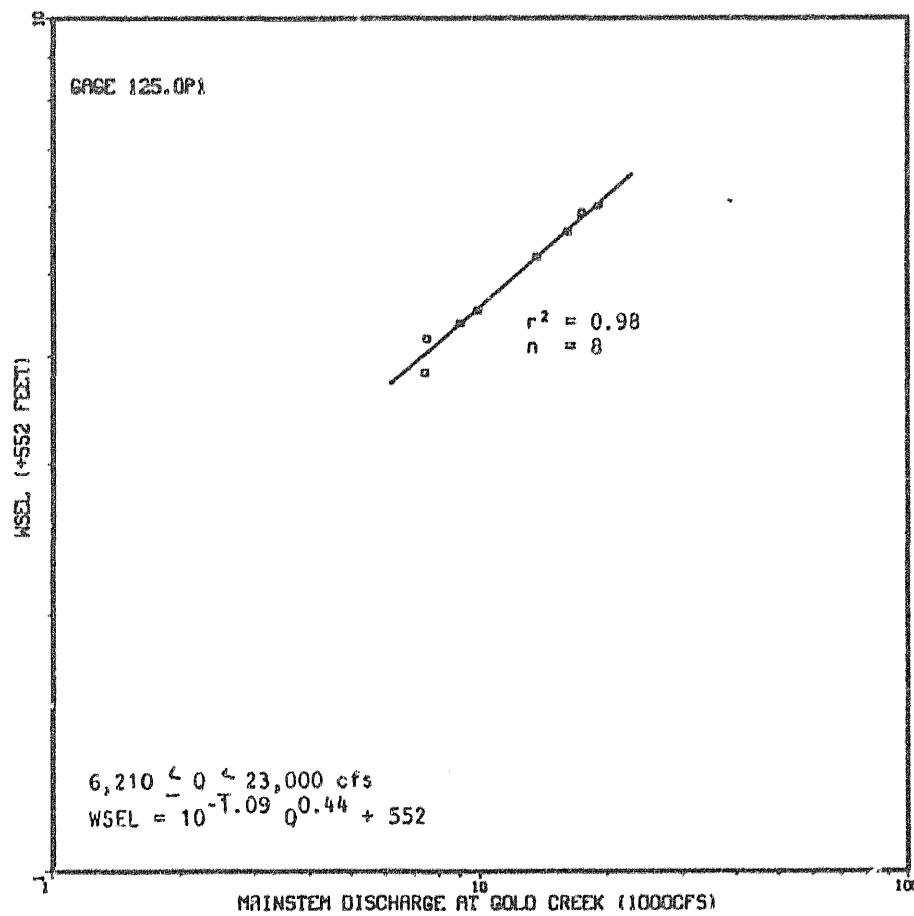


Figure II-13. Stage discharge curve for cross section 1 and relationships between mainstem discharge, site flow and water surface elevation for cross section 2 at site 125.2R.

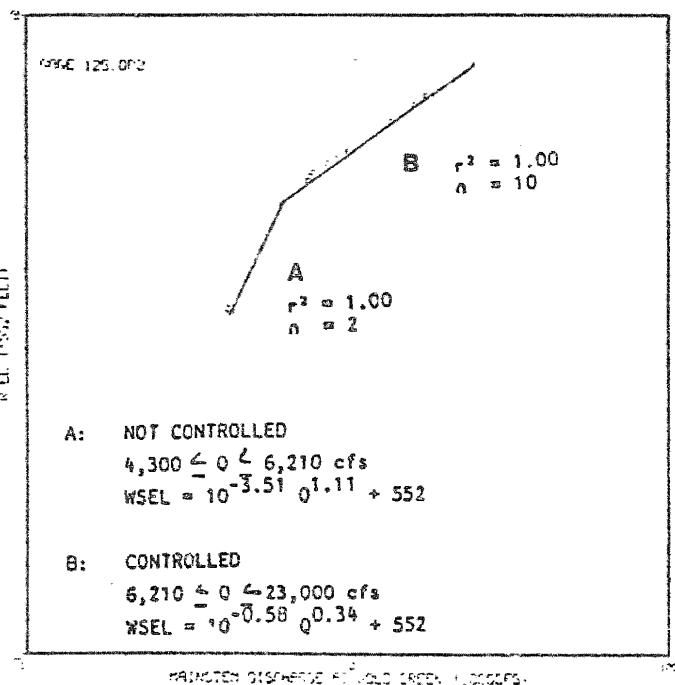
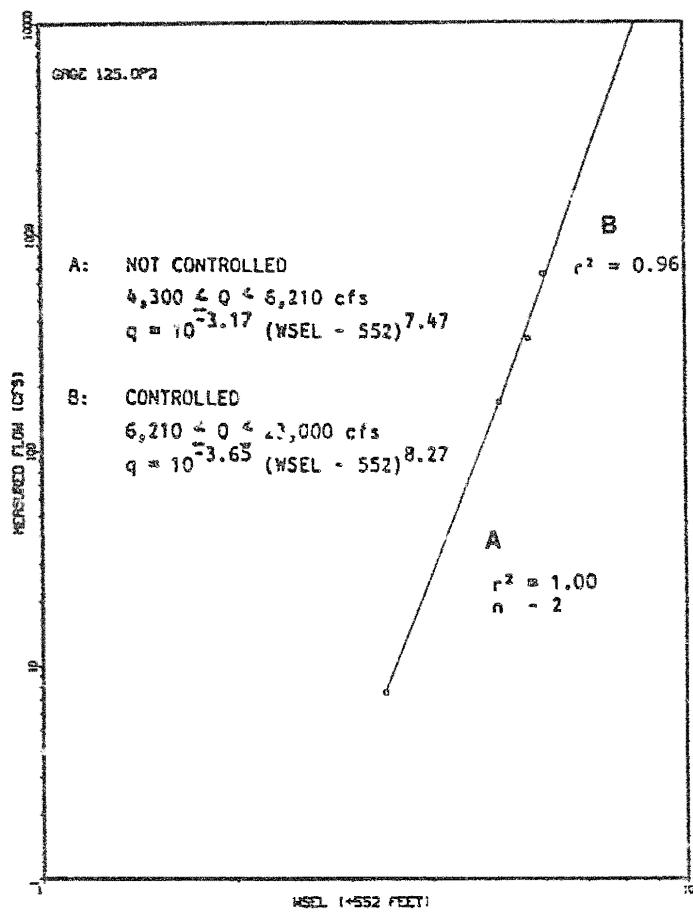
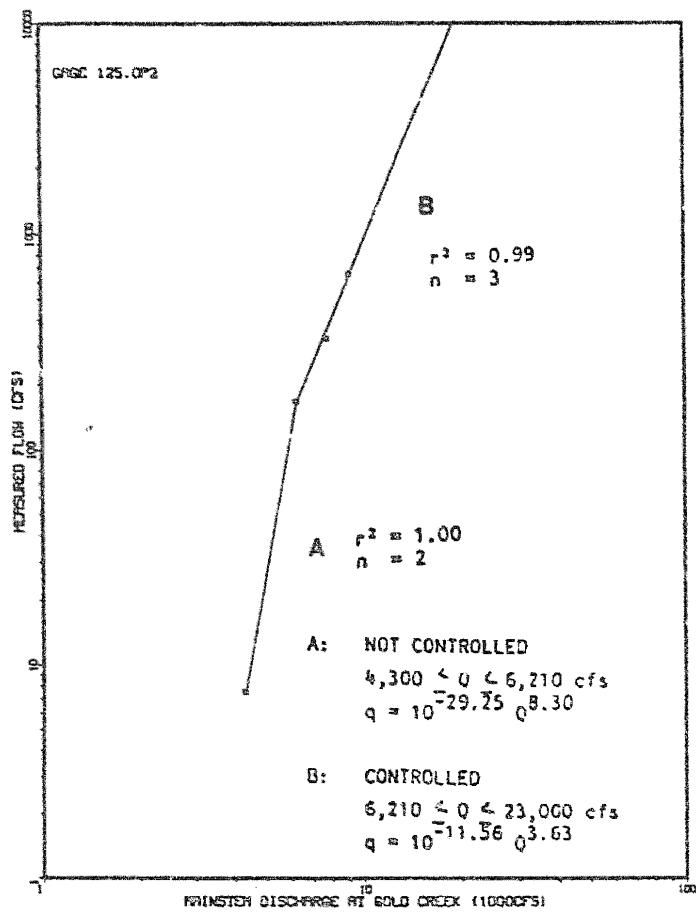


Figure II-13. Stage discharge curve for cross section 1 and relationships between mainstem discharge, site flow and water surface elevation for cross section 2 at site 125.2R.

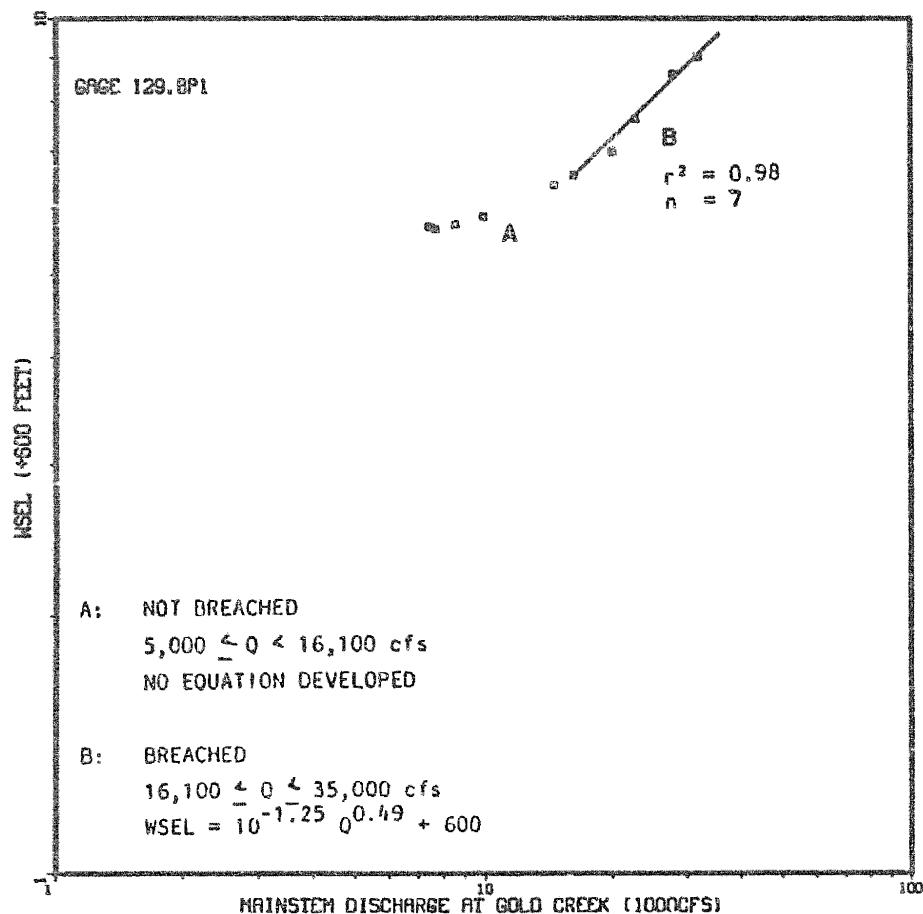


Figure II-14. Stage discharge curve for cross section 2 at site 130.2R.

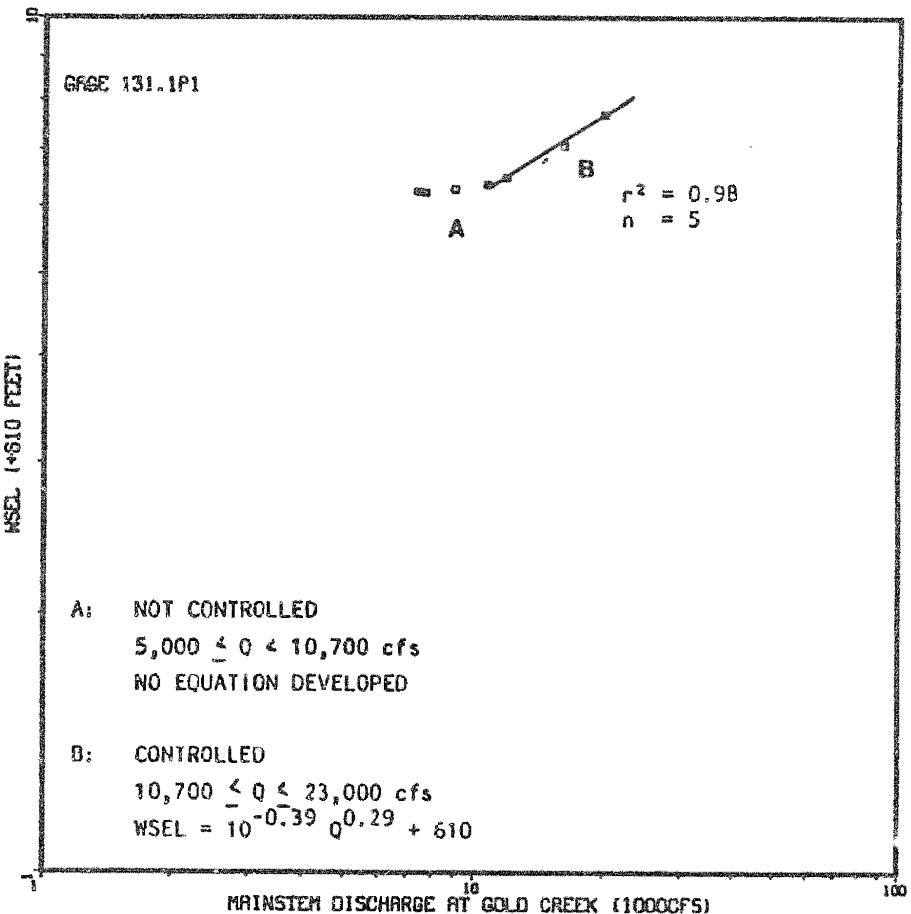


Figure II-15. Stage discharge curve for cross sections 1 and 3 at site 131.3L.

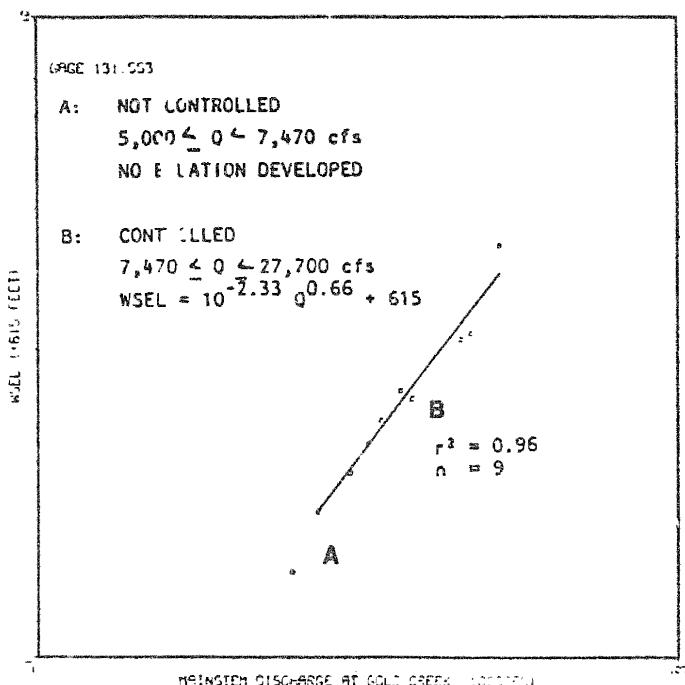
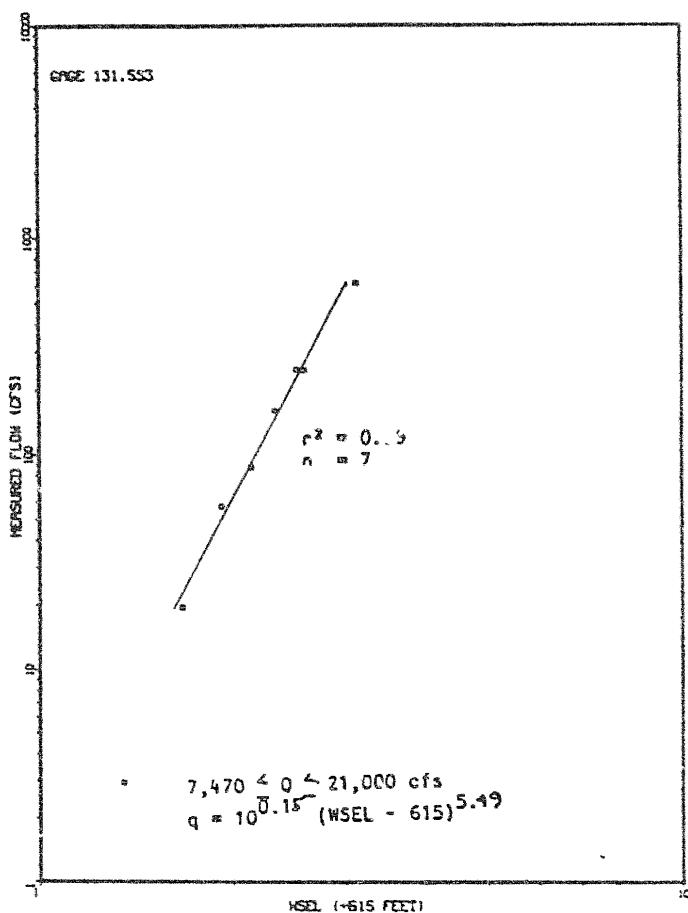
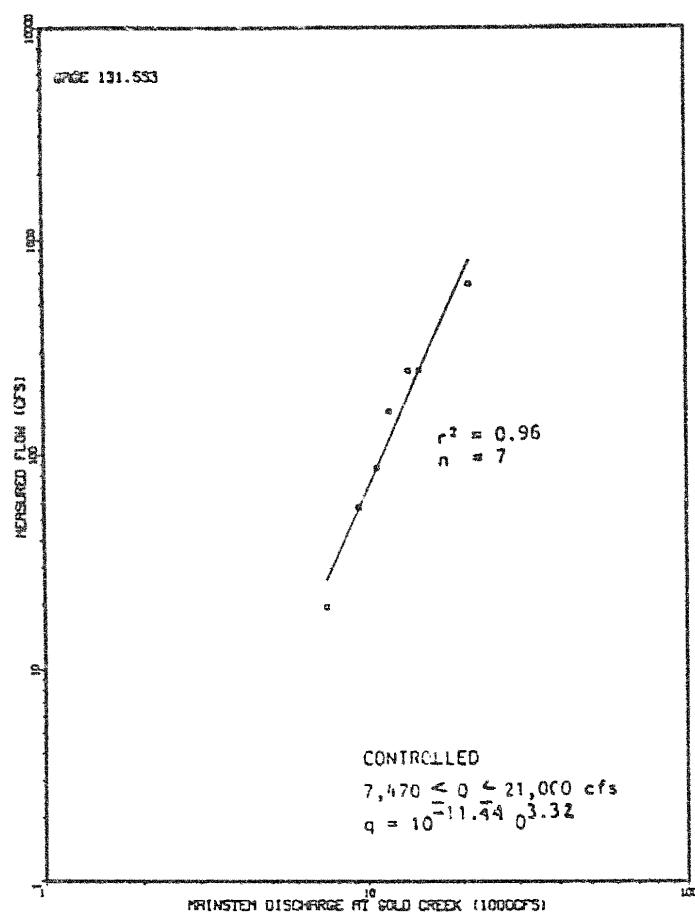


Figure II-16. Relationships between mainstem discharge, site flow and water surface elevation for cross section 3 at site 131.7L.




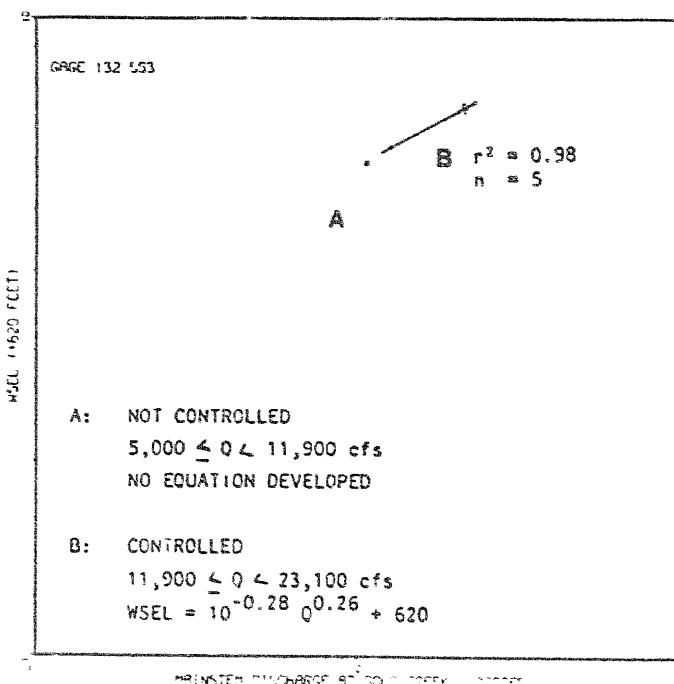


Figure II-17. Relationships between mainstem discharge, site flow and water surface elevation for cross section 4 at site 132.6L.

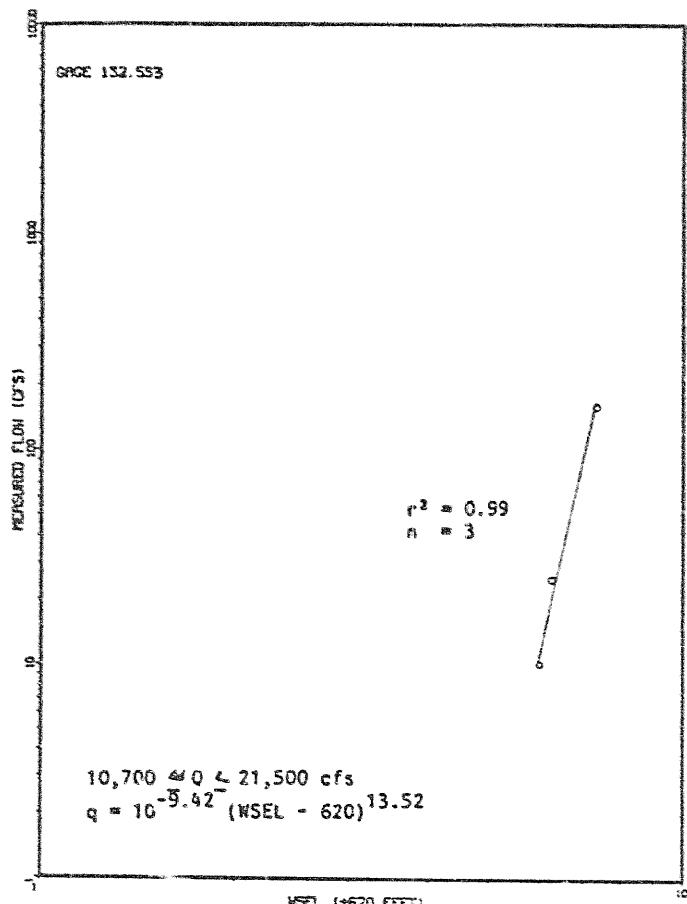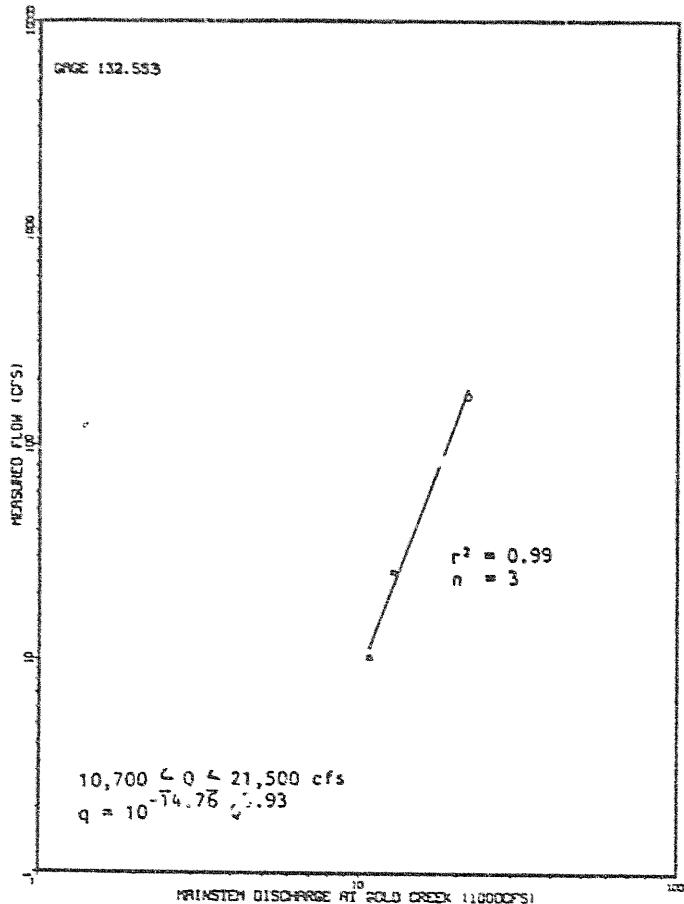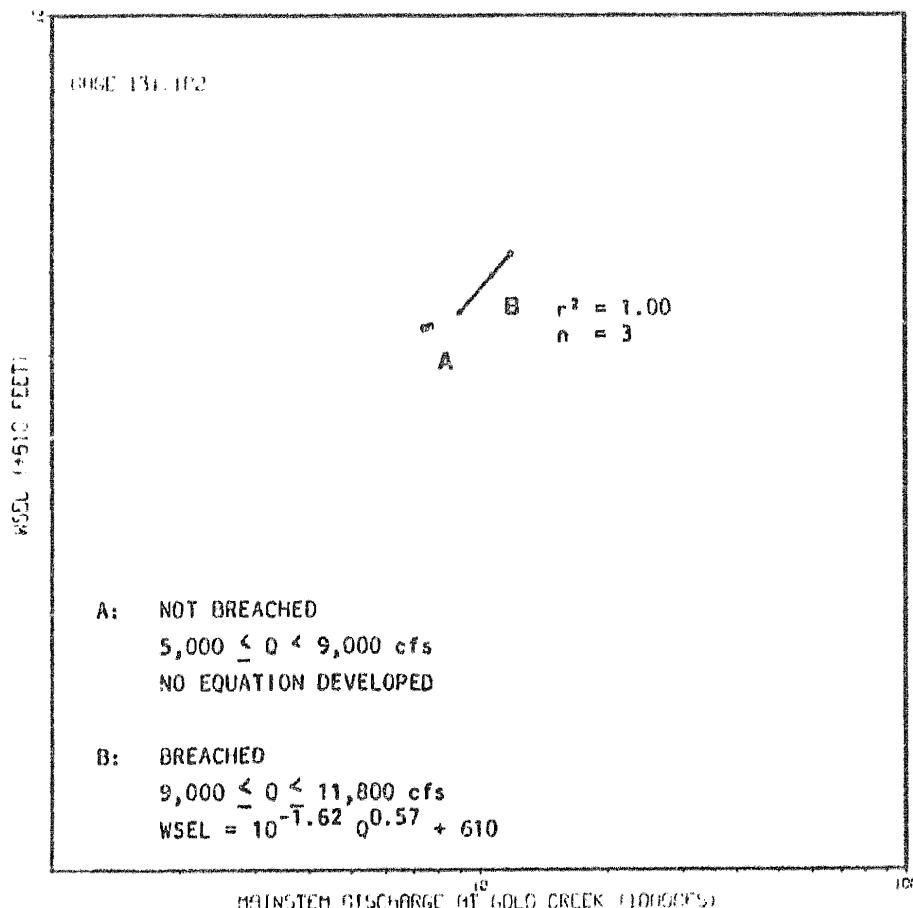

II-29

Figure II-15. Stage discharge curve for cross sections 1 and 3 at site 131.3L.

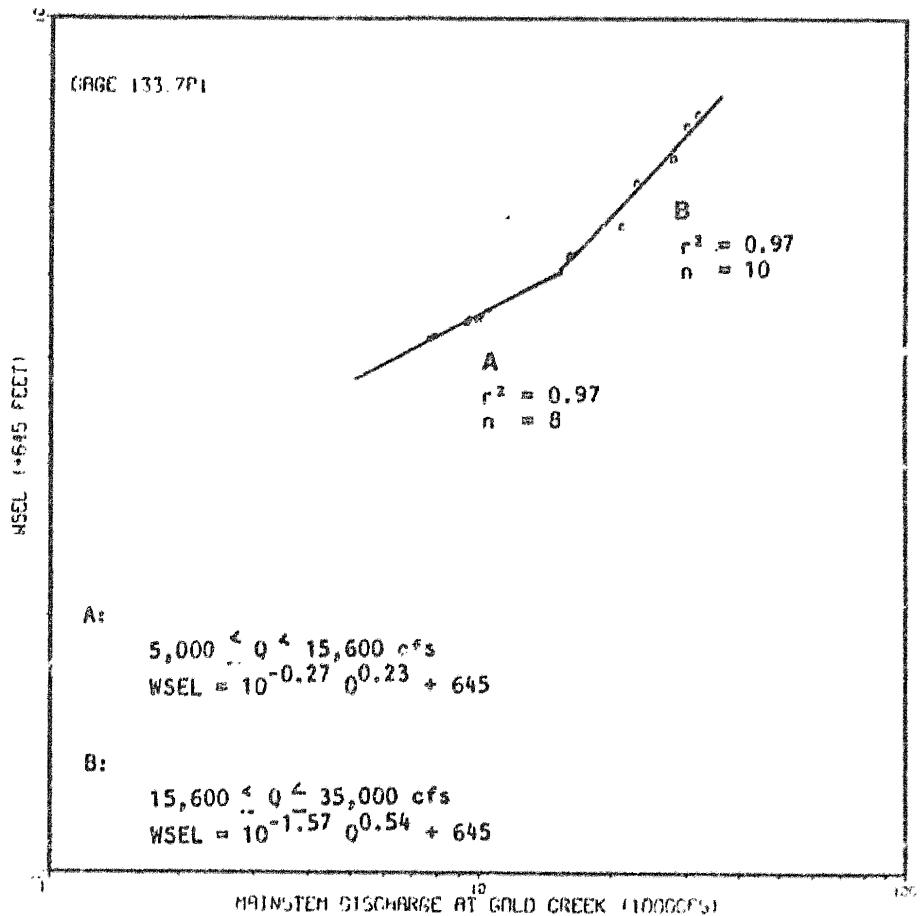


Figure II-18. Stage discharge curve for cross section 3 at site 133.8R.

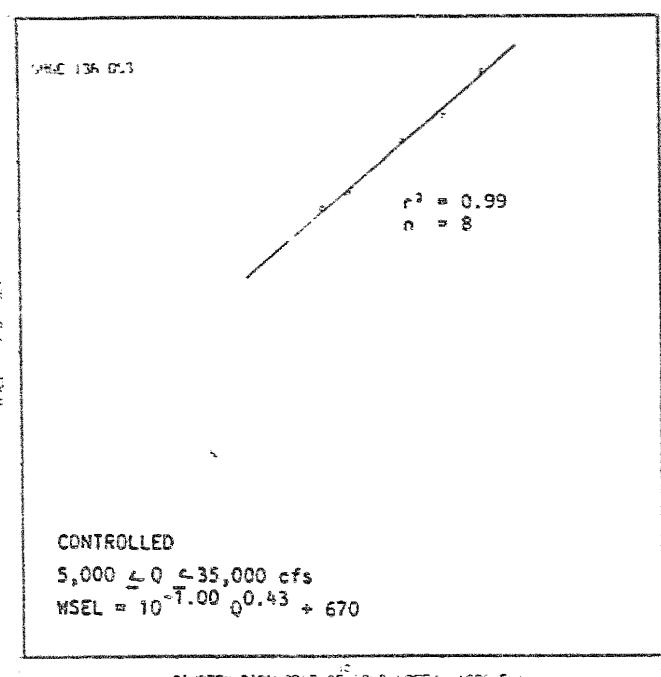
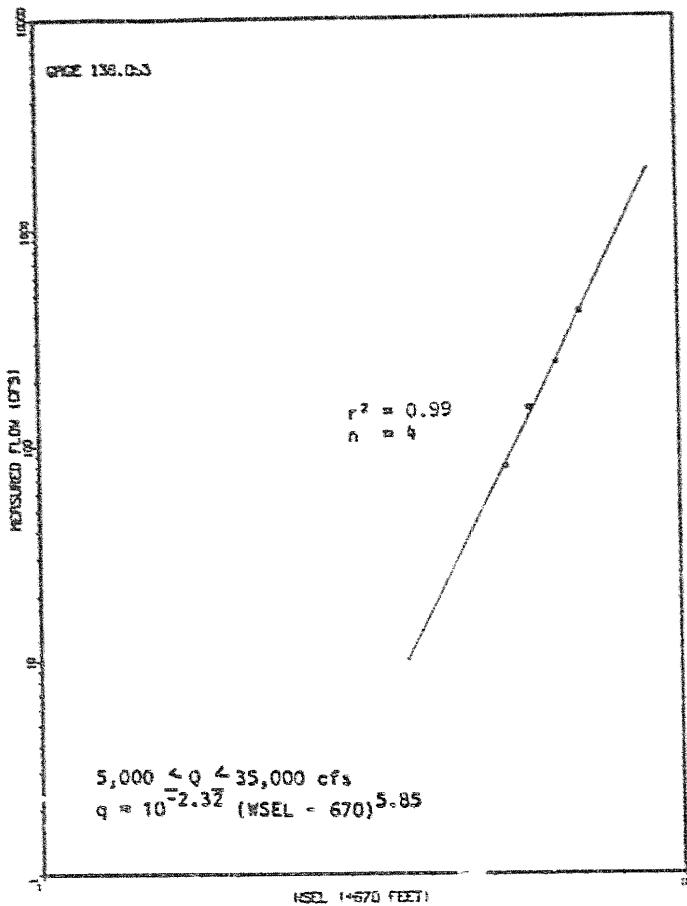
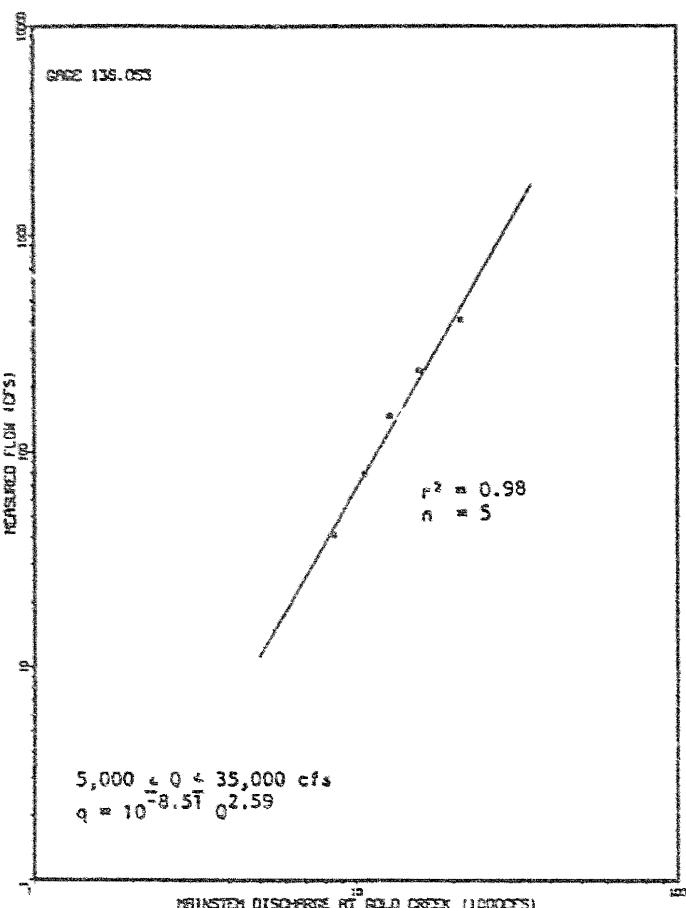


Figure II-19.

Relationships between mainstem discharge, site flow and water surface elevation for cross section 4 at site 136.0L.

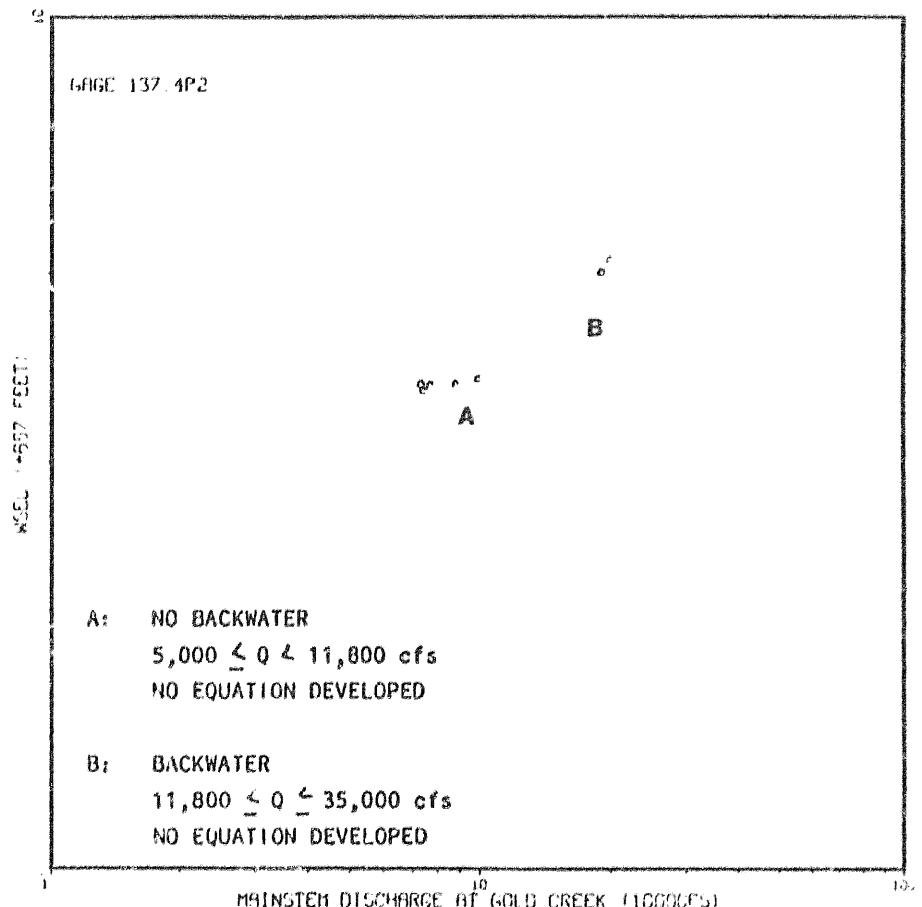
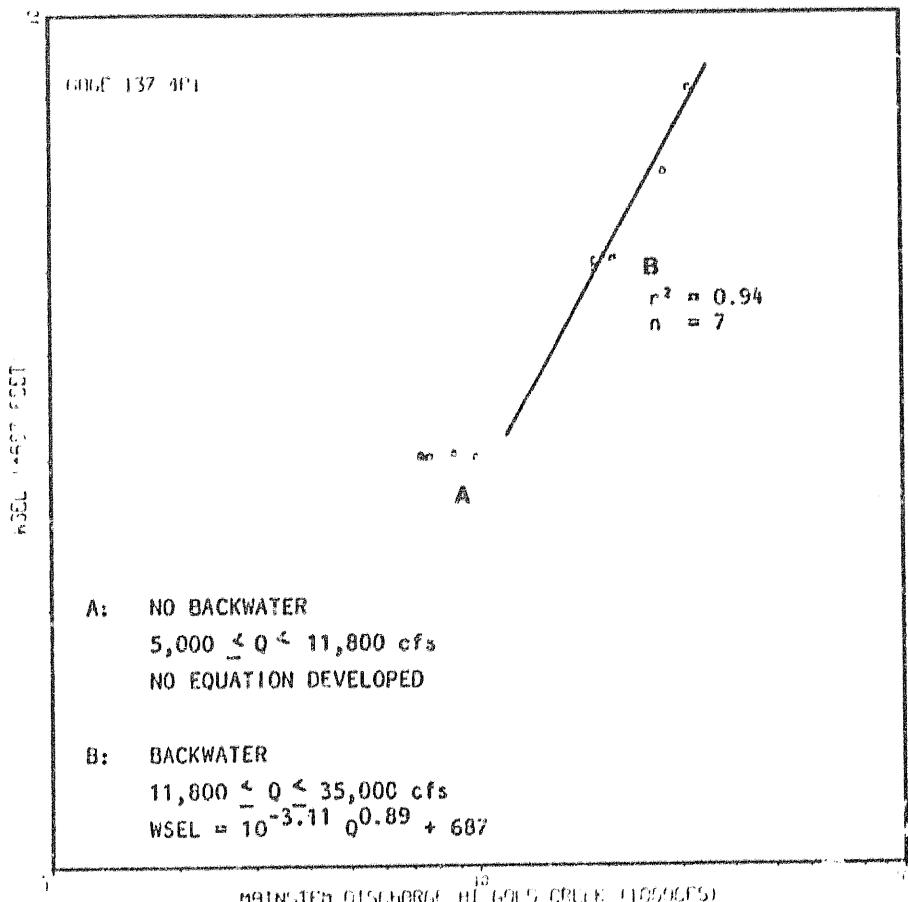


Figure II-20. Stage discharge curves for cross sections 1 and 2 at site 137.5R.

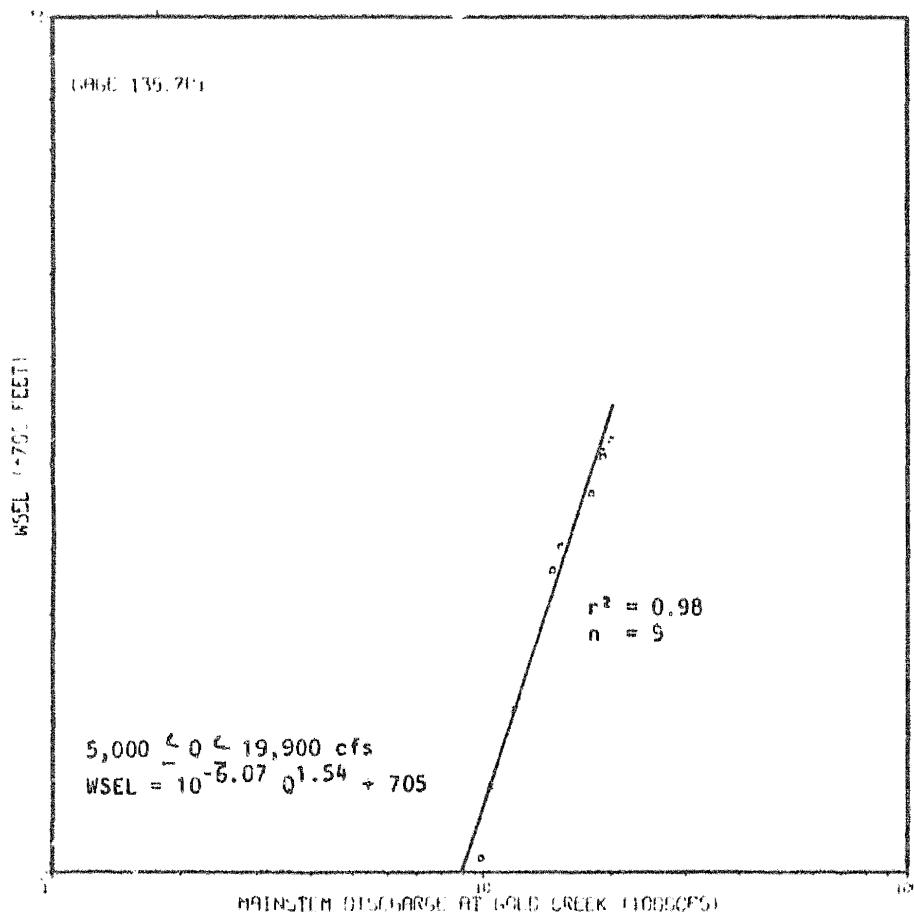


Figure II-21. Stage discharge curve for cross section 2 at site 138.7L.

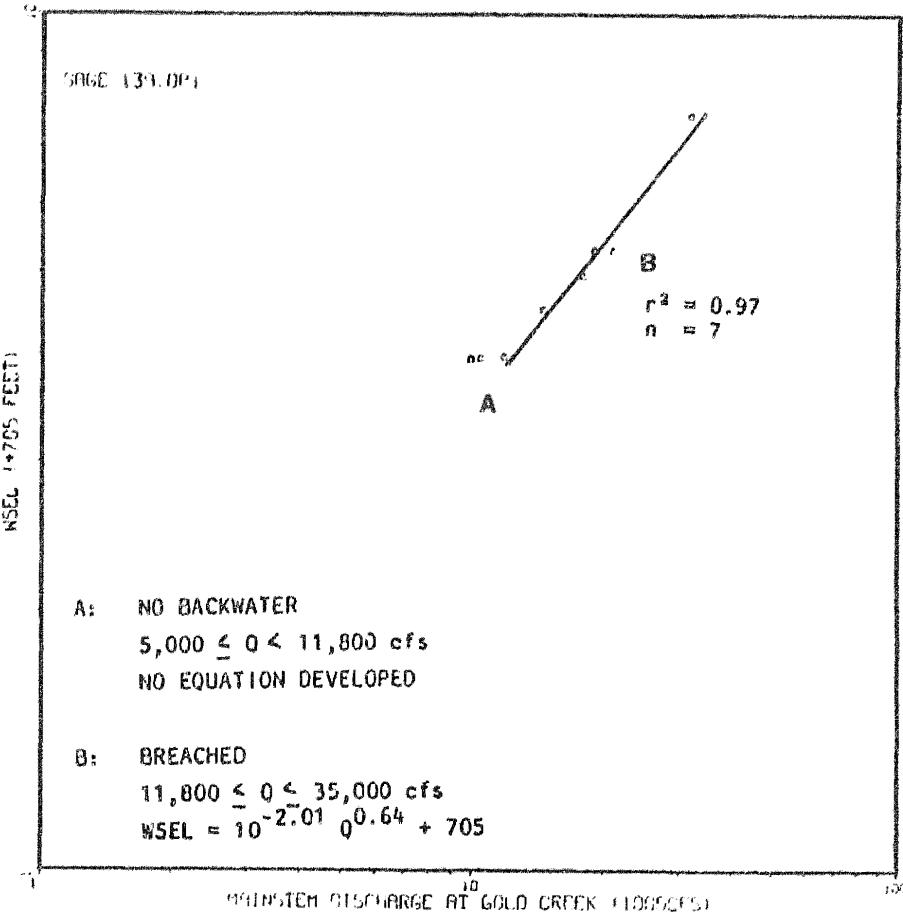


Figure II-22. Stage discharge curve for cross section 2 at site 139.0L.

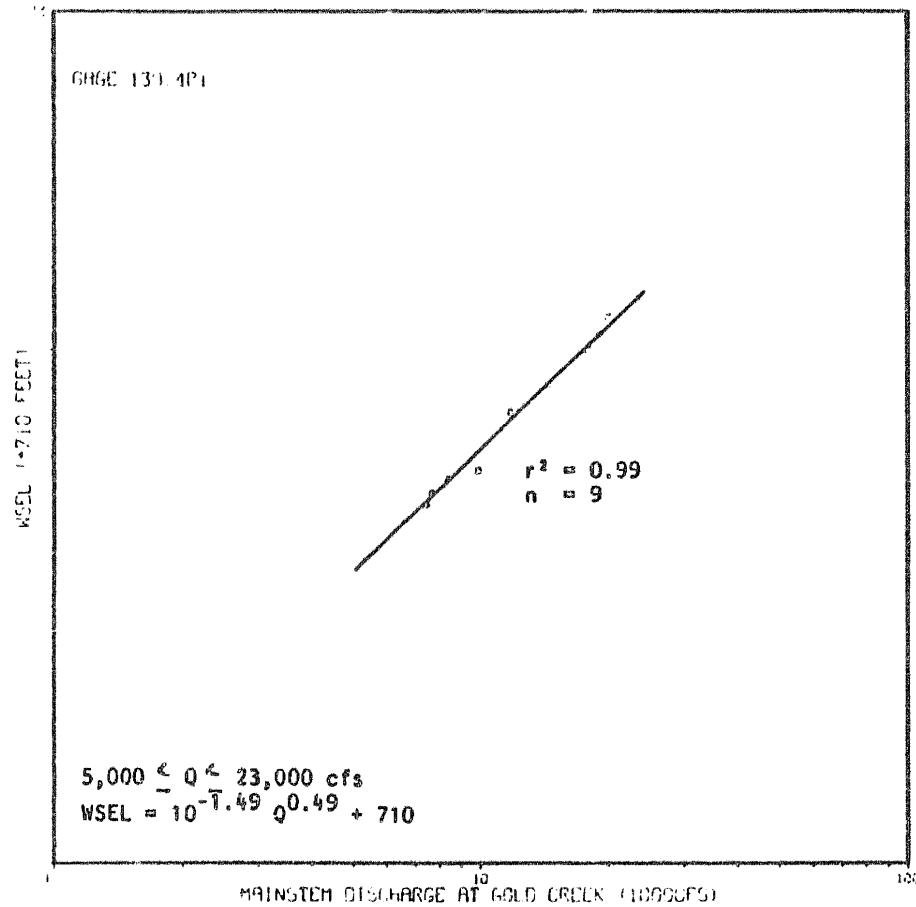


Figure II-23. Stage discharge curve for cross section 2 at site 139.4L.

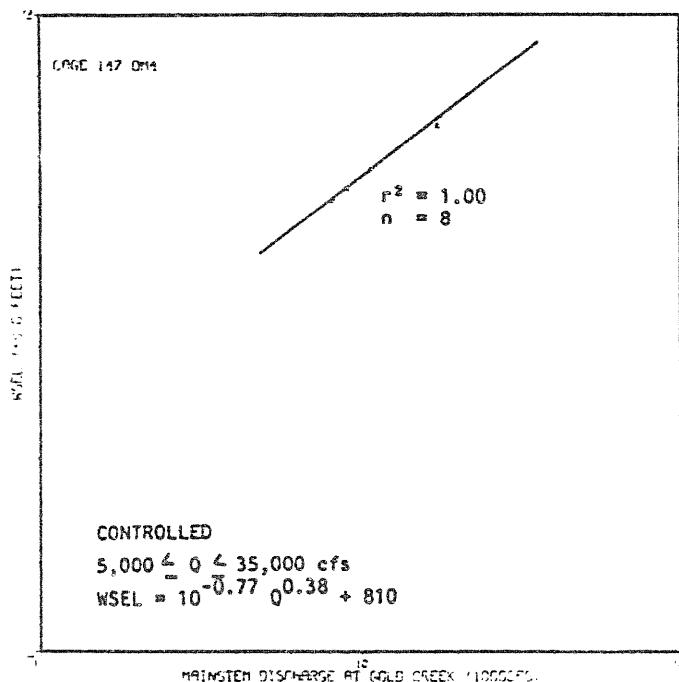
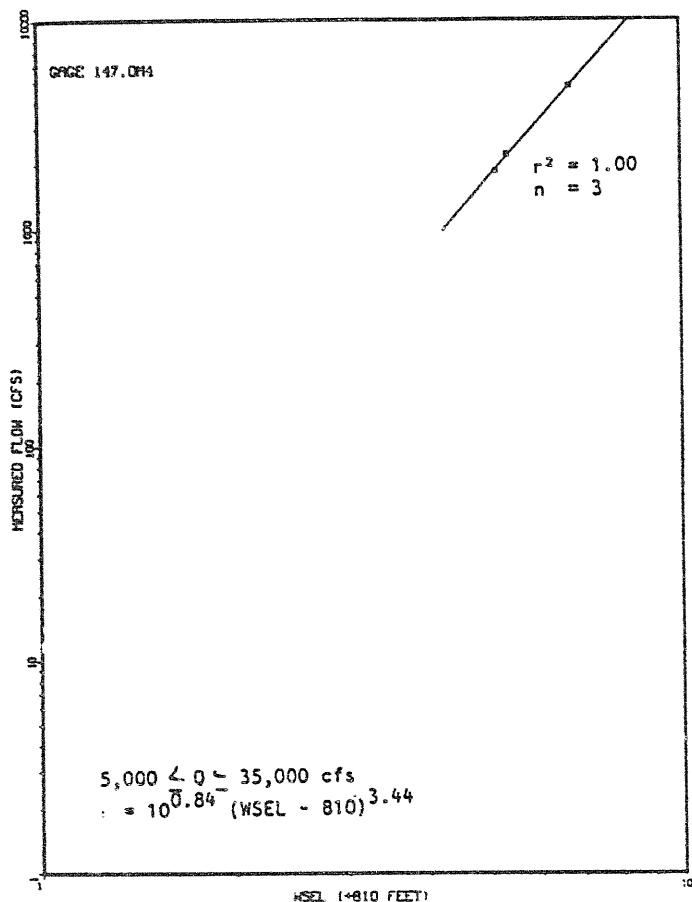
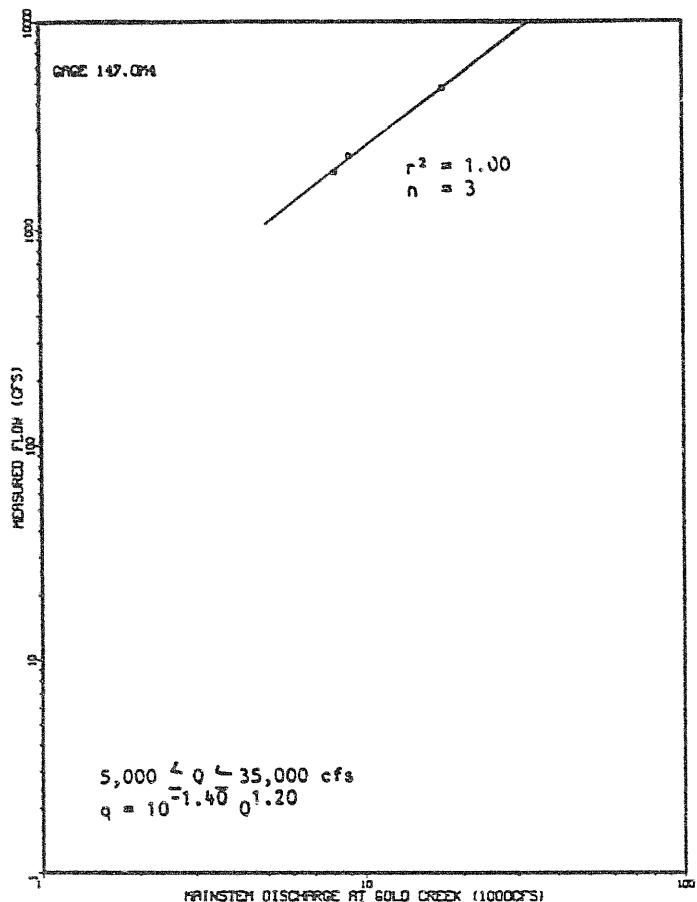


Figure II-24. Relationships between mainstem discharge, site flow and water surface elevation for cross section 4 at site 147.1L.

DISCUSSION

The relationships between site flow and middle river discharge were developed for mainstem controlled conditions at each study site. High regression coefficients and general knowledge of the sites indicate the relationships expressed as logarithmic regression equations are reliable over the range of mainstem discharge for which data are available. Inspection of aerial photography and familiarity with the sites provided sufficient evidence of flow conditions outside the range of available field data to extend the relationship somewhat beyond the range of available field data.

fresh exiting
A view of the
selected
sites is detailed

PART III
CALIBRATION AND APPLICATION
OF IFG HYDRAULIC MODELS

INTRODUCTION

The middle river modeling analysis may be viewed as consisting of three steps. The initial step involved the collection and analysis of biologic data to determine the seasonal distribution of fish by species and life phase within middle river habitats and to identify the behavioral responses (or preferences) of life phase to physical habitat variables. This work was principally conducted by ADF&G Su Hydro during the 1982 and 1983 field seasons (Schmidt et al. 1984, Estes and Vincent-Lang 1984).

Second, the study sites are established which represent typical habitats and sufficient field data are collected to describe anticipated changes in physical habitat conditions due to streamflow alterations. With regard to the middle river modeling studies, hydraulic simulation models are extensively used to forecast anticipated changes in depths and velocities. Calibration and application of these hydraulic models is the subject of this section of the middle river modeling (MRM) report.

The third step involves the application of habitat suitability criteria (developed in Step 1) in combination with the calibrated hydraulic models to simulate the response of fish habitat to incremental changes in depth and velocity. This analysis is facilitated by using the IFG HABTAT model which is capable of evaluating other habitat variables such as substrate composition

and cover. Habitat response to streamflow variations is portrayed by an index called weighted usable area (WUA). WUA forecast are presented for juvenile chinook at each study site in this section of the report but will be discussed in a subsequent report by EWT&A.

Two different hydraulic models were applied in the MRM studies - the IFG-2 and IFG-4. Selection of one hydraulic model over the other depends on three considerations. These include (1) the level of resolution of the aquatic habitat microhabitat desired (2) the level of effort available for commitment to field data collection and (3) site-specific considerations. The IFG-2 model is a water surface profile program (step backwater model) which is based on uniform flow theory. It is most applicable to stream reaches with relatively mild gradient and uniform cross section (gradually varied flow conditions). The IFG-4 model is an empirical model based on regime theory and regression analysis. It provides greater latitude for application to stream reaches with non-uniform gradient and irregular cross section (rapidly varied flow conditions). One or two sets of field data are recommended for calibration of the IFG-2 model, whereas a minimum of three data sets are recommended to calibrate the IFG-4 model.

Both IFG hydraulic models are based on the assumption that steady flow conditions exist within a rigid stream channel. Streamflow is defined as "steady" if the depth of flow and velocity at a specific location remains constant throughout the time interval under consideration. This definition is commonly accepted to mean that the discharge remains constant through the study site during the time interval required to collect a set of calibration data. A stream channel is "rigid" if it (1) does not change shape during the

time period required to collect all sets of calibration data, and (2) does not change shape while conveying natural streamflows of the magnitude to be simulated (Trihey 1980).

Prior to initiating the 1984 MRM studies, approximately 130 side channel or mainstem locations were selected as candidate study sites by EWT&A based on examination of aerial photography. Side channels and side sloughs at which habitat models had been developed by ADF&G Su Hydro prior to 1984 were excluded from the site selection process. Each candidate study site was classified into one of eleven habitat categories according to the habitat transformation it underwent as the mainstem discharge decreased from 23,000 cfs to 9,000 cfs (Table III-1). This approach to study site selection was chosen because a notable transition is expected to occur in existing mainstem and side channel habitat as a result of project induced changes in the natural flow regime of the middle river. A total of eight study sites were selected for detailed hydraulic analysis in 1984 (Table III-2 and Figure III-1).

Table III-2. Types of hydraulic models applied at 1984 middle river modeling sites for rearing chinook. Sites are identified by river mile and orientation to the river bank looking upstream (L=left; R=right).

Site	Type of Model
101.2R	7 cross section IFG-4
101.5L	5 cross section IFG-2
112.6L	9 cross section IFG-2
119.2R	5 cross section IFG-2
131.7L	7 cross section IFG-4
132.6L	9 cross section IFG-4
136.0L	6 cross section IFG-4
147.1L	6 cross section IFG-2

Table III-1. Description of Habitat Transformation Categories

Category	Description
0	Tributary mouth habitats that persist as tributary mouth habitat at a lower flow.
I	Upland slough and side slough habitats that persist as the same habitat type at a lower flow.
II	Side channel habitats that transform to side slough habitats at a lower flow and possess upwelling which appears to persist throughout winter.
III	Side channel habitats that transform to side slough habitats at a lower flow but do not appear to possess upwelling that persists throughout winter.
IV	Side channel habitats that persist as side channel habitats at a lower flow.
V	Indistinct mainstem or side channel areas that transform into distinct side channels at a lower flow.
VI	Indistinct mainstem or side channel habitats that persist as indistinct areas at a lower flow.
VII	Indistinct mainstem or side channel areas that transform to side slough habitats at a lower flow and possess upwelling which appears to persist throughout winter.
VIII	Indistinct mainstem or side channel habitats flow which transform to side slough habitats at a lower flow but do not appear to possess upwelling which persists throughout winter.
IX	Any water course that is wetted that dewatered or consists of isolated pools without habitat value at a lower flow.
X	Mainstem habitats that persist as mainstem habitat at a lower flow.

* Habitats were based on a reference flow of 23,000 cfs

Source: Aaserude et al. 1985.

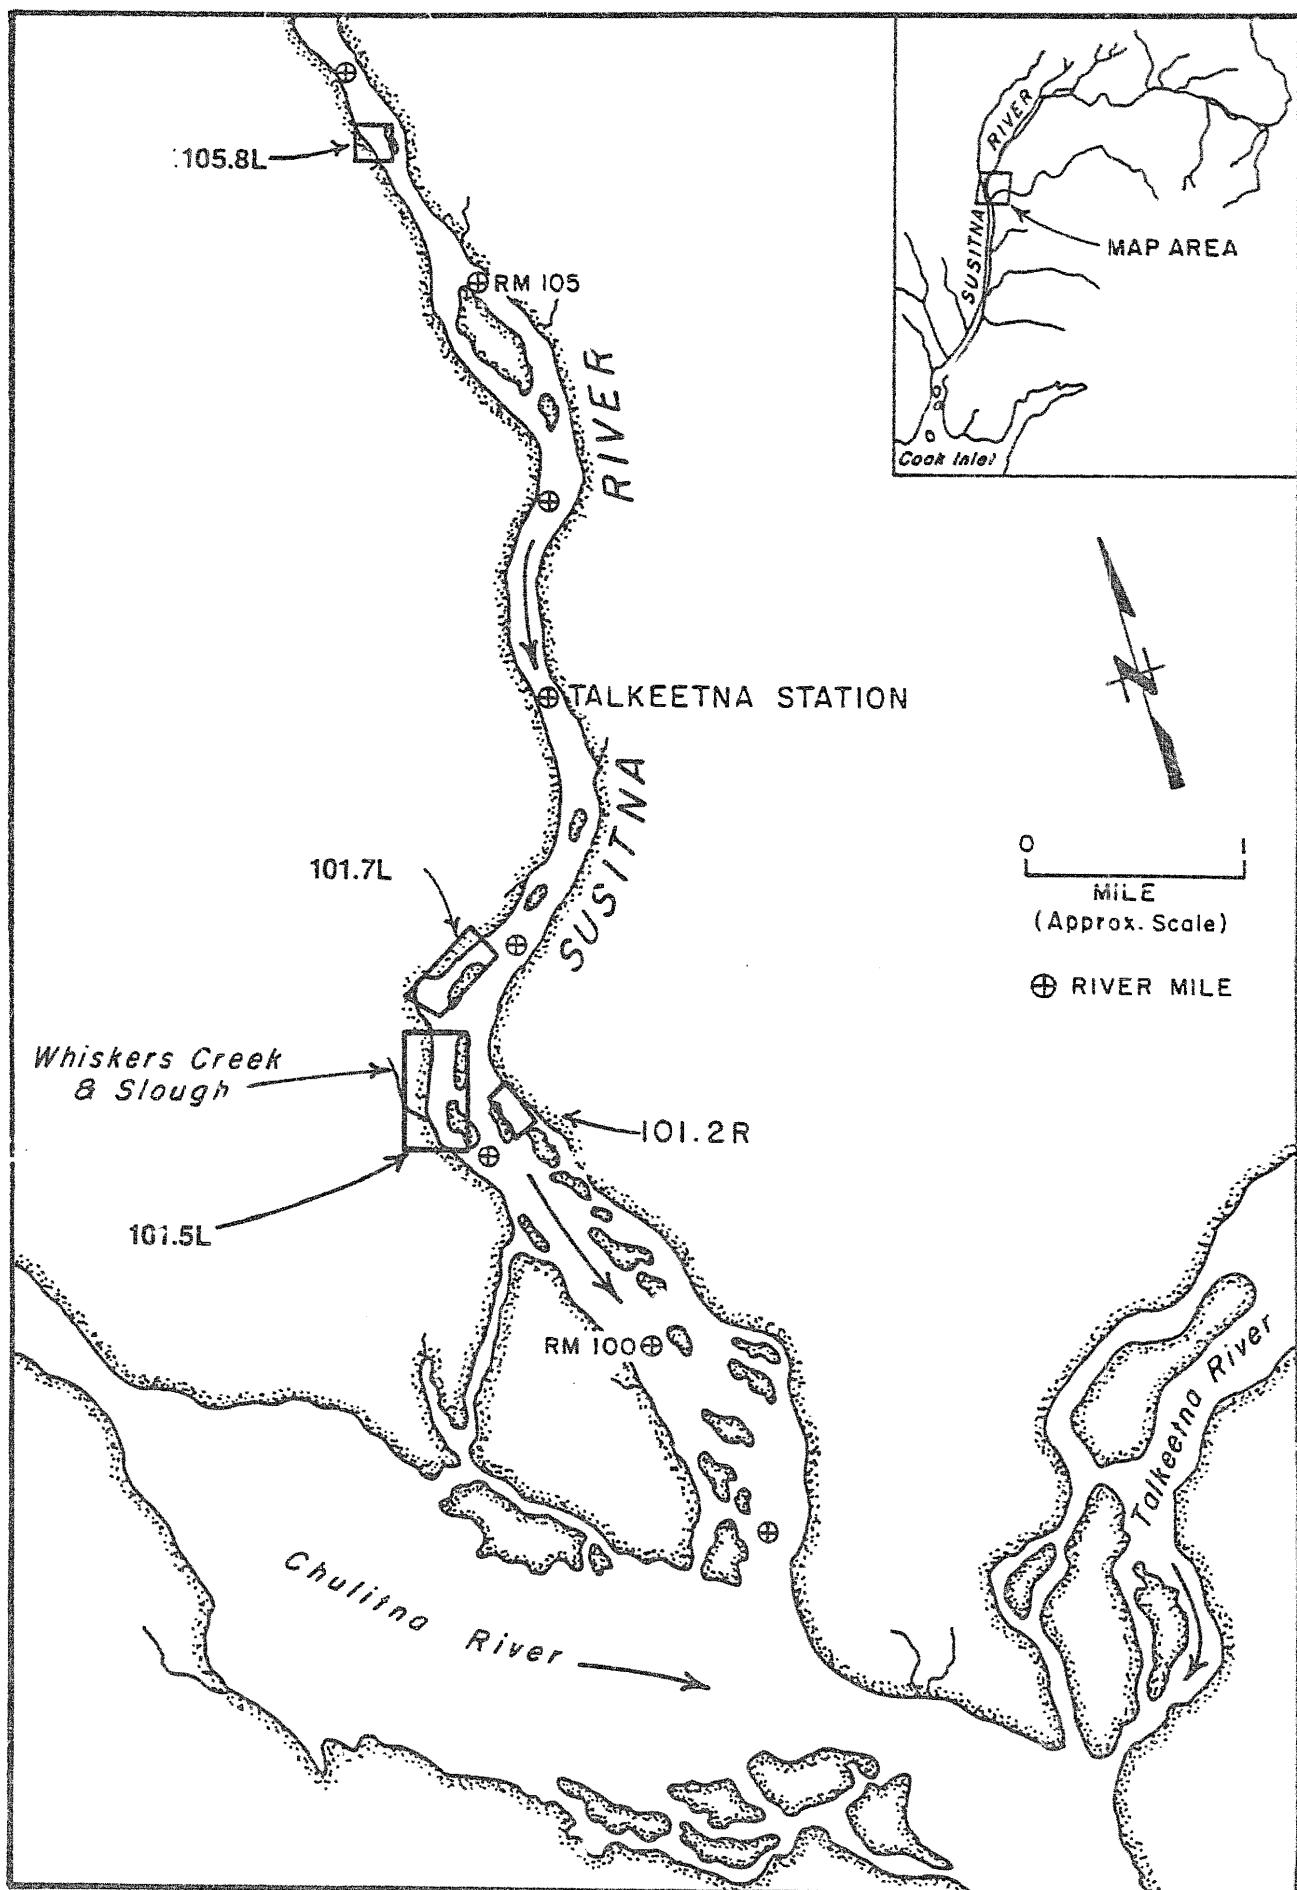


Figure III-1. Middle river IFG and DIHAB modeling sites.

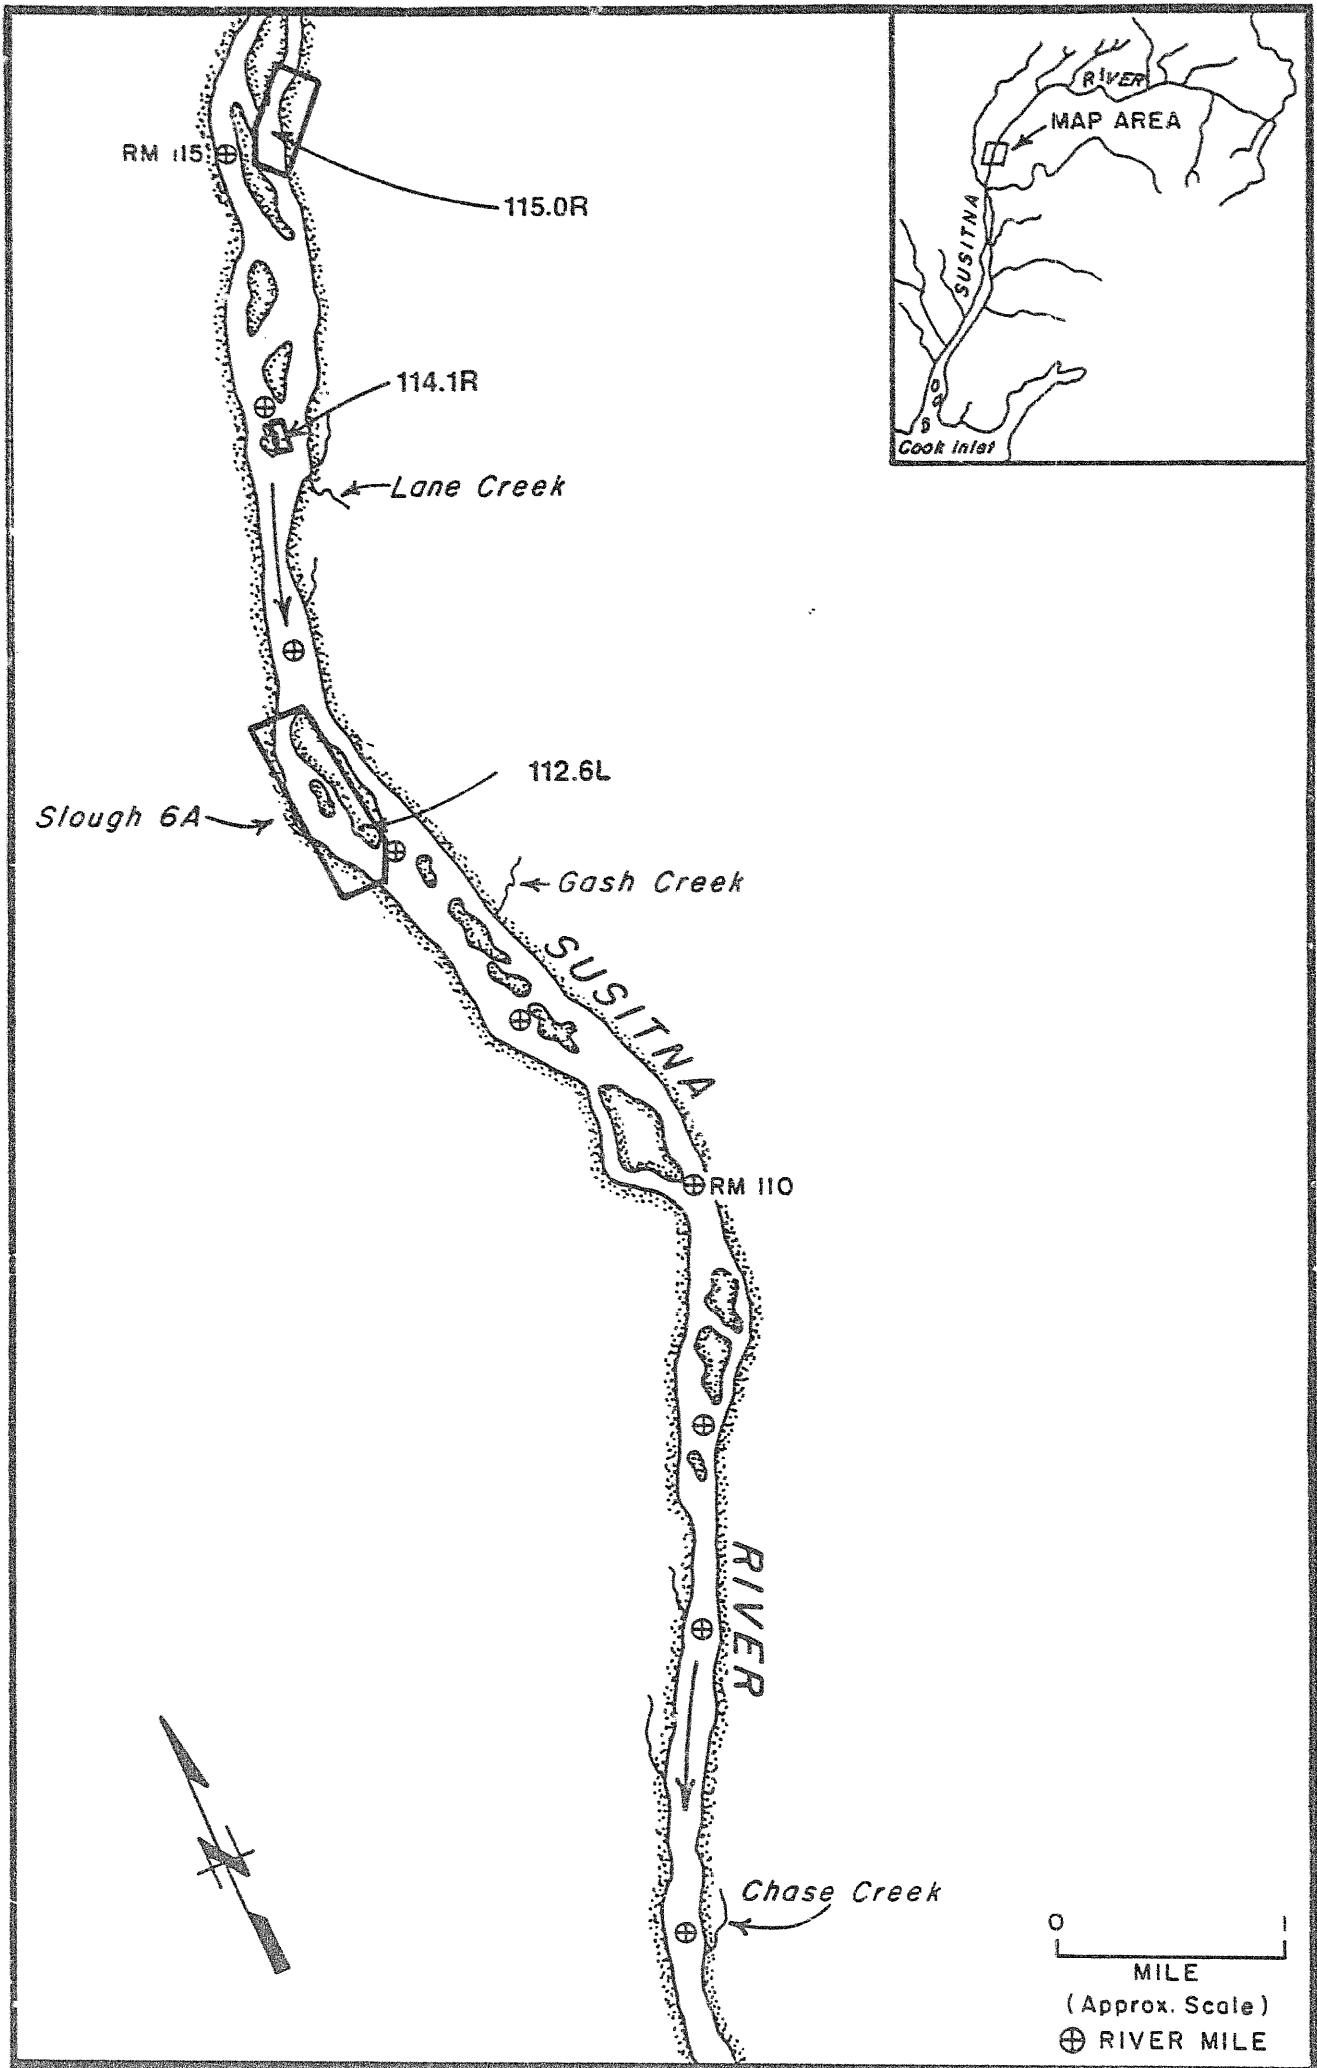


Figure III-1. Middle river IFG and DIHAB modeling sites.

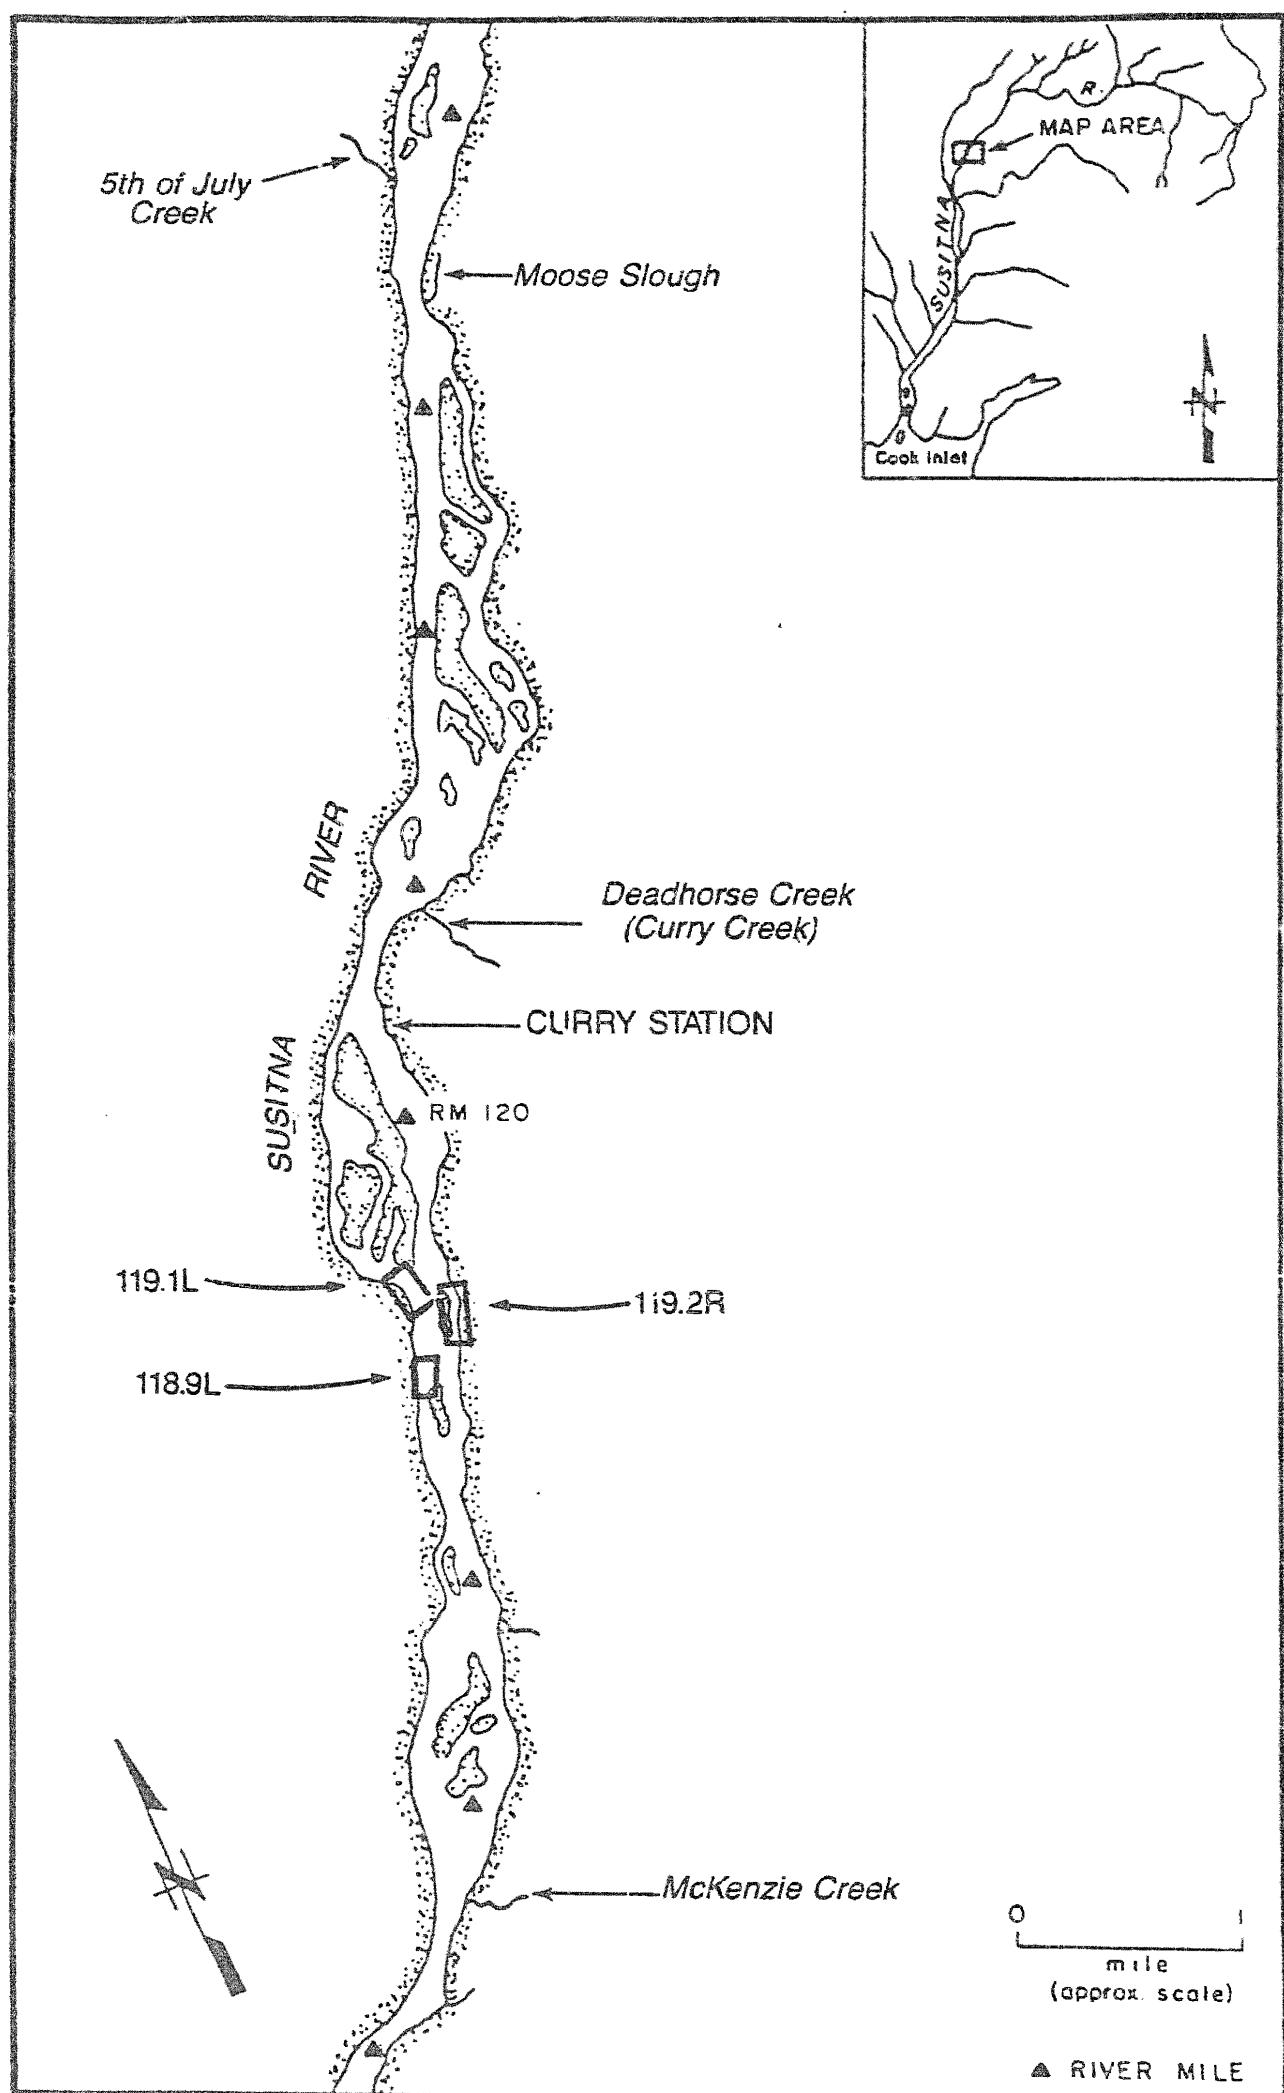


Figure III-1. Middle river IFG and DIHAB modeling sites.

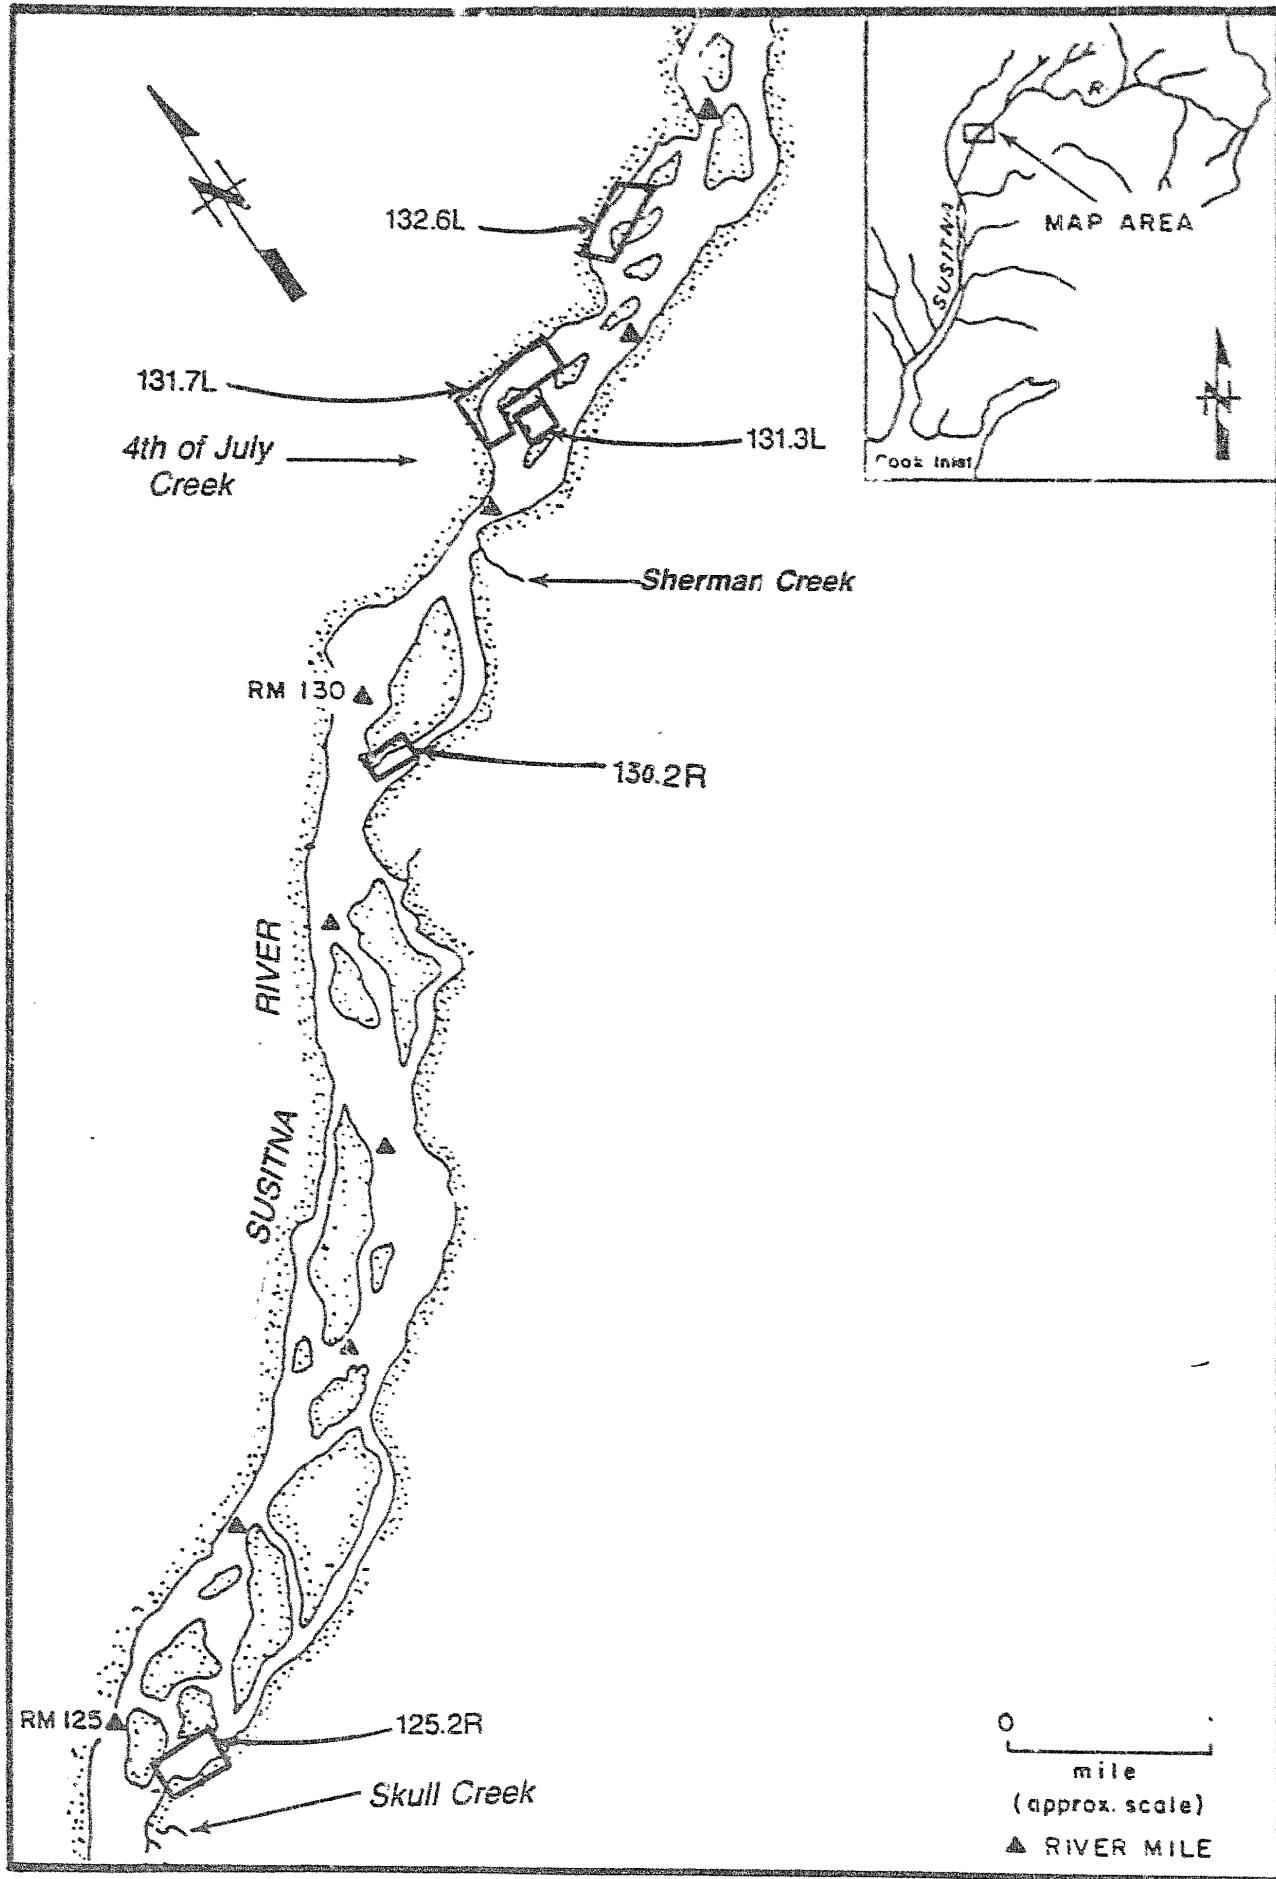


Figure III-1. Middle river IFG and DIHAB modeling sites.

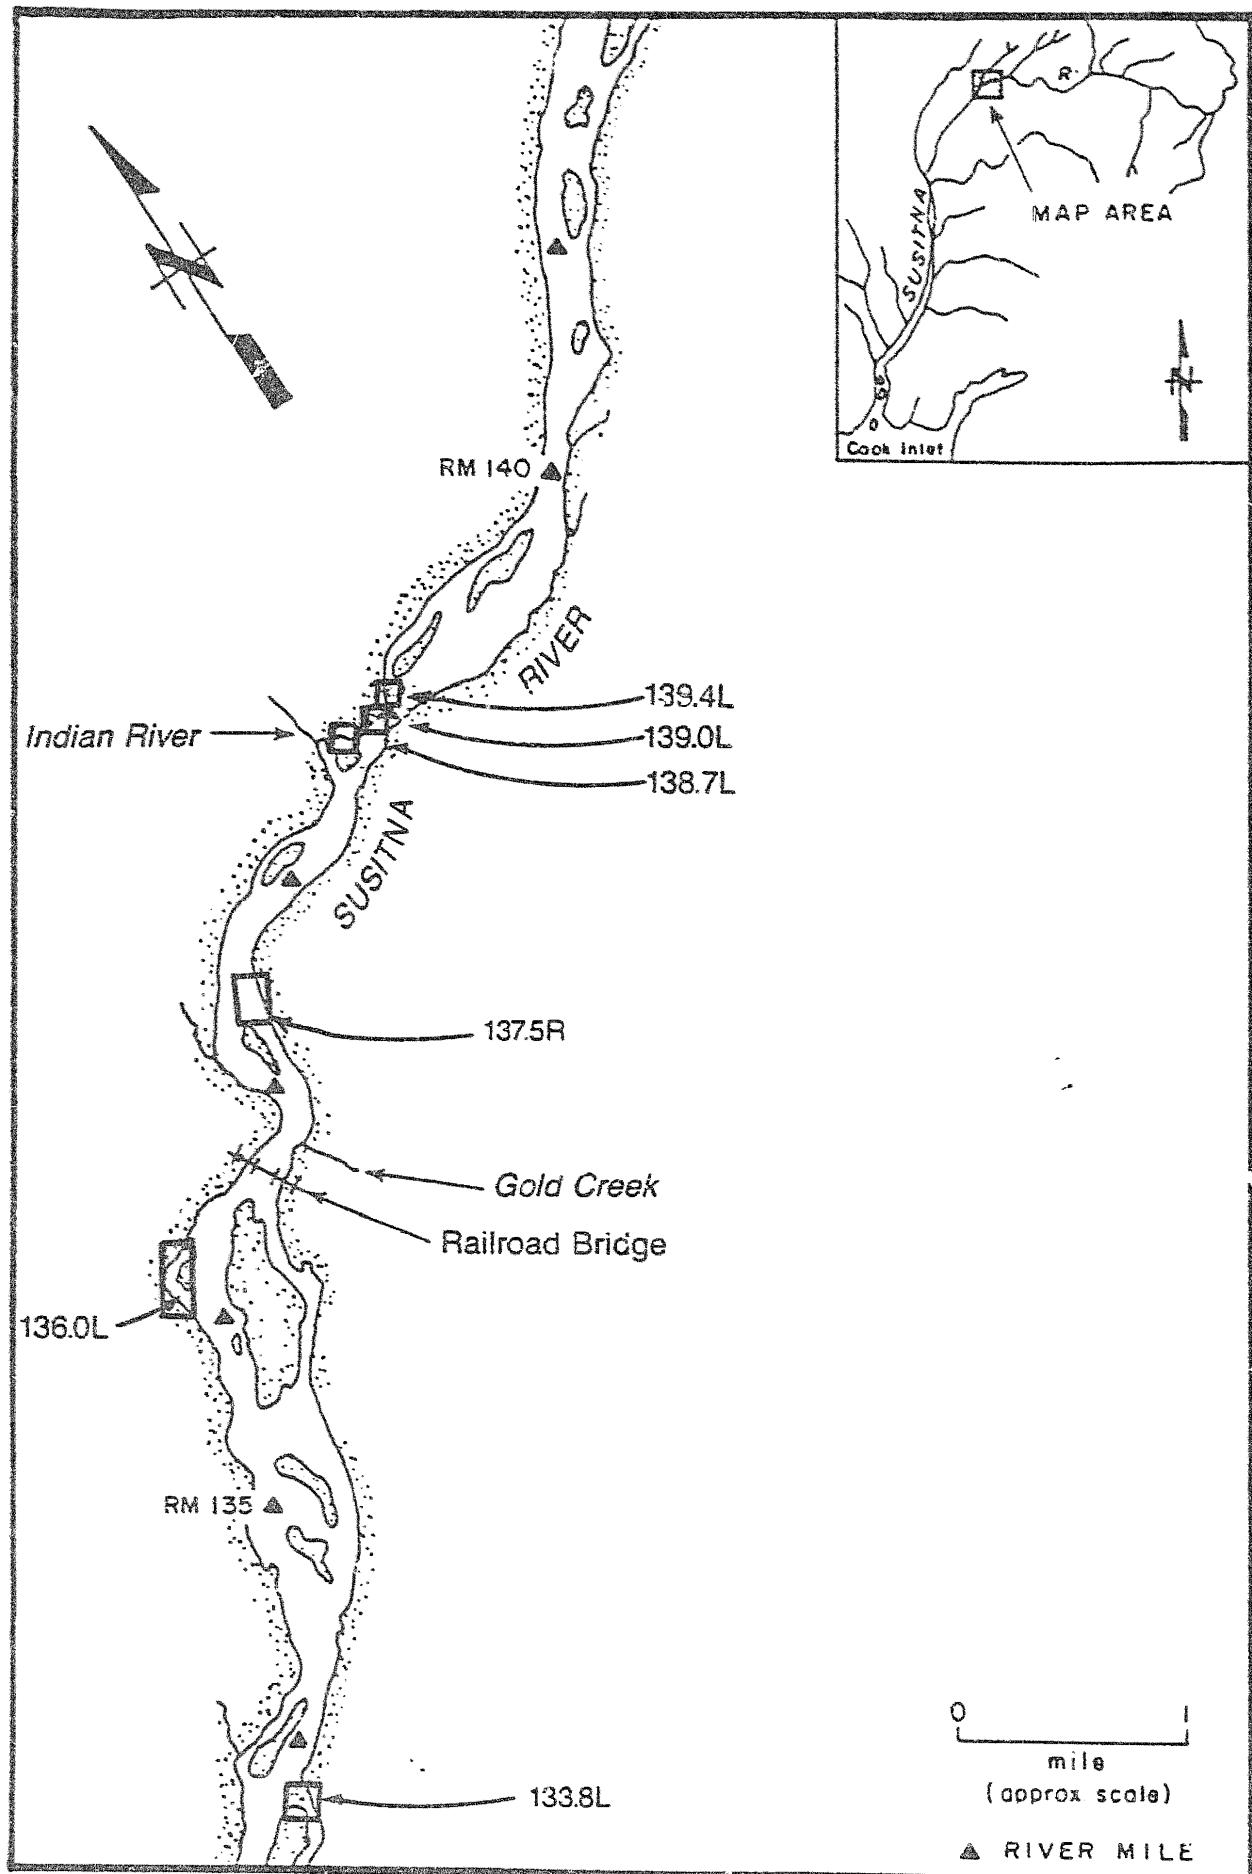


Figure III-1. Middle river IFG and DIHAB modeling sites.

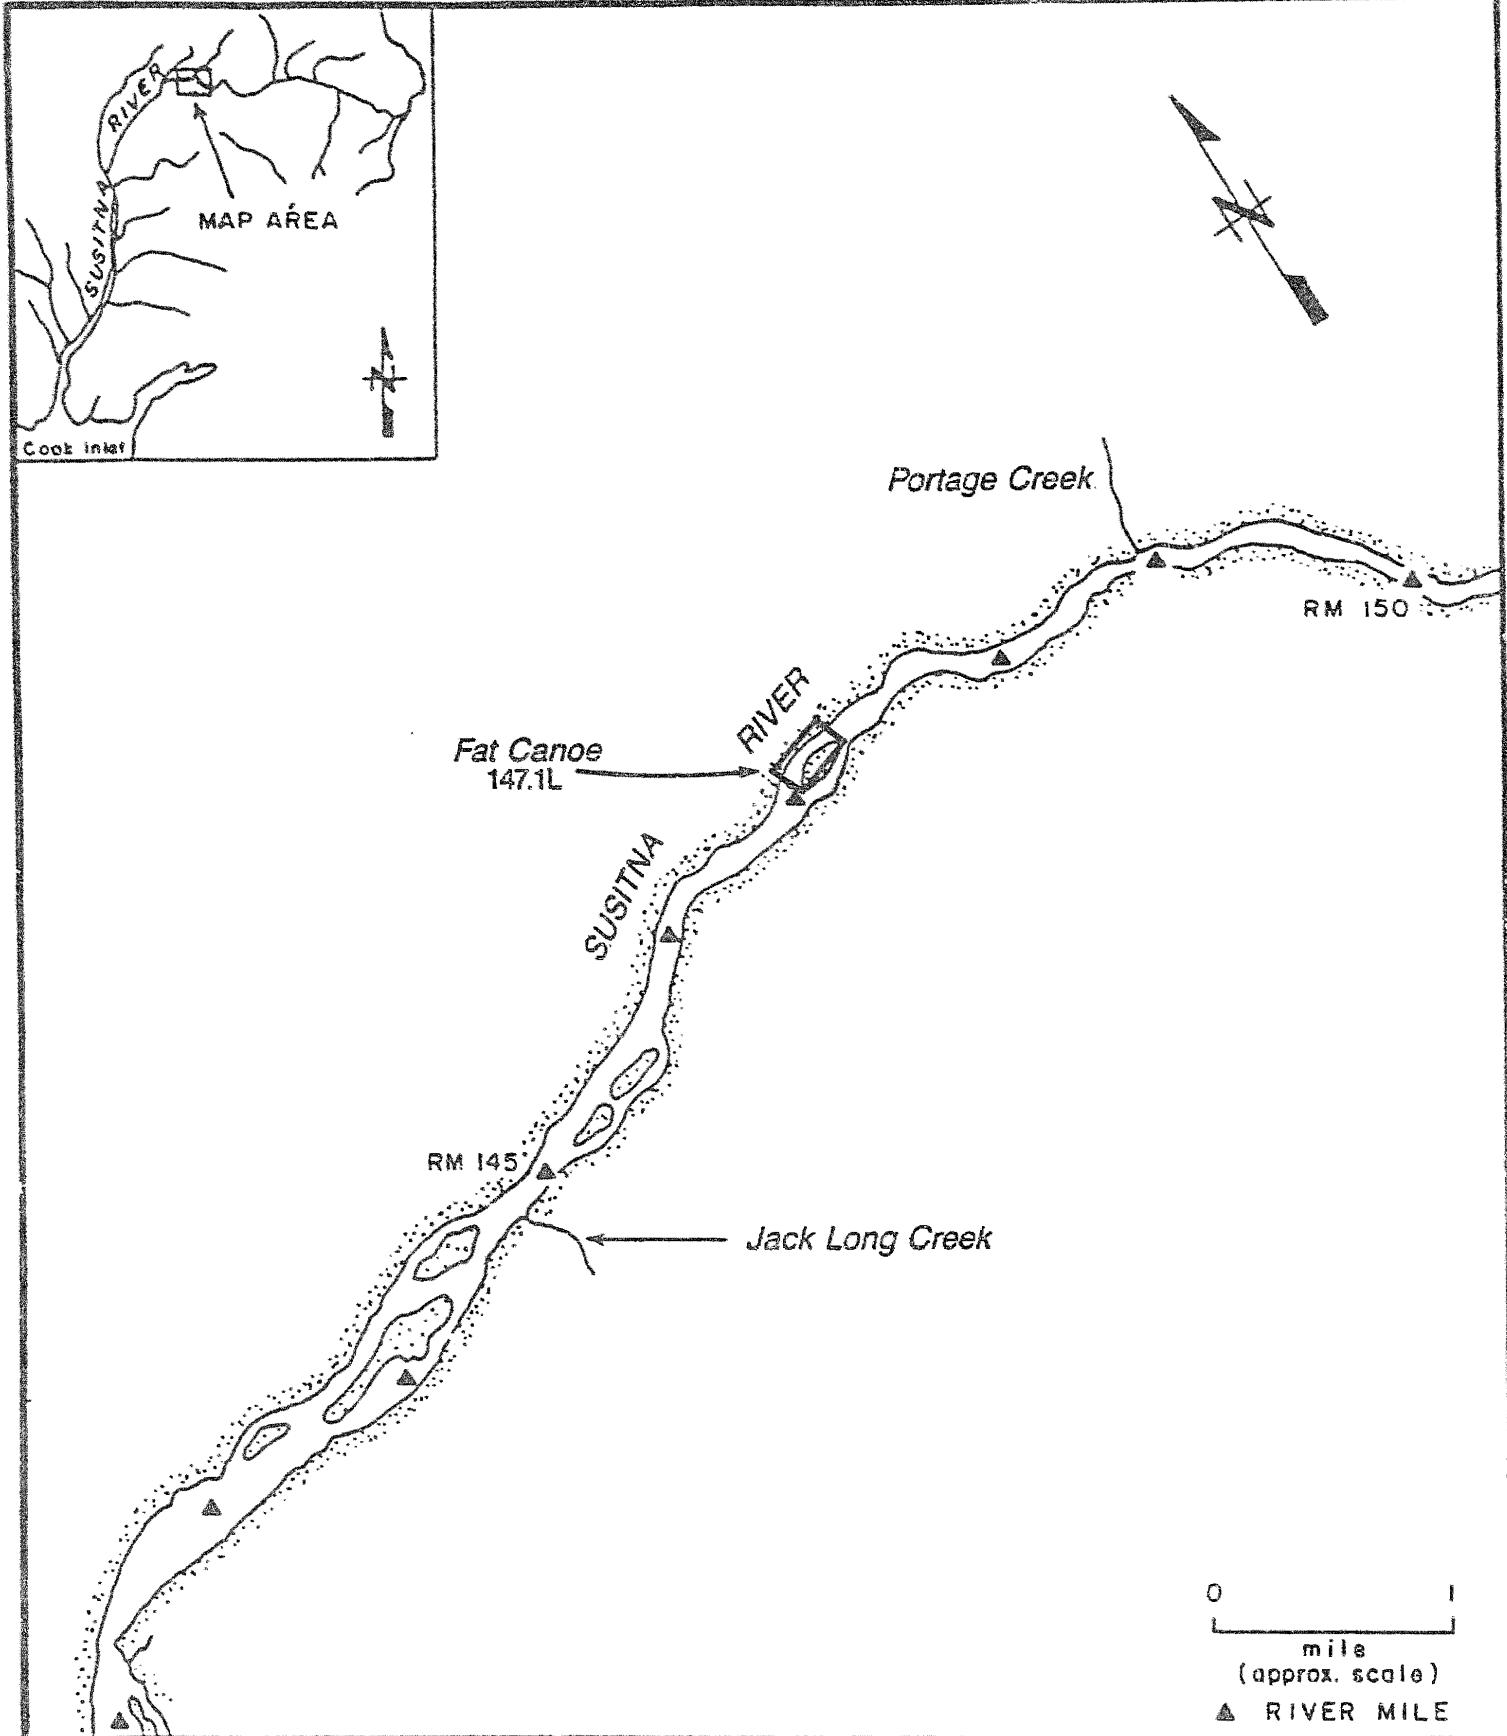


Figure III-1. Middle river IFG and DIHAB modeling sites.

Habitat categories that were well represented by existing models were not studied further during the 1984 field season.

METHODS

Site Installation and Data Collection: A varying number of cross sections and staff gages were installed at each study site to describe pools, riffles, and runs. Cross sections were also positioned at the transitions between riffles and pools.

Methods for installing staff gages are described in Part II of this report and the FY84 ADF&G Su Hydro Aquatic Studies Procedures Manual. Cross section profiles were determined for each cross section with a level and survey rod. Horizontal distances between headpins were measured to the nearest 1.0 ft by stadia survey or measuring tapes. Streambed elevations were measured to the nearest 0.1 ft using differential leveling techniques. In conjunction with the cross section survey, the water surface elevation was determined at the left and right waters edge, and depth of flow was measured at a minimum of three points on each cross section.

Substrate composition and the associated cover value were visually estimated and recorded across each transect. Substrate composition was classified using the criteria presented in Table III-3 (Estes and Vincent-Lang 1984). Cover was described using a two-digit code following Schmidt et al. (1984), in which the first digit refers to the cover type and the second digit identifies the percent cover (Table III-4). The presence of upwelling groundwater was visually determined at each cross section during October 1984 and April 1985.

Table III-3. Substrate code classification.

Substrate	Visually Estimated Particle Size	Classification
Silt		1
Sand		2
Small Gravel	1/8-1"	3
Large Gravel	1-3"	4
Rubble	3-5"	5
Cobble	5-10"	6
Boulder	>10"	7
		8
		9
		10
		11
		12
		13

Table III-4. Cover Code Classification.

COVER	CODE	PERCENT COVER	CODE
silt, sand	1	0-5	.1
emergent vegetation	2	6-25	.2
aquatic vegetation	3	26-50	.3
1-3" gravel	4	51-75	.4
3-5" rubble	5	76-100	.5
> 5" cobble, boulder	6		
debris	7		
overhanging riparian vegetation	8		
undercut bank	9		

The IFG-4 hydraulic model requires that the water surface elevation be identified for each cross section at which no flow occurs. This elevation is called the stage of zero flow and generally corresponds to the streambed elevation in riffles and runs and the downstream hydraulic control for pools. The stage of zero flow is not required when applying the IFG-2 model.

Thus at all IFG-4 sites, the stage of zero flow at each cross section within the study site was determined from the surveyed streambed profile. Streambed elevations of hydraulic controls downstream of the study sites were estimated for use in the model calibration procedures.

Depth and velocity information necessary for model calibration were collected at each site using a Marsh-McBirney or Price AA velocity meter and a top-setting wading rod. Water depth was measured to the nearest 0.05 foot and velocities were measured to 0.1 feet per second. These measurements were classified as either "calibration" or "shoreline" data. Calibration data were collected for use with the IFG-4 model at the smaller study sites and were obtained at verticals across an entire cross section. Shoreline data were collected at the larger study sites and were obtained at verticals on that portion of the cross section extending from each bank out into the channel until either the depth or velocity was limiting to field personnel. Shoreline data were used in the IFG-2 model to provide high resolution along the channel margins where fish habitat might exist. Depths and velocities used in the mid channel cells of the model were estimated from cross section and water surface profiles and apportionment of discharge using the continuity equation.

General Techniques for Hydraulic Model Calibration: Calibration of the IFG-4 model was undertaken following recommended IFG guidelines (Main 1978 and Milhous et al. 1984) as supplemented by Trihey and Hilliard (1984). Guidelines suggested by Trihey and Hilliard include:

1. Forecasting depths and velocities for streamflows representing the anticipated extrapolation limits of the calibrated model during the initial calibration runs.
2. Visual examination of water surface profile plots for each calibration discharge as well as the streamflows representing the upper and lower extrapolation limits of the model.

If the observed and predicted water surface profiles do not agree, or the forecast water surface profiles for the upper and lower extrapolation flows appear unreasonable (i.e. water flowing uphill or conflicting with the slope of the calibration profile) the following procedures were completed through an iterative process.

- a. Examine the stage of zero flow to see that it has been correctly defined.
- b. Check that cross section coordinates have been correctly calculated and transferred to the IFG-4 input deck.
- c. Check that the right and left bank water surface elevations have been properly used to provide a horizontal water surface

across the cross section. If a large discrepancy exists between right and left bank water surface elevations, adjust the streambed elevations to cause a horizontal water surface elevation to exist.

- d. Adjust the calculated water surface elevations at each cross section within the following limits to provide more realistic forecasts of water surface profiles for the extrapolation flows:

flat gradient \pm 0.02 ft

steep gradient \pm 0.05 ft

- e. If steps a through d do not result in reliable water surface profiles for the extrapolation flows, it is quite possible the stage discharge relationship is non-linear, and more reliable hydraulic simulations will result from high and low flow models used in combination rather than one model to simulate the entire flow range of interest. Therefore, separate the field data into two subsets and develop two hydraulic models following the guidelines and procedures described above.

*Is this
and same
2,*

re

3. After reasonable water surface profiles are forecast by model, review the velocity adjustment factors (VAF's) in accordance with the IFG guidelines.

*Wb15
L*

While reviewing the VAF's, measured velocities were adjusted ± 0.10 ft/sec in low velocity areas or ± 10 percent if in excess of 2 ft/sec, and extremely small non-zero velocities (.01 to .05 ft/sec) or abnormally large Manning's "n" values (.1 to .9) were assigned to pool and shoreline areas where zero velocity was reported in order to improve the predictive capability of the IFG-4 model over the range of extrapolation flows.

Calibration of IFG-2 models also followed recommended IFG guidelines and was supplemented by procedures developed by EWT&A to utilize the shoreline depth and velocity data collected over a wide range of flows and the well-defined rating curves developed for several cross sections in the study site. The primary approach in calibrating IFG-2 models was adjustment of Manning's "n" values for each cell along the cross section until predicted shoreline velocities and water surface profiles agreed with the field data.

Required input data for an IFG-2 model includes the water surface elevations at the downstream cross section (Cross section 1) for each streamflow to be simulated. These elevations were obtained from the stage-discharge relationship developed for this cross section (refer to Section II). Stage-discharge curves developed at the other cross sections in the study site provided target water surface elevations with which to compare forecast water surface profiles. If the model predicted a low water surface elevation at a particular transect, the Manning "n" values were increased. Decreasing Manning "n" values dropped the water surface elevation.

Once the desired water surface profile was attained for the calibration flow(s), the distribution of velocities across each cross section was compared with the available field observations. Plots of observed versus predicted velocities were used to identify cells where an adjustment in the Manning "n" value for individual cells was required. If individual "n" values were significantly altered in this process, the water surface elevation deviated from the target water surface elevation.

Manning "n" values generally decrease with an increase in discharge, a result of streambed roughness having a reduced effect on retarding flow as depth of flow increases. The IFG-2 model accepts n-modifiers to account for this principle (Milhous et al. 1984). To maintain the characteristic shape of the velocity distribution pattern across the cross section (i.e., the general trend of high mid channel and low shoreline velocity areas), all "n" values at the cross section were multiplied by a constant factor; greater than 1.0 to raise the water surface elevation, and less than 1.0 to lower it. Typical n-modifier values ranged from 1.02 for low flows to 0.60 for extremely high flows. The apparent skew between n-modifiers for high and low flows exists because most calibration data were collected during low flow conditions and therefore "n" values do not require much adjustment to simulate low flows hydraulic conditions as they do to reproduce high flow observations.

A single IFG-2 model was not always adequate to reliably predict both low and high flow hydraulic conditions. This was primarily due to interaction between channel geometry and flow that altered the stage-discharge relationship such as the overtopping of gravel bars, or transformation of a riffle-pool sequence

to a run. The need for two models was evidenced by unrealistic velocity distributions, especially along the shorelines, between high and low flow forecasts.

General Techniques for Hydraulic Model Verification: The quality of each calibrated IFG-4 or IFG-2 hydraulic model was evaluated at two levels. Level one is a qualitative assessment of the models overall performance with regard to four evaluation criteria. Each model was given a numeric rating depending upon its degree of compliance with each criteria. Numeric ratings were assigned through a comparison of model performance with criteria, or through professional judgment. Application of professional judgment requires: an understanding of open channel hydraulics, familiarity with the study site, experience with the model, and knowledge of how the model will be used in the habitat analysis.

Numeric ratings assigned model performance for each of the four criteria may be either 0, 1 or 2 as defined below. The overall score, calculated by summing the numeric ratings for the four criteria, was used to indicate the overall quality of the calibrated models according to the following scale:

Excellent	8 (maximum possible score)
Good	7
Acceptable	5-6
Unacceptable	<5; or zero for any evaluation category

Hydro. verification
→ define quality
of calibration
in field? L.

J. M. C.
report on
a manual
2

LEVEL ONE EVALUATION FOR IFG MODELS

Criteria 1: How well does the model conform to the IFG and EWT&A calibration guidelines?:

- a. Plot water surface profiles, stage of zero flow, and streambed profile. Are they reasonable? To be reasonable, water must flow downhill; an increase in discharge should cause the pool/riffle sequence to drown out and the water surface profile to become more uniform in gradient; a decrease in discharge should cause the water surface profile to more distinctly reflect changes in stream bed gradient and riffle/pool profiles.
- b. Examine water surface elevations forecast by the calibrated model. Are the predicted water surface elevations over a broad range of discharges coincident with the stage-discharge curves for each site?
- c. Compare predicted depths and velocities at the calibration flows to field data. Do the predicted discharges agree with the discharges measured in the field for each cross section (IFG-4 model only)? Are the predicted velocities realistic? Are there more than few outliers for the extrapolated flows?

Rating:

- 2 = A model that can forecast both water surface elevations and velocities accurately.

1 = A model that can define water surface elevations and velocities accurately at the calibration flows but may not be able to reliably define both WSEL and velocities near the limits of the extrapolation range.

0 = A model that cannot accurately reproduce depths or velocities at the calibration flow.

Criteria 2: How well does the extrapolation range of the calibrated model conform to the desired range?

Subbreaches of the overall extrapolation range of the calibrated model are rated excellent, good, acceptable or not acceptable depending upon the degree to which predicted water surface elevations coincide with the stage-discharge curve and VAF's coincide with IFG guidelines.

The first assumption made in this evaluation is that accurate stage-discharge curves are available for several cross sections in the study site. The ability to evaluate the forecasting capabilities of the model improve with an increasing number of well-defined stage discharge curves for the study site. By reviewing aerial photography and incorporating field experience it can be determined whether there is sufficient change in local channel geometry or flow patterns (such as other channels becoming overtopped at higher mainstem discharges) that may cause a significant change in the slope of the stage-discharge relationship above the range of available data.

Ratings:

2 = A model that can forecast water surface elevations coincident with the stage-discharge curve while retaining VAF's between 0.9 and 1.1 throughout the entire extrapolation range.

1 = A model that can forecast either VAF's or water surface elevations within the extrapolation range.

0 = A model that cannot forecast acceptable WSEL's or VAF's within the defined extrapolation range.

Criteria 3: Are the hydraulic models appropriately calibrated for the species and life stage being considered?

Study sites established to evaluate a particular species or life stage may not accurately represent microhabitat conditions important to another species or life stage. For example a good rearing site may not be an acceptable spawning site due to substrate composition or absence of upwelling. Carefully review the microhabitat characteristics of the study site in reference to life history requirements of the species or life stage being evaluated. Cross sections are properly located to accurately define the channel morphology which is of importance to the species and/or life stage of interest and that a sufficient number of verticals are included at each cross section to provide an accurate description of depth and velocity distribution.

Ratings:

2 = A model that provides sufficient precision in its hydraulic forecasts to be applied to both adult and juvenile life stages with an equally high level of confidence.

1 = A model that can provide a high level of precision for evaluating the life stage for which the study site was primarily established, but hydraulic forecasts are only considered "acceptable" for other species/life stages. Had cross sections and verticals within the study site been laid out differently, additional data collected, or a separate hydraulic model calibrated, a "2" rating would have been possible.

0 = Insufficient data were collected to calibrate the hydraulic model in the flow range of interest for the species/life stages to be evaluated.

Criteria 4: How well does the range of forecast depths and velocities compare with the depth and velocity suitability criteria?

Even though the model may not accurately reproduce depths or velocities from a hydraulic viewpoint, the erroneously predicted depths and velocities may occur within a range of values for which suitability indices are not sensitive. These ranges are unique to the particular set of habitat suitability criteria being applied. In general, hydraulic

models for juveniles should accurately define low velocity areas (0.8 ft/sec), but need not be as accurate when velocities exceed 2 ft/sec. Depths of flow greater than 0.15 ft need only be approximate and are of little consequence in steep-sided channels where an error in the water surface elevation will not cause a notable change in top width. Hydraulic models for spawners should accurately define velocities up to 2 ft/sec, and depths up to 1.0 ft.

Ratings:

2 = The hydraulic model provides accurate forecasts of depths and velocities present in the study site throughout the full ranges of depths and velocities for which suitability criteria are defined.

1 = Hydraulic forecasts are sufficiently accurate to describe the order of magnitude of the suitability index and therefore will result in a reliable habitat model even though the precision of the hydraulic forecasts are questionable.

0 = The hydraulic model is incapable of accurately identifying the order of magnitude of the habitat suitability index.

LEVEL TWO EVALUATION FOR IFG MODELS

Level two evaluation criteria were applied when the calibrated IFG-2 or IFG-4 model^s were not assigned an excellent rating during the level one evaluation. These analytical techniques can also be incorporated as additional steps in

recommended model calibration procedures for other studies using the IFG hydraulic models.

The best method of evaluating the predictive capabilities of the hydraulic models would be to collect additional data sets near the limits of the extrapolation range that are not used in the calibration procedure and then compared with the model predictions. This method can seldom be applied, however. The analytical procedure which follows has been suggested by Wilmott (1981) for use with geographic models which face similar problems when evaluating differences between observed and predicted data.

IFG-4 Model:

A visual comparison is made between scatter plots of the observed and predicted depths and velocities at all cross sections for each calibration flow. A quantitative assessment can be made by computing several statistics which describe the differences between observed and predicted values. Pearson's Product-Moment Correlation Coefficient (r), Coefficient of Determination (r^2), the slope (b) and intercept (a) of a least squares regression between observed and predicted values have usually been reported as reliable measures of a model's predictive capabilities. Willmott (1981) has suggested computing additional statistics to better evaluate the predictive capability of the model. These variables include the systematic and unsystematic components of the root mean square error

$$RMSE_S = [N^{-1} \sum_{i=1}^N ((a + bO_i) - O_i)^2]^{0.5}$$

and

$$RMSE_U = [N^{-1} \sum_{i=1}^N (P_i - (a + bO_i))^2]^{0.5}$$

as well as the total root mean square error

$$RMSE = [N^{-1} \sum_{i=1}^N (P_i - O_i)^2]^{0.5}$$

where:

$i = 1, 2, \dots, n$ (sample size of the number of predicted cells)

O = Observed or field measured data

P = Model predicted data.

"If RMSE is all, or largely composed of $RMSE_U$ " states Willmott, "perhaps the model is as good as it can be without major reworking." An index of agreement (d) may also be calculated to determine the degree to which a model's predictions are error free. The index of agreement is computed by

$$d = 1 - \frac{\sum_{i=1}^N (P_i - O_i)^2}{\sum_{i=1}^N [(P_i - O_i) + (O_i - \bar{O})]^2}$$

The value of d varies between 0.0 and 1.0 where a computed value of 1.0 indicates perfect agreement between the observed and predicted observations, and 0.0 denotes complete disagreement.

IFG-2 Model:

A visual comparison can be made of the observed and predicted velocity distribution plots for the IFG-2 models, where most of the observed data was obtained near the shoreline. In general, cells in the IFG-2 model do not coincide with verticals where field measurements were made, but rather with distinct changes in channel geometry, roughness, or habitat suitability. A

representative velocity distribution "shape" was developed for each cross section, using calibration flow data, which typically extended the full width of the channel.

Where only shoreline data was available, the horizontal velocity distribution was modeled after either measured values obtained at a similarly shaped cross section at the site where a complete data set was available, or by simply estimating a mid-channel velocity distribution based on the channel geometry (i.e., the highest velocities should correspond to the deepest portion of the channel). This is a reliable method, since cross-sectional area and discharge are fixed and therefore the average channel velocity is defined.

Applying the IFG-2 model at discharges other than the calibration flow produces velocity distributions similar in shape to that of the calibration flow. When inconsistencies between field data and predicted velocities occurred at high flows, a second model was developed. Generally, the high flow model predicts velocity profiles that are steeper near the water's edge than the corresponding low flow models.

General Techniques for Hydraulic Model Application: The calibrated hydraulic models were linked with the IFG HABTAT model to forecast WUA for juvenile chinook as a function of streamflow. Habitat suitability criteria (Curves) for each physical habitat variable used in the HABTAT model were derived from field observations of juvenile chinook in side channel and side slough areas (Schmidt et al. 1984) as described by Trihey et al. 1985. The suitability criteria applied for juvenile chinook are summarized in Figures III-2, 3, 4 and Table III-5.

JUVENILE CHINOOK

SUITABILITY CRITERIA CURVE
DEPTH

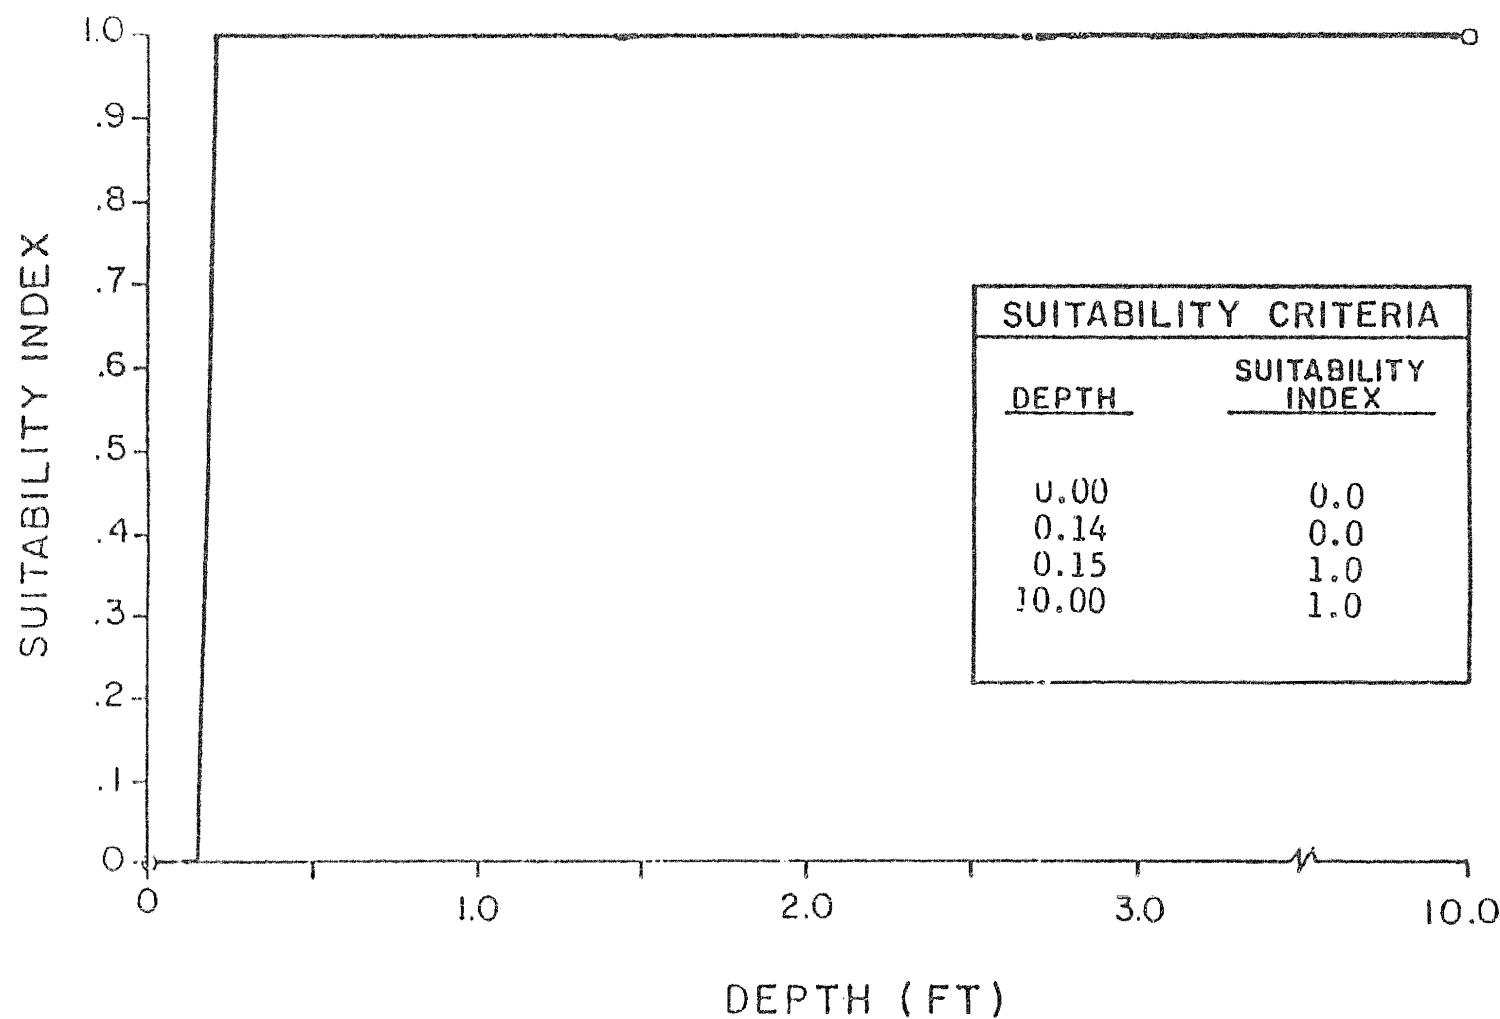


Figure III-2. Juvenile chinook salmon suitability criteria for depth applicable to clear and turbid water habitats. Source: Schmidt et al. 1984.

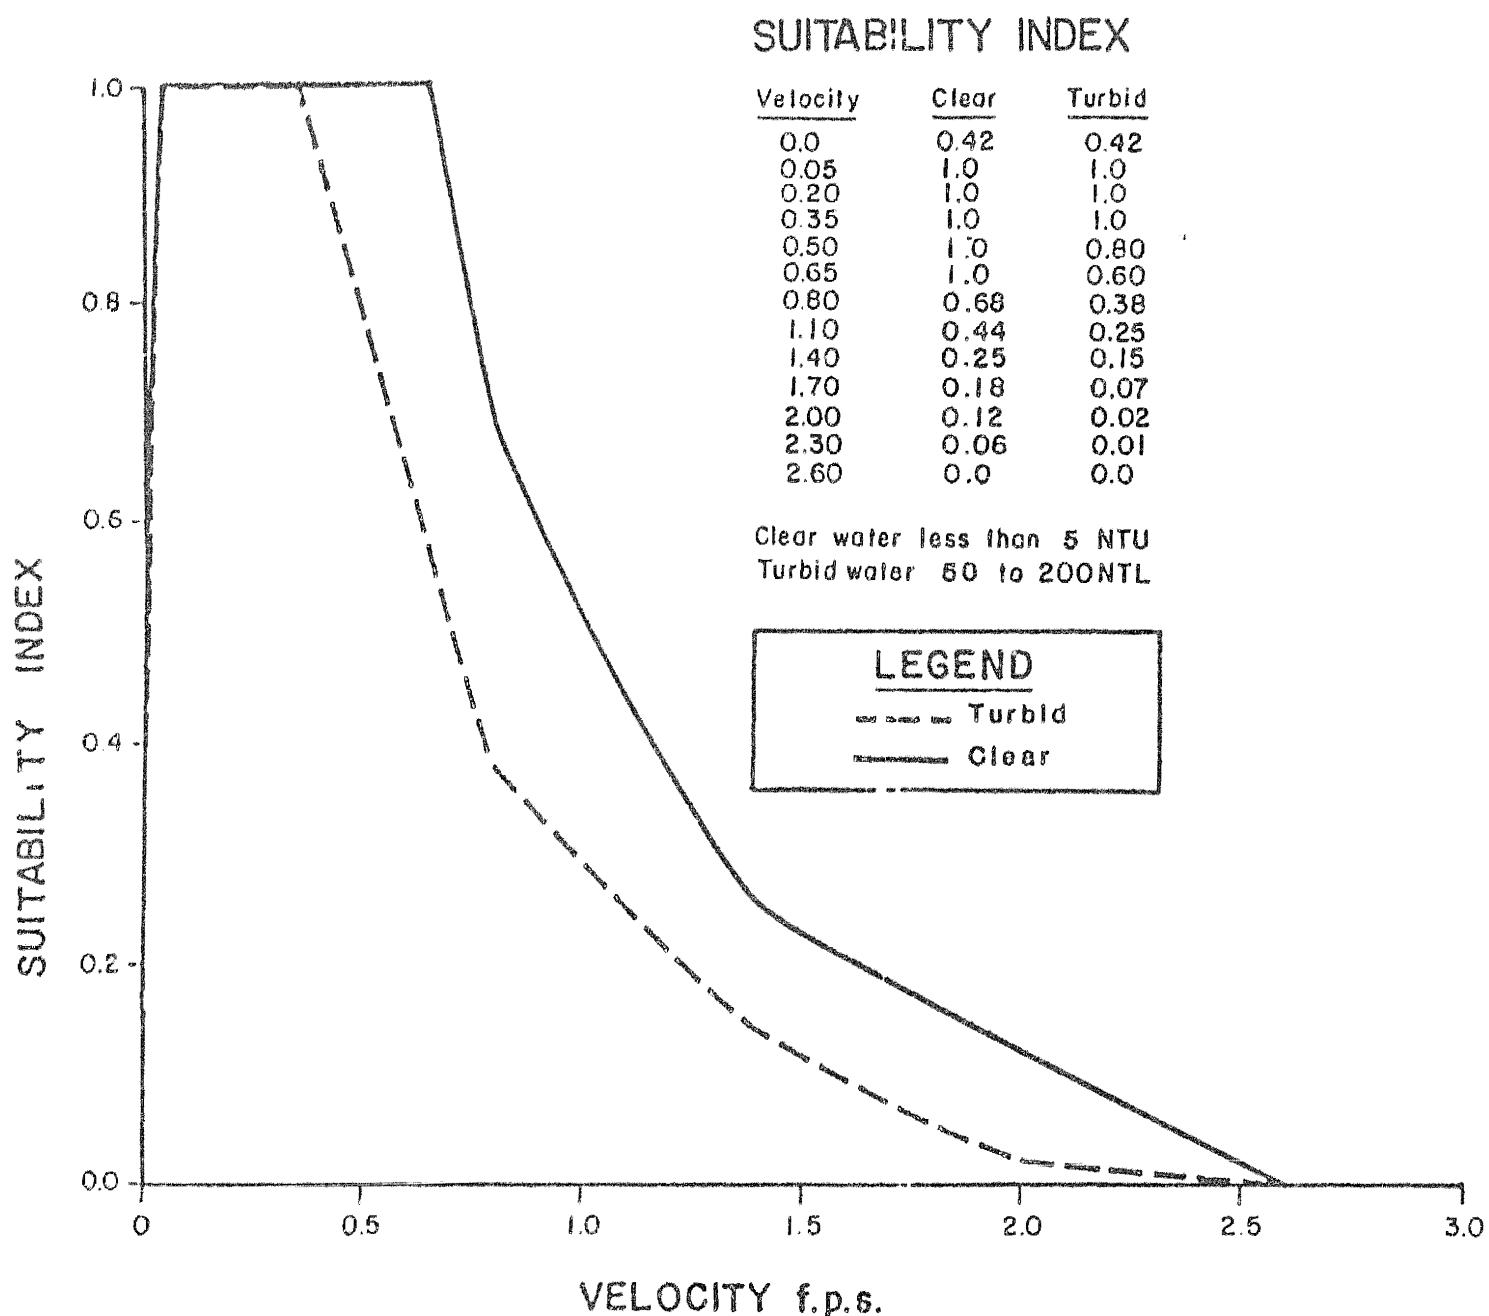


Figure III-3. Juvenile chinook salmon suitability criteria for velocity applicable to clear and turbid water habitats. Source: Schmidt et al. 1984, EWT&A and WCC 1985.

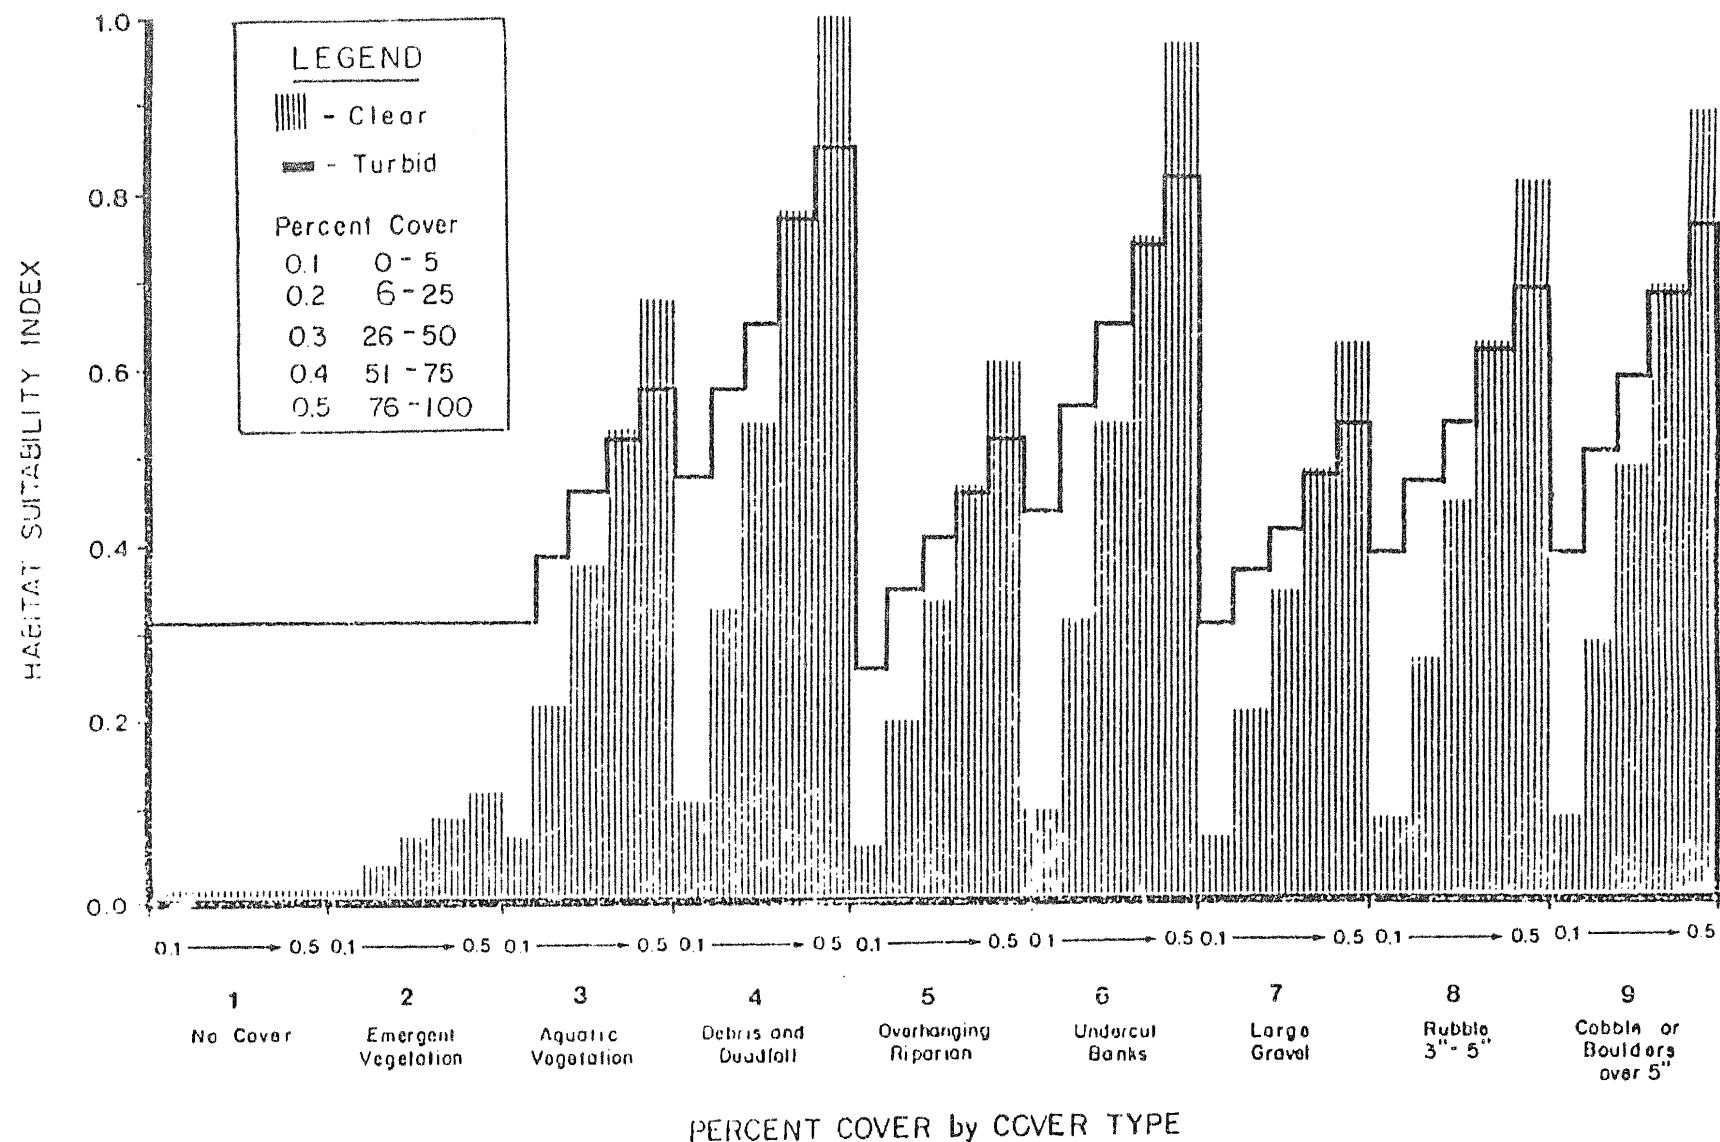


Figure III-4. Cover suitability criteria recommended for use in modeling juvenile chinook habitat under clear and turbid water conditions. Sources: Schmidt et al. 1984. EWT&A and WCC 1985.

Table III-5. Cover suitability criteria recommended for use in modeling juvenile chinook habitat under clear and turbid water conditions. Sources: Schmidt et al, EWT&A and WCC 1985.

Percent Cover	No Cover	Emergent Veg.	Aquatic Veg.	Debris & Deadfall	Overhanging Riparian	Undercut Banks	Large Gravel	Rubble 3"-5"	Cobble or Boulders <5"
Clear Water (ADF&G)									
0-5%	0.01	0.01	0.07	0.11	0.06	0.10	0.07	0.09	0.09
6-25%	0.01	0.04	0.22	0.33	0.20	0.32	0.21	0.27	0.29
26-50%	0.01	0.07	0.39	0.56	0.34	0.54	0.35	0.45	0.49
51-75%	0.01	0.09	0.53	0.78	0.47	0.75	0.49	0.63	0.69
76-100%	0.01	0.12	0.68	1.00	0.61	0.97	0.63	0.81	0.89
Turbid Water (EWT&A) ¹									
0-5%	0.31	0.31	0.31	0.48	0.26	0.44	0.31	0.39	0.39
6-25%	0.31	0.31	0.39	0.58	0.35	0.56	0.37	0.47	0.51
26-50%	0.31	0.31	0.46	0.67	0.41	0.65	0.42	0.54	0.59
51-75%	0.31	0.31	0.52	0.77	0.46	0.74	0.48	0.62	0.68
76-100%	0.31	0.31	0.58	0.85	0.52	0.82	0.54	0.69	0.76

¹ Multiplication factors: 0-5% - 4.38%; 6-25% - 1.75; 26-50% - 1.20; 51-75% - 0.98; 76-100% - 0.85

Of particular interest are the separate suitability criteria for velocity and cover which apply under clear and turbid water conditions. Clear water habitats occur in side channel areas conveying base flows derived from groundwater or tributary inflow when the side channel is not breached by the turbid waters of the mainstem. The mainstem discharge at which the transition from clear to turbid water occurs depends on the streambed elevation at the head of the side channel relative to the water surface elevation of the mainstem. Water surface elevation versus mainstem discharge and site flow versus mainstem discharge relationships described in Section II of this report were used to determine at which site flows the clear or turbid water velocity and cover criteria were to be applied.

Within the HABTAT model the study site is comprised of a matrix of cells, each possessing flow-dependent hydraulic variables obtained from the calibrated models. Since the top width of the study site responds to incremental changes in streamflow, the total number of wetted cells and their cumulative surface area also vary with flow.

The HABTAT program evaluates the utility of each cell at a specified flow by calculating a joint preference factor, which in this study was defined as the product of the individual suitability values associated with the prevailing velocity, depth and cover conditions. Weighted usable area is calculated for each cell by multiplying its surface area by the joint preference factor. The WUA for the study site is the sum of the individual cell WUAs. When plotted as a function of discharge, the study site WUA indicates the site specified response of fish habitat to changes in flow. WUA is expressed in units of square feet per 1,000 linear feet of stream.


Total wetted surface area and WUA curves for juvenile chinook were obtained at the eight hydraulic modeling sites corresponding to a range of mainstem discharge from 5,000 to 35,000 cfs at Gold Creek. Surface area and WUA values for site flows outside the recommended extrapolation range of the hydraulic models were estimated using trend analysis and professional judgement. Instances where this was necessary are documented in Table B-6.

A time series plot of available juvenile chinook habitat was also developed for each site by interfacing a synthesized record of site flows during the 1984 rearing season (May 20 to September 15) with the WUA versus site flow function. The resulting figures enable evaluation of habitat conditions on a site-by-site basis over the summer growth period.

RESULTS

Site 101.2R

Site Description: This site is located 2.2 miles above the confluence of Chulitna River on the east bank of the Susitna River (Plate III-1). The study reach is 1,500 ft and varies from 350 ft wide in the lower half of the site to 250 ft wide in the upper half. Cross sections 1, 3, 4 and 9 describe the shallow, high velocity areas while cross sections 7 and 8 represent a deep, slow velocity area (Figure III-5). Cross section 6 separates the two areas. Cross sections 2 and 5 describe the small right channel and did not extend across the main channel as the hydraulic conditions at adjacent cross sections were similar. Cross sections 3 and 4 extend across a small backwater channel

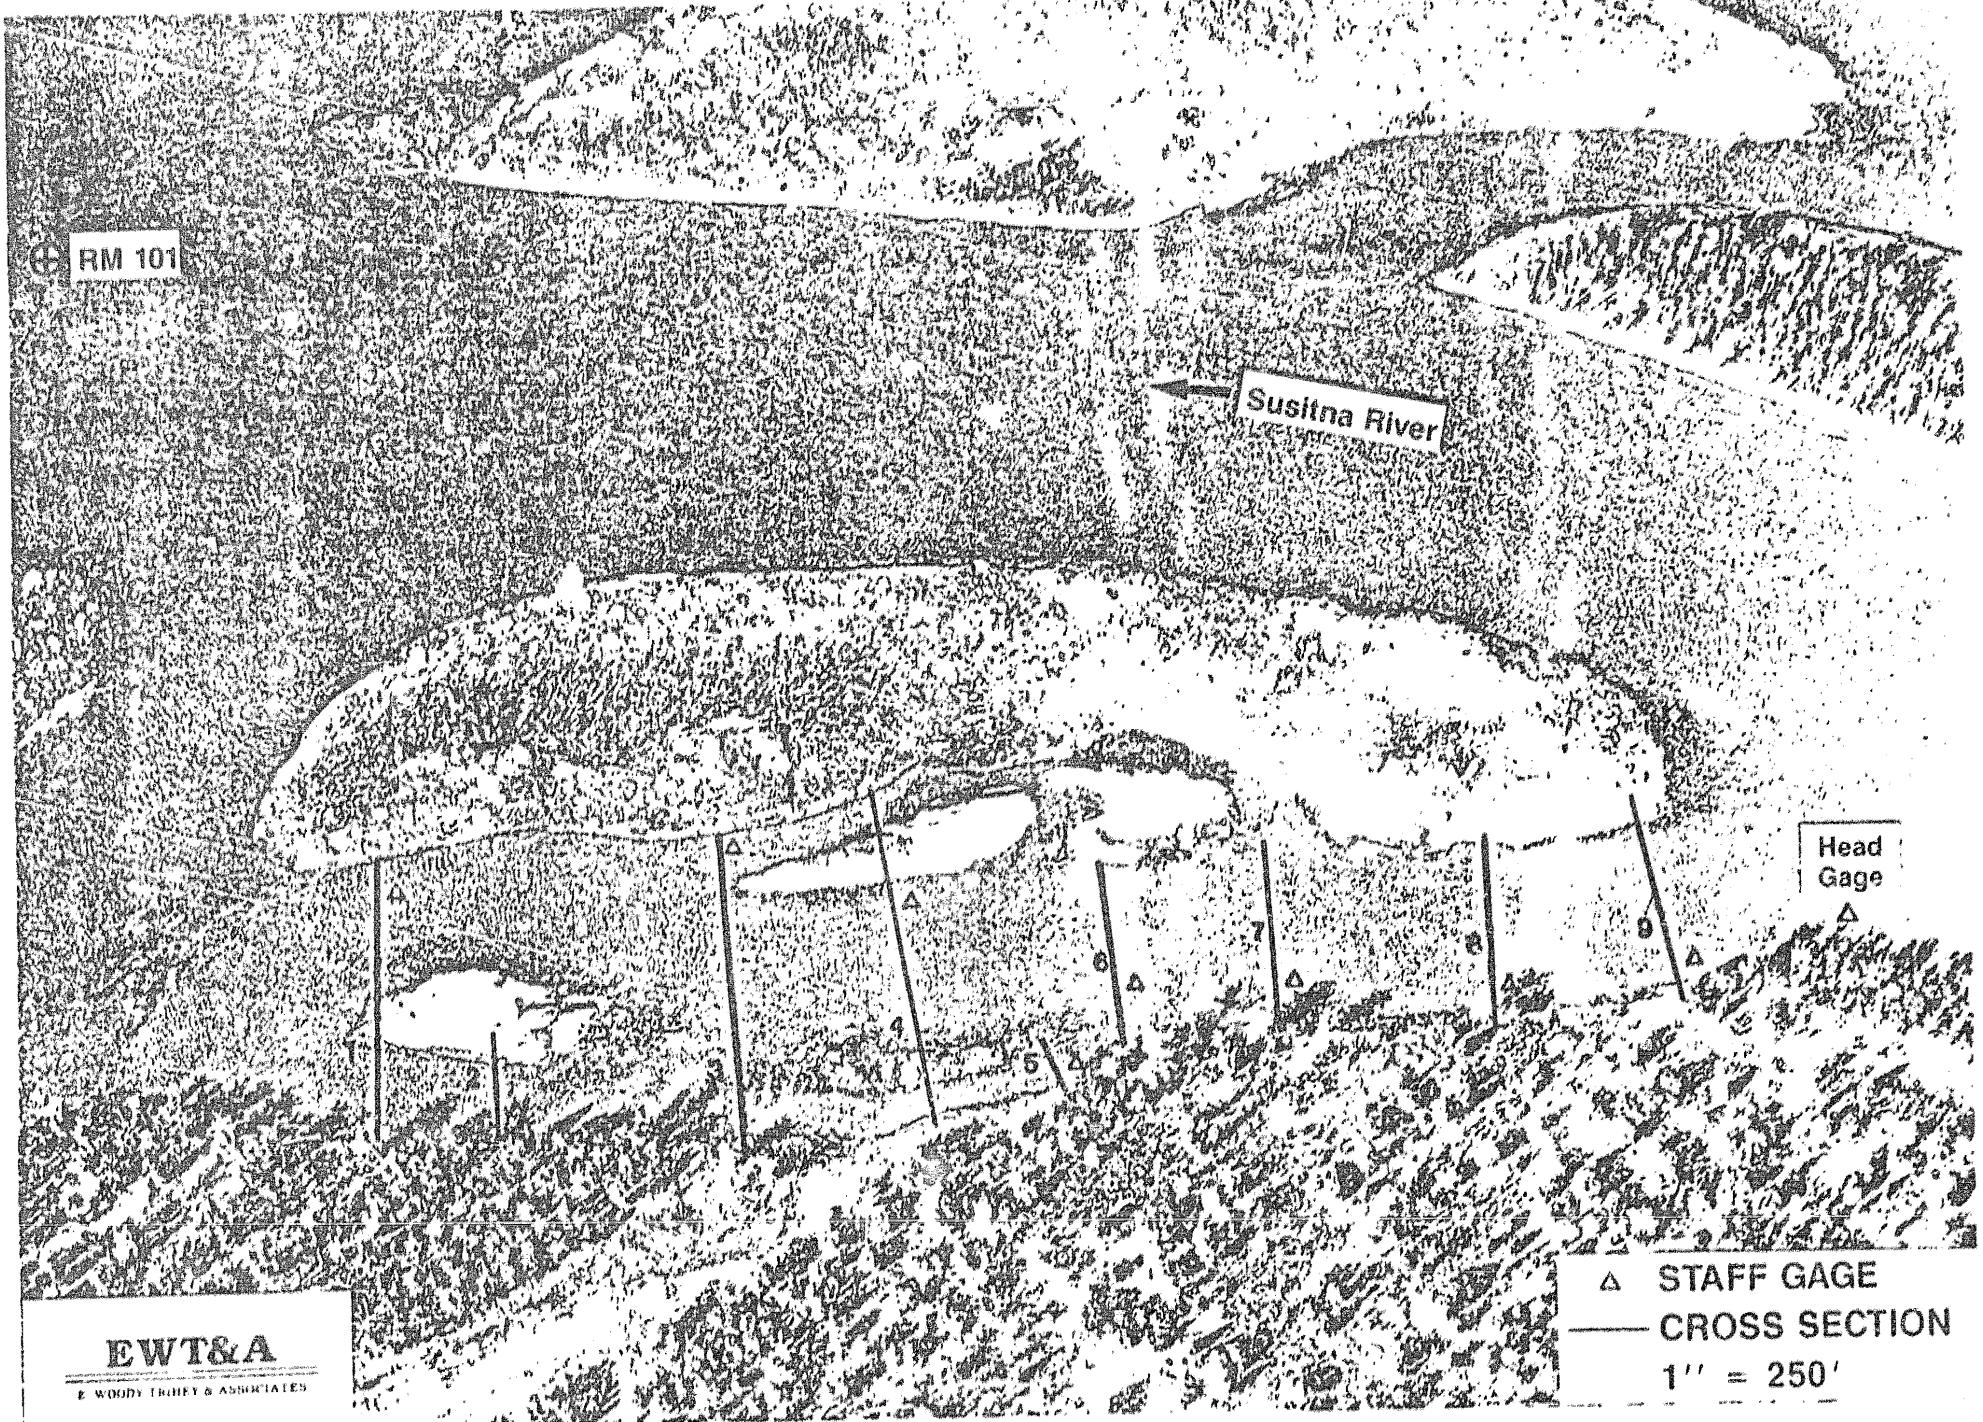

III-33

Plate III-1. Modeling site 101.2R on June 1, 1982 at mainstem discharge: 23,000cfs.

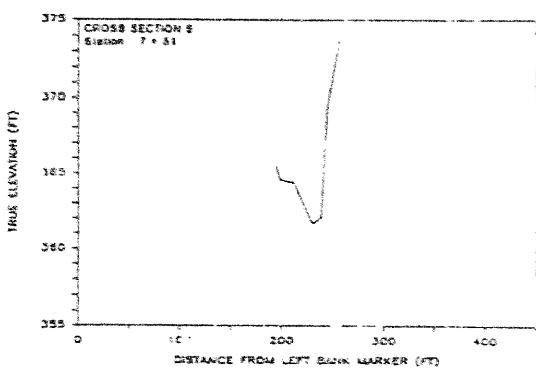
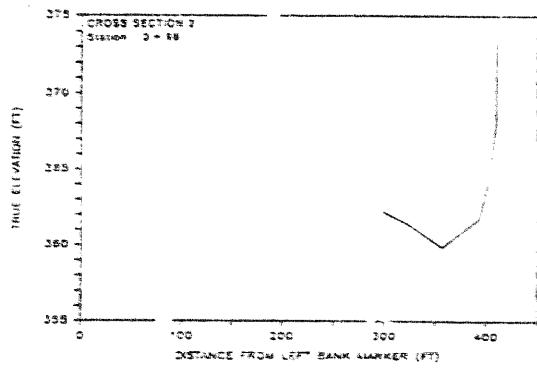
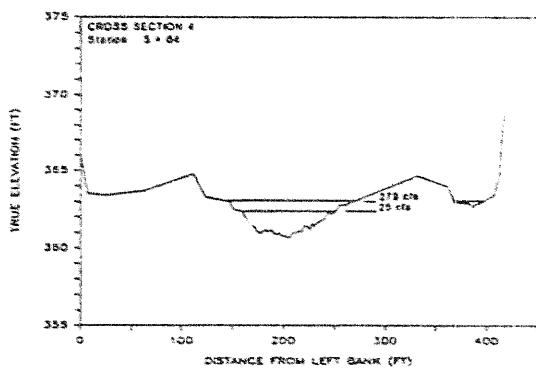
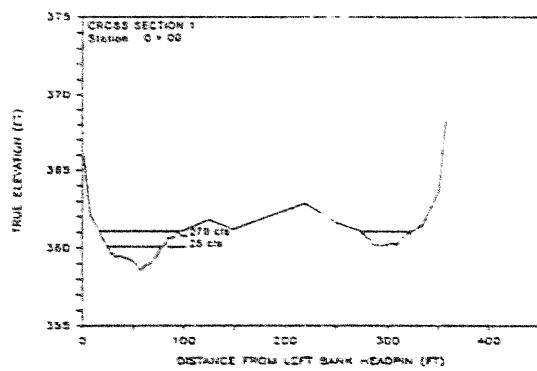
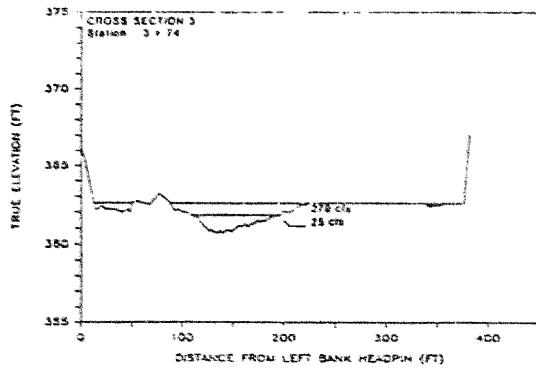
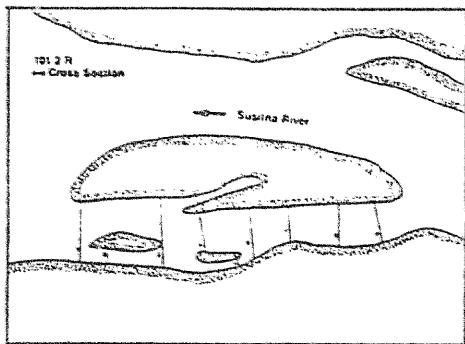


Figure III-5. Cross sections for 101.2R study site depicting water surface elevations at calibration discharges of 25 and 279 cfs.

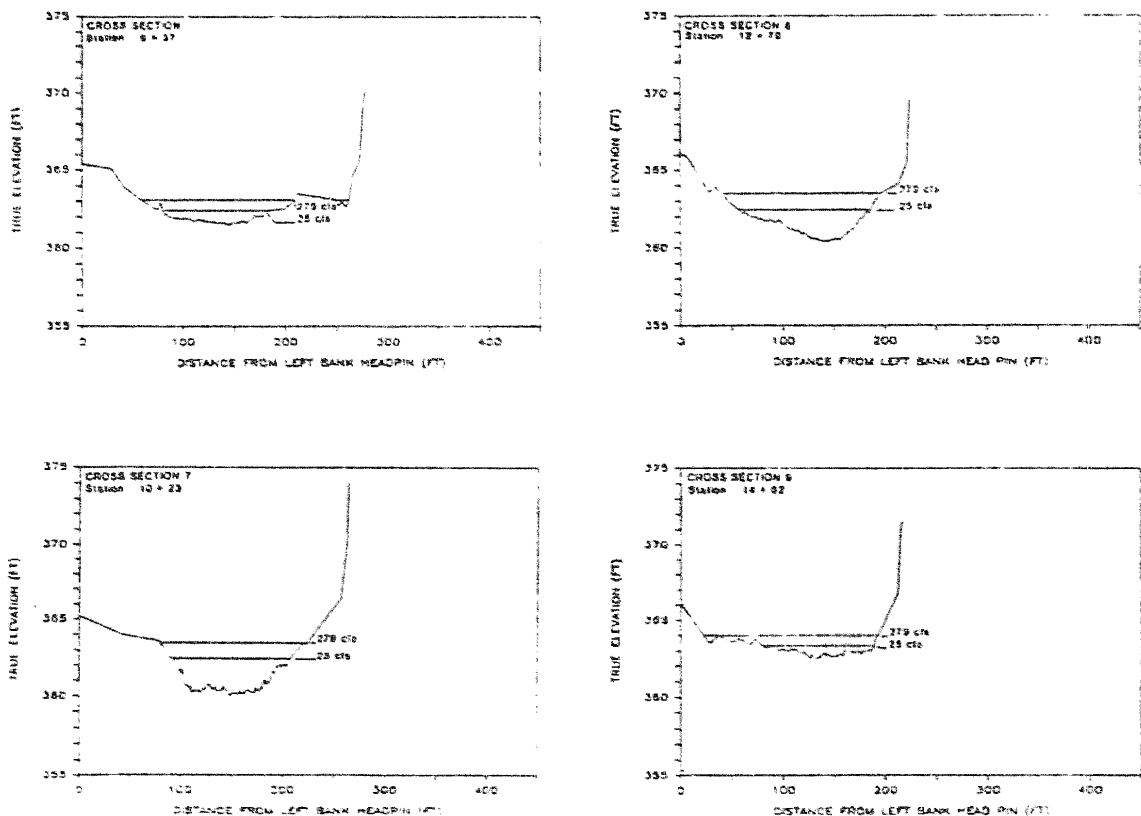


Figure III-5. Cross sections for 101.2R study site depicting water surface elevations at calibration discharges of 25 and 279 cfs.

along the left bank. Substrate is mainly cobble and large gravel throughout the site with a layer of silt in the left channel. Cover is available predominately from the rubble and cobble substrate present with some debris present.

The vegetated gravel bar along the left bank and across the channel head breaches at 9,200 cfs. Below 9,200 cfs, the site is ponded and only the wetted area near cross section one is connected to the mainstem. The right channel breaches at 14,000 cfs. Site flows of 10 and 0 cfs correspond to mainstem discharges of 10,400 and 7,400 cfs. At 23,000 cfs (mainstem), site flow exceeds 600 cfs.

This study site was selected to represent side channels that become dewatered at low discharges. Upwelling was suspected to maintain low baseline flow conditions and the site appeared to have potentially good rearing habitat although no previous utilization has been documented. An IFG-4 model was selected because of the non-uniform flow conditions present and the channel size.

Chum salmon adults have been observed to use the site but no redds were detected. Some juvenile chinook salmon have been observed in the site. Access to the site is difficult below 9,200 cfs. Passage upstream of cross section 1 is not possible in the unbreached condition.

Calibration: Table III-6 lists the data used to calibrate the hydraulic model for this site. Depth and velocity measurements were made across each cross


section at every calibration flow. Because cross sections 2 and 5 do not extend across the main channel, they were not included in the hydraulic model.

Table III-6. Hydraulic data available to calibrate the IFG-4 model for site 101.2R.

Date	Flow (cfs)	Discharge (cfs)
840830	265	15,300
840903	25	11,200

The hydraulic model was established to describe the depths and velocities in the main channel. At discharges greater than 14,000 cfs, flow entered the right channel. The water surface elevations in the main and right channels differed across cross sections 1 through 5. The streambed elevations were raised in the right channel to maintain a horizontal water surface elevation across a cross section (Figure III-6). The backwater area at the mouth of the left channel also had different water surface elevations than the main channel. The streambed elevations in the left channel were also raised to maintain horizontal water surface elevations at cross sections 3 and 4. Observed and predicted water surface profiles from the calibrated model are shown in Figure III-7. The extrapolation limits are also plotted. The IFG-4 model was calibrated with respect to depth by making comparisons between the stage-flow curves and the model predicted water surface elevations. The comparison made at the discharge cross section is illustrated in Figure III-8; similar comparisons were made at each cross section.

MEASURED

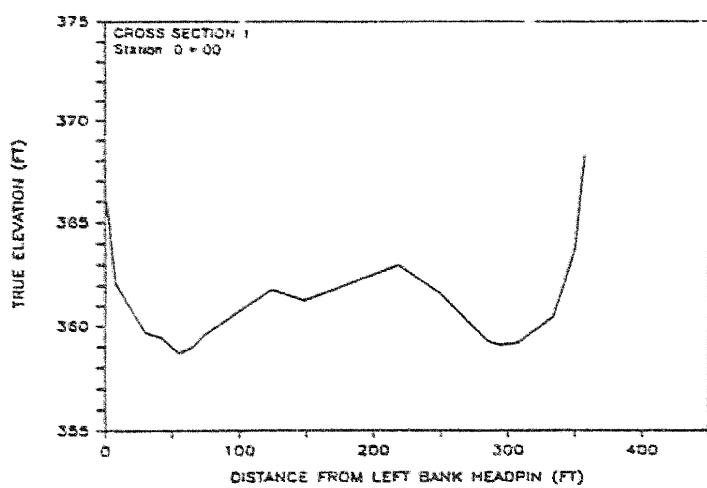

ADJUSTED

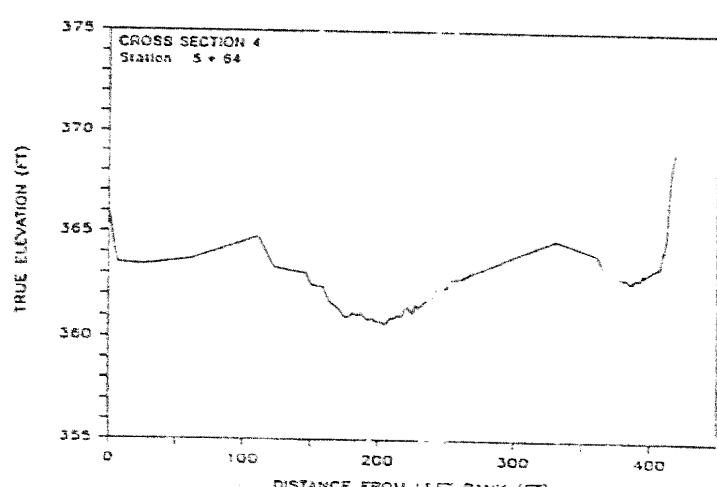
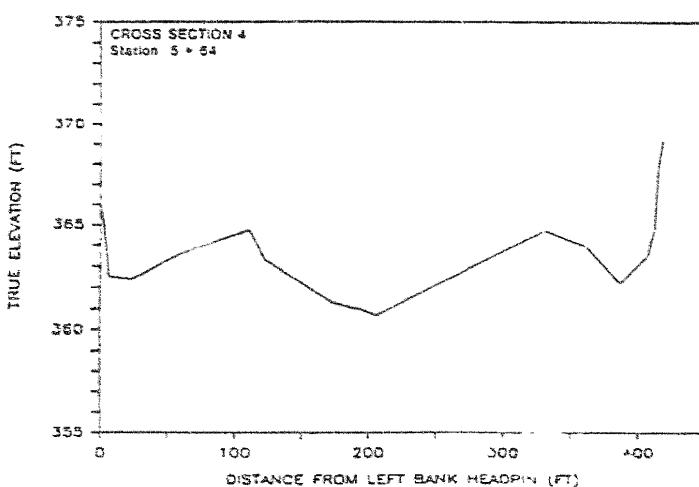
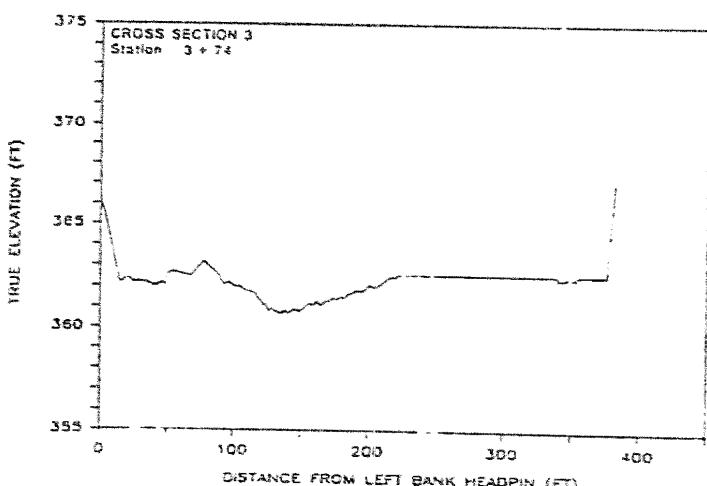
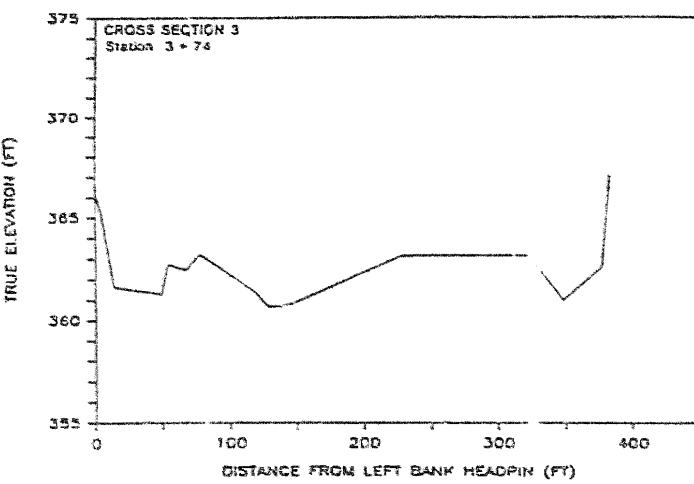
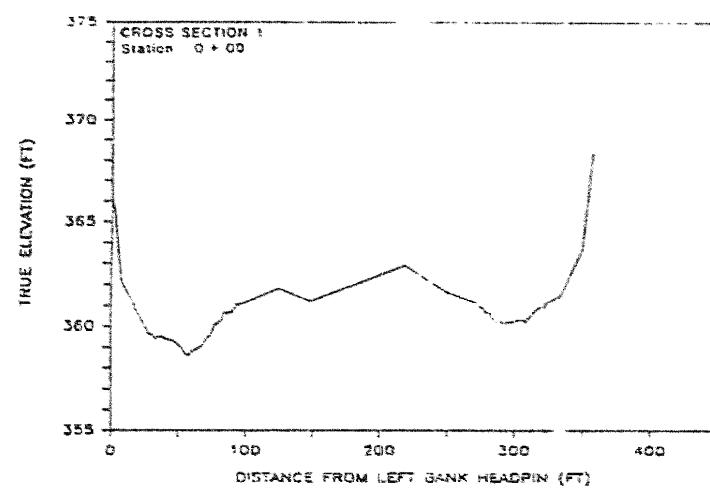


Figure III-6. Comparison between measured and adjusted cross sections 1, 3, and 4 at 101.2R study site.

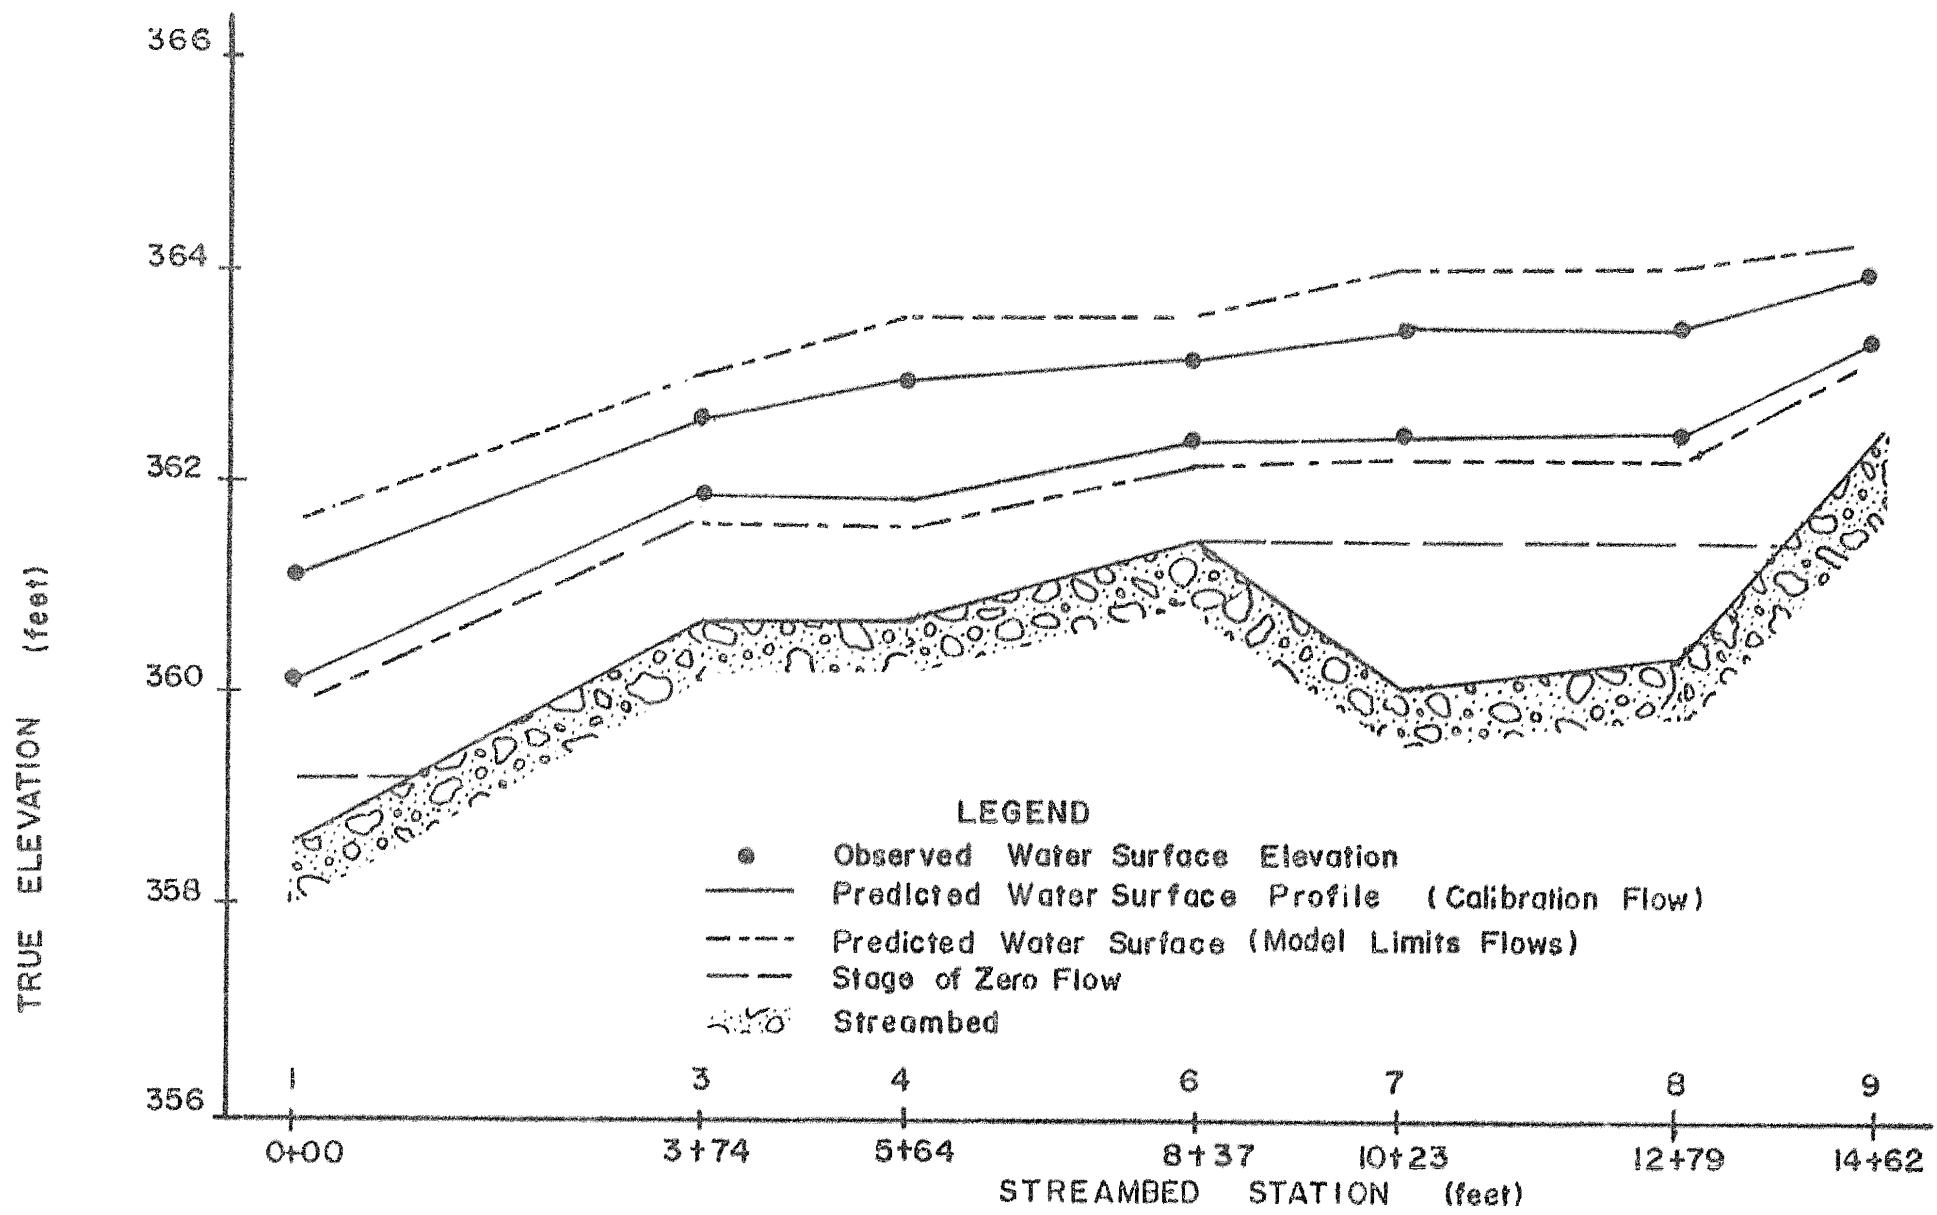


Figure III-7. Comparison of observed and predicted water surface profiles from calibrated hydraulic model at 101.2R study site.


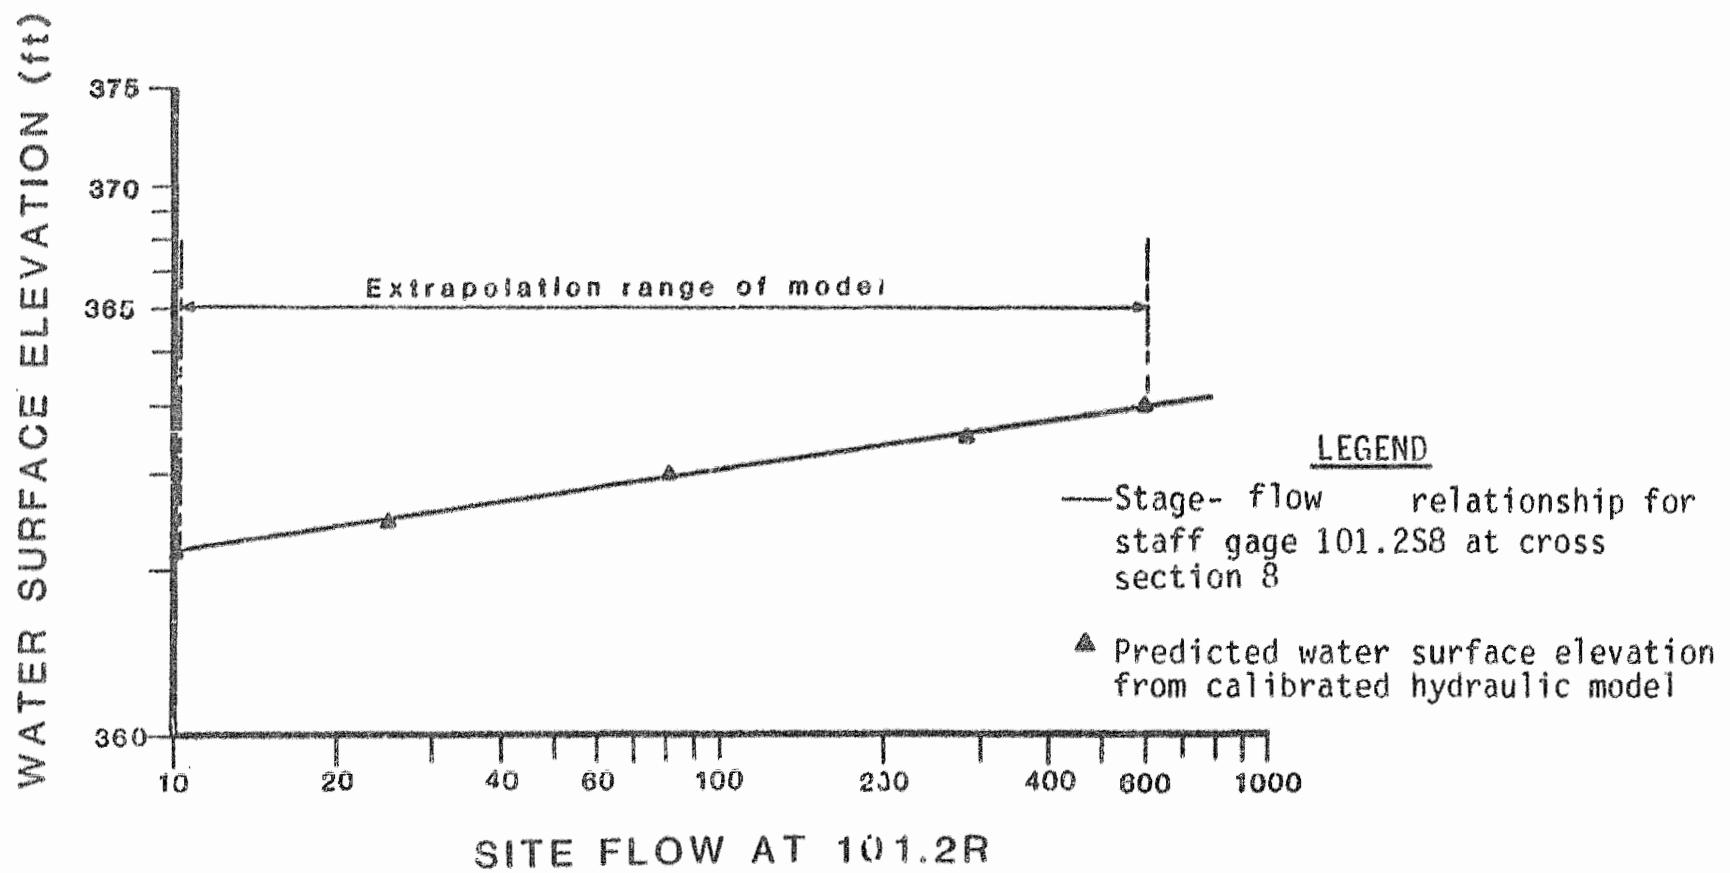


Figure III-8. Comparison between water surface elevations forecast by the calibrated hydraulic model and the stage-flow relationship for 101.2R cross section 8.

Verification: An analytical analysis was made to compare the predictive capabilities of the model. Scatter plots comparing the observed and predicted depths and velocities (Figure B-2.1) indicate the model is capable of accurately predicting hydraulic data. Statistical tests were also made and the results summarized in Table B-5.

Application: An excellent rating was assigned from 9,200 to 17,600 cfs mainstem discharge. From 9,200 to 10,300 cfs, the baseline flow is estimated to be 10 cfs. Between discharges of 10,300 to 17,600 cfs, the site flow ranges from 10 to 600 cfs. As discussed in Part II of this report, there is a change in the flow versus stage relationship changes as the gravel bar which separates the main and right channels becomes overtopped. Because there is no data available to describe exactly how this change affects the flow-stage relationship, the upper limit of the excellent rating was set to be 17,600 cfs. The predictive capabilities also break down so it is no longer reliable above 17,600 cfs (600 cfs site flow).

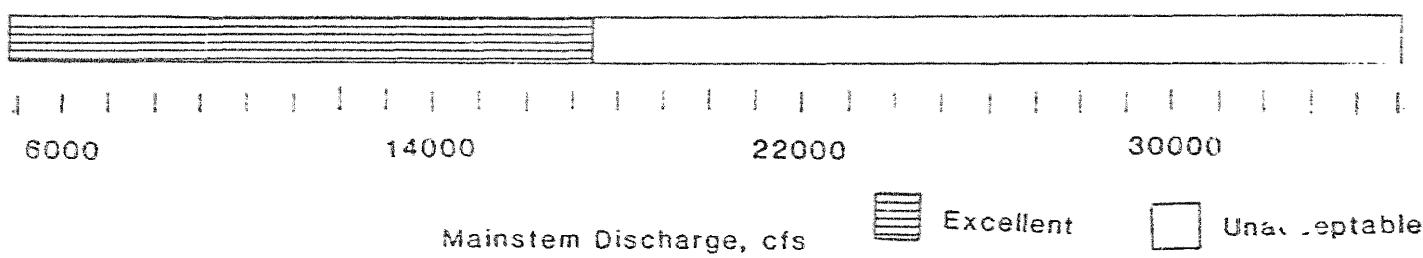

Total surface area and WUA curves for study site 101.2R are provided in Figure III-9. These curves are plotted to the same vertical scale, representing square feet per thousand feet of stream reach. A comparison of the two curves indicates the relative proportion of the wetted surface area containing rearing habitat for juvenile chinook at various mainstem discharges.

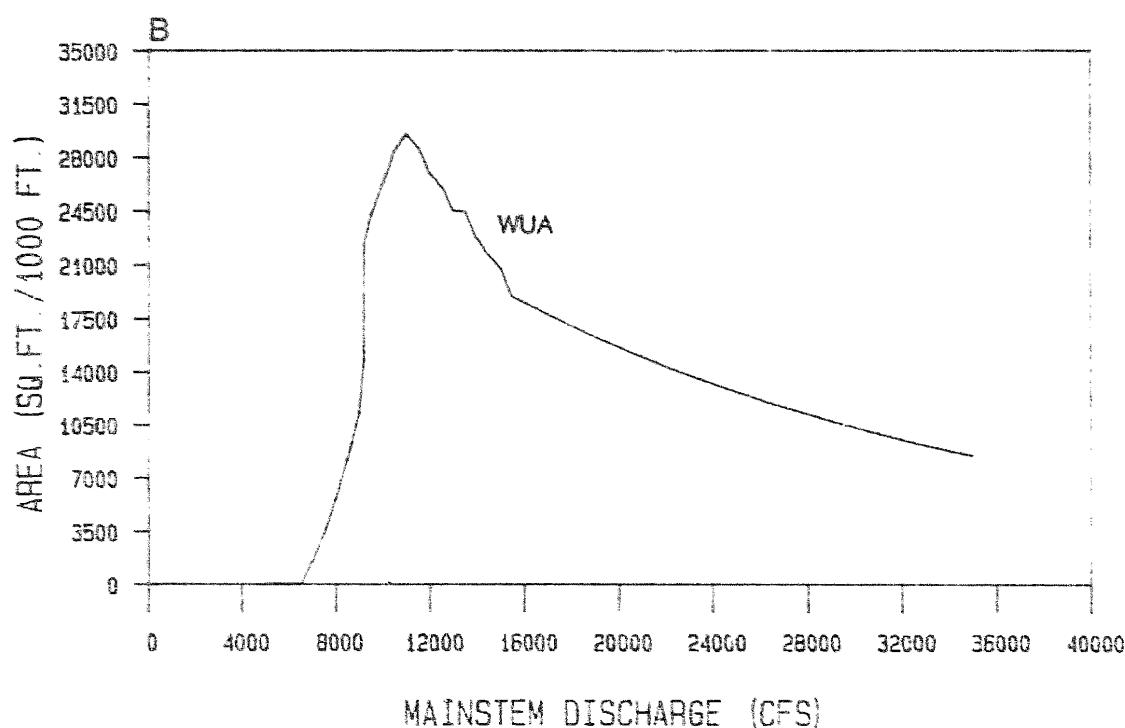
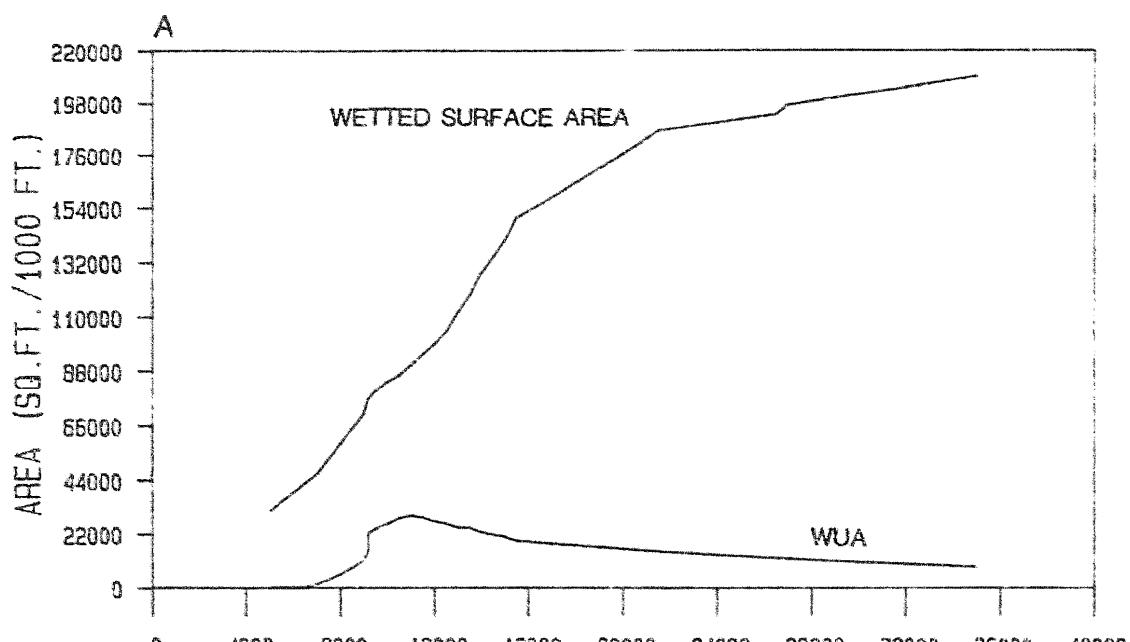


Figure III-9. Projections of gross surface area and WUA of juvenile chinook salmon habitat as a function of discharge for the 101.2R modeling site.

Rearing habitat for juvenile chinook in the side channel is maximized at mainstem discharges in the vicinity of 11,000 cfs. The sharp rise in WUA which occurs near 9,000 cfs is caused by the site being breached and the associated increase in turbidity which provides additional cover value for juvenile chinook.

The WUA curve is also plotted in Figure III-9b at an expanded vertical scale to accent the response of rearing habitat to incremental changes in discharge. The presence of turbid water and the distribution of water velocity are the primary determinants of the WUA response curve at this site. Although much of the site exists as riffle-run habitat, the channel gradient is low enough that water velocities do not become limiting to juvenile chinook until mainstem discharges exceed 16,000 cfs. The large vegetated gravel bar which separates the side channel from the mainstem and another large gravel bar in the lower portion of the study site which is exposed at low flows does not provide for any appreciable increase in rearing habitat at higher flows due to the low cover value of their sand and gravel substrates. Nevertheless, in relation to flow conveyance, this study site possesses fairly good habitat for juvenile chinook in the lower flow ranges (Figure III-9a).

The WUA forecasts were obtained using the HABTAT model linked with the IFG-4 model previously described in this site discussion. Because of the limited extrapolation range of this particular IFG-4 model the WUA and surface area curves were estimated for mainstem discharges less than 9,200 cfs and greater than 16,000 cfs.

The wetted surface area of the channel were estimated for discharges of 5,100 and 7,400 cfs using digitized measurements obtained from aerial photography, as described in Klinger-Kingsley (1985). These estimates, 31,600 and 46,500 sq ft/1,000 ft, were assigned to discharges of 5,000 and 7,000 cfs. Low turbidity habitat suitability criteria were used to forecast juvenile chinook WUA at 9,200 cfs (breaching flow for this side channel) and the amount of rearing habitat available under non-breached conditions was assumed to decline to zero at a constant rate between this discharge and 6,500 cfs. This assumption is supported by numerous field observations of clear standing water which is cut off from the mainstem. Although still contributing to total wetted surface area, clear ponded water provides progressively less suitable habitat for juvenile chinook as mainstem flows recede.

At mainstem discharges exceeding 16,000 cfs (the upper extrapolation limit of the IFG-4 model), estimates of the wetted surface area at 23,000 and 27,000 cfs were also obtained from aerial photography. Surface areas associated with discharges between 16,000 cfs and 27,000 cfs were interpolated. Surface area estimates for discharges greater tan 27,000 cfs were obtained by trend analysis; exponentially extending the surface area curve to a maximum of 210,000 sq ft/1,000 ft at 35,000 cfs.

The WUA curve for juvenile chinook was assumed to decay exponentially above 16,000 cfs. This trend is evident at other middle river side channel for which high flow hydraulic models are available. In addition extension of the WUA curve beyond 16,000 cfs using this technique does not appear inconsistent with the rate of decline forecast by the calibrated model for discharges less than 16,000 cfs. Additional information is provided in Table B-6.1.

Time series WUA and site flow plots are presented in Figure III-10a and b. Low site flows during late May and early September, corresponding to mainstem discharges of 9,000 to 13,000 cfs, resulted in comparatively high rearing habitat forecasts for these periods. High site flows during the intervening months produced low habitat forecasts.

Site 101.5L

Site Description: This site is located 2.2 miles above the confluence of the Chulitna River on the west bank of the Susitna River (Plate III-2). The study reach is 3,100 ft long and 430 ft wide. A large backwater area is present throughout the lower half of the site for the entire discharge range (5,000 to 35,000 cfs). One cross section describes the backwater area; a second describes the transition between low and high velocity areas. Three cross sections define the deep, fast area in the upper half of the study reach (Figure III-2). Cobble and rubble substrate predominate throughout the site. A thick layer of sand exists along the right bank of the mouth. The available cover is provided by large substrate with less than 25 percent considered acceptable.

This study site was selected to represent large side channels which remain side channels from 5,000 to 35,000 cfs. An IFG-2 model was selected because of the large size of the channel and its uniform shape. In addition, field reconnaissance indicated that rearing habitat was limited to the stream bank margins, and a limited amount of data would therefore be adequate to simulate channel hydraulics with an IFG-2 model.

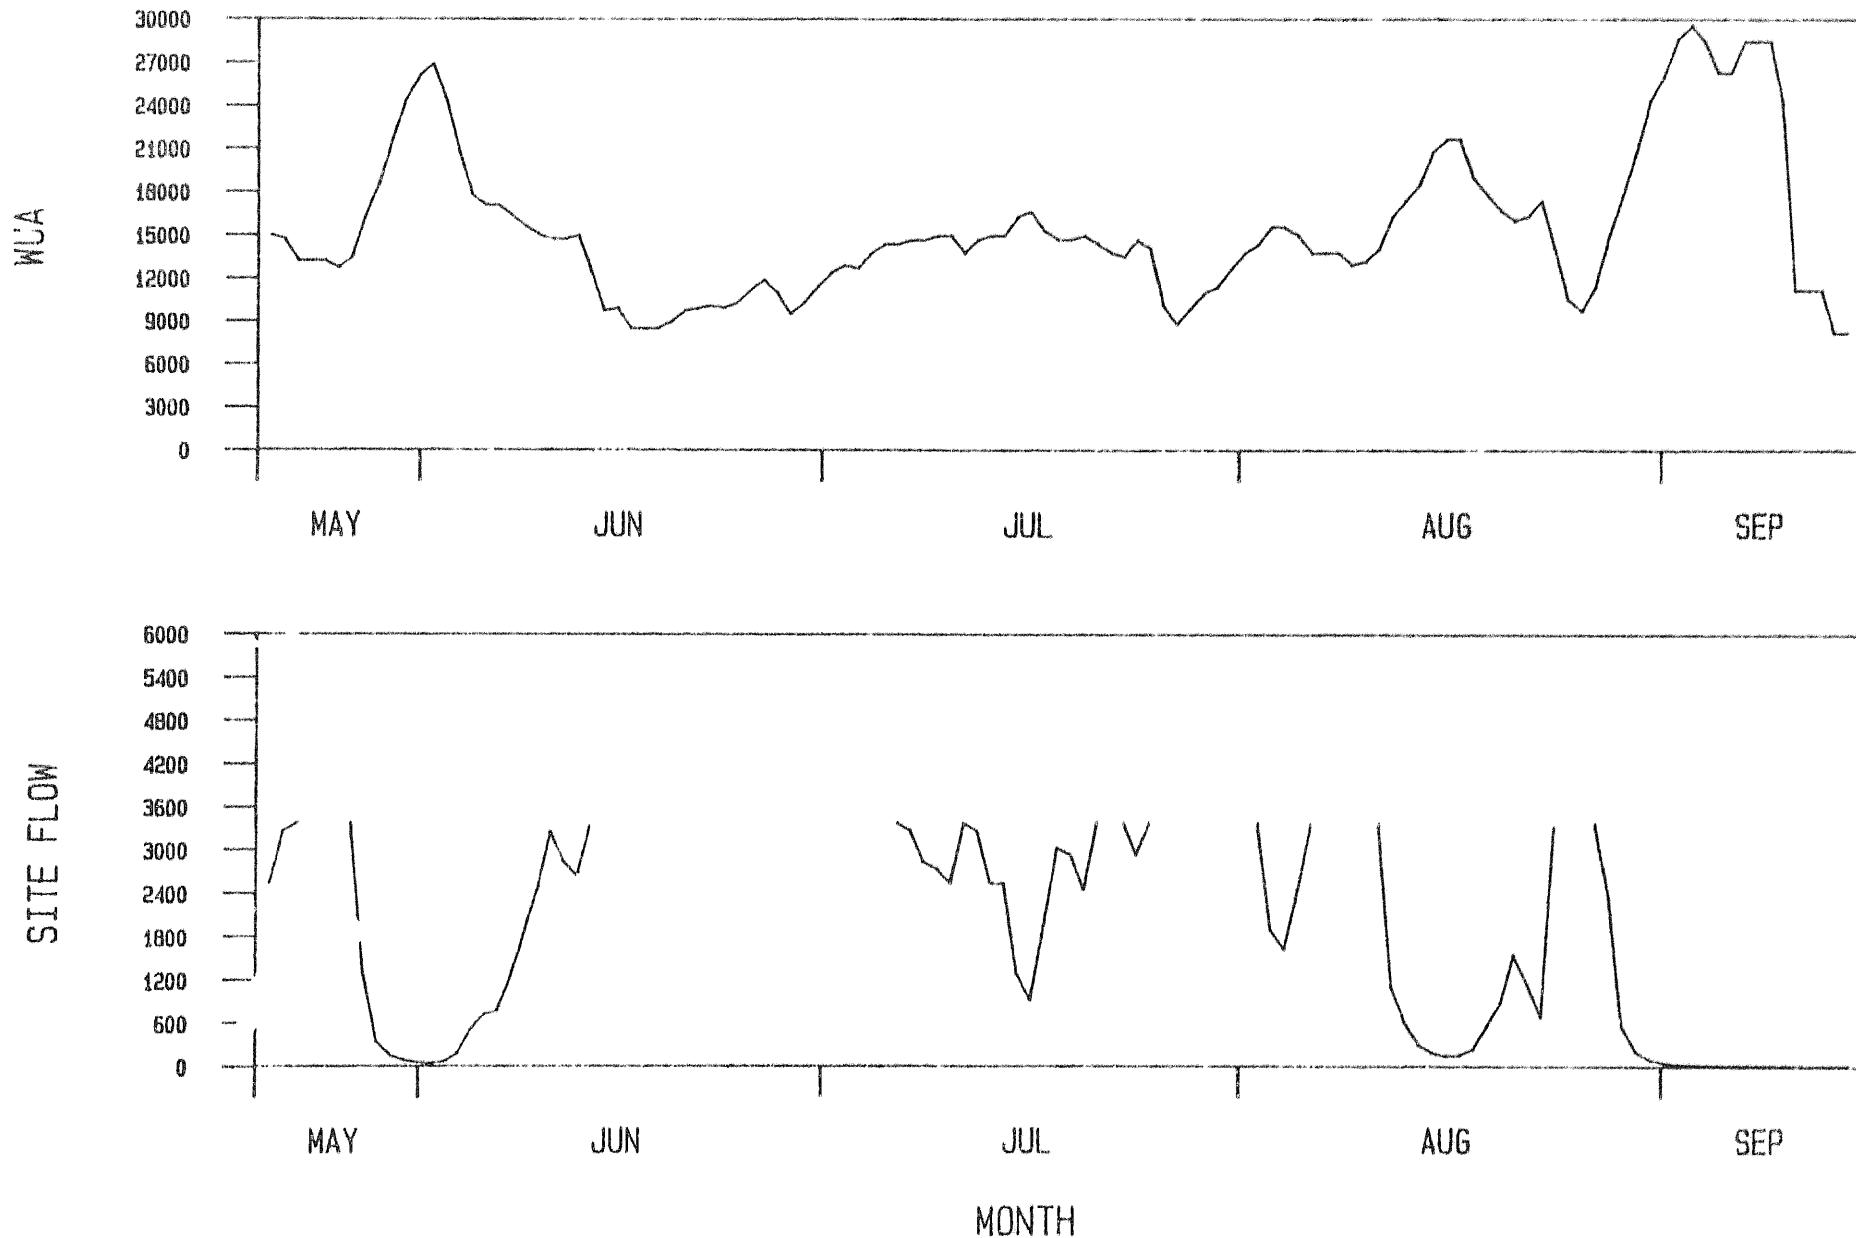


Figure III-10. Time series plots of juvenile chinook salmon WUA as a function of discharge from May 20 to September 15, 1984 for 101.2R modeling site.

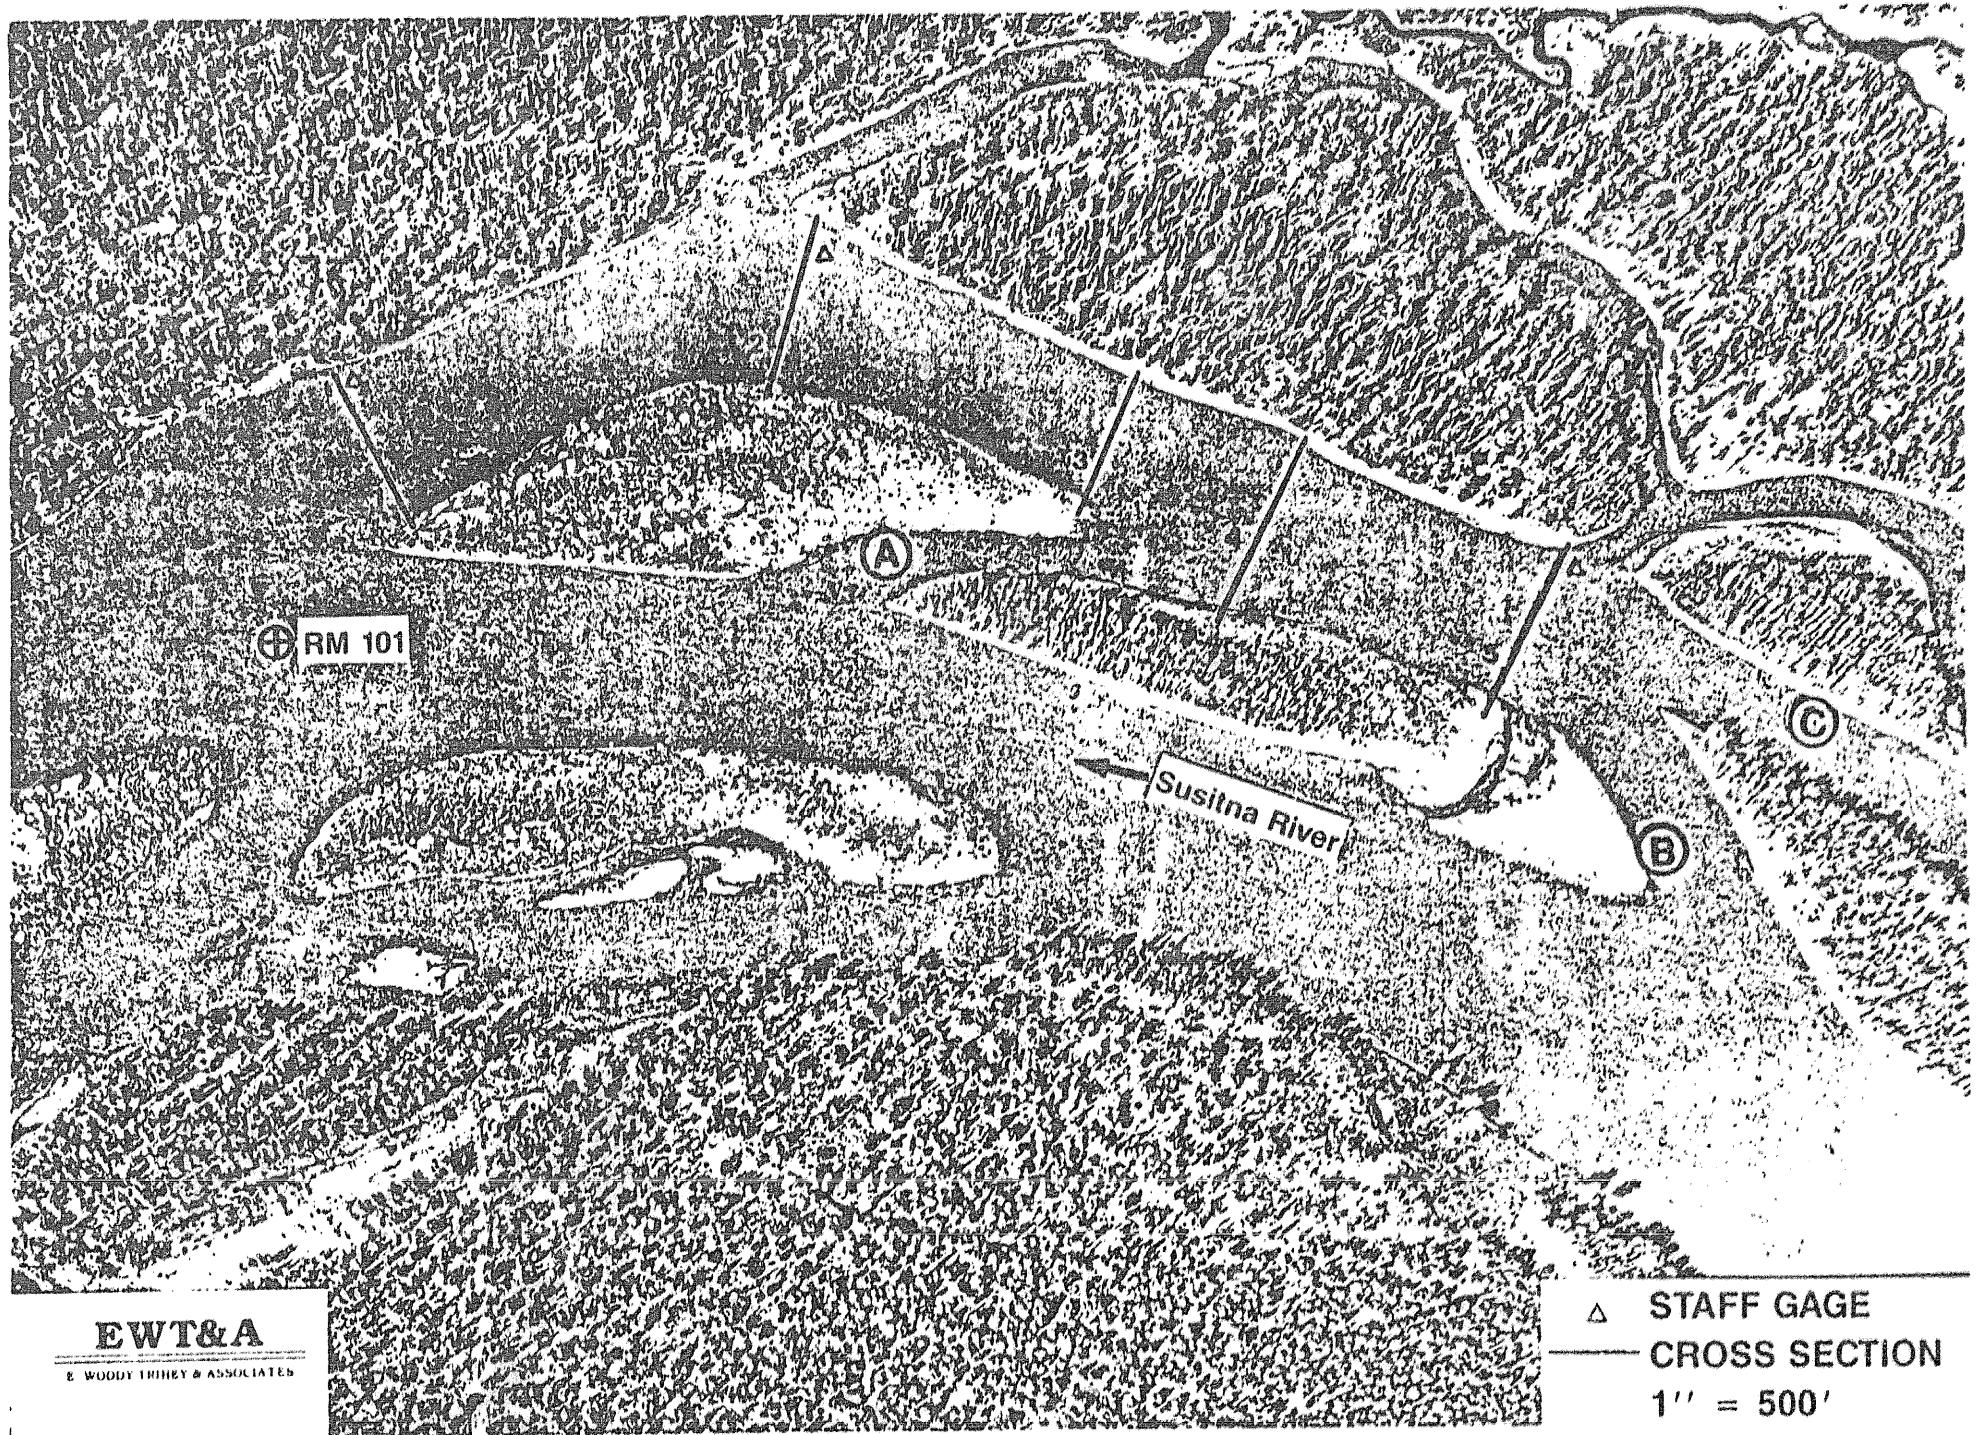


Plate III-2. Modeling site 101.5L on June 1, 1982 at mainstem discharge: 23,000 cfs.

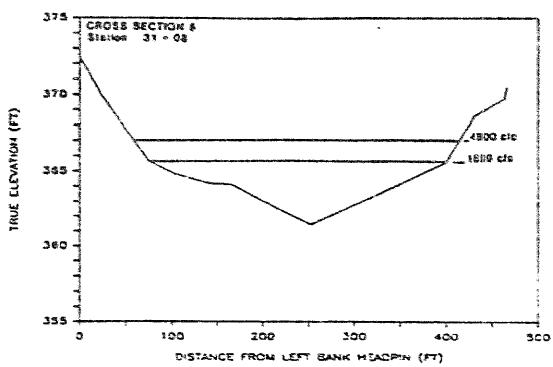
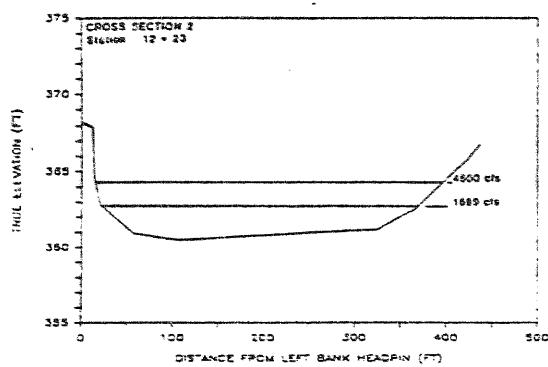
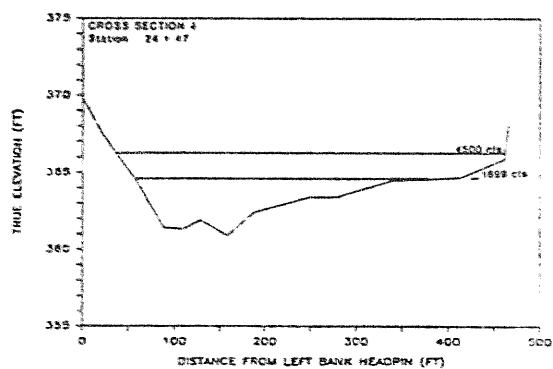
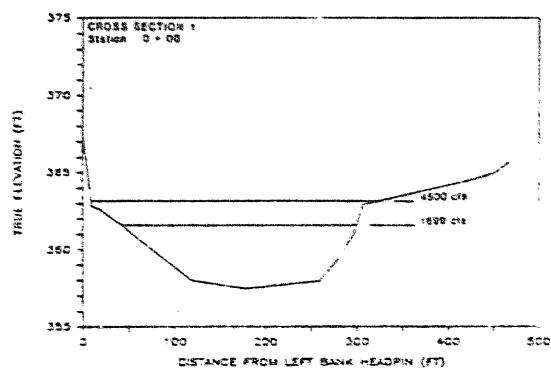
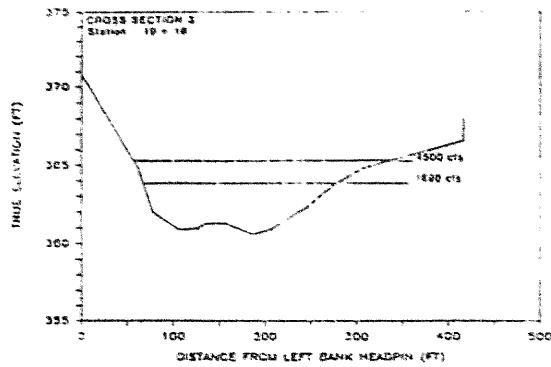
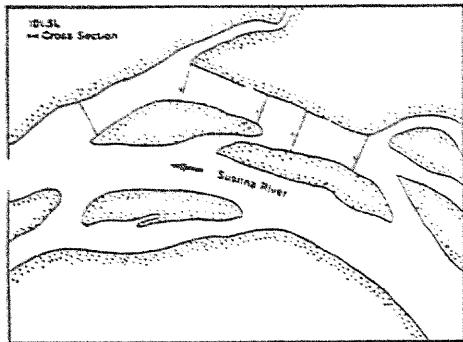


Figure III-11. Cross sections for 101.7L study site depicting water surface elevations at calibration discharges of 1696 and 4500 cfs.

Channels B and C convey mainstem flow at all discharges and 10,000 cfs, respectively. Channel A becomes active at 12,000 cfs and redirects less than ten percent of the flow from the side channel to the mainstem. Site flows of 6,030, 2,400 and 1,640 cfs correspond to mainstem discharges of 23,000, 10,400 and 7,400 cfs respectively.

Spawning salmon have not been observed in the side channel. Juvenile chinook, coho and sockeye salmon have been identified in the site. The large backwater area at the mouth eliminates any access difficulty, and the deep channel allows passage throughout the site at all discharges.

Calibration: The data available to model the site included level surveys for cross sections 1, 2, and 5; rating curves developed by ADF&G at cross sections 2 and 5 (Estes and Vincent-Lang, 1984); and the hydraulic data summarized in Table III-7. Cross sections 3 and 4 were developed from the discharge measurement notes.

Table III-7. Hydraulic data available to calibrate the IFG-2 model for site 101.5L.

Date	Flow (cfs)	Discharge (cfs)	Calibration Cross Section(s)	Type*
841012	1622	6210	4	D
841001	1696	7830	5	D
840911	2213	9330	1, 2 3	S D
940921	2250	11,400	1, 2, 5	S

Table III-7 (Continued).

940831	3530	14,300**	3	D
840820	4500	18,500	1, 2, 5	S

* D = Discharge measurements (includes mid channel and shoreline measurements)

S = Shoreline measurements (does not include mid channel measurements)

** = Adjusted to instantaneous discharge

Two models were required to accurately describe the site for mainstem discharges of 5,000 to 35,000 cfs. Velocity profiles for site flows of 1,696 and 2,250 cfs at cross sections 1, 2, and 5 were similar. However, to simulate the velocity distribution across the channel at a site flow of 4,500 cfs required a different set of Manning's "n" values. Velocities increased gradually with distance from the water's edge at low flows, but rose quickly and approached maximum channel velocity much closer to shore at high flows.

The velocity profiles for the two measured flows at cross section 3 were very similar and represented low and medium flows through the site. Only low flow data were available for cross section 4.

In calibrating the two models with respect to depth, predicted water surface elevations at cross sections 2 and 5 were compared to the corresponding elevations calculated from the rating curves. Water surface elevations for cross sections 3 and 4 were checked by comparing the predicted top widths with the top widths determined from the discharge measurements. Water surface profiles based on IFG-2 output for the calibration flows of 1,696, 2,250, and 4,500 cfs and for the flows corresponding to discharges of 5,000 and 35,000 cfs are shown in Figure III-12. Observed water surface elevations and rating curve water surface elevations are also shown.


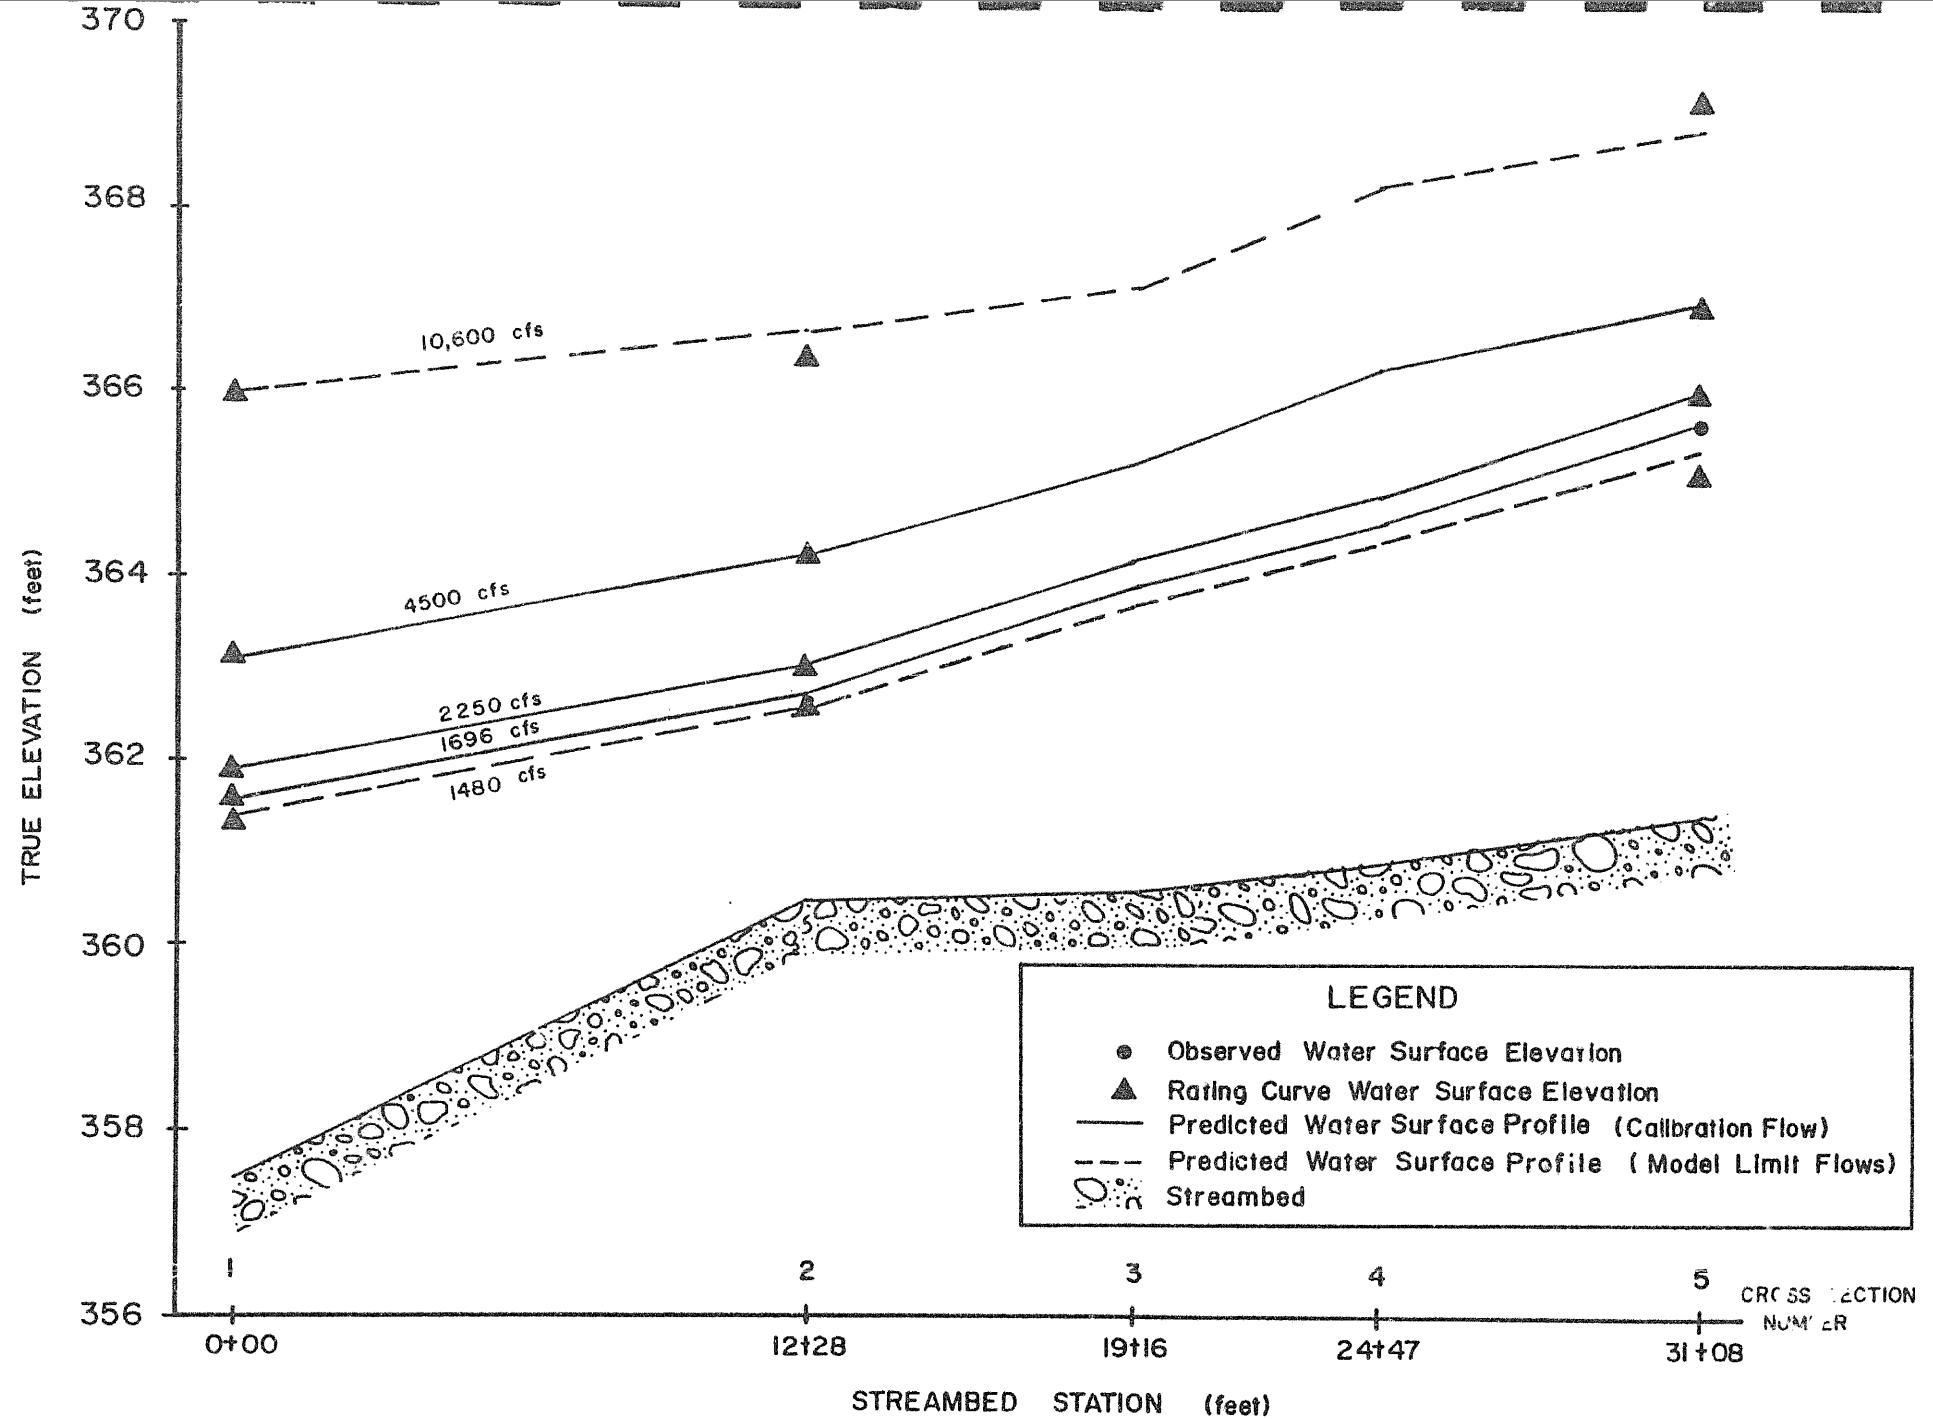


Figure III-12. Comparison of observed and predicted water surface profiles from calibrated model at 101.5L study site.

Verification: Figures B-2.2 and B-2.3 show velocity profiles produced by the two IFG-2 models at cross section 5 for calibration flows of 1,696 and 4,500 cfs. The observed shoreline velocities for those flows are also plotted. The figures demonstrate that the set of "n" values that produces the proper velocity profile at the low flow does not accurately produce that of the high flow, and vice versa.

Application: The low flow IFG-2 model represents site conditions for mainstem discharges up to 10,600 cfs while the high flow model is applicable to mainstem discharges greater than 10,600 cfs. This breakpoint corresponds to a site flow of 2,500 cfs. By utilizing all available site information, including aerial photography, channel geometry and field experience, the limits for which the models can be considered excellent extend beyond the range of available data. The models were extrapolated beyond the data range to 5,000 cfs on the lower end of the low flow model and 23,000 cfs for the upper end of the high flow model. At 23,000 cfs, the channel geometry suggests that the total flow loss through the overflow channel is less than ten percent. Because this outflow is minor, the upper model limit was extrapolated from 23,000 to 35,000 cfs. However the overall rating for the high flow model for the mainstem range of 23,000 to 35,000 cfs was considered good, rather than excellent. The total wetted surface area and juvenile chinook WUA curves for the study site are presented in Figure III-13. In this figure the WUA and surface area curves are plotted to the same scale and expressed in identical units; i.e., square feet per 1,000 feet of stream. A comparison of the two curves gives an indication of the proportion of the study site which contains rearing habitat.

The application ranges and ratings are summarized below in the bar chart.

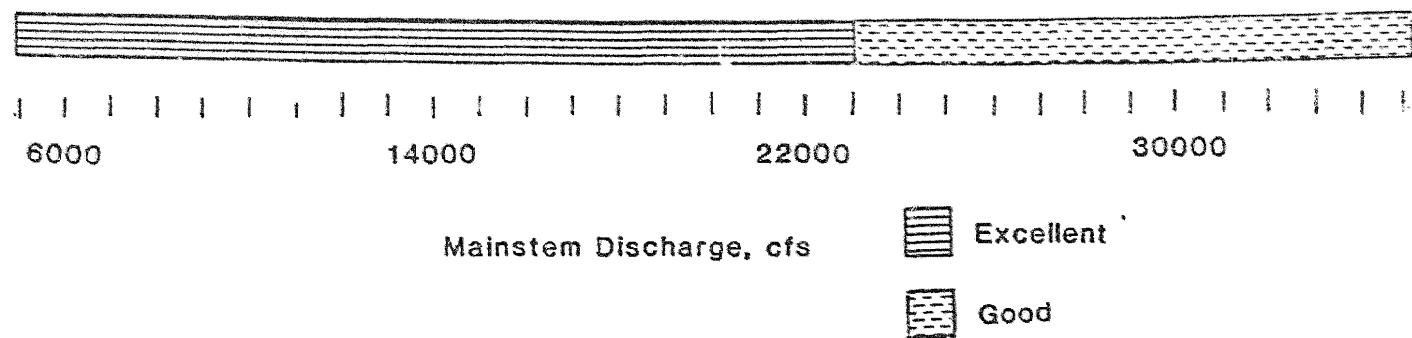

Site 101.5L is distinguished by a comparatively narrow range of juvenile chinook WUA for mainstem discharges between 5,000 and 35,000 cfs, suggesting that areas suitable for chinook raring are generally recruited and lost at comparable rates. Most of the rearing habitat is located in a narrow band along the right shoreline where velocities are not limiting (Williams 1985).

The response of the WUA curve to variations in mainstem discharge is diagrammed in Figure III-13 which is plotted on an expanded vertical scale. The increase in WUA forecasts associated with lower mainstem discharges reflect the influence of lower velocities. The WUA forecasts associated with lower flows at this site reflect the combined effect of overtopping discharges (in both overflow and secondary feeder channels) and the channel geometry on nearshore velocities. At higher flows the small increases observed in juvenile chinook habitat are due to the progressive development of a low-velocity backwater area at the lower end of the study site. The significance of these changes in habitat potential in response to streamflow, however, becomes relatively insignificant when viewed in relation to the wetted surface area of the side channel.

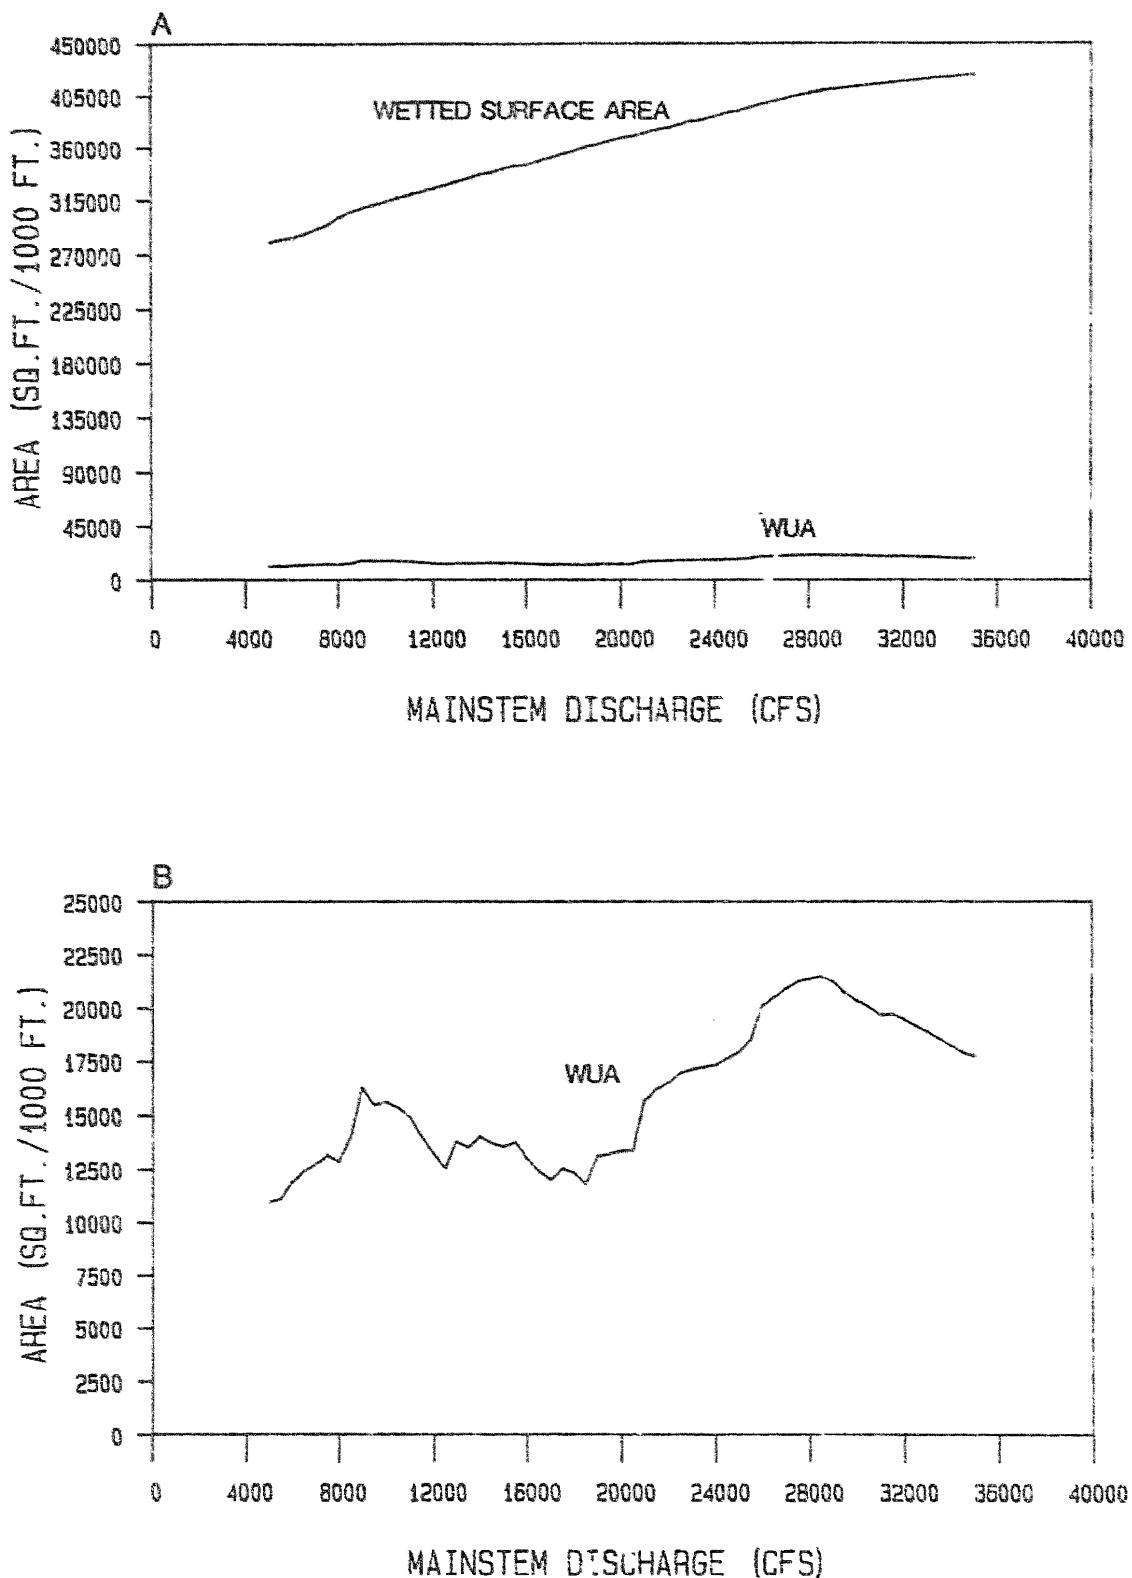


Figure III-13. Projections of gross surface area and WUA of juvenile chinook salmon habitat as a function of discharge for the 101.5L modeling site.

WUA were forecast using low- and high-flow IFG-2 models linked with the HABTAT model to account for flow-dependent variations in shoreline velocity distribution. The side channel conveys turbid water at mainstem discharge less than 5,000 cfs. Therefore WUA for juvenile chinook was forecast using only turbid water habitat suitability criteria. Application of low and high flow WUA models resulted in separate WUA functions which were joined together to form the single habitat response curve presented in Figure III-13. This was accomplished by overlapping the WUA forecasts from the low and high flow models and choosing a discharge value which would effect the smoothest transition from one habitat response curve to the other. The selected value was 8,500 cfs (Table B-6.2).

The time series plot of WUA for juvenile chinook bears a strong resemblance to the daily streamflow record at the site for the May 20 to September 15, 1984 period (Figure III-14). Site flows during this period typically vary between 4,000 and 8,000 cfs, accompanied by changes in habitat potential ranging from 12,000 to 22,000 sq ft/1,000 ft. The seasonal variability of WUA is small. With the exception of a few high flow periods, site flows and juvenile chinook habitat at site 101.5L show a remarkable degree of temporal stability during the rearing season.

Site 112.6L

Site Description: This site is located approximately 2 miles downstream of Lane Creek on the west bank of the Susitna River (Plate III-3). The study reach is 4,100 ft long and varies between 500 and 700 ft wide. Eight cross


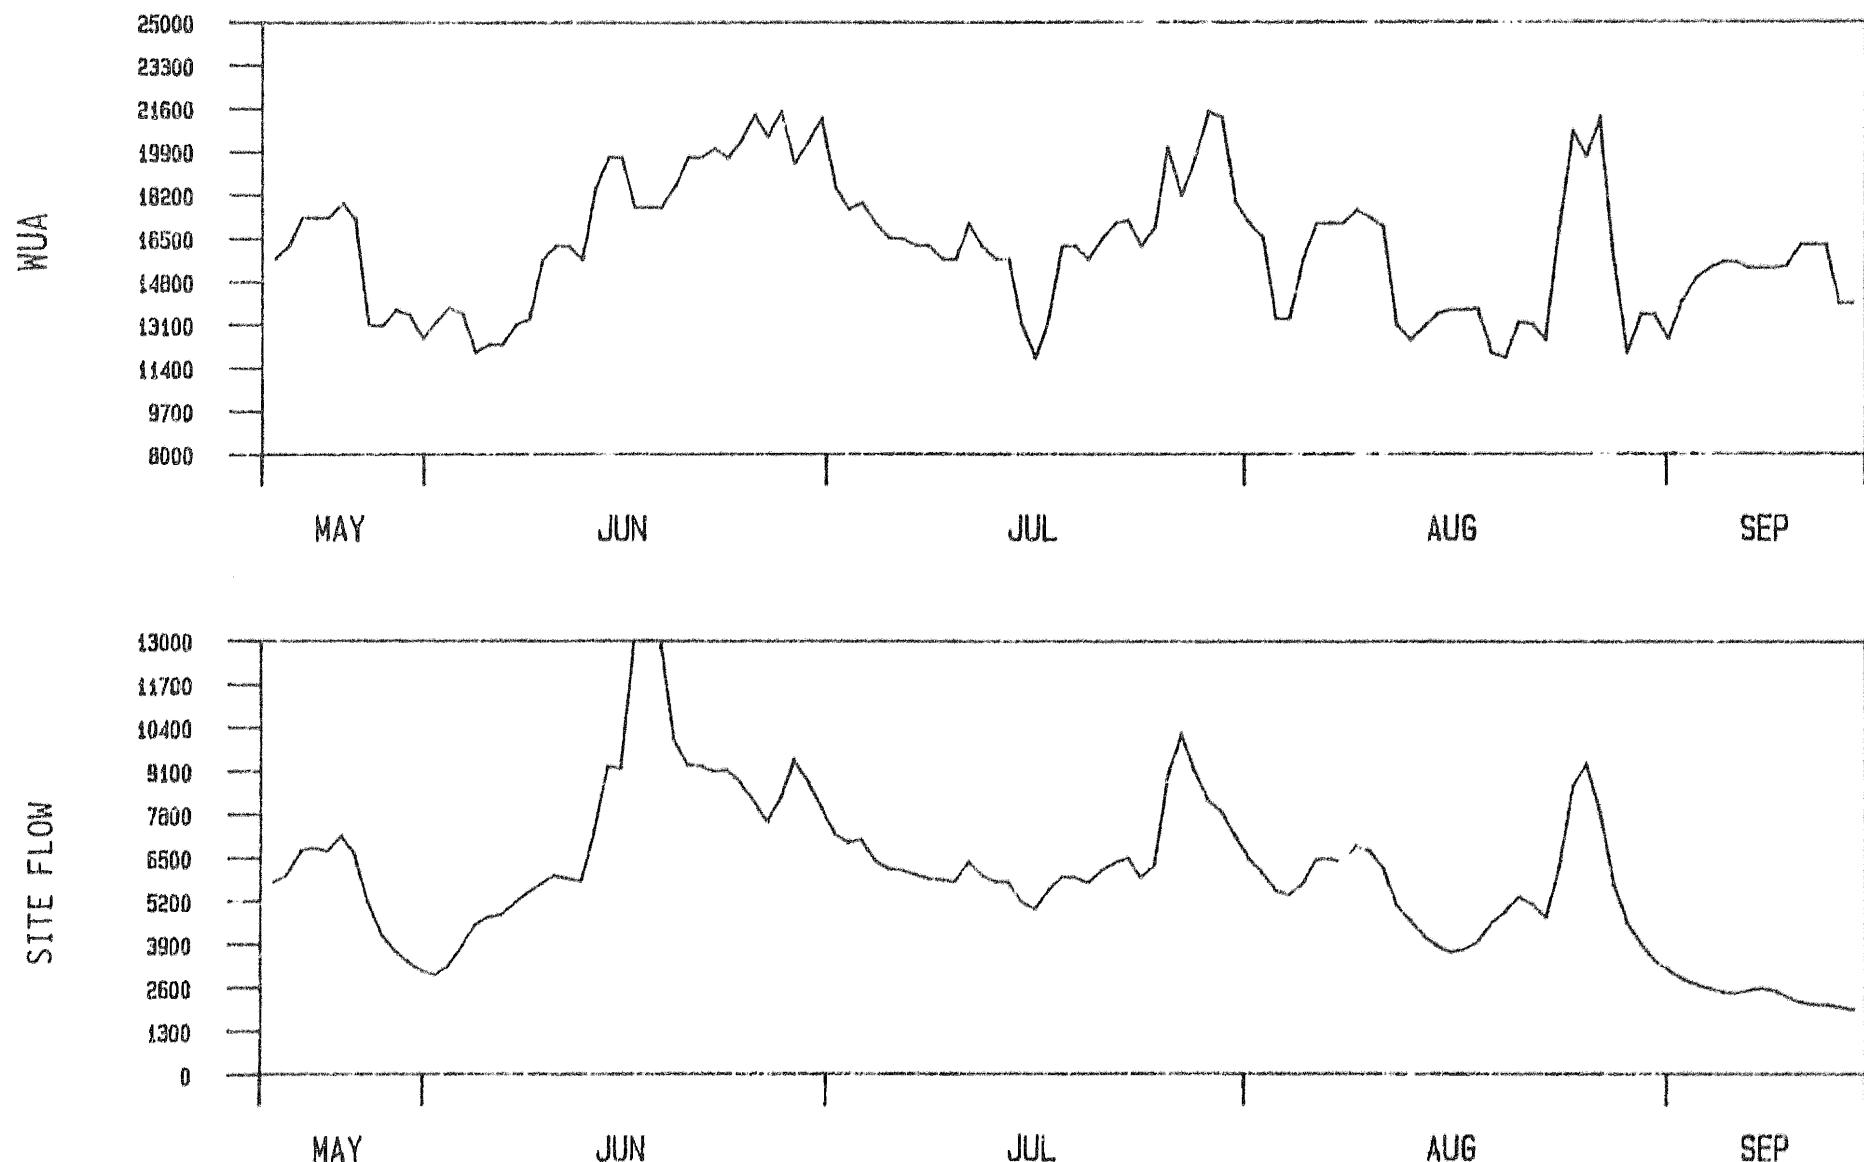


Figure III-14. Time series plots of juvenile chinook salmon WUA as a function of discharge from May 20 to September 15, 1984 for 101.5L modeling site.

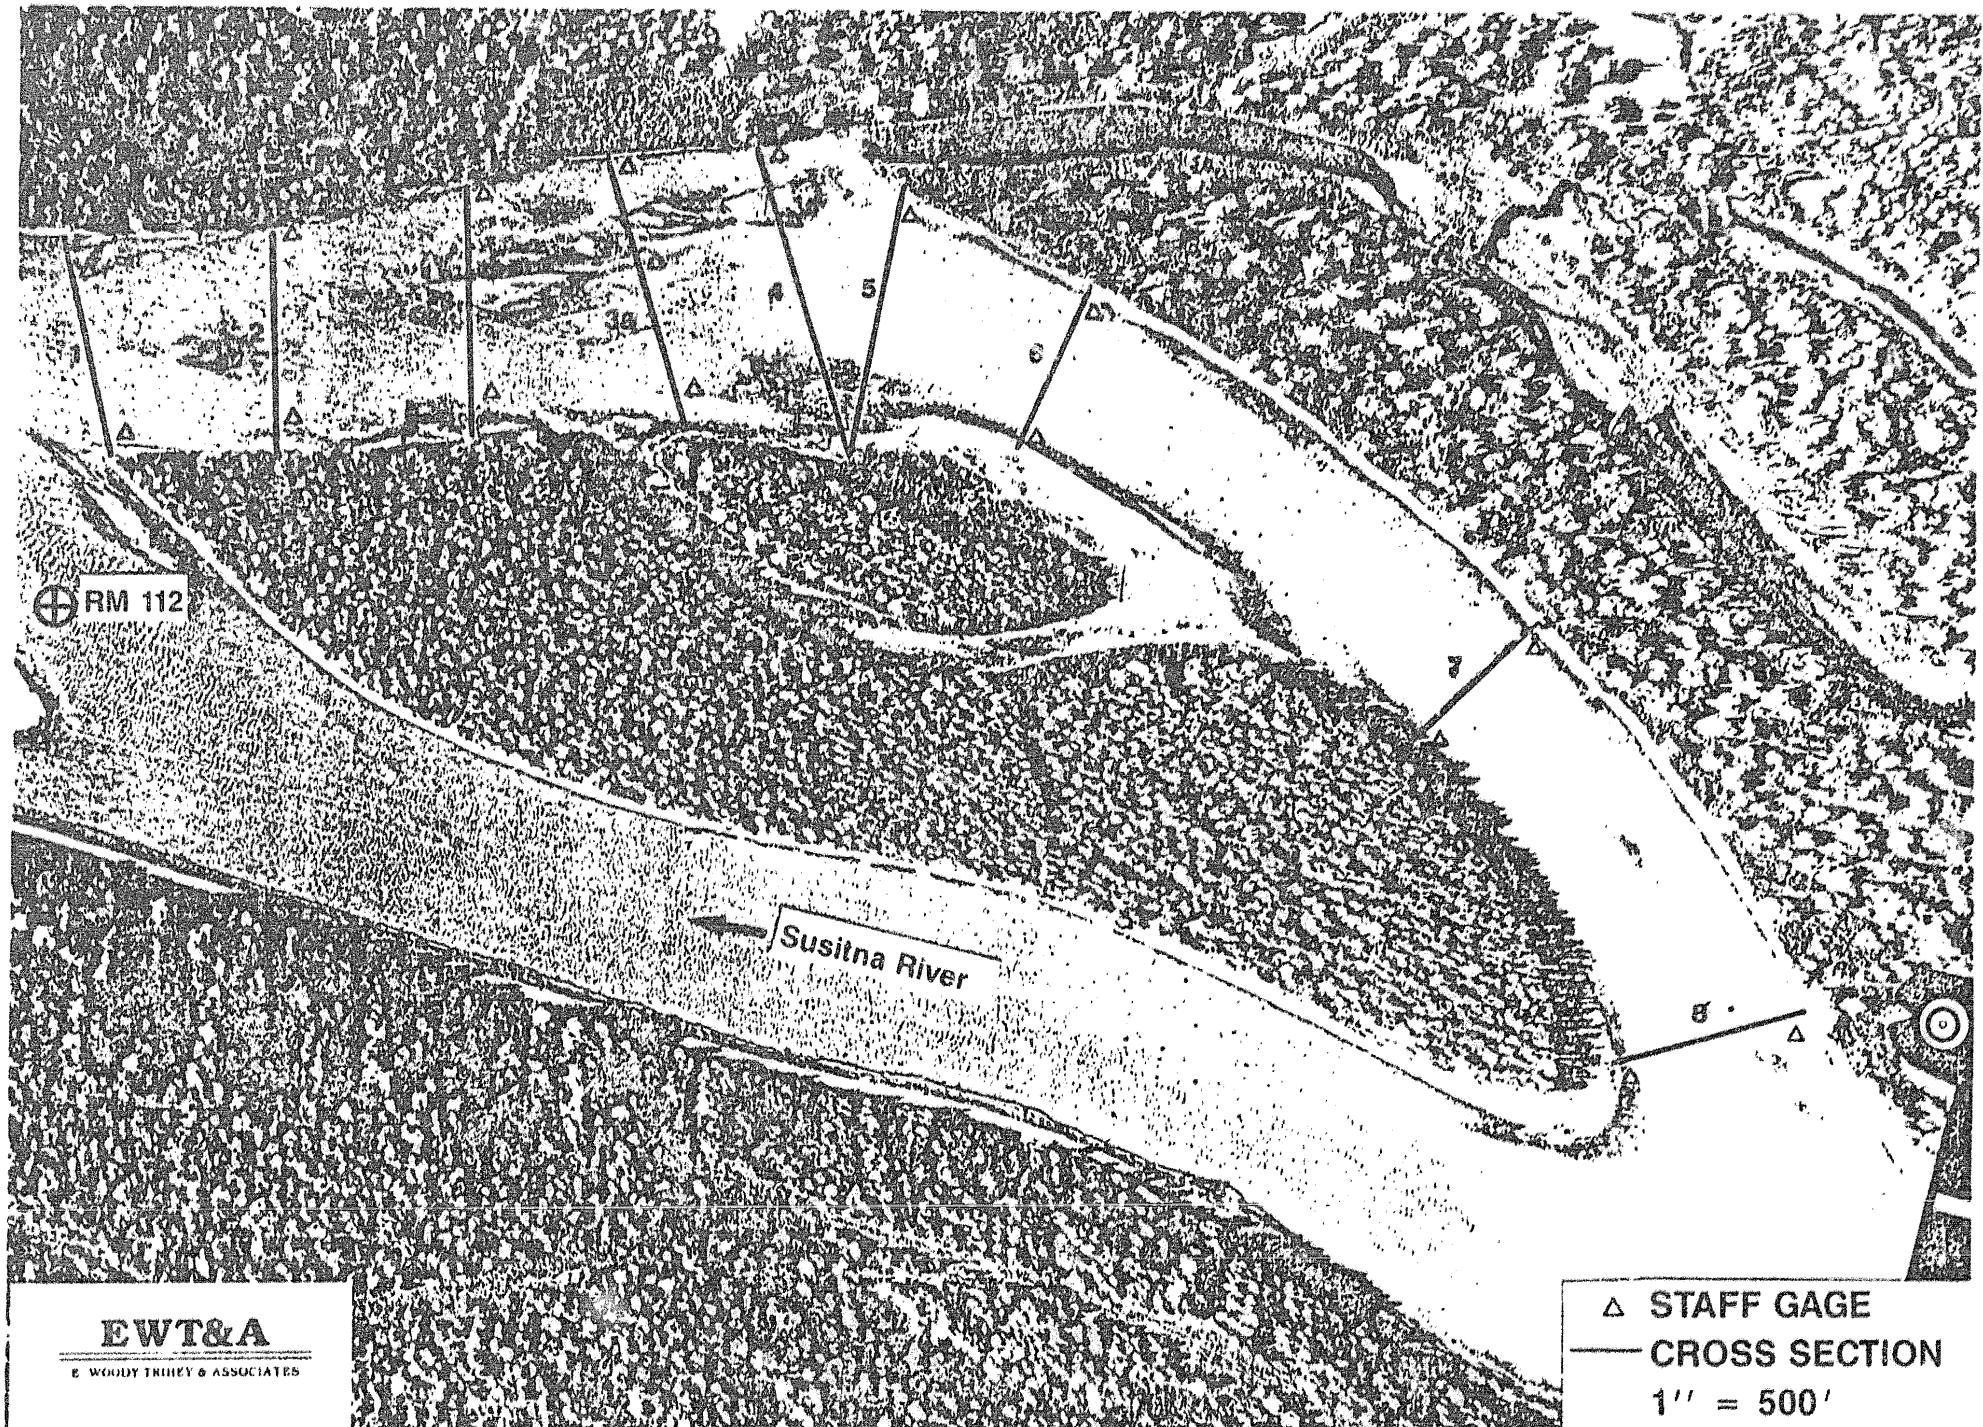

EWT&A
E WOODY TRUHLY & ASSOCIATES

Plate III-3. Modeling site 112.6L on September 6, 1983 at a mainstem discharge: 16,000 cfs.

sections were initially established during high mainstem discharges occurring in early August: cross sections 1, 2, 5, 6 and 7 describe low velocity areas; 3, 4 and 8 define high velocity areas. As flows receded during the fall, cross section 4 was relocated and an additional cross section, 3A, was added to better describe the shallow, high velocity area midway through the site (Figure III-15). Substrate composition is cobble and rubble with layers of silt and sand found in pool areas and in the backwater area located at the mouth. The large substrate provides cover, with less than 50 percent considered acceptable.

The side channel is breached at mainstem discharges greater than 5,000 cfs. The overflow channel along the right bank conveys side channel flow at discharges above 20,000 cfs. Pool and riffle sequences dominate the site below 10,000 cfs, and a gravel bar below the confluence of Slough 6A is exposed. At discharges above 10,000 cfs, the channel becomes a large run. Flows of 7,130, 1,230 and 377 cfs correspond to mainstem discharges of 23,000, 10,400 and 7,400 cfs.

This large study site was selected to represent large side channels which reduce to small side channels at low discharges. An IFG-2 model was selected because of the large size of the channel. Field reconnaissance indicated that rearing habitat was limited to streambank margins at high discharges, and a limited amount of data would therefore be adequate to simulate channel hydraulics with an IFG-2 model.

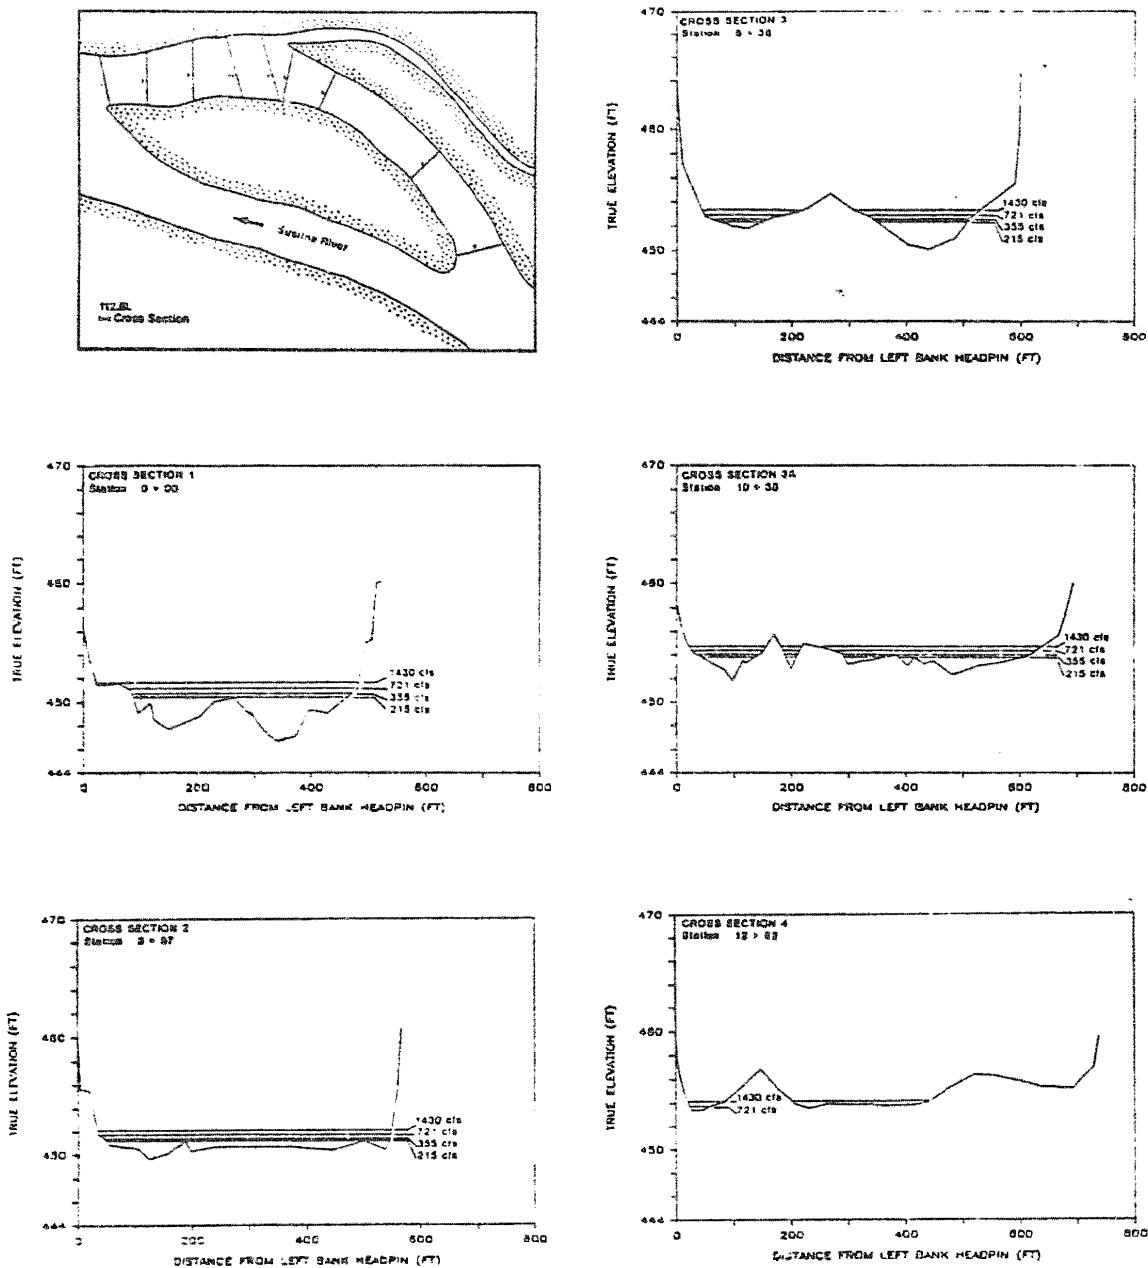


Figure III-15. Cross sections for 112.6L study site depicting water surface elevations at calibration discharges of 215, 355, 721, and 1430 cfs.

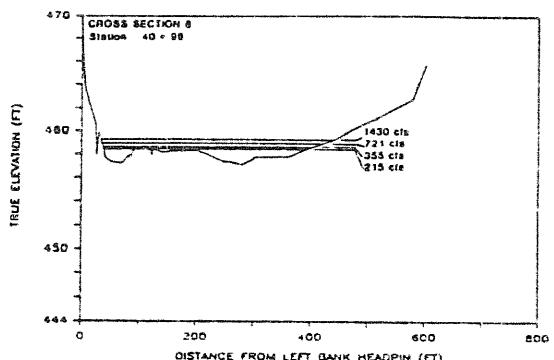
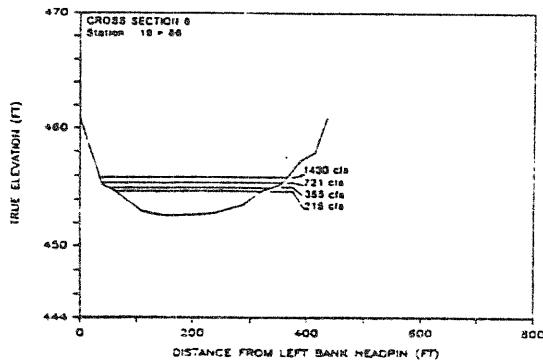
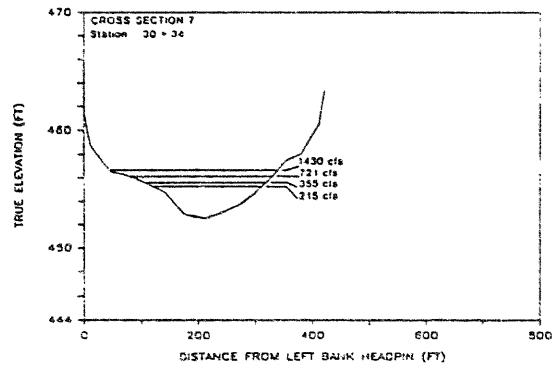
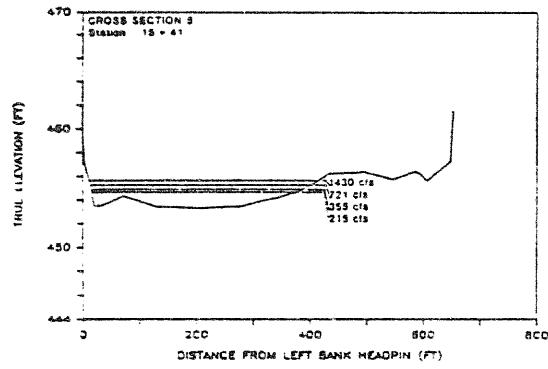


Figure III-15. Cross sections for 112.6L study site depicting water surface elevations at calibration discharges of 215, 355, 721 and 1430 cfs.

Salmon have not been observed spawning in the site. Chinook fry have been observed using the channel particularly below the confluence of Slough 6A. Access to and passage through the site are not problems in this side channel.

Calibration: The data available to model the site consisted of level surveys for all nine cross sections and the hydraulic data summarized in Table III-8.

Table III-8. Hydraulic data available to calibrate the IFG-2 model for site 112.6L.

Date	Flow (cfs)	Discharge (cfs)	Calibration Cross Section(s)	Type*
841012	215	6210	7	D
840930	355	7500	6, 8 1,2,3,3A,4,5,7	D S
840913	721	9000	7	D
840904-05	1430	10,800	8 1,2,3,3A,4,5,6,7	D S
840830	2980	15,300	6	D
840822	4820	19,100	1,2,3,4,5,6,7,8	S

* D = Discharge measurements (includes mid channel and shoreline measurements).

S = Shoreline measurements (does not include mid channel measurements).

The IFG-2 model requires a horizontal water surface at each cross section. Field observations of this site indicated that this did not always occur. Of the several staff gages installed at each cross section, only data from the

gage which best represented the largest portion of flow was used to calculate the target water surface elevations in the calibration process.


Adjustments were made to cross section survey data to create a horizontal water surface elevation at some cross sections. Observed depths for the calibration flow of 355 cfs (site flow) were plotted with the cross section survey data. Cross sections 2, 3, 3A, 4 and 8 did not have horizontal water surface elevations and were modified as follows: where the plotted water surface elevation was lower than the representative water surface elevation, the streambed was raised by the difference in the two water surface elevations. Conversely, the streambed was lowered where the plotted water surface elevation was higher than the representative water surface elevation.² Only cross sections 8 was adjusted significantly along the left bank (Figure III-16).

Well-defined rating curves based on mainstem flow were adopted for seven of the nine cross sections. Data collected at cross section 3A and the new cross section 4 was insufficient to develop a good rating curve. Therefore these cross sections were calibrated with velocities only.

Overtopping of the gravel bar in the lower reach during high flow events causes a transformation in the velocity distribution across the site, and thus two hydraulic models were required.

In calibrating the models with respect to depth, predicted water surface elevations at all cross sections except 3A and 4 were compared to the corresponding elevations calculated from the rating curves. Water surface

MEASURED

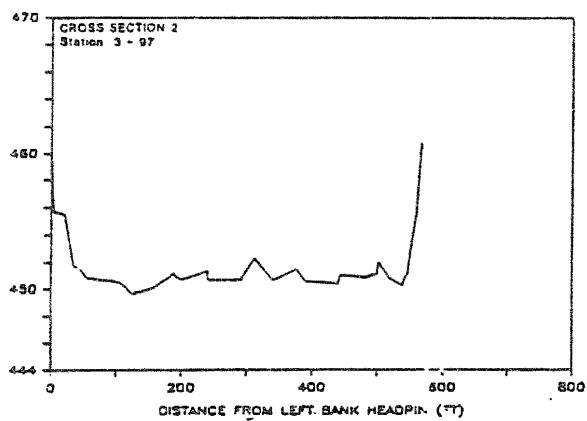

ADJUSTED

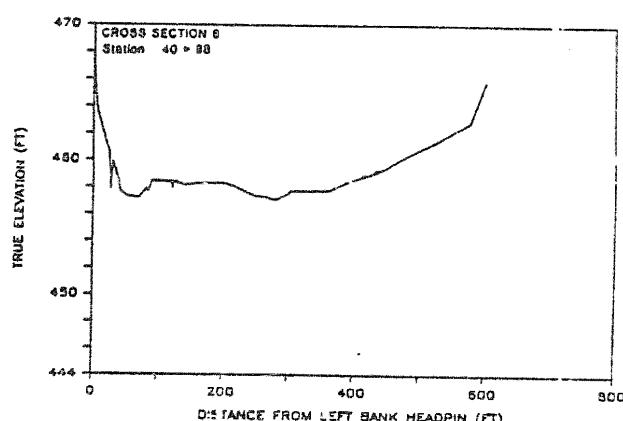
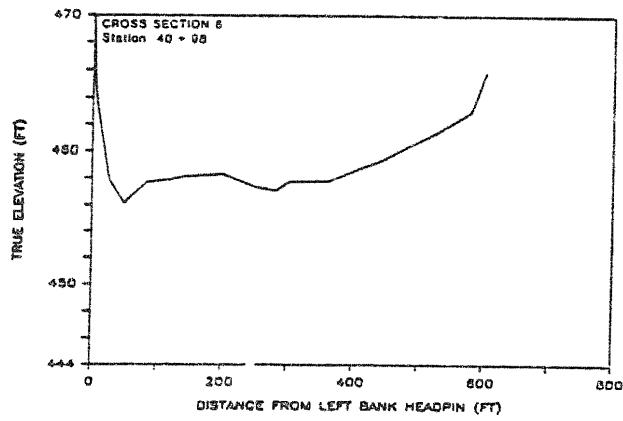
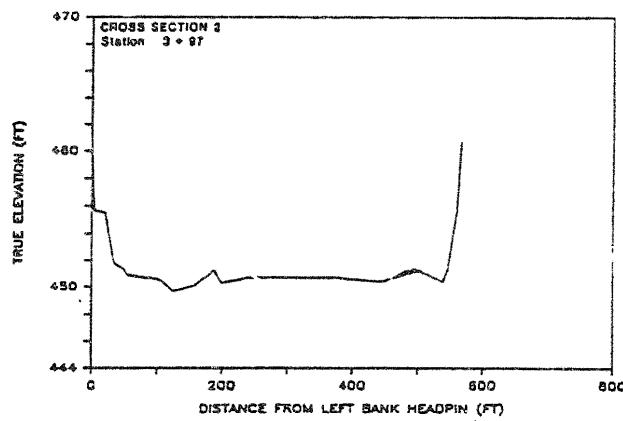


Figure III-16. Comparison between measured and adjusted cross sections 2 and 8 at 112.6L study site.

profiles based on IFG-2 output for the calibration flows and the flows corresponding to 5,000 and 35,000 cfs are shown in Figure III-17. Observed water surface elevations are also shown for the calibration flows, and rating curve water surface elevations are shown for the model limit flows.

Verification: Figures B-2.4 and B-2.5 show velocity profiles produced by the two IFG-2 models at cross section 3 for calibration flows of 355 and 4,820 cfs. The observed velocities for those flows are also plotted. The figures demonstrate that the set of "n" values that produces the proper velocity profile at the low flow does not accurately produce that of the high flow, and vice versa.

Application: The low flow model describes depths and velocities present in the channel for mainstem discharges up to 10,000 cfs. The high flow model is applicable to site flows corresponding to mainstem discharges greater than 10,000 cfs. The transition from low to high flow model occurs at a site flow of 1,070 cfs. Limits for the excellent quality rating were expanded from the limits defined by available data to the mainstem range of 5,000 to 35,000 cfs. Cross sections 3A and 4 describe a riffle area at low flows which becomes a run at higher discharges. Because of the limited data available to calibrate these cross sections at high flows, the high velocities are projected throughout the entire extrapolation range. Because these cross sections represent only about 10 percent of the total area of the site, and actual velocities at the high flow are probably beyond the usable range on the suitability curve, the overall model rating was not reduced from excellent.


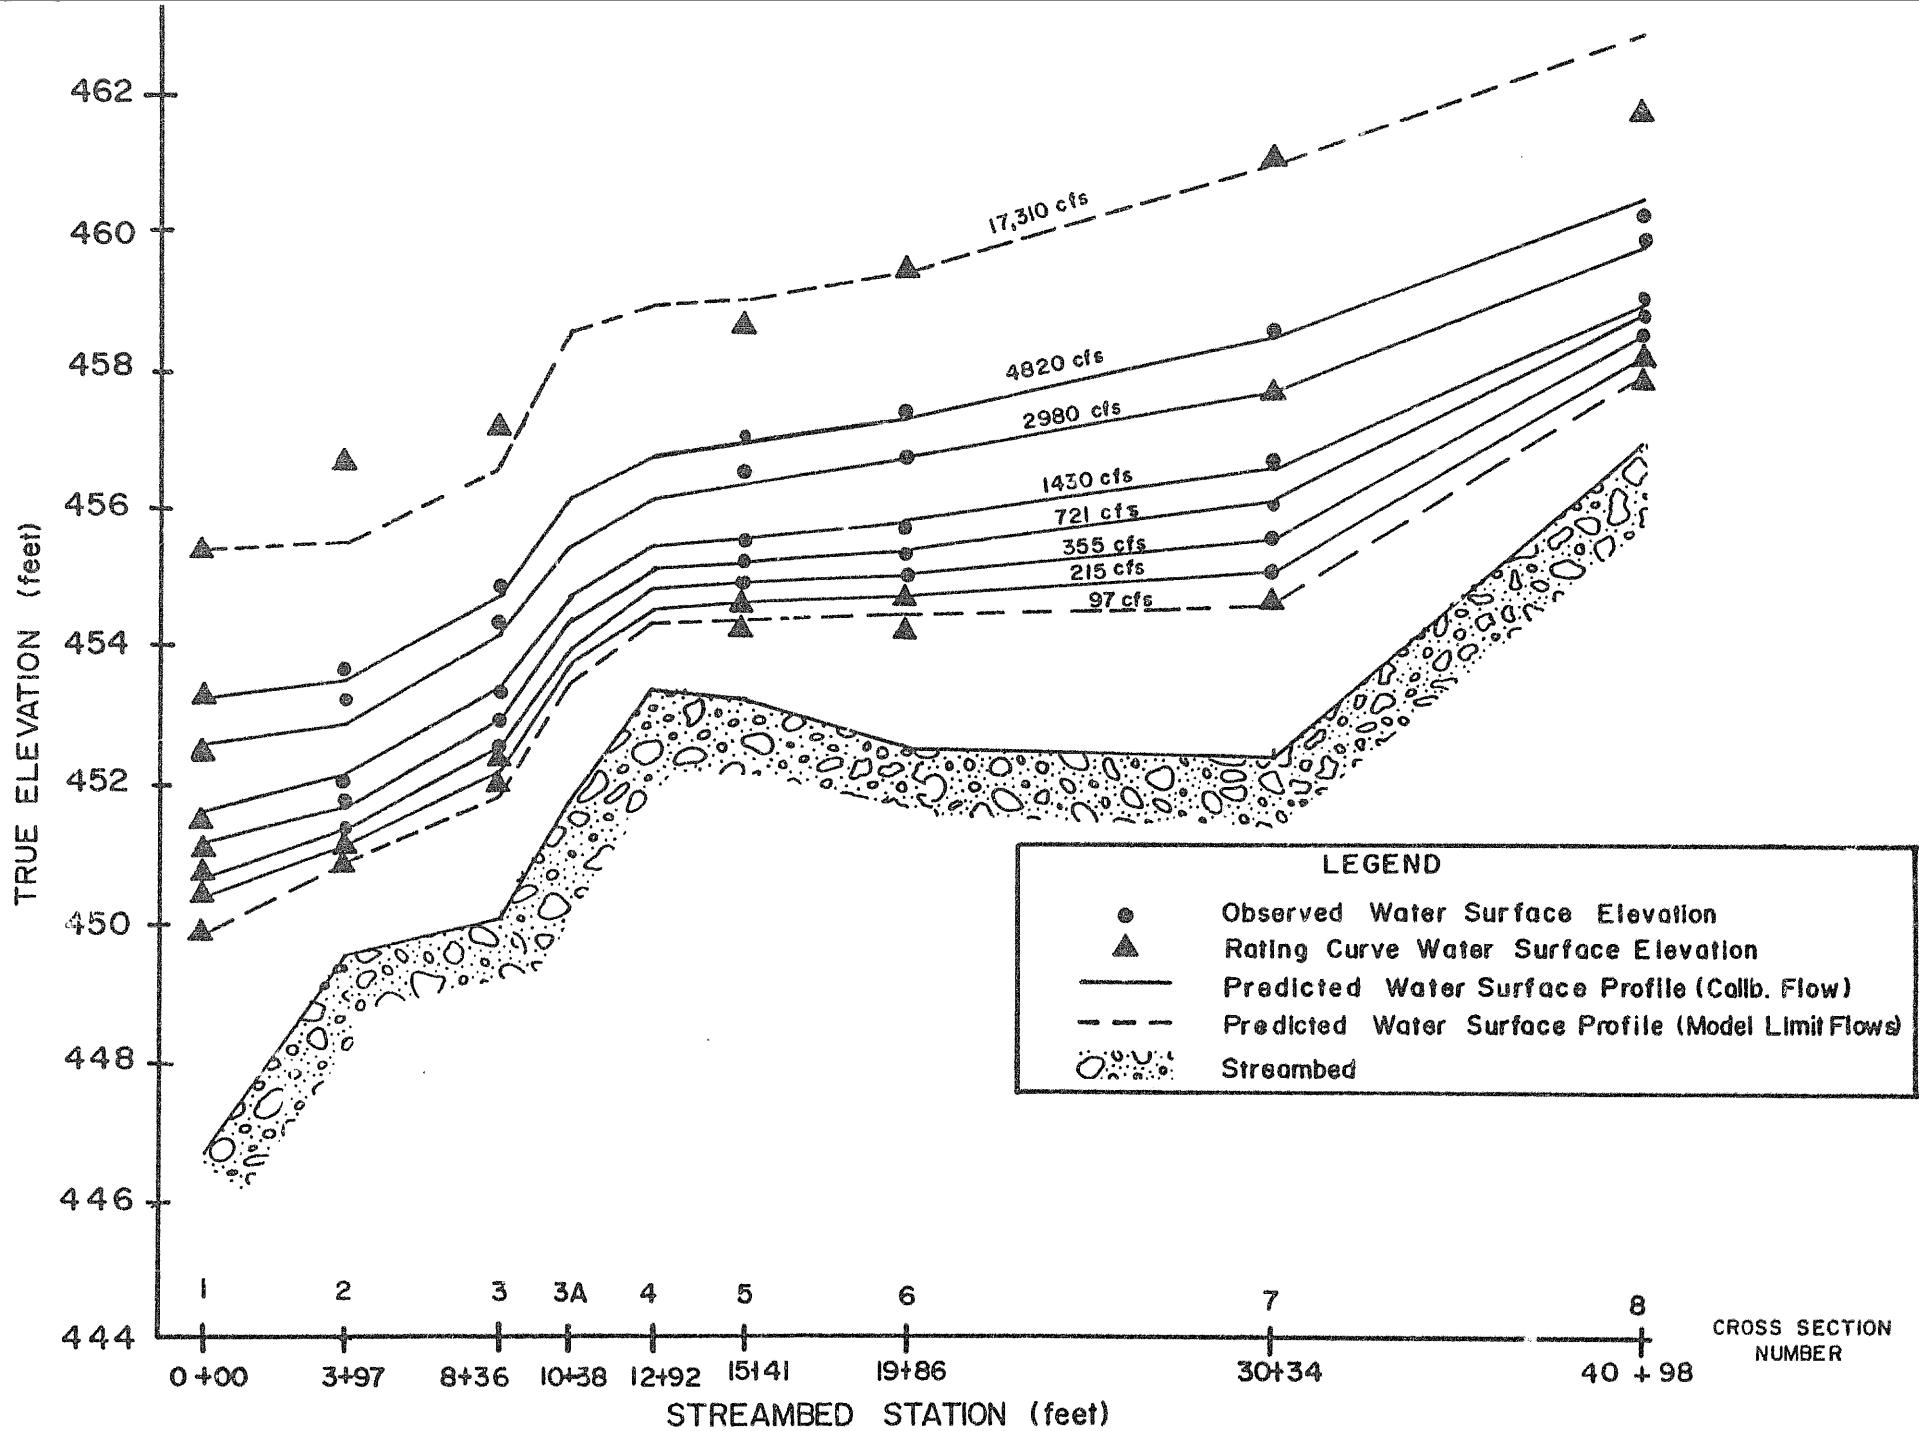


Figure III-17. Comparison of observed and predicted water surface profiles from calibrated models at 112.6L study site.

The application ranges and ratings are summarized below in the bar chart.

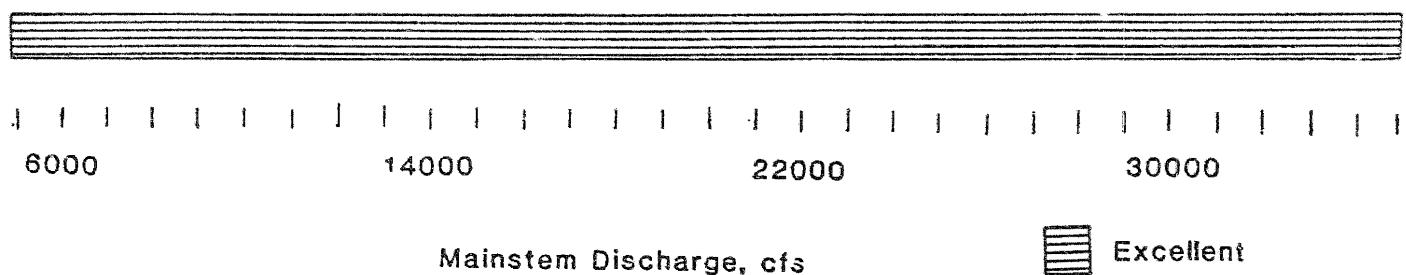

In Figure III-18a total wetted surface area and juvenile chinook WUA are presented per 1,000 feet of stream at the same scale. Figure III-18b is plotted at an expanded vertical scale.

At discharges below 8,000 cfs the side channel conveys less than 10 percent of the total mainstem discharge and contains an extensive amount of low velocity turbid water habitat. Hence the WUA indices for juvenile chinook are quite large. Williams (1985) demonstrated that the shoreline area within Side Channel 6A possessing suitable chinook rearing velocities is five times greater at 13,500 cfs than at 33,000 cfs. Further, the wetted surface area possessing suitable velocities more than doubles as discharge decreases from 13,500 to 8,000 cfs.

The WUA response curve plotted in Figure III-18 accents the precipitous decline in habitat potential which accompanies the increase in mainstem discharge above 8,000 cfs. The secondary WUA peak, occurring near 16,000 cfs, results from the overtopping of a large mid-channel gravel bar in the lower portion of the study site. At higher discharges, velocities increase throughout the site, decreasing its value to juvenile chinook.

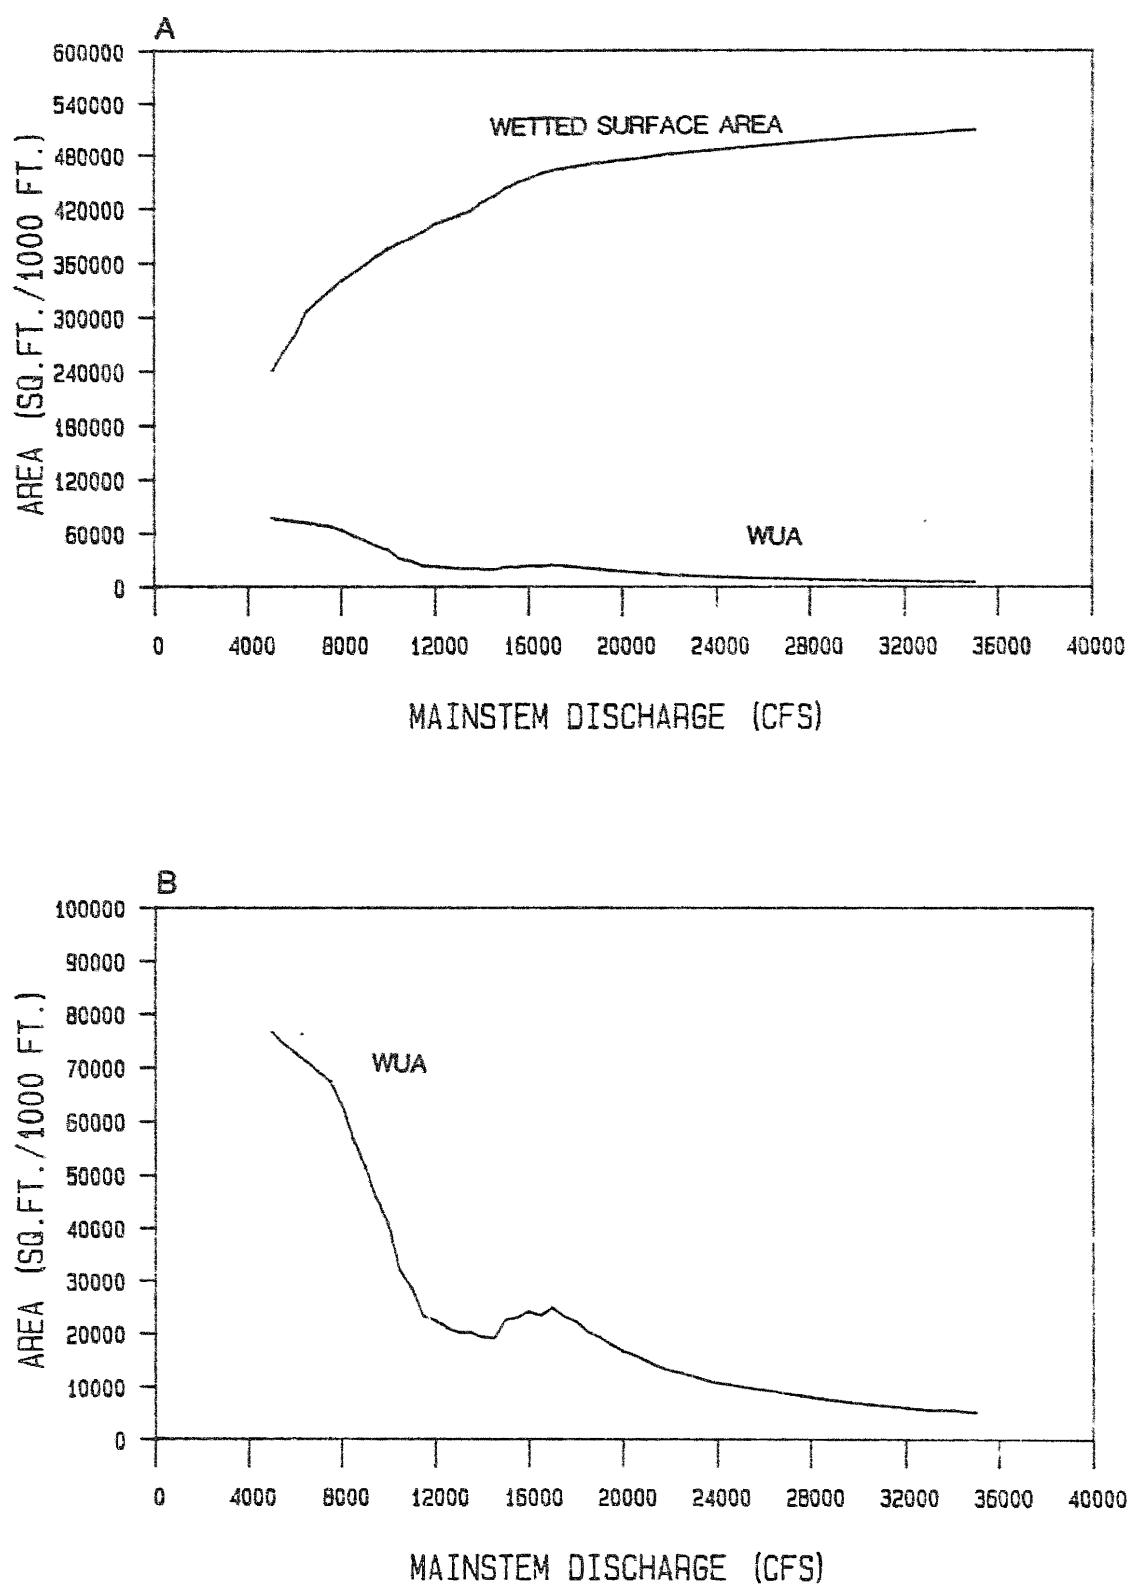


Figure III-18. Projections of gross surface area and WUA of juvenile chinook salmon habitat as a function of discharge for the 112.6L modeling site.

WUA indices were forecast using low-and high-flow IFG-2 models linked with the HABTAT model. Because this side channel remains breached at mainstem discharges less than 5,000 cfs, turbid water suitability criteria were used for all habitat simulations. Separate WUA response curves were forecast using the high and low flow HABTAT models. The single habitat response curve presented in as Figure III-18a was developed by overlapping the WUA forecasts from the low and high flow models then averaging corresponding WUA values within the area of overlap to obtain a smooth transition (Table B-6.3).

Time series plots of the 1984 site flow and WUA indices reflect considerable variation in habitat potential (Figure III-19).

Site 119.2R

Site Description: This site is approximately 1.5 miles below Curry Station on the east bank of the Susitna River (Plate III-4). The study reach encompasses the entire side channel which is 1,800 ft long and 180 ft wide. Three cross sections were established to define the deep, low velocity area at the mouth and two cross sections to define the shallower, faster velocity area near the head of the channel (Figure III-20). A large backwater area is present at all flows and extends from the mouth up to cross section 3. Upwelling and groundwater seepage occur near cross sections 3 and 4 along the right bank. A small tributary enters from the right bank above cross section 3. Substrate varies from cobble and rubble at the upper two cross sections to silt in the backwater area. Riprap from the railroad is present along the right side of the channel and provides 5 to 25 percent acceptable cover.

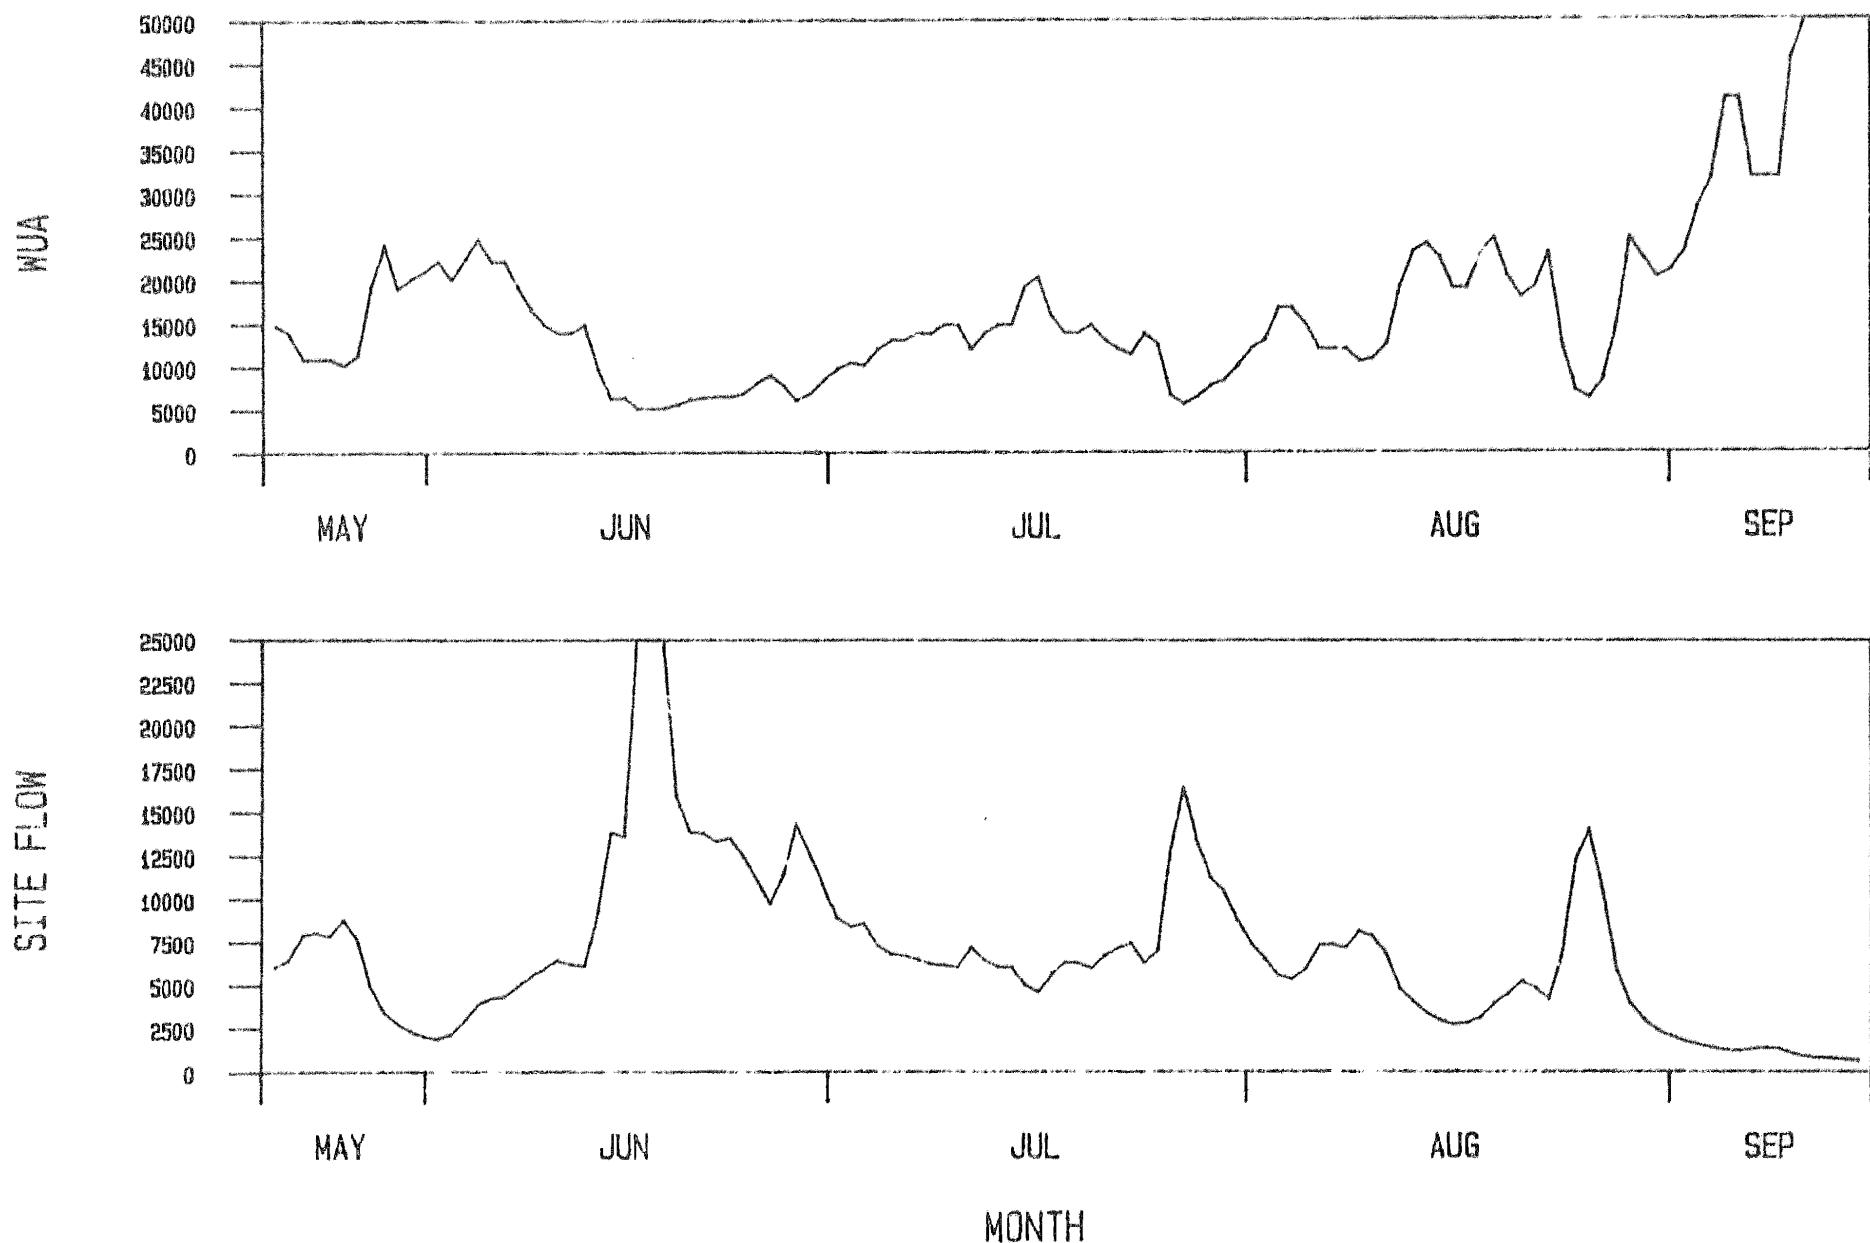


Figure III-19. Time series plots of juvenile chinook salmon WUA as a function of discharge from May 20 to September 15, 1984 for 112.6 modeling site.

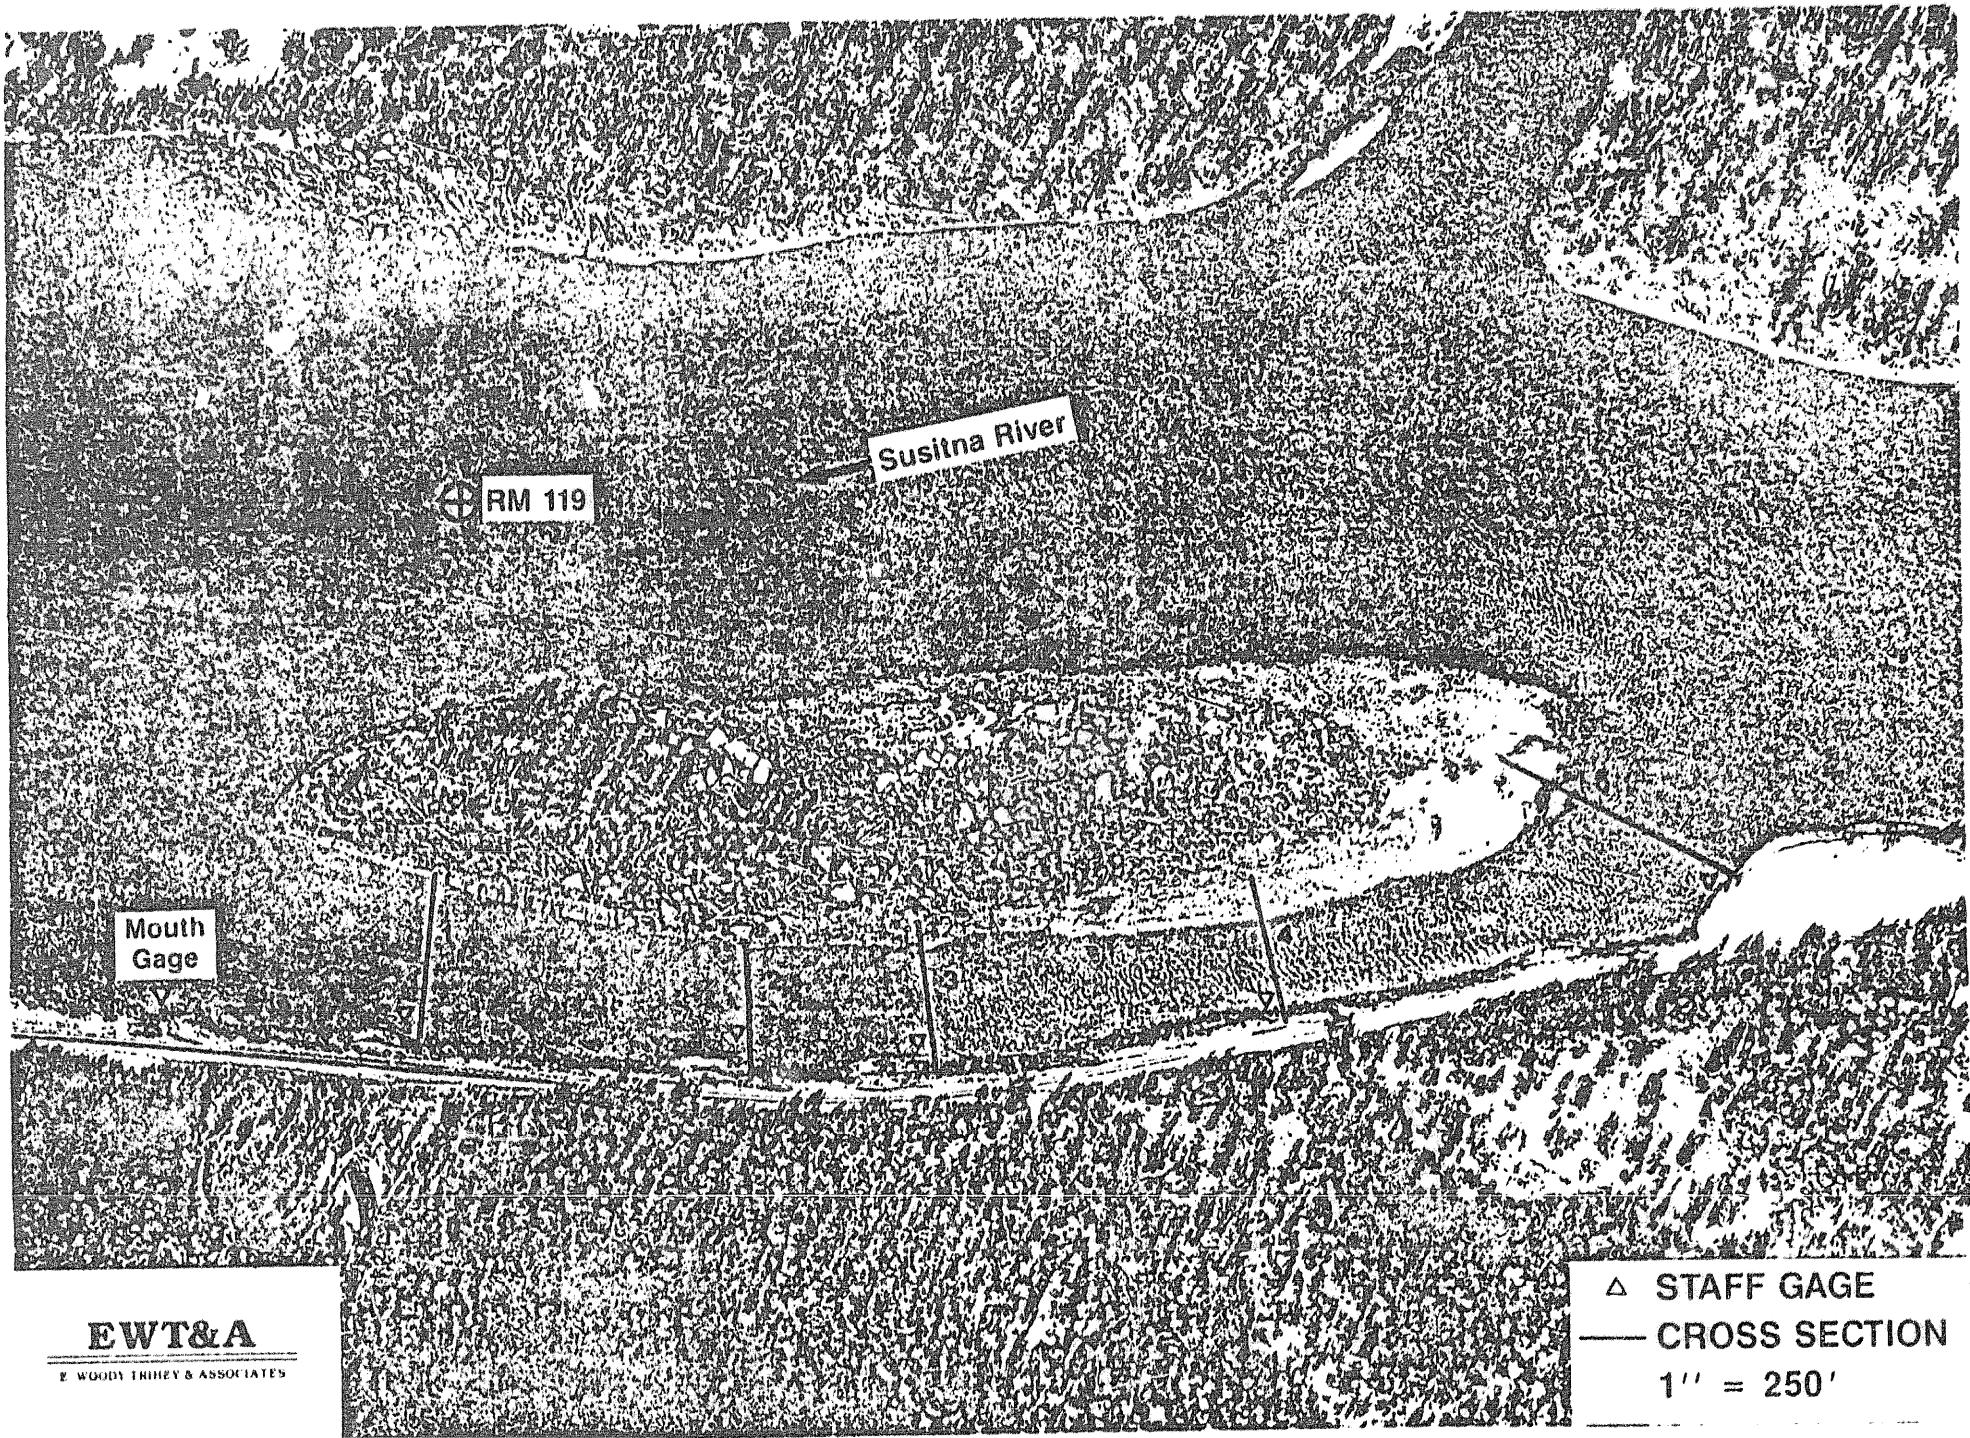


Plate III-4. Modeling site 119.2R on June 1, 1982 at mainstem discharge: 23,000 cfs.

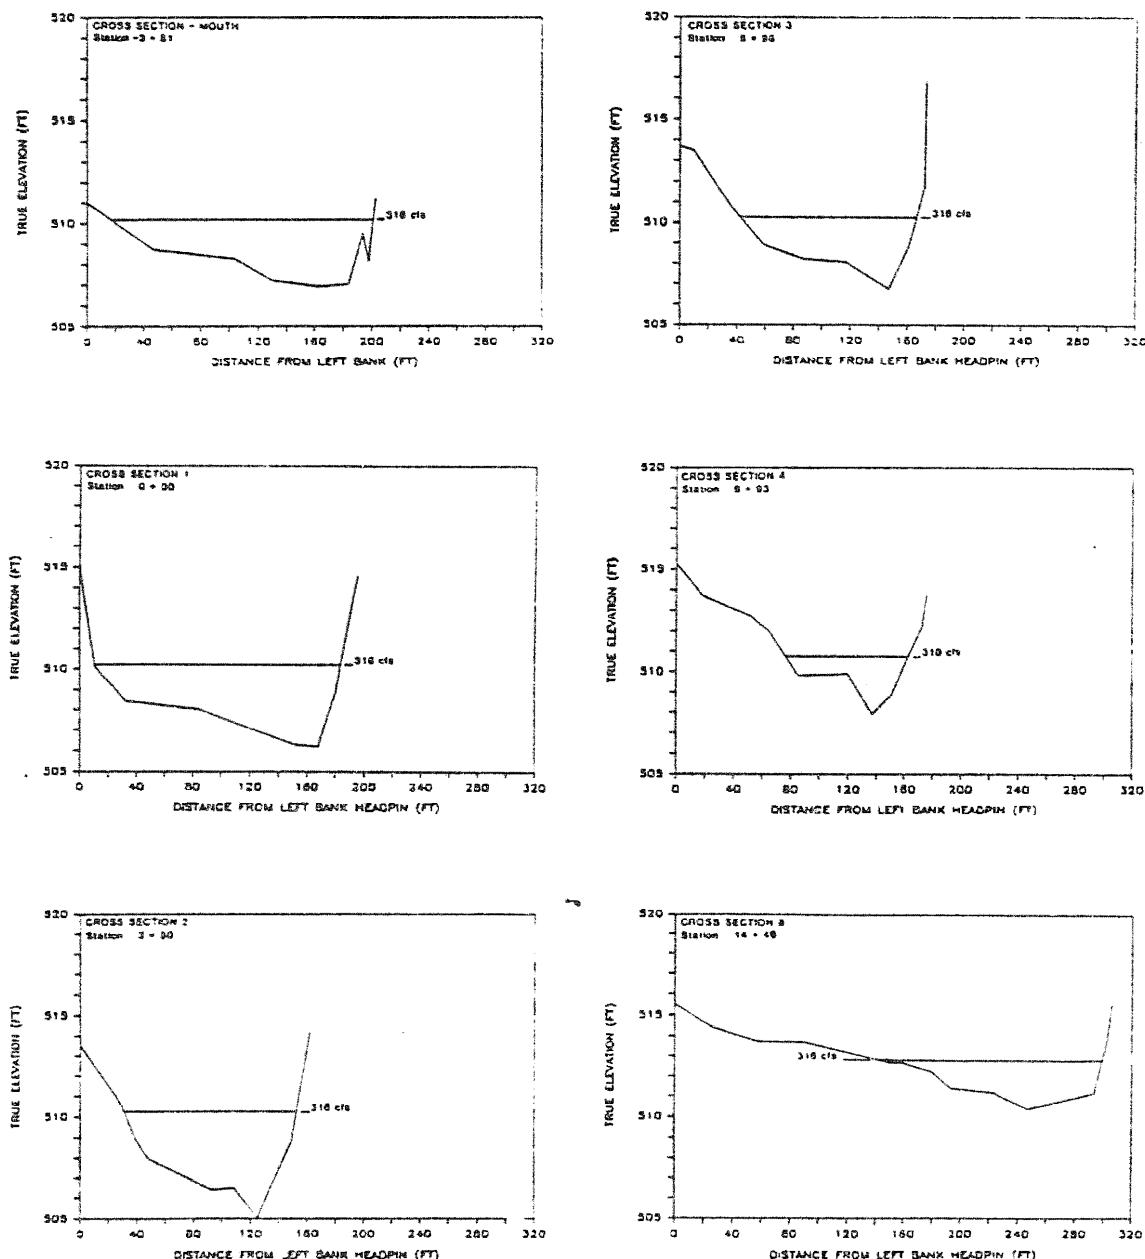
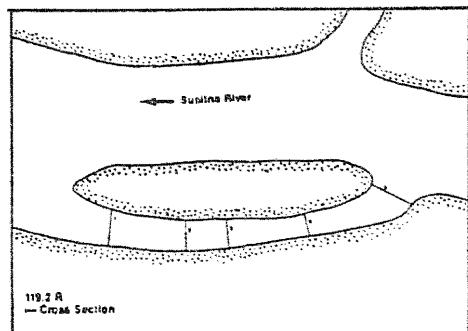


Figure III-20. Cross sections for 119.2R study site depicting water surface elevations at calibration discharge of 316 cfs.

The side channel is breached by the mainstem at 10,000 cfs. Below 10,000 cfs, cross sections 4 and 5 are dry; the backwater area at the lower end of the site persists even at 5,000 cfs. Above 23,000 cfs, the left bank becomes inundated and the site is a large run. Site flows of 1,180, 10 and 0 cfs correspond to mainstem discharges of 23,000, 10,400 and 7,400 cfs respectively.

This small side channel was selected to represent channels with high velocities at the head and low velocities at the mouth. An IFG-2 model was selected because of the limited data available.

Spawning salmon have not been observed in the side channel. Small numbers of juvenile chinook and sockeye salmon were identified in the site. The large backwater area at the mouth eliminates any access difficulty into the site. Passage through the site is possible below cross section 3 in unbreached conditions.

Calibration: The data available to model the site consisted of level surveys for all cross sections and the hydraulic data summarized in Table III-9.

Table III-9. Hydraulic data available to the calibrate IFG-2 model for site 119.2R.

Date	Flow (cfs)	Discharge (cfs)	Calibration Cross Section(s)	Type*
840831	71	13,600	3	D
840819	316	17,400	1,2,3,4,5	D

Table III-9 (Continued).

840824	1090	22,700	3	D
--------	------	--------	---	---

* D = Discharge measurements (includes mid channel and shoreline measurements)
S = Shoreline measurements (does not include mid channel measurements)


The streambed elevations shifted from August to September due to the high flows in the mainstem. Because most of the data was taken before the high flow event, the cross section elevations used in the hydraulic model were adjusted to agree with the discharge measurements (Figure III-21).

A velocity profile was developed for each cross section, based on the site flow of 316 cfs. Velocities associated with the other two flows were available only at cross section 3. Velocities predicted by the model were judged to be reasonable throughout the application range of 10,000 to 23,000 cfs (mainstem) based on channel geometry.

To calibrate the model with respect to depth, comparisons were made between observed and model predicted water surface elevations. Water surface profiles based on IFG-2 output for the three calibration flows and for the flows corresponding to discharges of 10,000 and 23,000 cfs are shown in Figure III-22. Observed water surface elevations for the calibration flows and rating curve water surface elevations for the model limit flows are also shown.

Verification: One model adequately reproduces the velocities over the range of available data (Figure B-2.6).

MEASURED

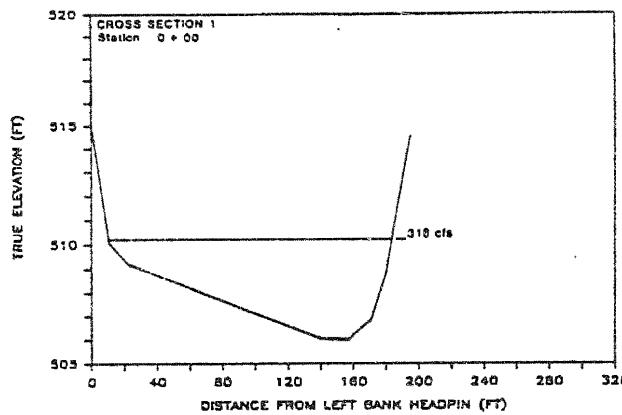

ADJUSTED

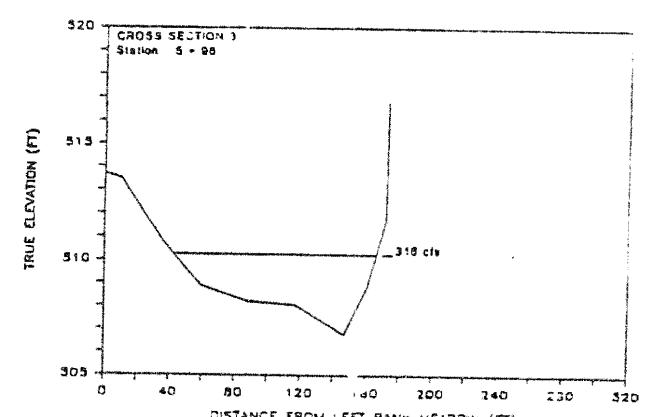
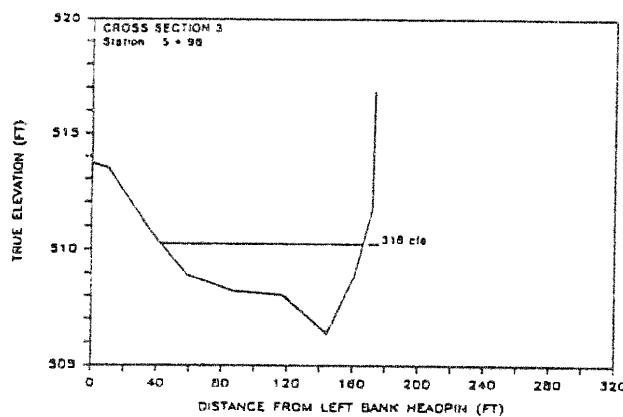
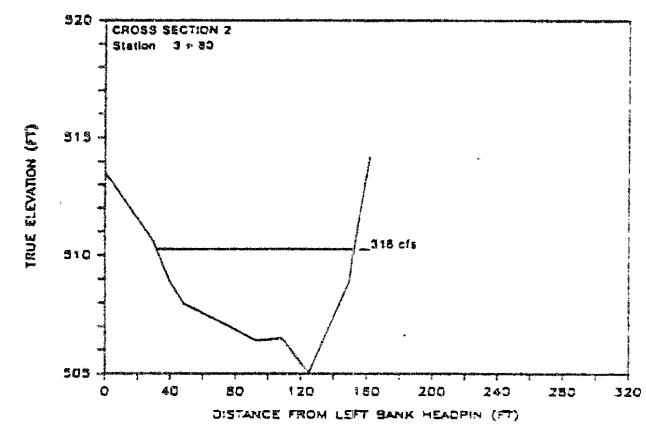
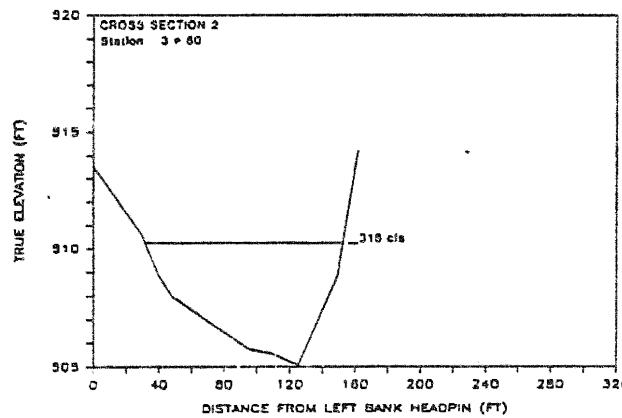
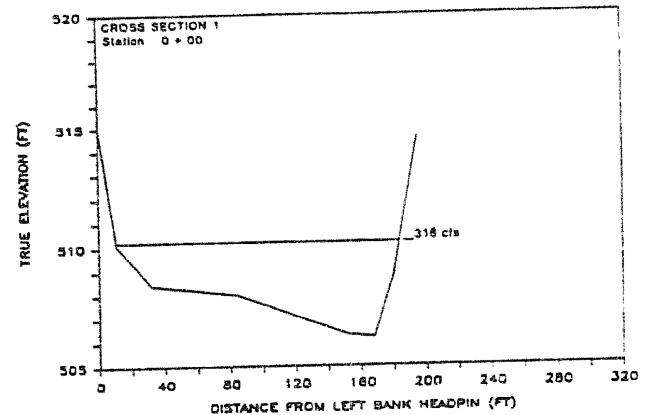


Figure III-21. Comparison of measured and adjusted cross sections 1, 2, and 3 at 119.2R study site.


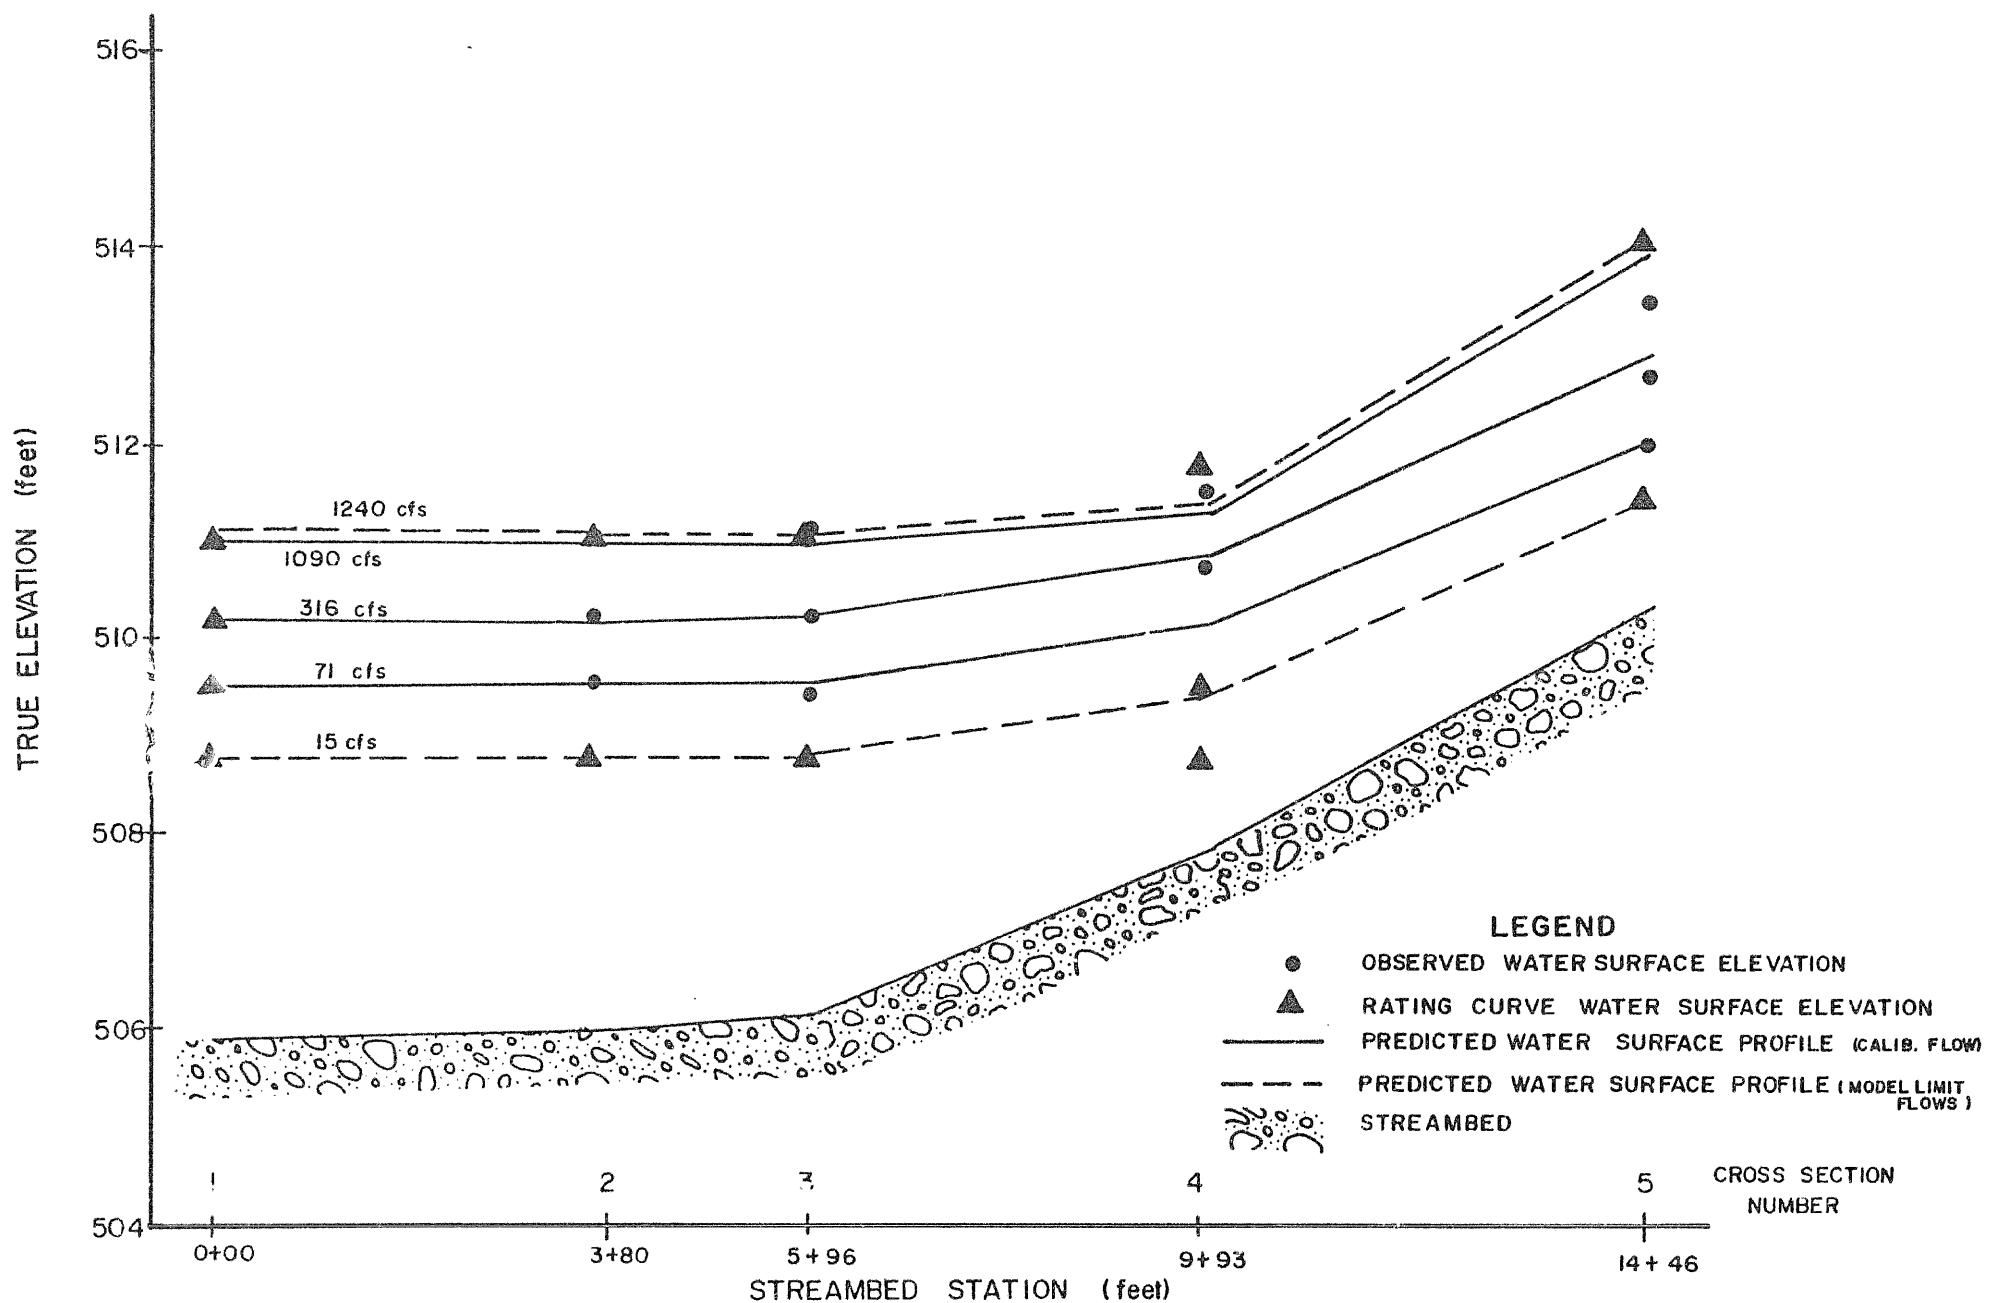


Figure III-22. Comparison of observed and predicted water surface profiles from calibrated model at 119.2R study site.

Application: The IFG-2 model was assigned an excellent rating for site flows of 15 to 1,240 cfs, corresponding to mainstem discharges of 10,000 to 23,000 cfs. At very high mainstem discharges, the site's flow regime changes dramatically. The large volume of water flowing through the site drowns out the backwater area, and the silty, vegetated left bank becomes inundated. The distribution of predicted velocities at the upper cross sections become unrealistic at flows above 23,000 cfs. Therefore, an unacceptable rating was assigned to the mainstem range of 23,000 to 35,000 cfs.

The application range and ratings are summarized below in the bar chart.

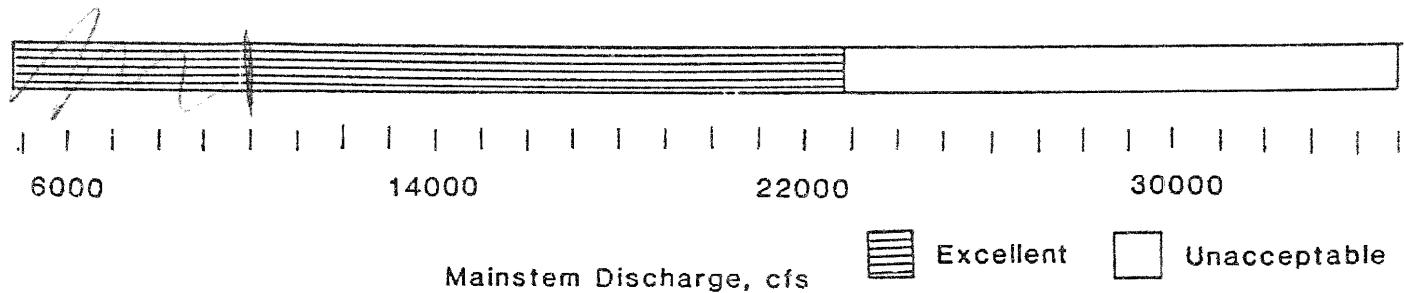

The wetted surface area and juvenile chinook WUA curves are presented in Figure III-23a. Both curves are plotted to the same scale and expressed in identical units; i.e., square feet per 1,000 feet of stream. The greatest proportion of the wetted surface area provides rearing habitat for juvenile chinook at mainstem discharges between 10,000 and 12,000 cfs.

The WUA curve plotted in Figure III-23b at an expanded vertical scale accents the rapid increase in rearing habitat associated with this site breaching near 10,000 cfs. This marked increase is attributed to turbid mainstem water entering the site and significantly increasing the cover value afforded juvenile chinook. As mainstem discharge increases beyond 13,000 cfs

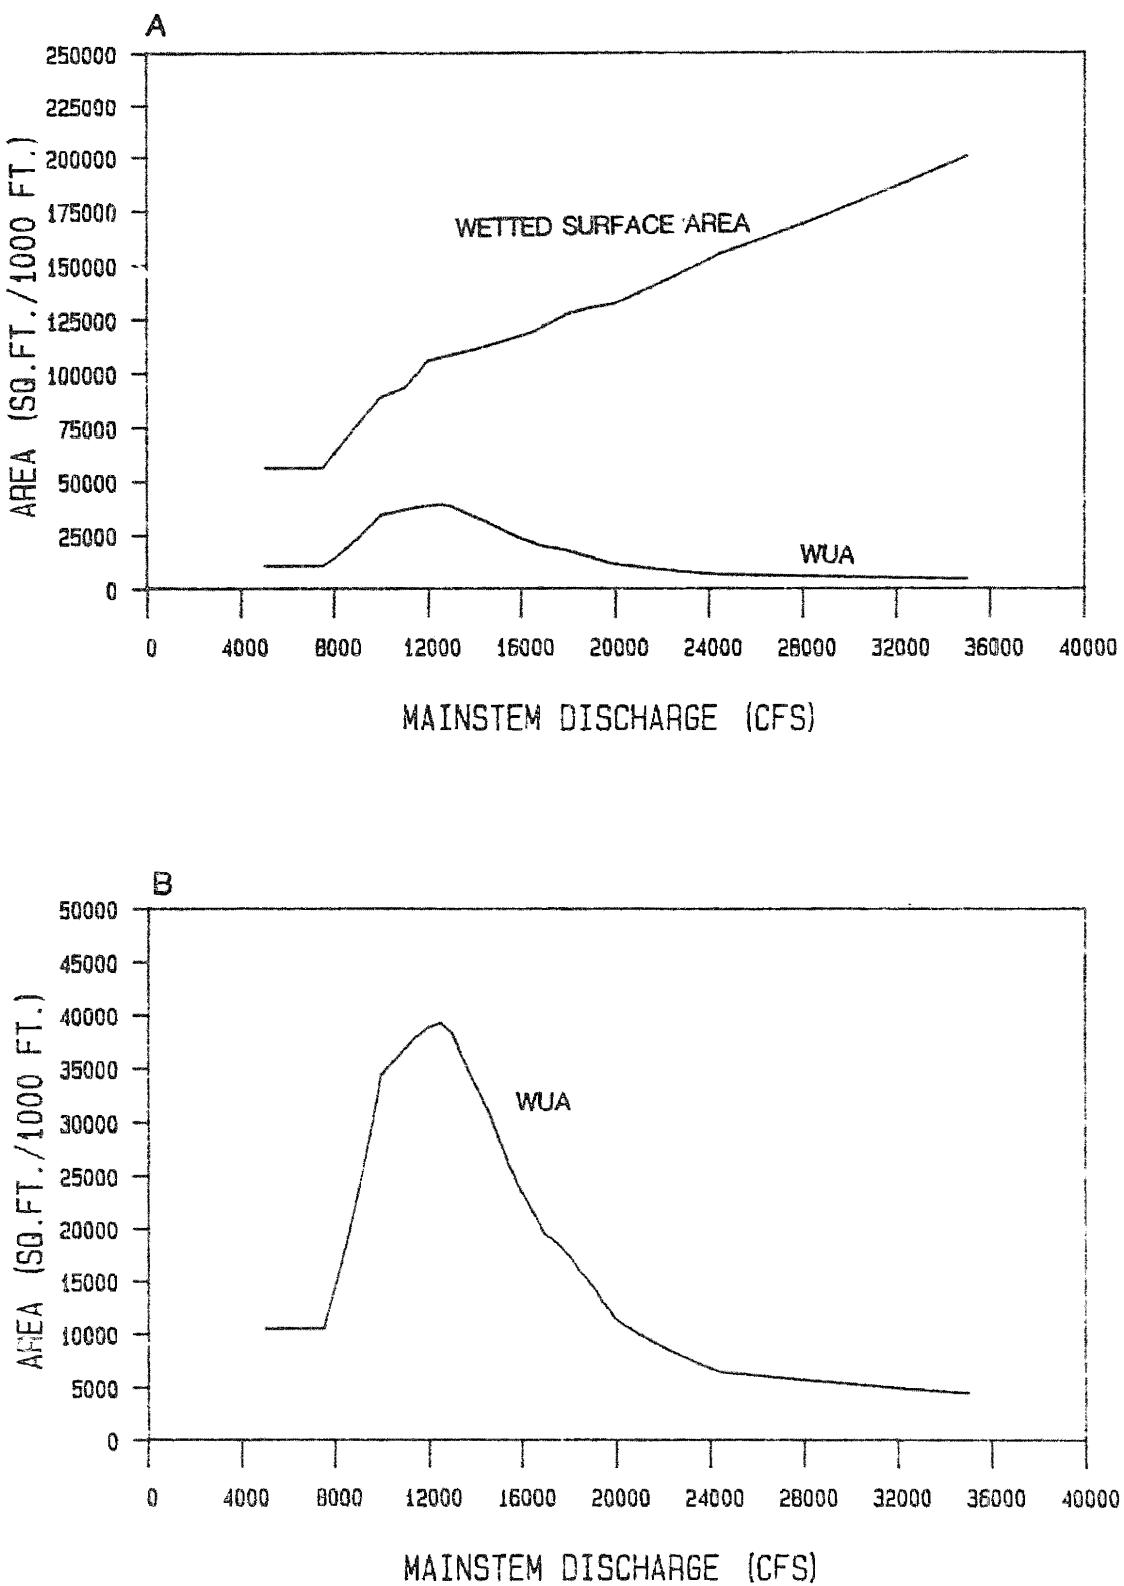


Figure III-23. Projections of gross surface area and WUA of juvenile chinook salmon habitat as a function of discharge for the 119:2 modeling site.

velocities begin to reduce the rearing potential at this site. Above 24,000 cfs available rearing habitat is restricted to shoreline margins where sufficient object cover is available to retard velocity.

Because the extrapolation range of the hydraulic model was limited to a range of mainstem discharges from 10,000 to 22,000 cfs, it was necessary to estimate wetted surface areas and juvenile chinook WUA beyond the extrapolation limits of the hydraulic model. The wetted surface area was determined by digitizing enlarged air photographs obtained at mainstem discharges of 5,100, 7,400 and 10,600 cfs. The surface area measurements at 5,100 and 7,400 cfs were the same. The ratio of the digitized surface area at 10,600 cfs to that forecast by the hydraulic model at the same flow was .47. This ratio was used to adjust the digitized surface areas from the 5,100 cfs and 7,400 cfs photography before using these surface areas to extent the forecast surface area curve from 10,000 cfs to 5,000 cfs.

Juvenile chinook WUA estimates for unbreached conditions are based on the assumption that rearing habitat potential declines at a constant range as mainstem discharge declines from the breaching flow of 10,000 to 7,400 cfs. The percentage of the total wetted surface area providing potential rearing habitat at 7,400 cfs was assumed to be roughly half, the proportion of clear water habitat present immediately preceding breaching. WUA values for mainstem discharges between 7,400 and 10,000 were linearly interpolated. Since wetted surface area remained constant as mainstem discharge declined from 7,400 to 5,100 cfs, WUA for juvenile chinook was assumed to remain constant.

An exponential decay function was used to extend the WUA curve beyond the upper extrapolation range of the calibrated hydraulic model. The decay function selected reproduced a habitat response trend evident to other middle river side channel sites. The surface area curve was extended from 22,000 cfs to 35,000 cfs using a positive exponential function. Both the surface area and WUA curves should be applied with discretion in the 23,000 to 35,000 cfs range even though Figure III-23 indicates errors associated with these curves would be insignificant. Table B-6.4 contains further detail regarding the synthesis of surface area and WUA response curves for this site.

Time series plots of WUA and average daily site flow (Figure III-24) indicate fairly low habitat potential for juvenile chinook exist at this site during mid-summer, but comparatively high WUA indices are associated with early summer and fall site flows. Rearing habitat is maximized at this site when the mainstem discharges range between 10,000 and 14,000 cfs (Figure III-23a), associated with typical mid-summer discharges (20,000 to 25,000 cfs). Hence, the time series plot, Figure III-24, reflects greater fluctuations in juvenile chinook habitat at this site than is evident for other side channel study sites during the open water season.

Site 131.7L

Site Description: This site is located directly above the confluence of Fourth of July Creek along the west bank of the Susitna River (Plate III-5). The study reach is 1,900 ft long and ranges from 250 ft wide in the lower half of the site to 400 ft in the upper half. Three cross sections define the

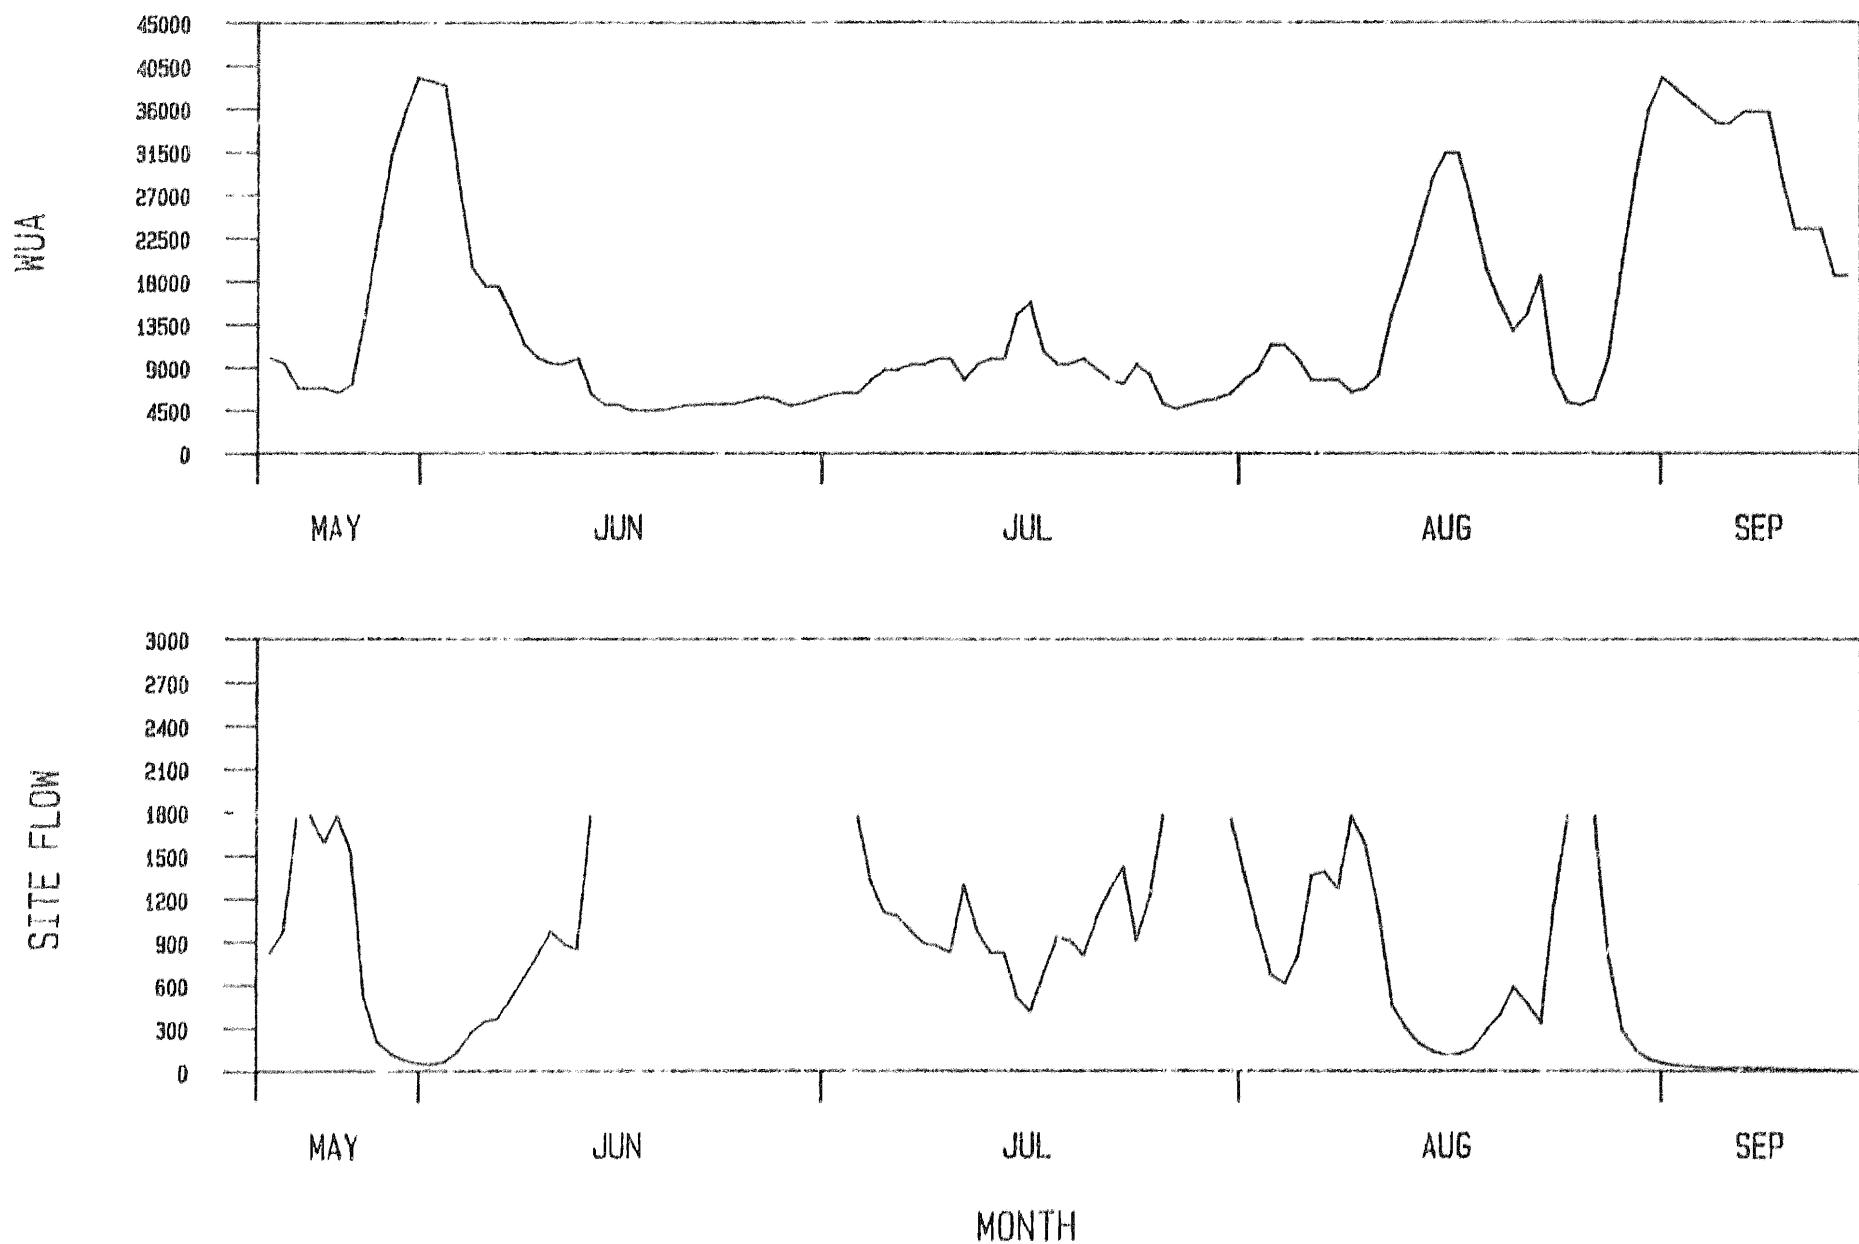


Figure III-24. Time series plots of juvenile chinook salmon WUA as a function of discharge from May 20 to September 15, 1984 for 119.2R modeling site.

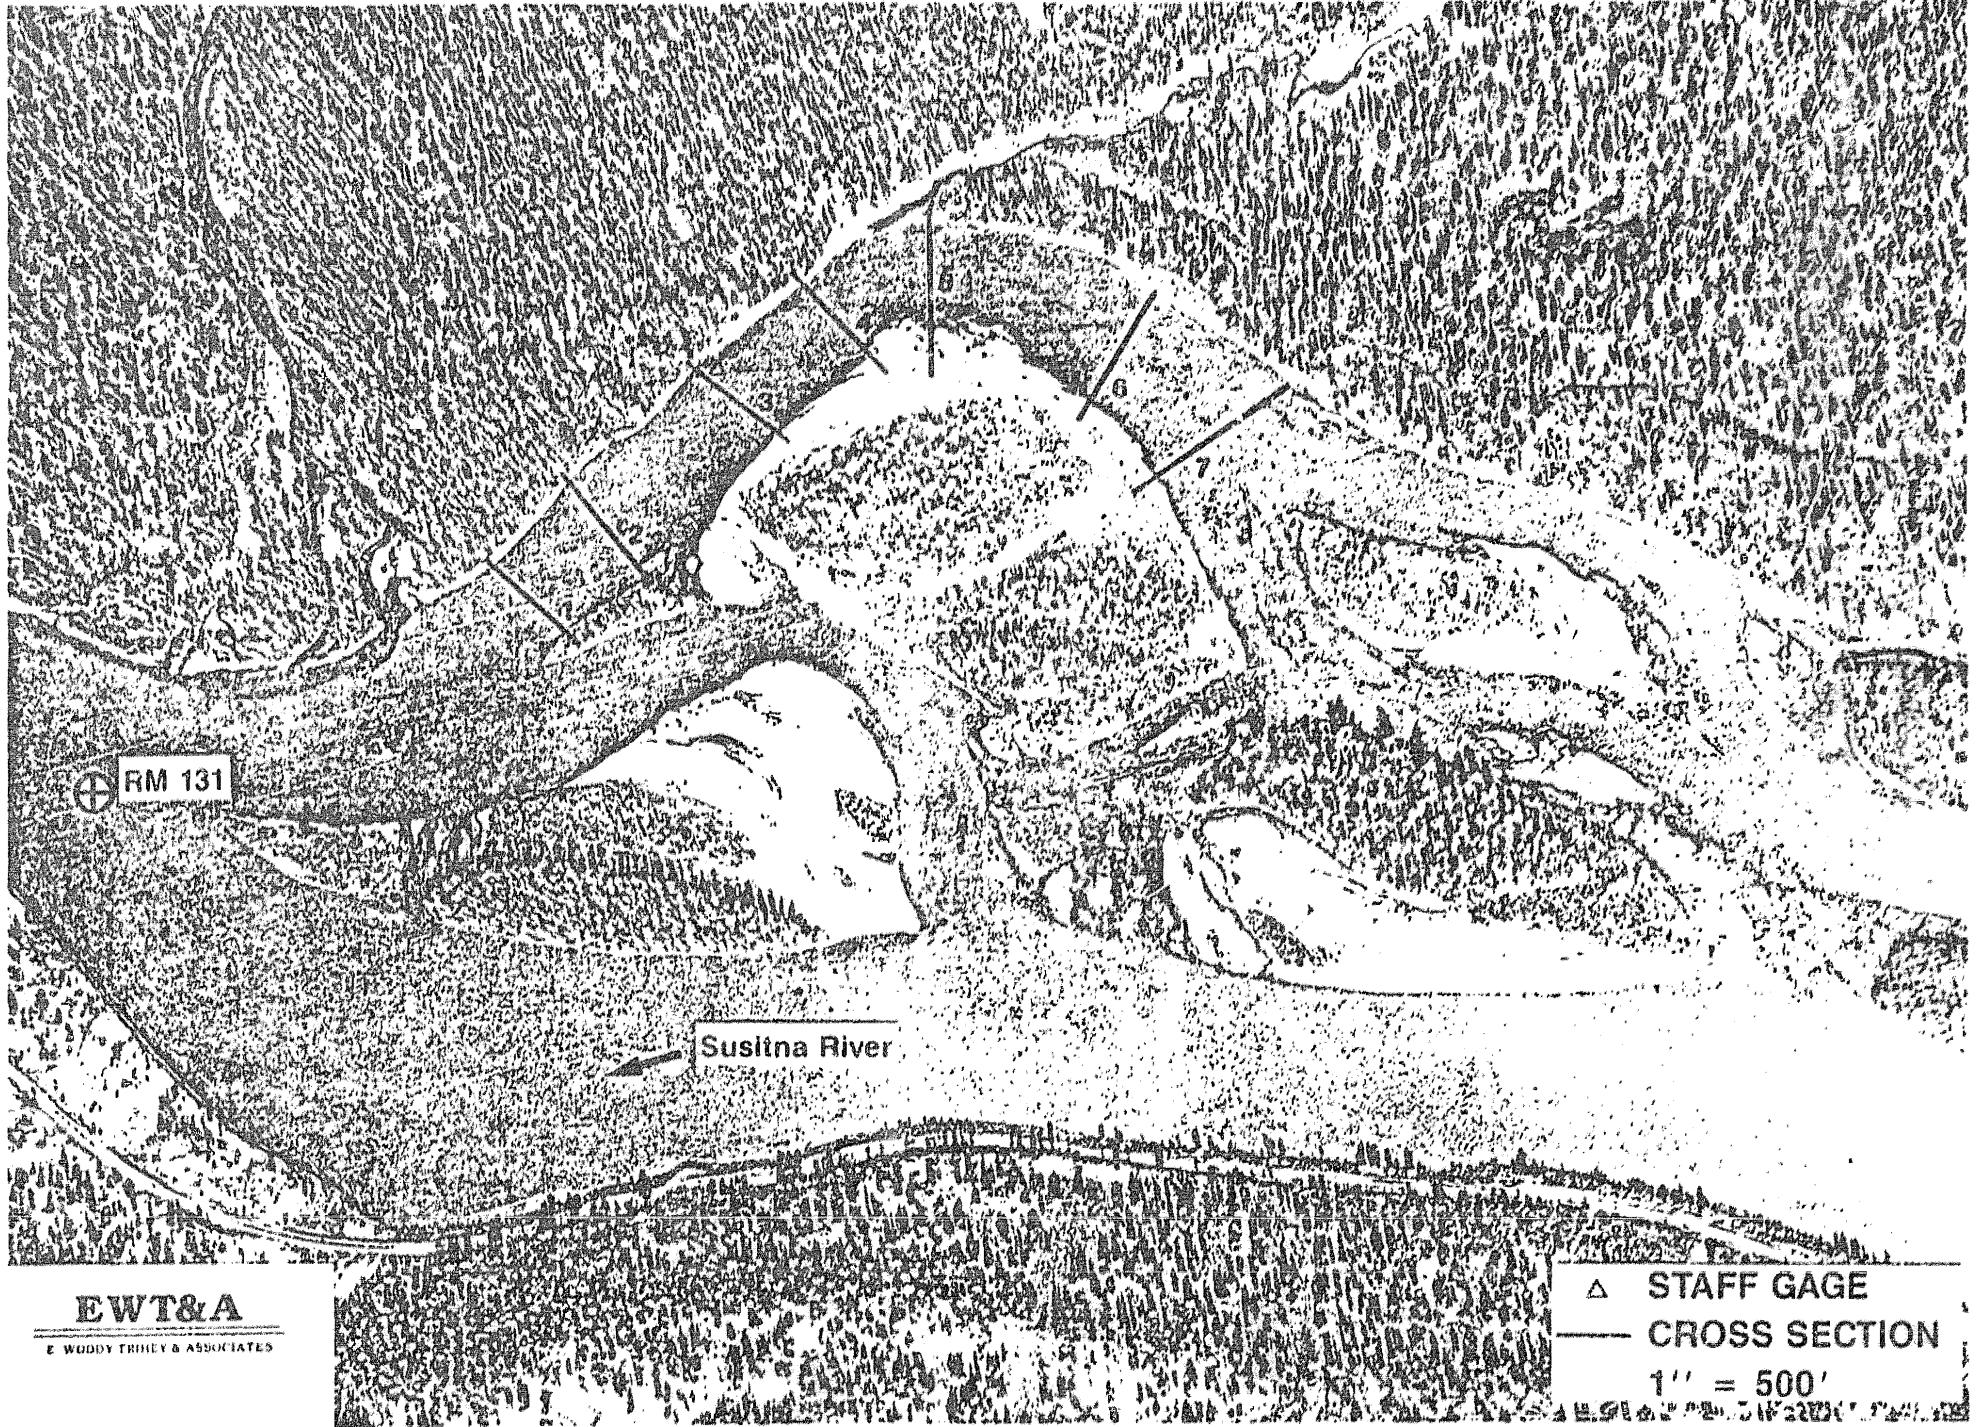


Plate III-5. Modeling site 131.7L on June 1, 1982 at mainstem discharge: 23,000 cfs.

deep, low velocity area sand two cross sections describe the shallow faster velocity areas. Two cross sections were established in the transition areas below low and high velocity areas (Figure III-25). Cobble and rubble are the principle substrates found in the lower half of the site with gravel and rubble substrate being predominate in the upper half. Silt and sand deposits exist in pool areas and backwater zones. Cover is provided by the larger substrate and by two debris zones found in the site.

Three channels (A, B and C on Plate III-6) convey mainstem flow into the site at mainstem discharges of 5,000, 10,000 and 14,500 cfs. Site flows greater than 800, 79 and 15 cfs correspond to mainstem discharges of 23,000, 10,400 and 7,400 cfs.

This study site was selected to represent side channels that remain side channels for a broad range of discharges. Upwelling was suspected to maintain baseline flows and the site appeared to have good rearing habitat. An IFG-4 model was selected because of the non-uniform flow conditions and channel size.

Chum salmon have been observed spawning in the site. Juvenile chinook fry rear in the channel. Access to and passage through the site are not limited at any flow.

Calibration: To calibrate the IFG-4 model for the site, four data sets were collected at each cross section (Table III-10).

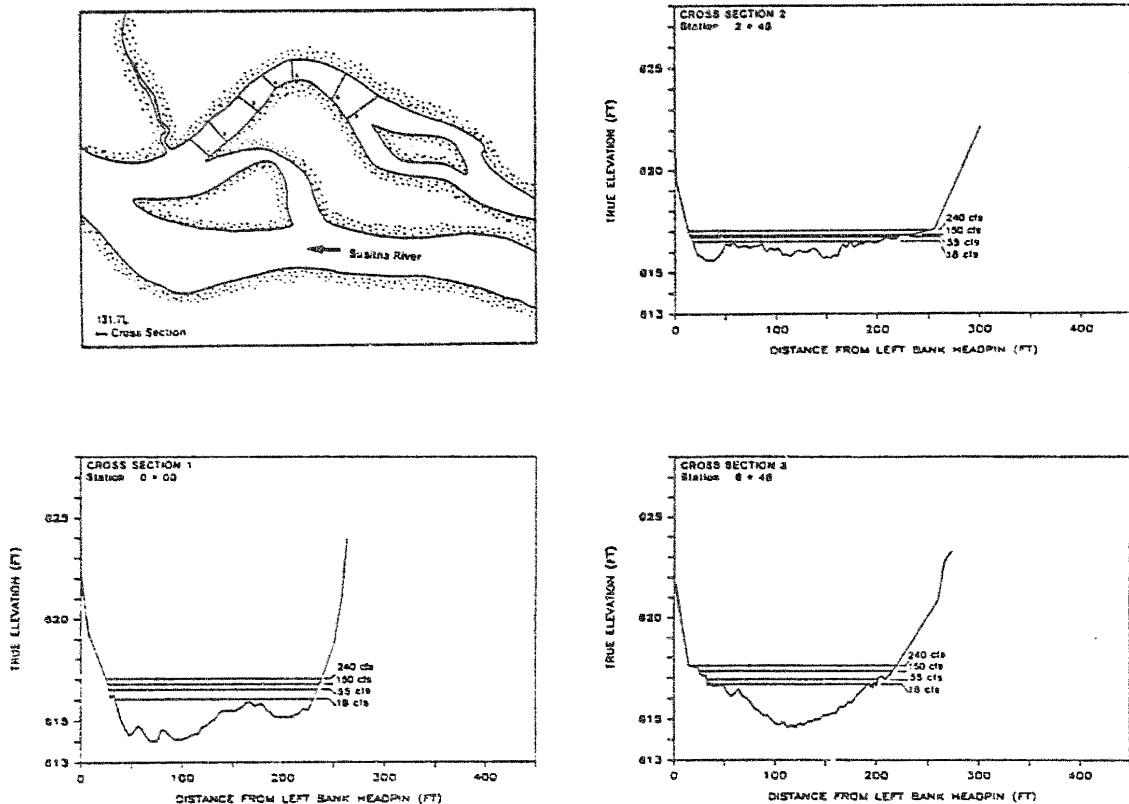


Figure III-25. Cross sections for 131.7L study site depicting water surface elevations at calibration discharges of 18, 55, 150, and 240 cfs.

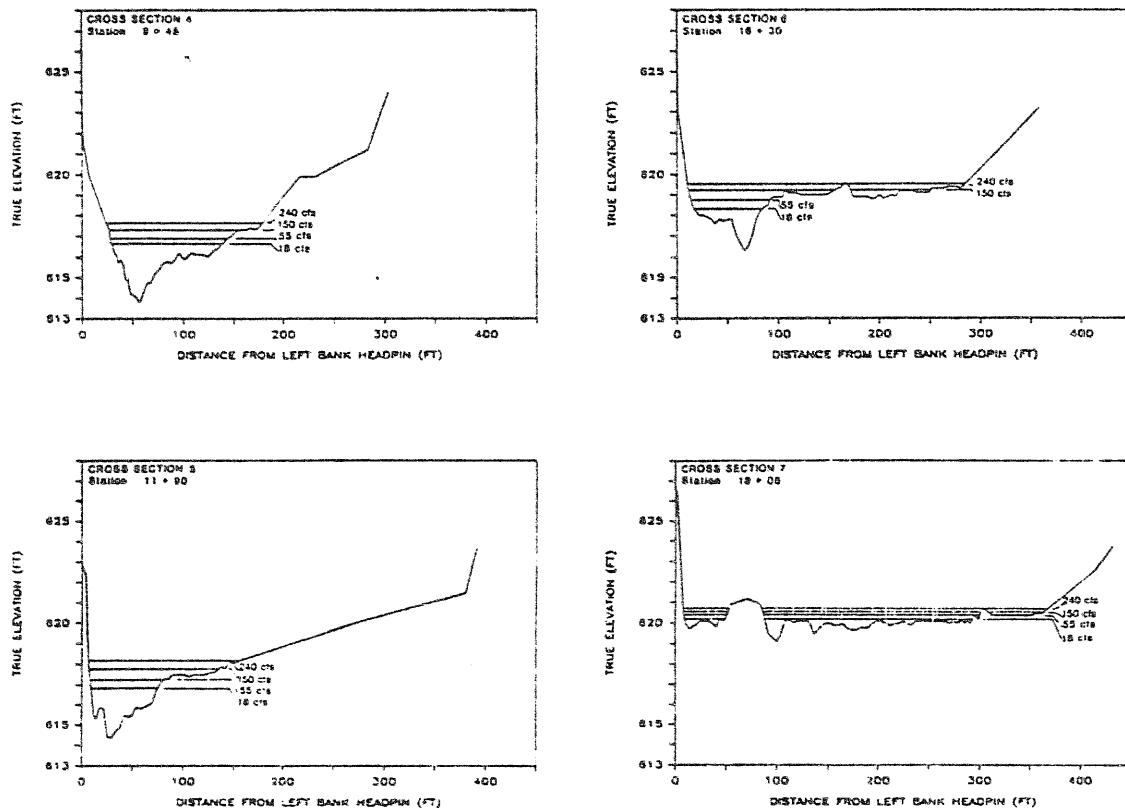


Figure III-25. Cross sections for 131.7L study site depicting water surface elevations at calibration discharges of 1², 55, 150, and 240 cfs.

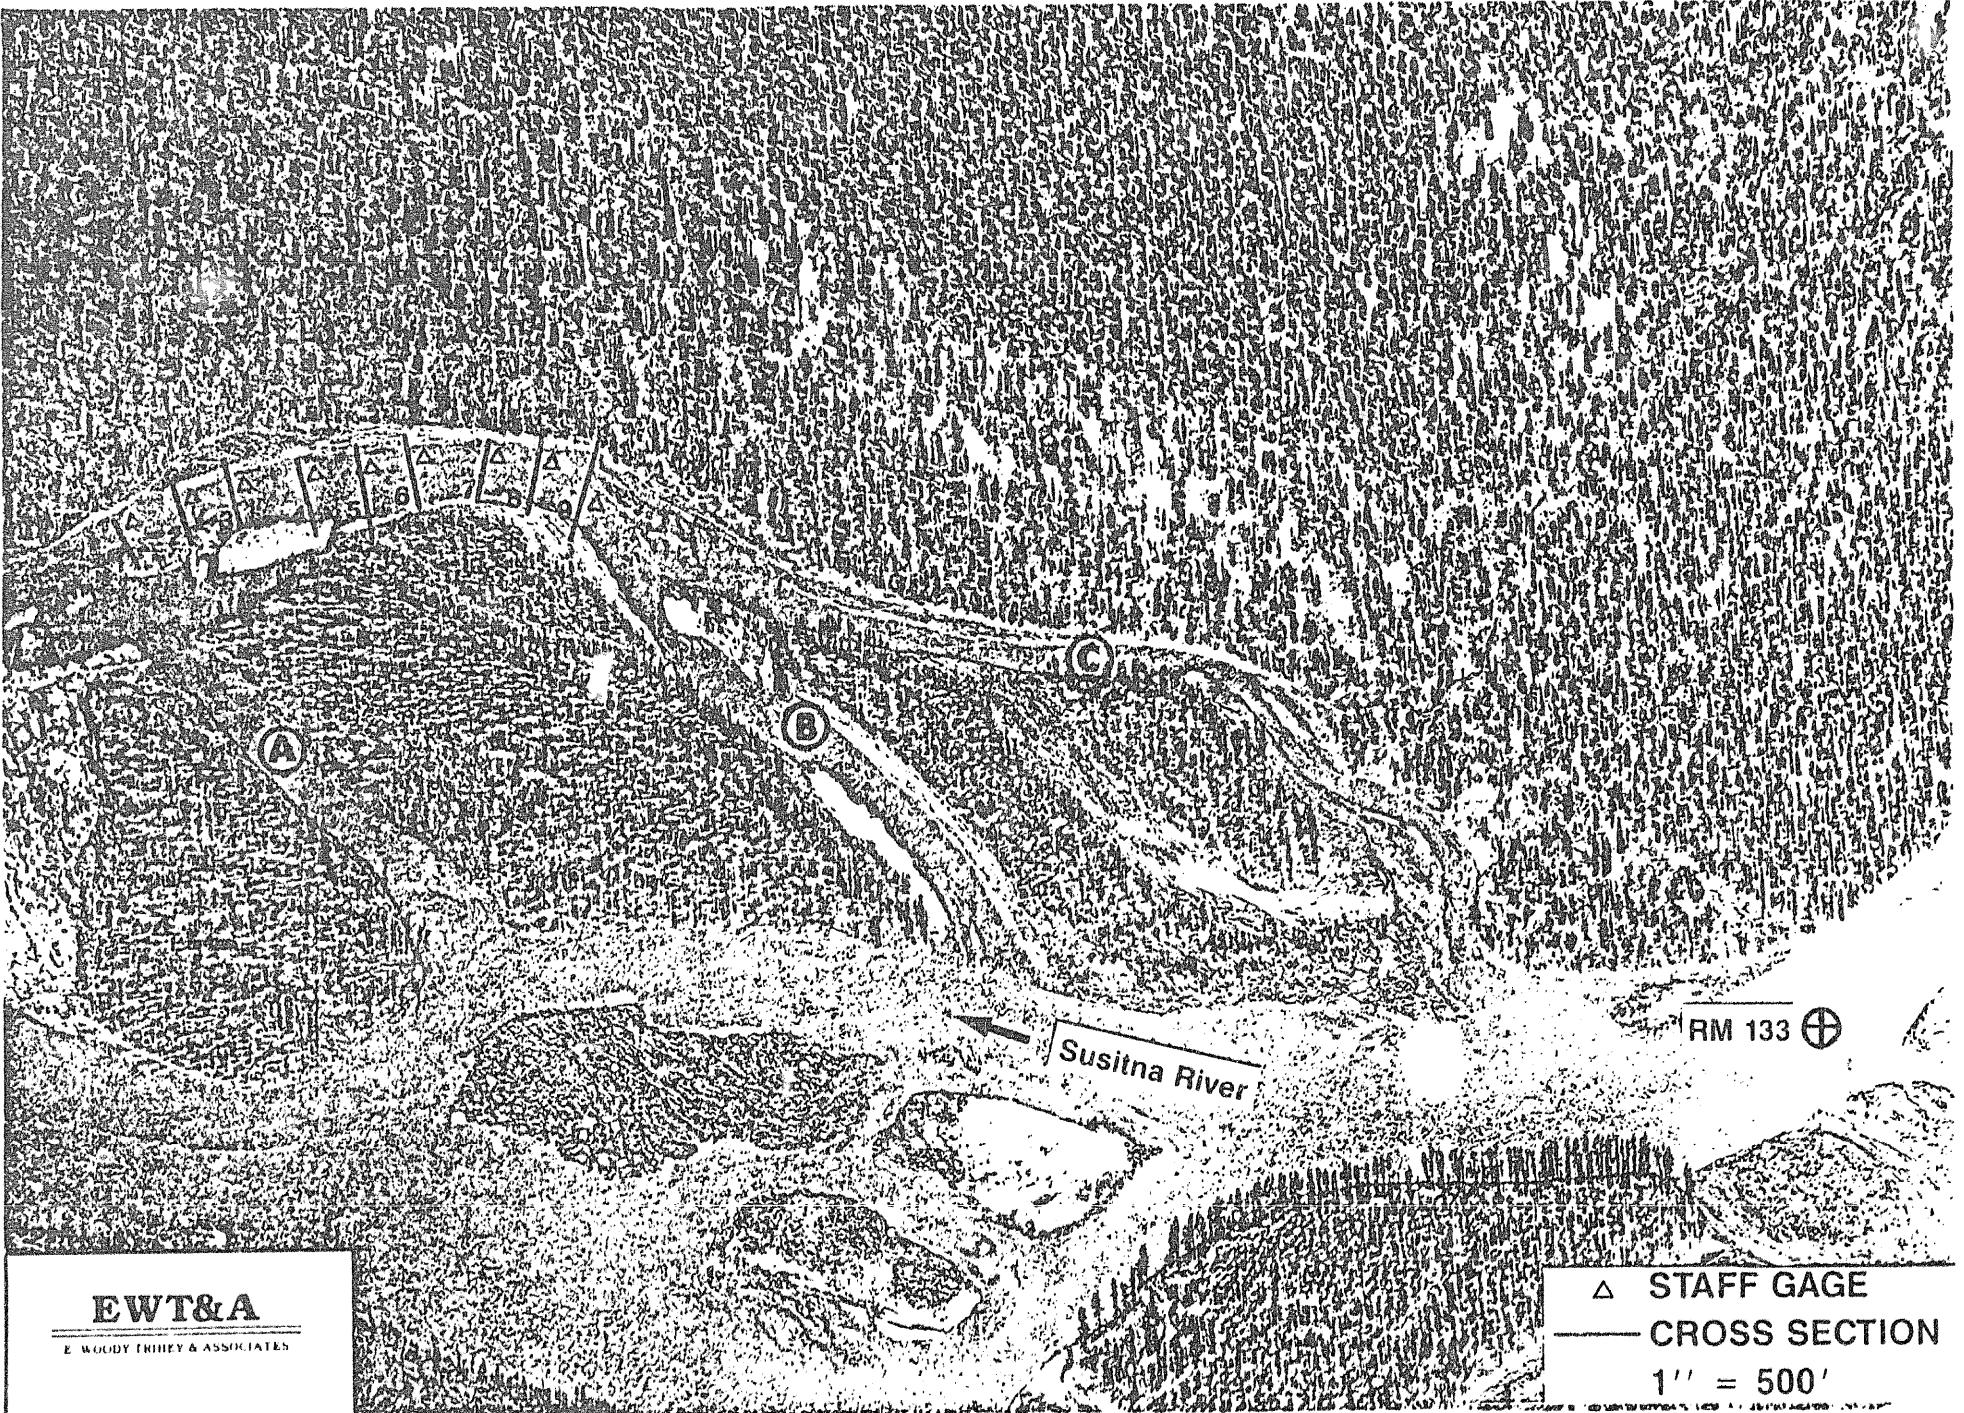


Plate III-6. Modeling site 132.6L on June 1, 1982 at mainstem discharge: 23,000 cfs.

Table III-10. Hydraulic data available to calibrate the IFG-4 model for site 131.7L.

Date	Flow (cfs)	Discharge (cfs)
840927	18	7470
840919	55	9390
840902	157	11800
840817	250	14800

The input data required a stage of zero flow value to be assigned to each cross section. A large riffle area below the study site controlled the stage of zero at cross section one. Because a streambed profile was not surveyed for the site, the stage of zero flow was estimated during the iterative calibration process.

Horizontal water surface elevations were not maintained across three cross sections in the site. At cross section 2, the backwater area along the left bank had a lower water surface than the main channel and was raised to maintain a horizontal water surface. Along the right bank at cross sections 6 and 7, a shoal area raised the water surface to higher elevations than the main channel. The streambed was lowered at both cross sections to maintain a horizontal water surface across both cross sections. Also, along the left bank at cross section 7 was a backwater area which had a lower water surface

than the main channel. These streambed elevations were also raised (Figure III-26).


A plot depicting the observed and predicted water surface profiles for the calibration flows as well as profiles for the extrapolation limits is shown in Figure III-27. Above 600 cfs, the reliability of the stage and velocity predictions decrease.

To calibrate the IFG-4 model with respect to stage, comparisons were made between the WSEL vs. q curve and the model predicted water surface elevations (Figure III-28). Similar comparisons were made at each cross section however, only the discharge cross section is shown here.

The performance of the calibrated model can be evaluated by comparing the observed and predicted water surface elevations, discharges and velocity adjustment factors (Table B-4.2). The difference in observed and predicted water surface elevations is generally less than 0.03 ft. The largest difference in observed and predicted discharges is 5 percent. The velocity adjustment factors range from 0.92 to 1.04, which indicates the models are suitably calibrated.

Verification: Figure B-2.7 are the scatter plots of observed and predicted depths and velocities. A reliable hydraulic model should be able to predict the same depth of velocity as observed in the field. The one-to-one relationship demonstrates the model is predicting accurately. The results of the statistical tests are shown in Table B-5. For both depth and velocity

MEASURED

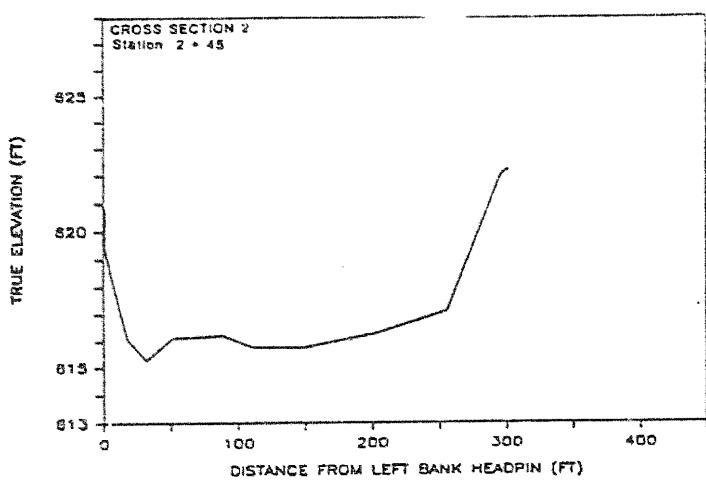

ADJUSTED

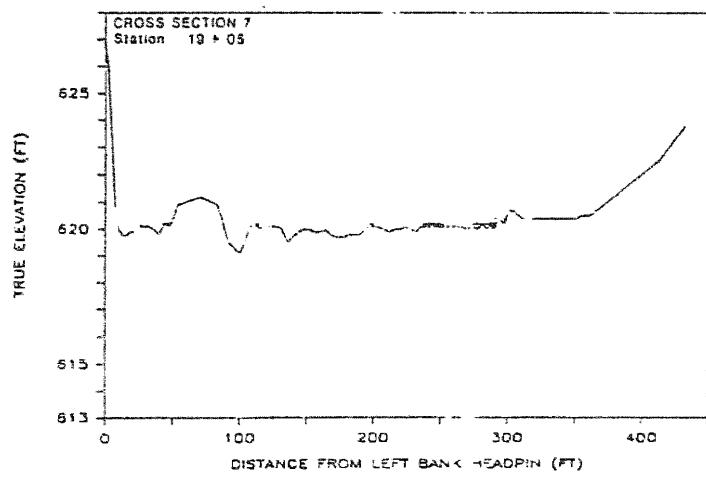
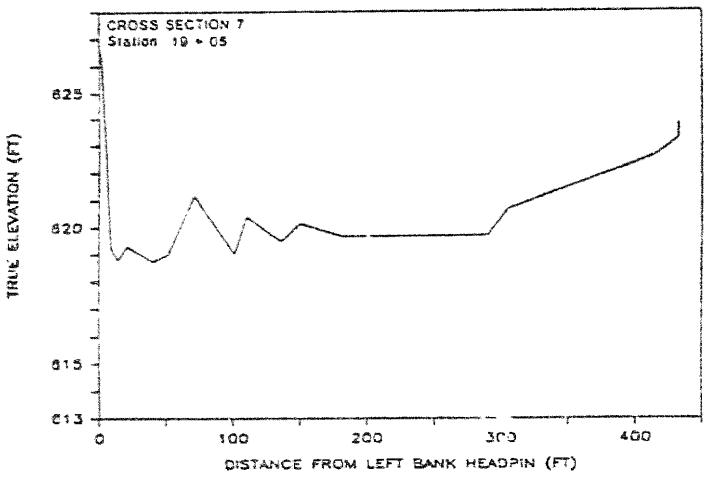
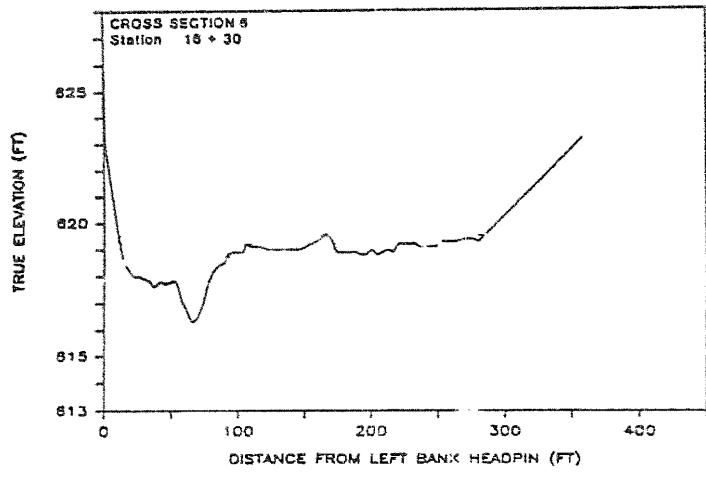
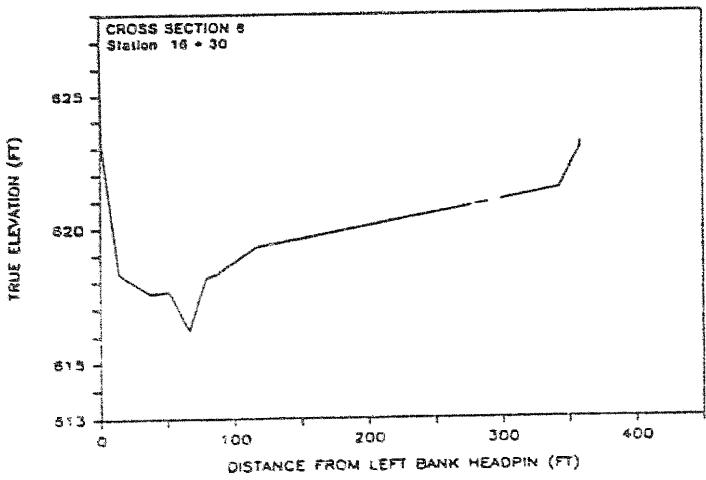
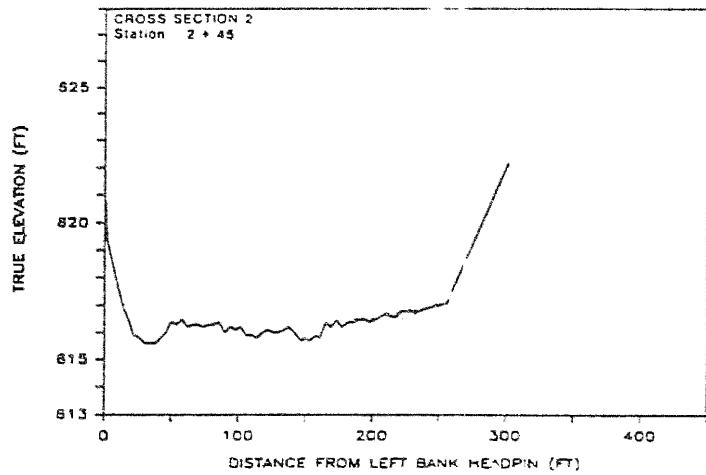


Figure III-26. Comparison between measured and adjusted cross sections 2, 6, and 7 at 131.7L study site.

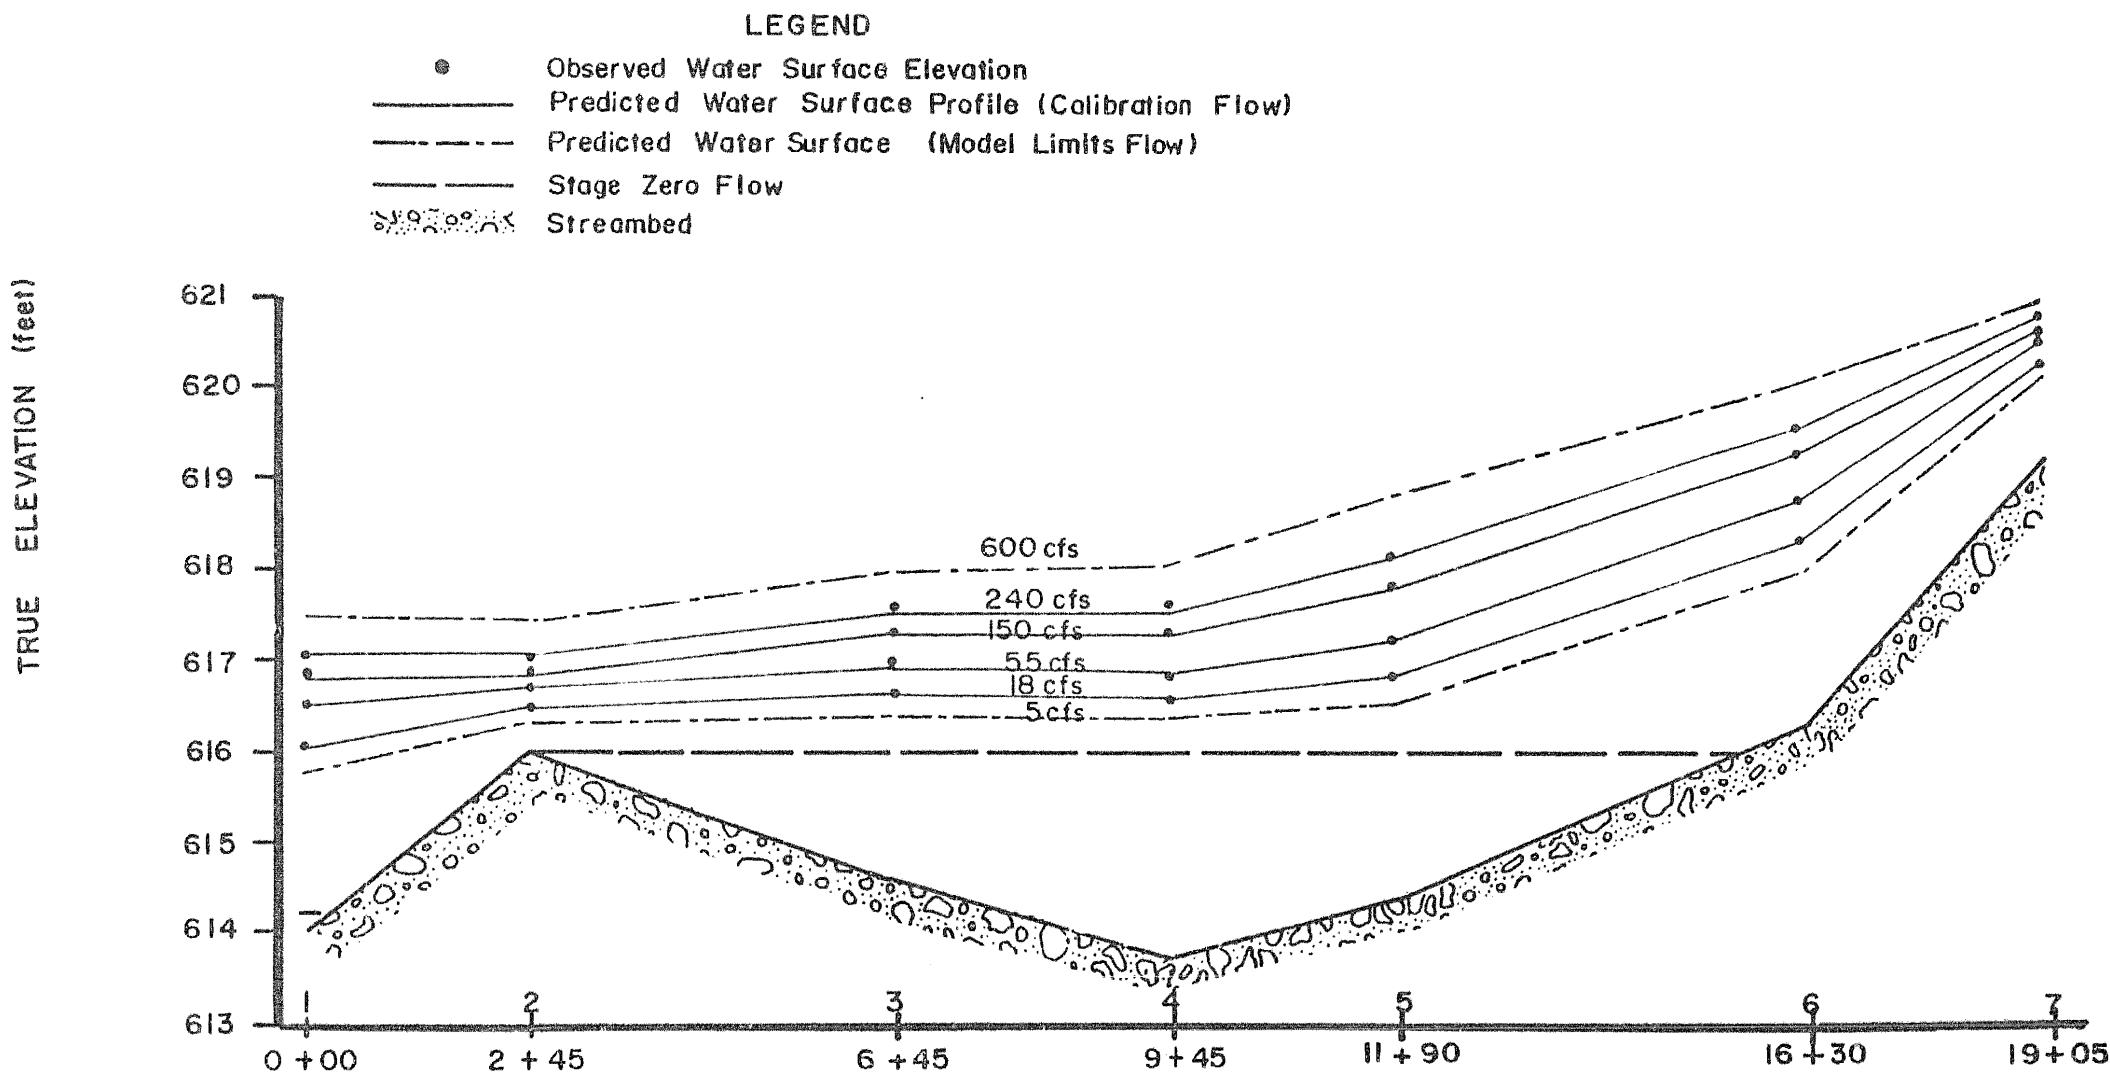


Figure III-27. Comparison of observed and predicted water surface profiles from calibrated hydraulic model at 131.7L study site.

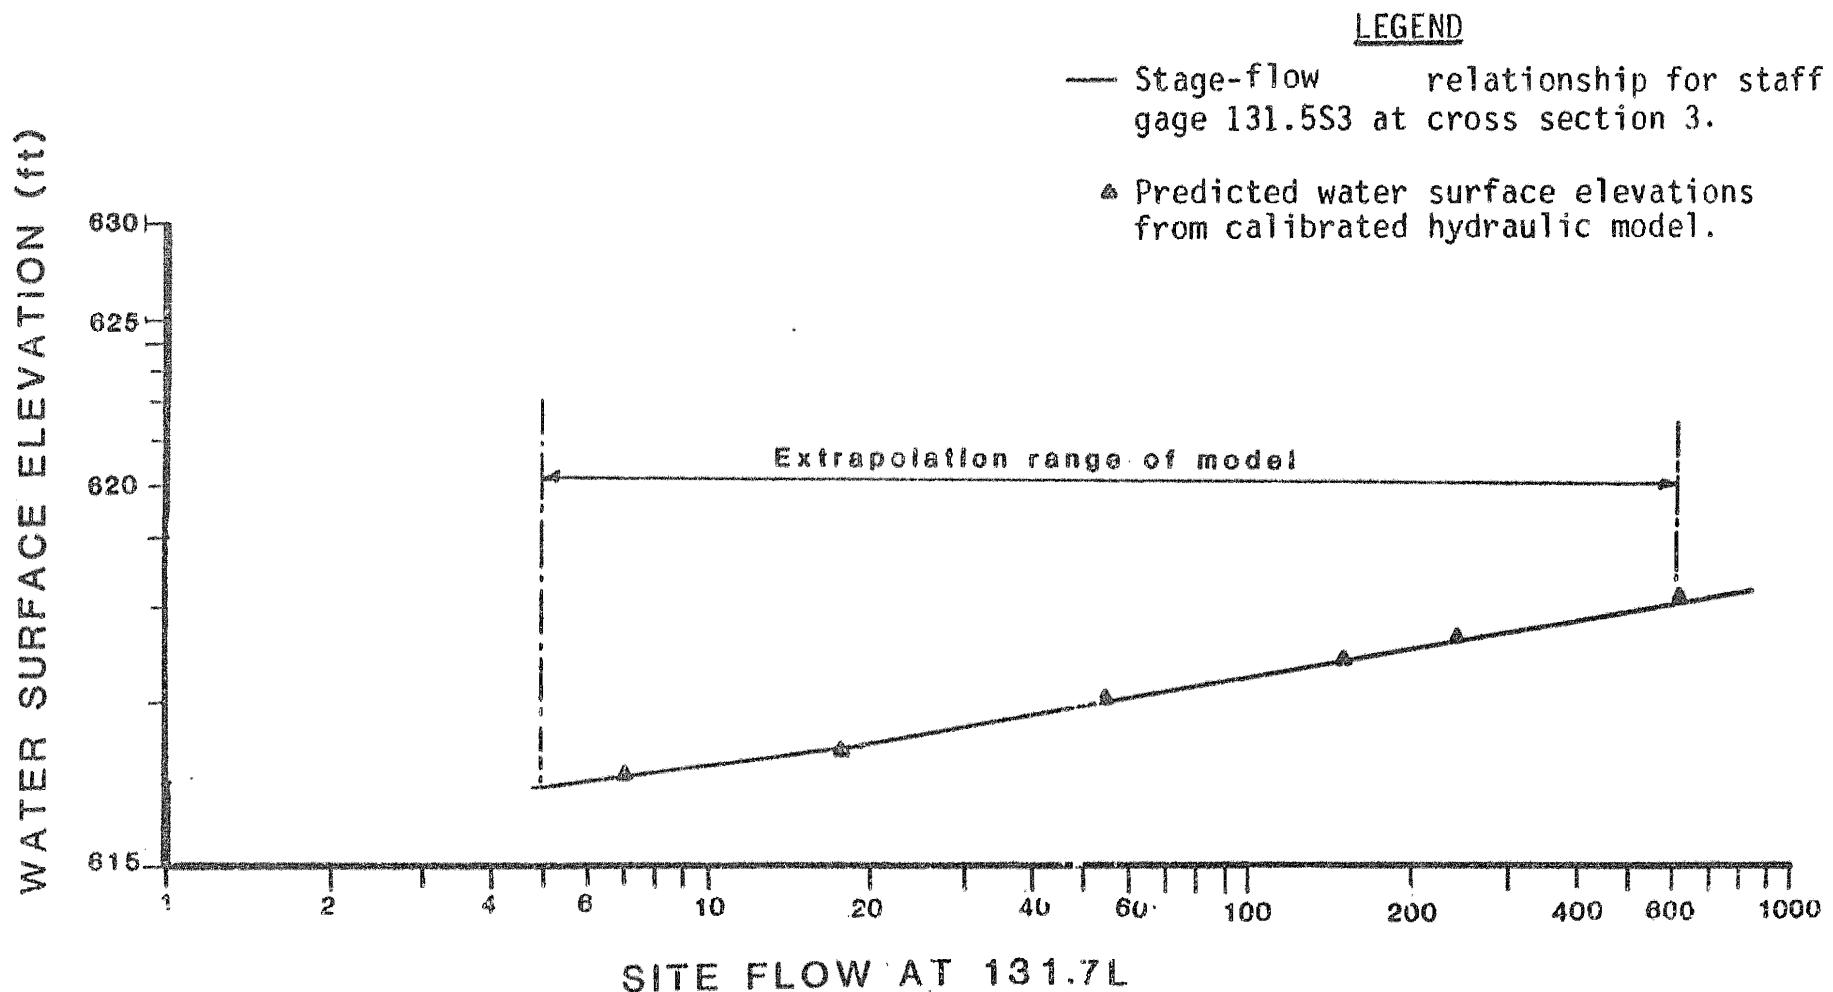


Figure III-28. Comparison between water surface elevations forecast by the calibrated hydraulic model and the stage-flow relationship for 131.7L cross section 3.

comparison, the $RMSE_U$ is nearly equal to the RMSE, an indication the model is good. The index of agreement is 0.99 for depth and velocity another indication how well the model is predicting.

Application: The breaching discharge for the site was estimated at 5,000 cfs, and the channel flow becomes controlled by the mainstem at about 7,400 cfs. Baseline flow conditions of 5, 10 and 15 cfs occur at 5,000, 6,000, and 7,000 cfs mainstem, respectively. Above 7,400 cfs, an IFG-4 model was calibrated for site flows of 15 to 600 cfs (7,400 to 19,300 cfs mainstem), an excellent rating was assigned. An overall rating of unacceptable was assigned to the model between 19,300 and 35,000 cfs.

The application range and ratings are summarized below in the bar chart.

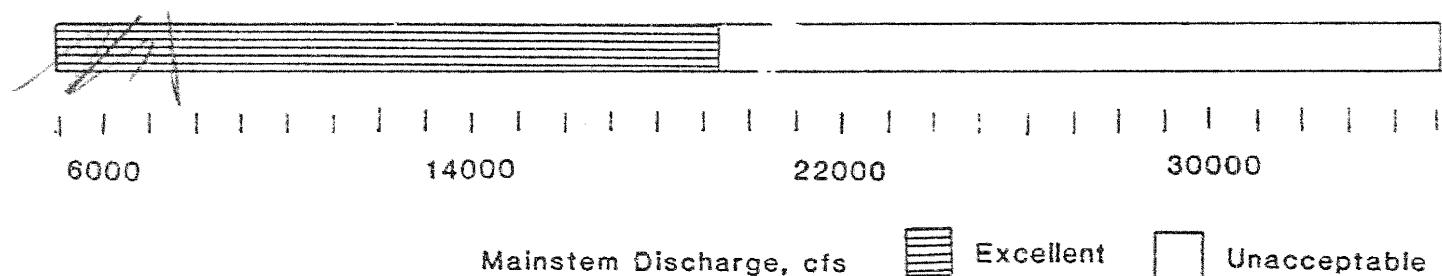


Figure III-29a provide surface area and WUA response curves for this site. Because this side channel conveys mainstem water at 5,000 cfs only turbid water suitability criteria were used for juvenile chinook. The pronounced increase in WUA indices as mainstem discharge increases from 5,000 to 8,000 cfs (Figure III-29b) is associated with a rapid increase in wetted area possessing suitable rearing velocities rather than a change from clear to turbid water habitat discussed at other study sites.

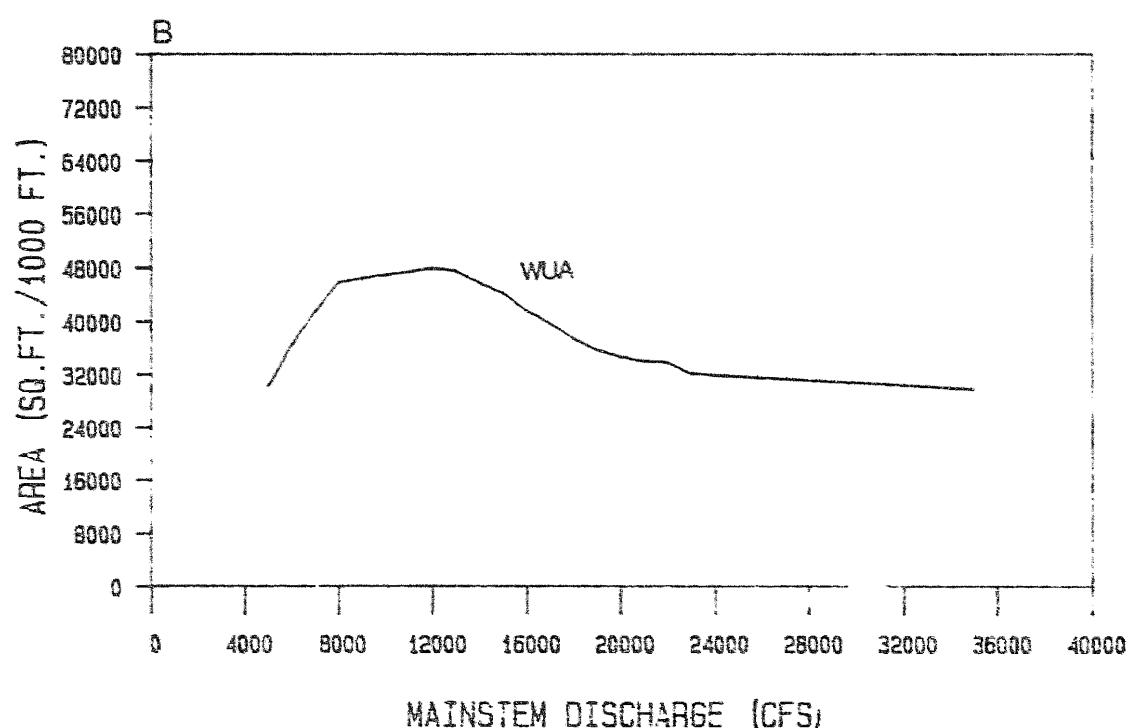
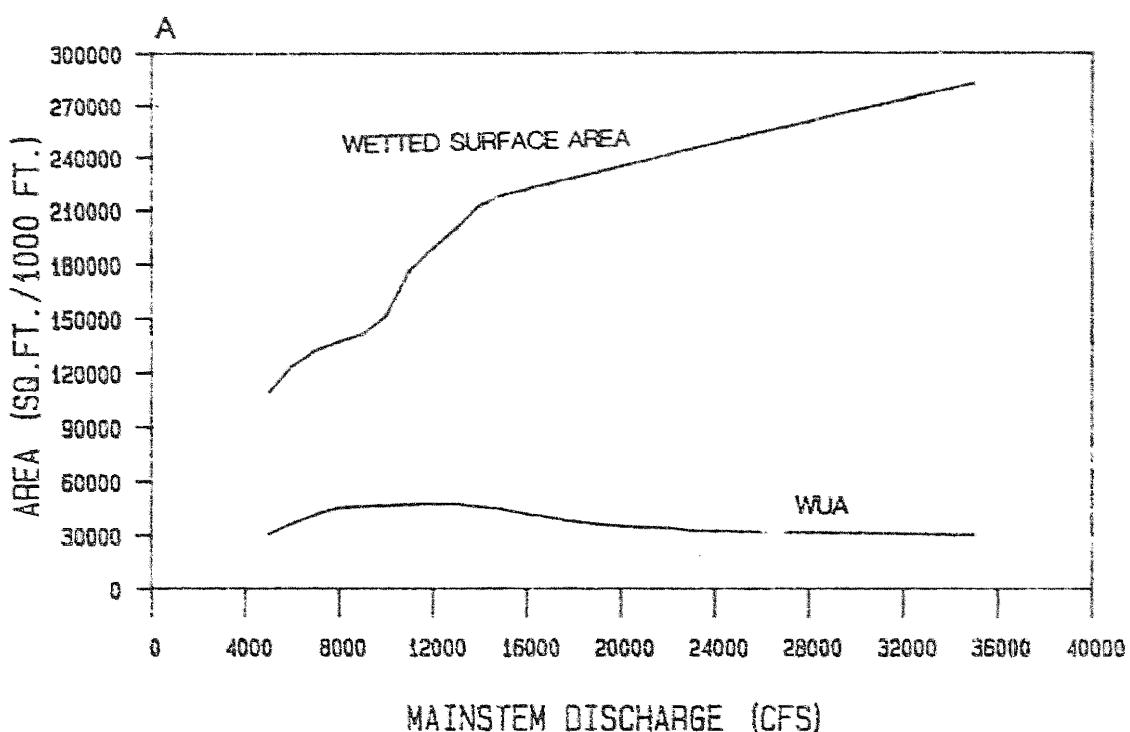


Figure III-29. Projections of gross surface area and WUA of juvenile chinook salmon habitat as a function of discharge for the 131.7L modeling site.

An extensive gravel bar located on the inside of the bend and near the head of this site (Plate III-5) exerts the greatest influence on the shape of the WUA curve at this site. As mainstem discharge increases above 5,000 cfs a large shallow riffle develops which provides juvenile chinook significant amounts of rearing habitat. At higher flows this shoal area is characterized by unsuitably high water velocities and the site's habitat potential diminishes accordingly.

The WUA and surface area response curves for this site were forecast using the HABTAT model linked to an IFG-4 hydraulic model calibrated for a range of mainstem discharge from 5,000 cfs to 23,000 cfs. A constant rate of change was assumed to exist for both curves as mainstem discharges increased to 35,000 cfs (Table B-6.5).

Time series plots (Figure III-30) indicates juvenile chinook habitat within the side channel remains relatively constant during the mid-summer months, however fairly large variations in habitat potential exist between mid-summer and late spring or early autumn habitat forecasts. Another notable feature of this site is the high levels of rearing habitat provided during the rearing period relative to other study sites.

Site 132.6L

Site Description: This site is located in the channel immediately upstream of 131.7L on the west bank of the Susitna River (Plate III-6). The study reach is 1,140 ft long and ranges from 140 ft wide at the mouth to 180 ft wide at the upper end of the study reach. Cross sections 1, 3 and 9 define the fast,

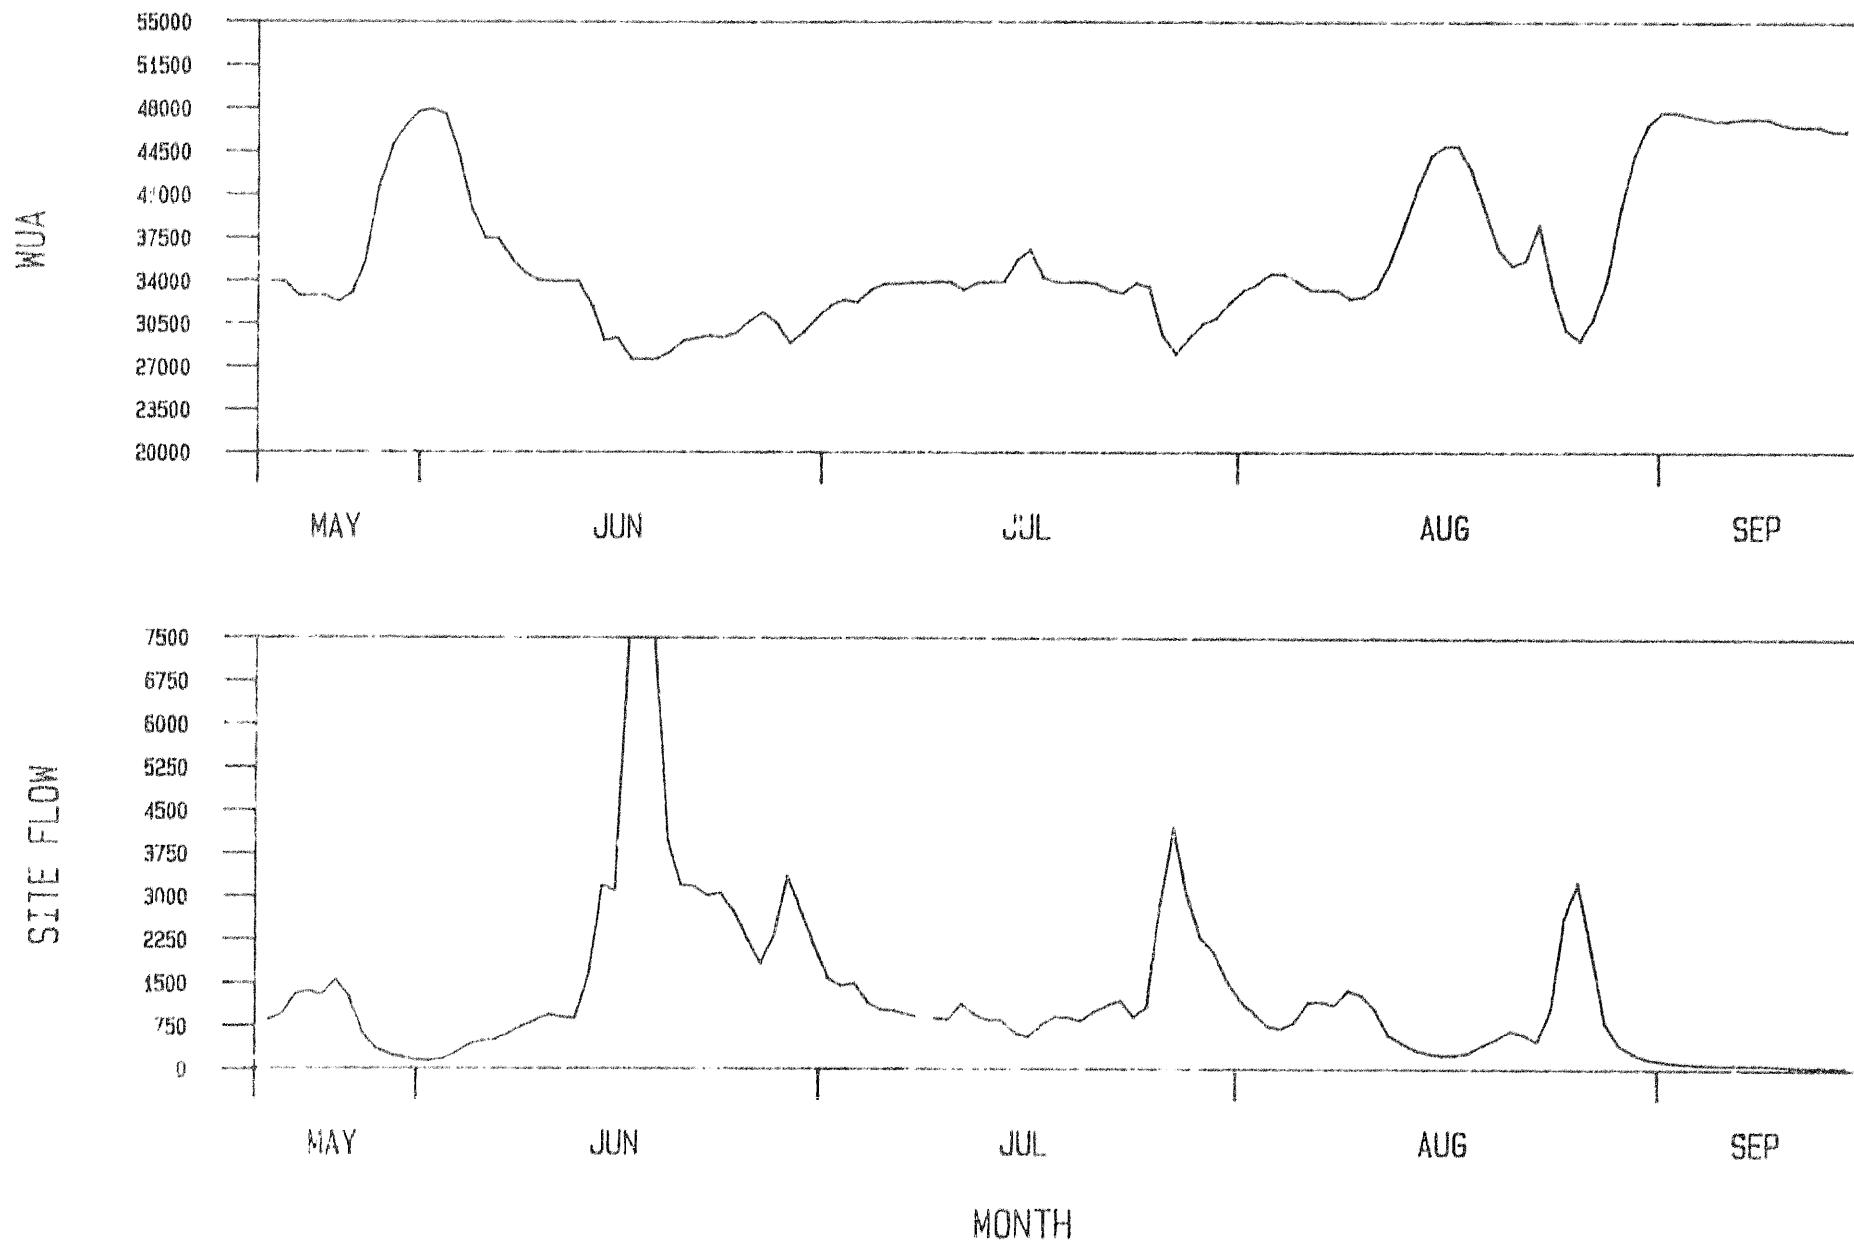


Figure III-30. Time series plots of juvenile chinook salmon WUA as a function of discharge from May 20 to September 15, 1984 for 131.7L modeling site.

shallow areas. Cross sections 2 and 4-8 describe the deep, slow velocity areas. A small backwater area is present on the left bank of cross section 9 (Figure III-31). Silt and sand substrate is predominant throughout the deep area while cobble and rubble substrate is generally found in the shallow areas. Vegetation, including horsetails, lines the left bank of the channel providing some cover.

Channels B and C breach at mainstem discharges of 10,000 and 14,500 cfs. Below 10,000 cfs, the water is ponded and eventually dries up. An overflow channel along the right bank conveys site flow at 25,000 cfs and redirects a small percentage of flow from the site to Channel A. A backwater area is present from the mouth up through cross section 2 at mainstem discharges greater than 23,100 cfs.

This site was selected to represent small side channels that remain small throughout a large range of discharges. An IFG-4 model was selected because of the small channel size and the non-uniform channel conditions.

No adult salmon have been observed in the site. However, a large number of chinook juvenile rear in the site. Access to and passage through the site are not possible below 10,000 cfs.

Calibration: To calibrate the IFG-4 model for this site, two data sets were collected at each cross section and are summarized in the following table.

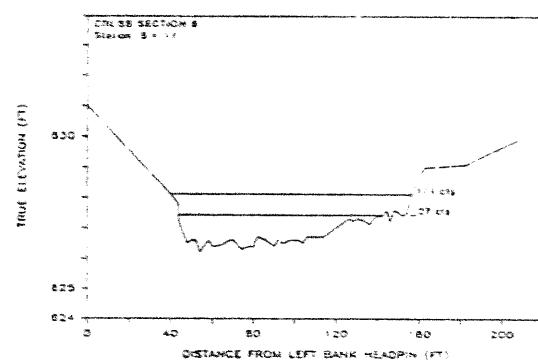
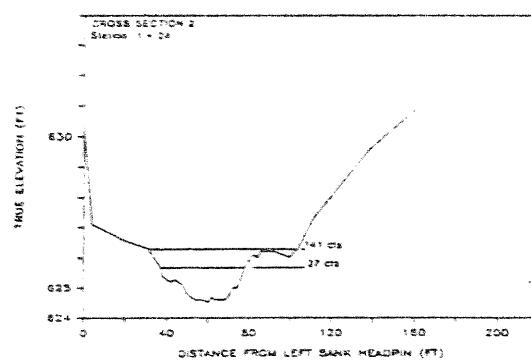
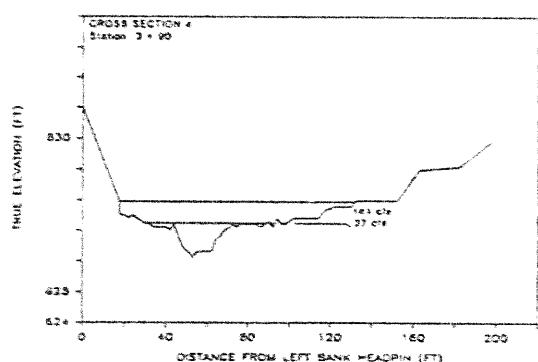
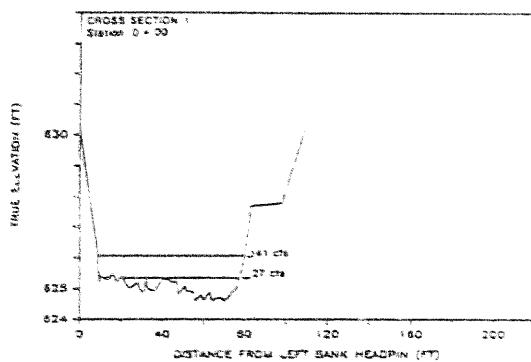
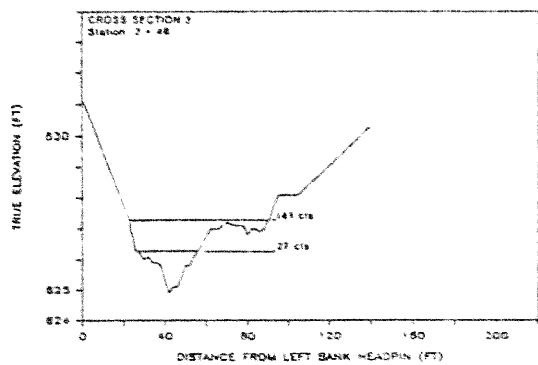
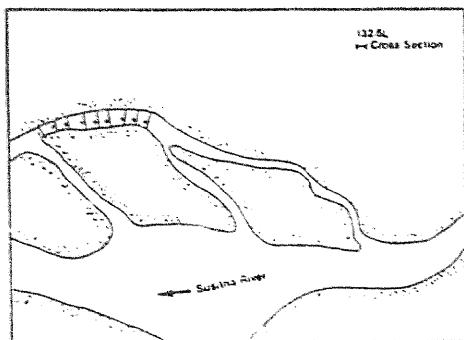


Figure III-31. Cross sections for 132.6l study site depicting water surface elevations at calibration discharges of 27 and 141 cfs.

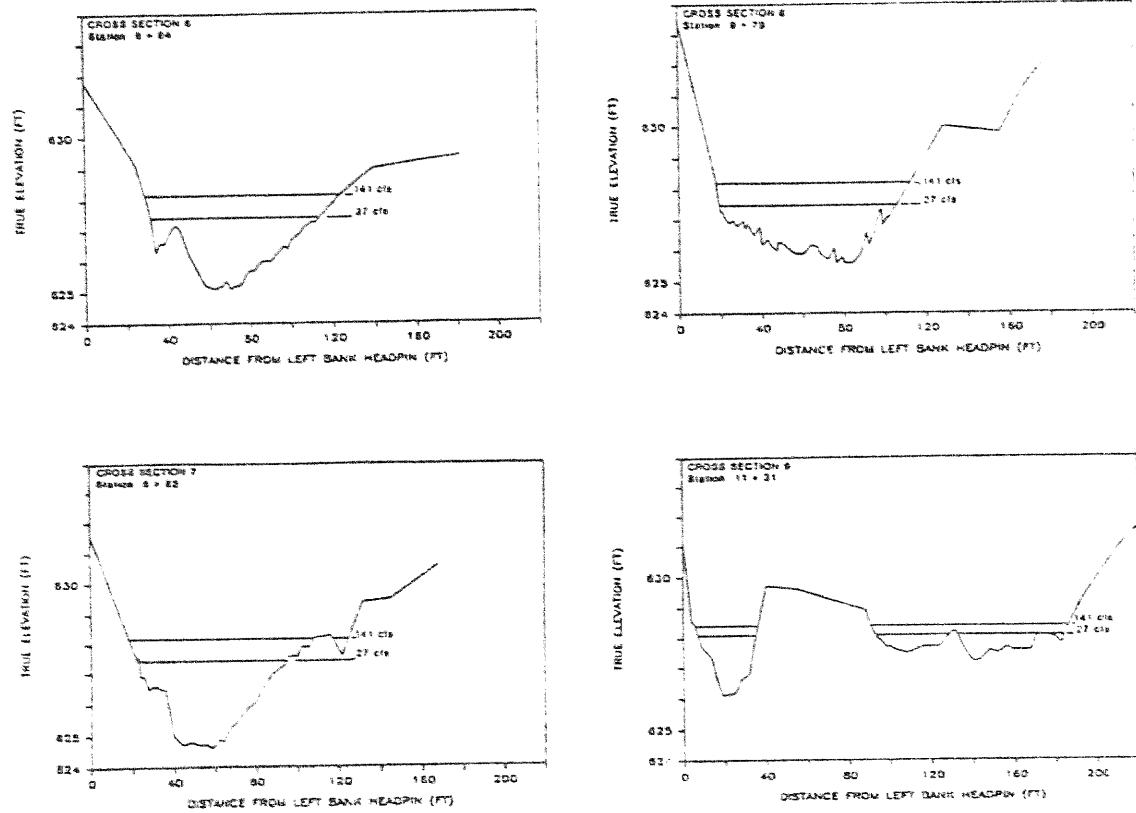


Figure III-31. Cross sections for 132.6L study site depicting water surface elevations at calibration discharges of 27 and 141 cfs.

Table III-11. Hydraulic data available to calibrate the IFG-4 model for site 132.6L.


Date	Flow (cfs)	Discharge (cfs)
940901	27	12,700
840708	141	21,500

A horizontal water surface elevation did not occur at cross section 9 due to the small backwater area on the left side of the channel. The streambed elevations in this area were raised so that the left and main channel water surfaces had the same elevation (Figure III-32).

A plot depicting the observed and predicted water surface profiles for the calibration flows as well as profiles for the extrapolation limits is shown in Figure III-33. Because only two data sets are used in the model, the predicted water surface elevations are equal to the observed elevations. The depth and velocity predictions above a site flow of 300 cfs begin to breakdown; thereby setting 300 cfs as the upper limit of the model.

The IFG-4 model was calibrated using the previous described guidelines. Figure III-34 shows a comparison between the WSEL vs q curve and the model predicted water surface elevations for each cross section in the site, similar comparisons were made but shown here only for the discharge cross section.

MEASURED

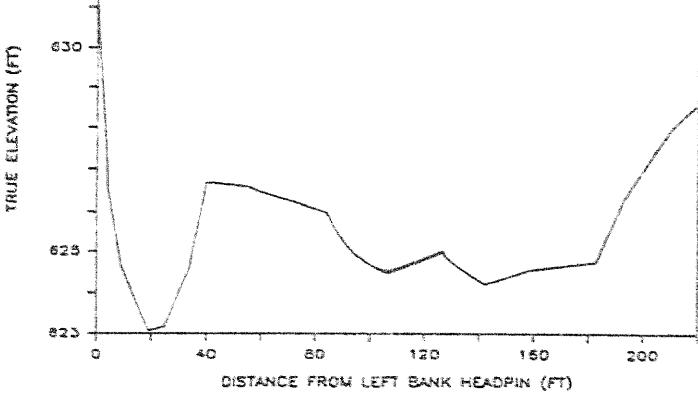

ADJUSTED

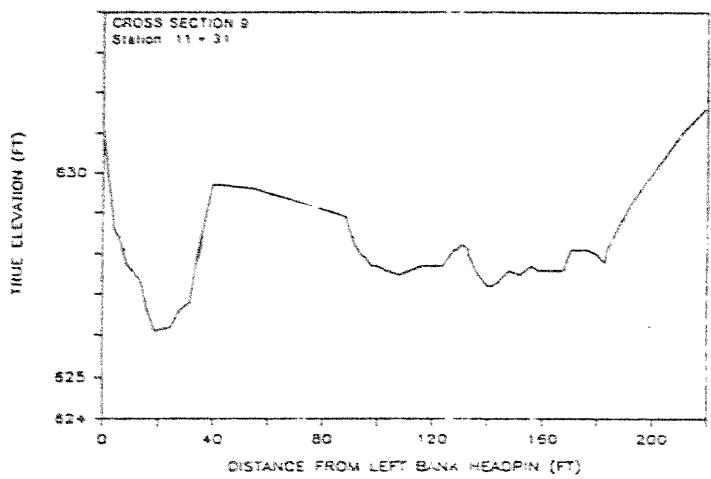


Figure III-32. Comparison between measured and adjusted cross section 9 at 132.6L study site.

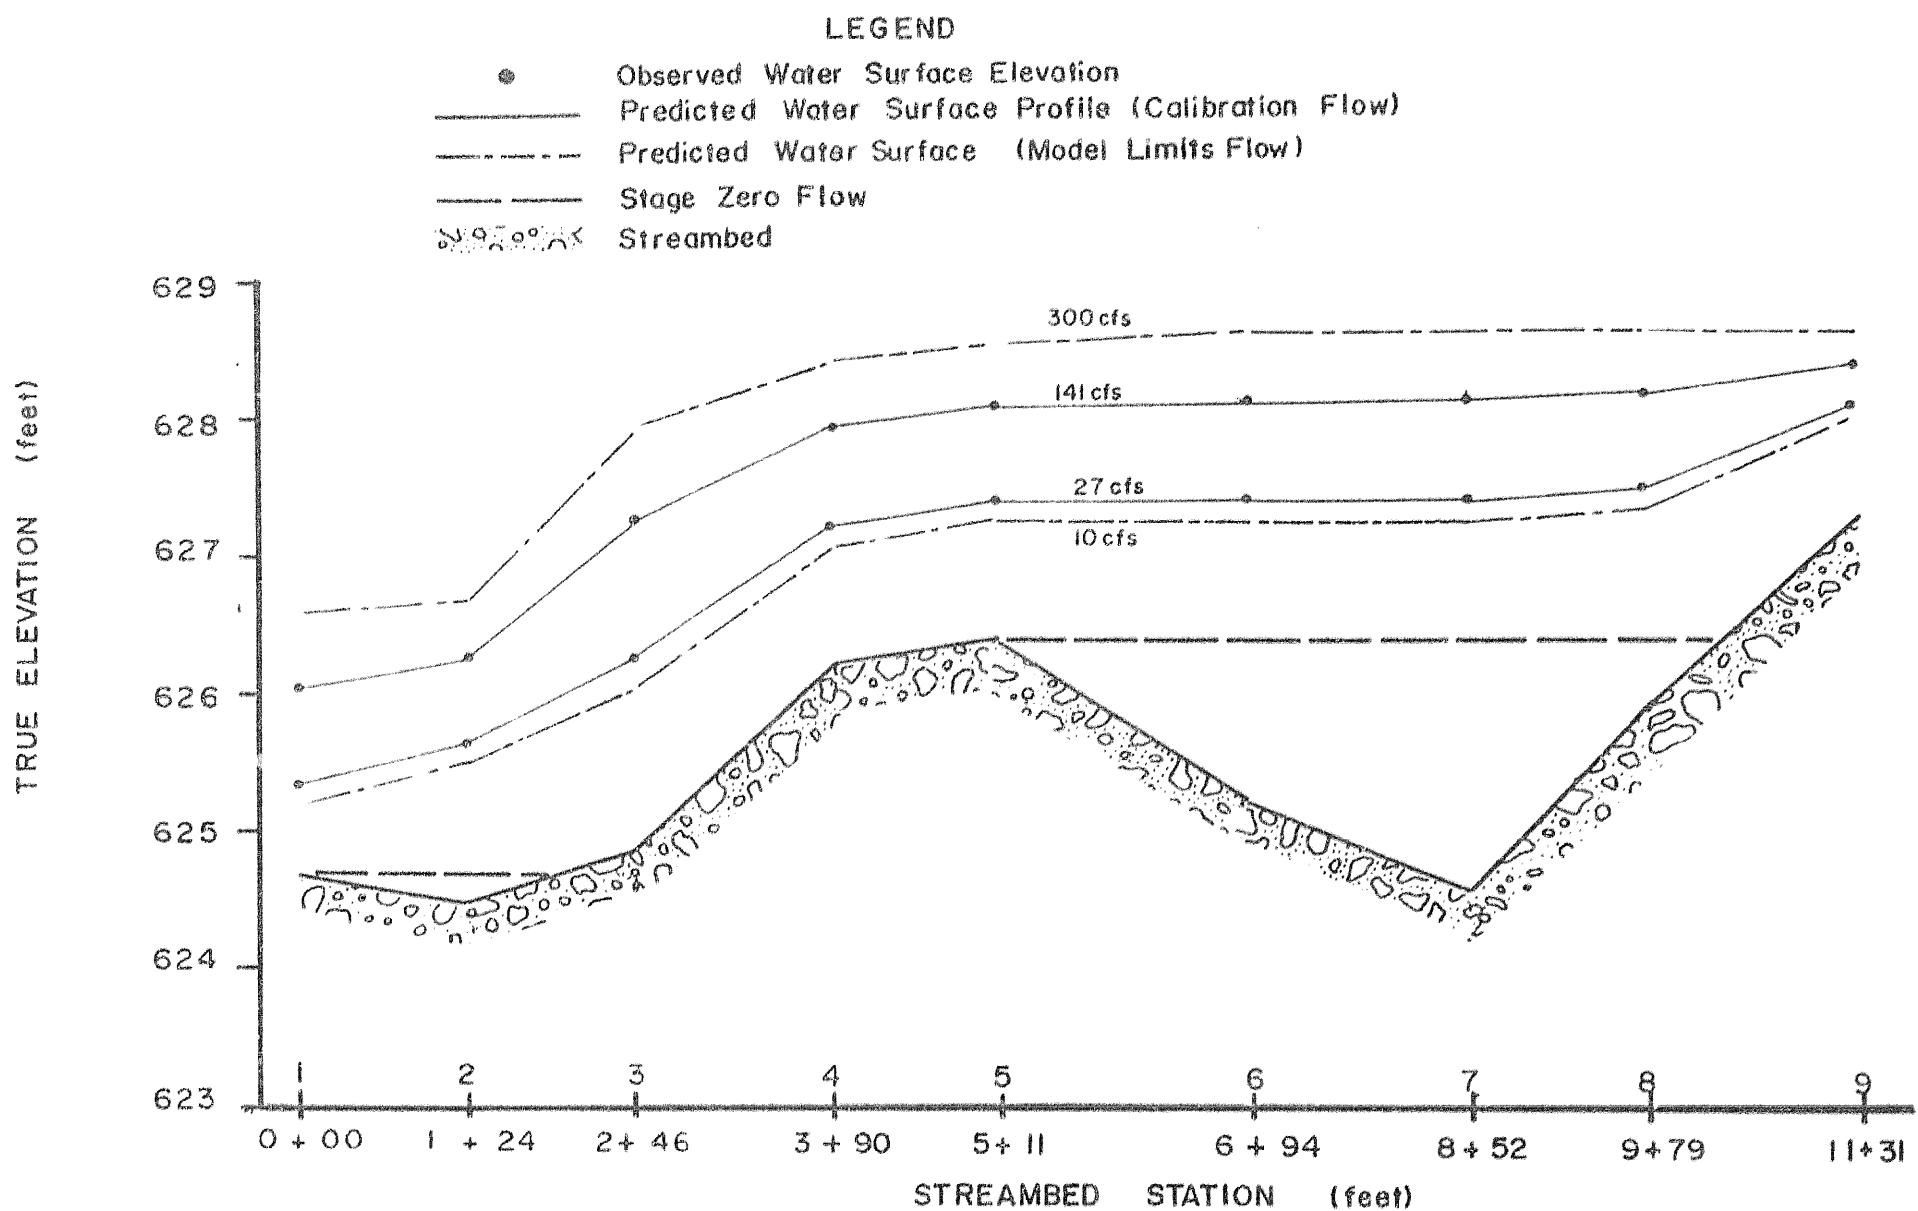


Figure III-33. Comparison of observed and predicted water surface profiles from calibrated hydraulic model at 132.6L study site.

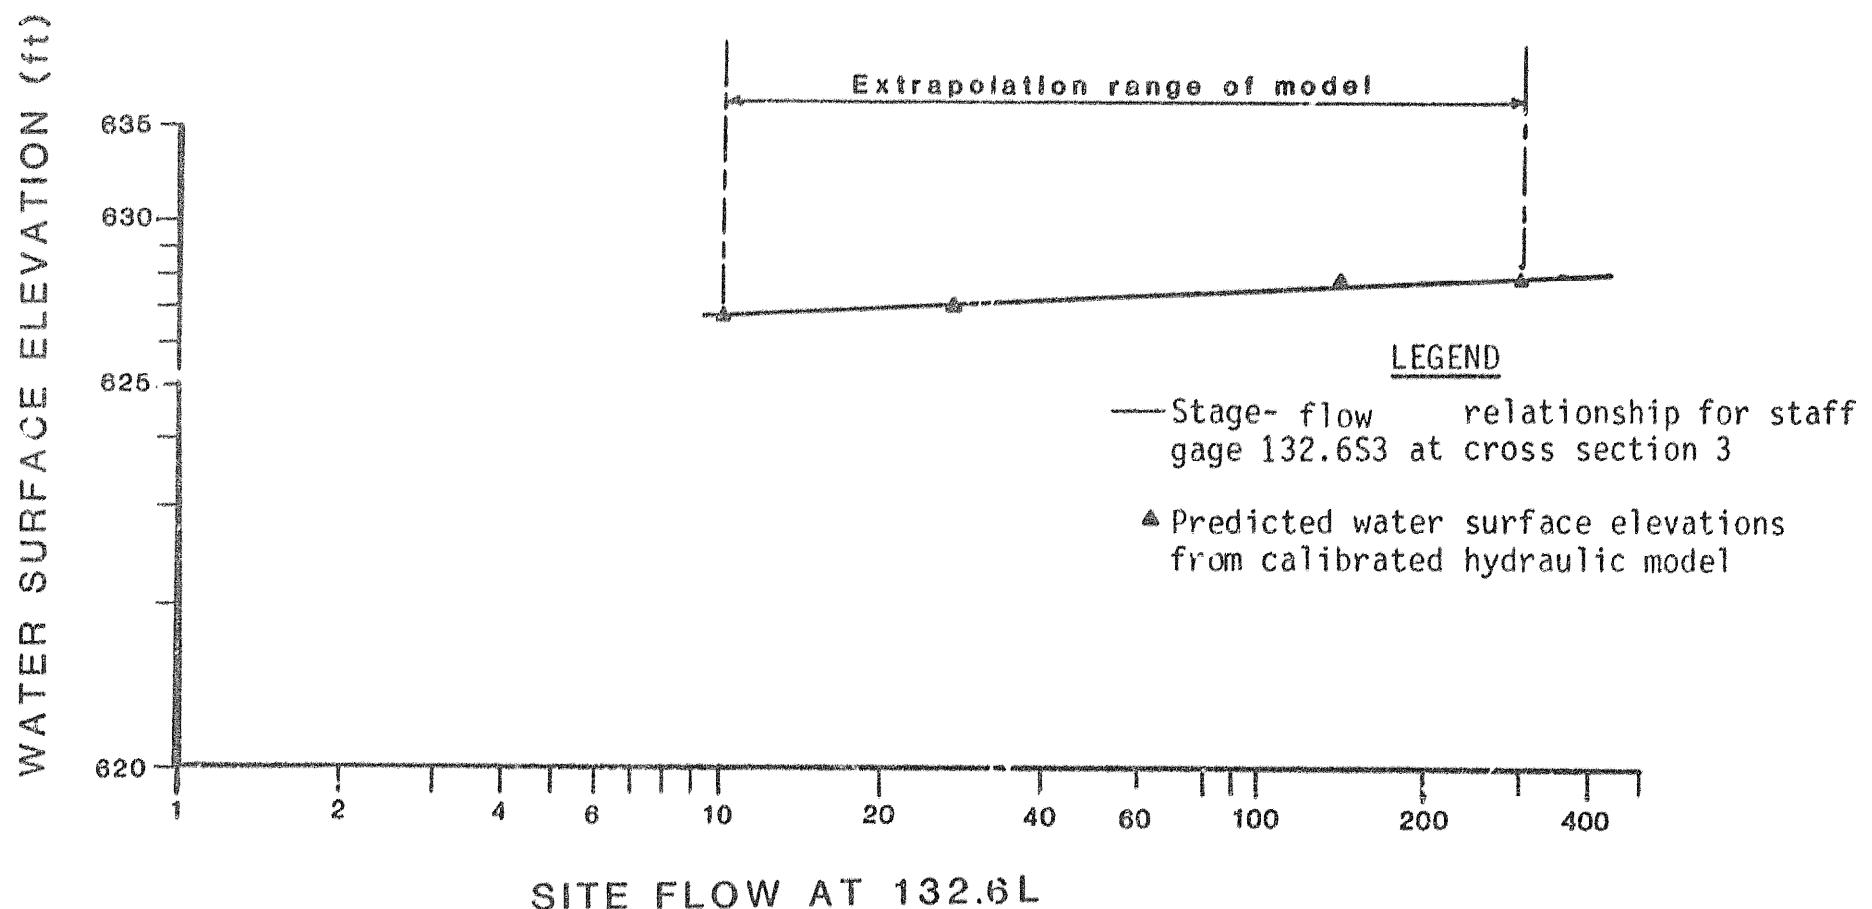



Figure III-34. Comparison between water surface elevations forecast by the calibrated hydraulic model and the stage-flow relationship for 132.6L cross section 3.

The calibrated model can be evaluated by comparing the observed and predicted water surface elevations, discharges and velocity adjustment factors (Table B-4.3). There is no difference in observed and predicted water surface elevations. The predicted discharges vary greatly from the mean at cross sections 1 and 8 as did the actual field measurements. The velocity adjustment factors ranged from 0.87 to 1.02.

Verification: Scatterplots (Figure B-2.8) and statistical tests (Table B-5) were made to compare the observed and predicted depths and velocities for the two point hydraulic model. The IFG-4 model is based on regression analysis and a two point regression connects both points. False precision is implied with a nearly perfect one-to-one relationship in the scatterplots and with the index of agreement (0.99).

Application: Site 132.6L breaches at 10,000 cfs and is controlled at 11,900 cfs mainstem. Baseline flow is estimated as 10 cfs for discharges below 10,000 cfs. For site flows of 10 to 17 cfs (10,000 to 11,900 cfs mainstem), the model is not able to forecast velocities accurately, reducing the rating for this flow range from excellent to good. The site was assigned an excellent rating for the 17 to 300 cfs range (11,900 to 25,000 cfs mainstem). Above 25,000 cfs the model was assigned an unacceptable rating.

The application range and ratings are summarized below in the bar chart.

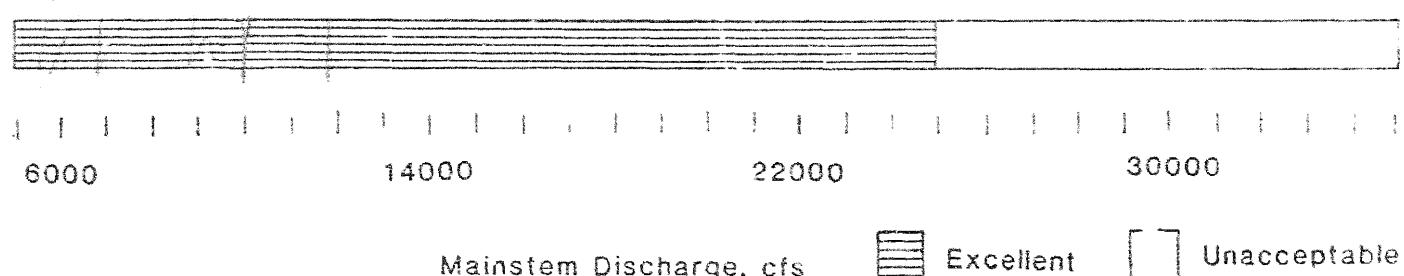

The surface area and juvenile chinook WUA curves for site 132.6L are plotted to the same vertical scale in Figure III-35a, with the WUA curve replotted to an enlarged scale in Figure III-35. In both figures surface area and WUA are expressed as square feet per 1,000 feet of side channel. A comparison of the two curves indicates the ratio between WUA and surface area is approximately 0.3 at 12,000 cfs declining toward 0.1 at 25,000 cfs.

This study site is breached at a mainstem discharge of 10,000 cfs and deters as mainstem flow continues to decline. The associated rapid decline in both wetted surface area and WUA is evident in Figure III-35. The juvenile chinook WUA curve drops suddenly when the side channel transforms from the breached to non-breached condition at 10,000 cfs. This is attributable to the site flow clearing thereby eliminating the cover value previously afforded juvenile chinook by turbid water. As mainstem discharge declines toward 5,000 cfs, both the wetted surface area and WUA approach zero.

The surface area and habitat response curves were forecast with the HABTAT model and IFG-4 hydraulic model which had been calibrated for mainstem discharges between 10,000 and 30,000 cfs. For mainstem discharges between 30,000 and 35,000 both curves were extended using exponential functions as indicated in Table B-6.6.

For mainstem discharges less than the breaching flow of 10,000 cfs surface area and WUA estimates were obtained by using clear water criteria for juvenile chinook at 9,000 and 10,000 cfs to determine the magnitude of change in WUA attributable to the site flow clearing then reviewing air photo

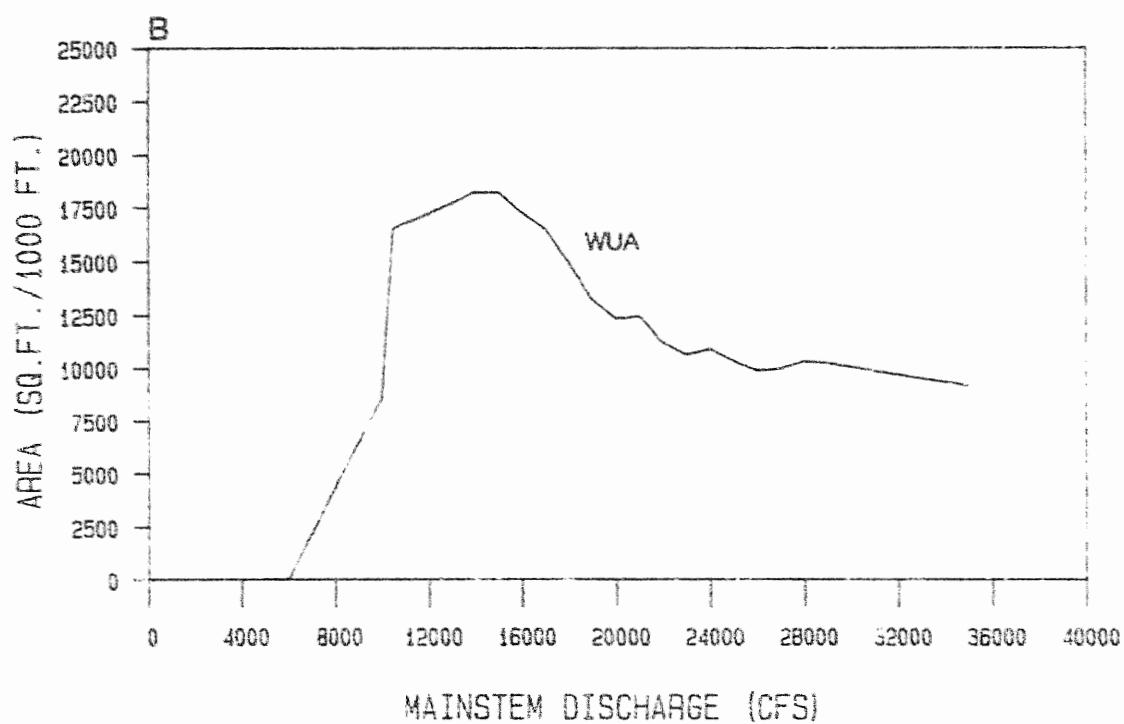
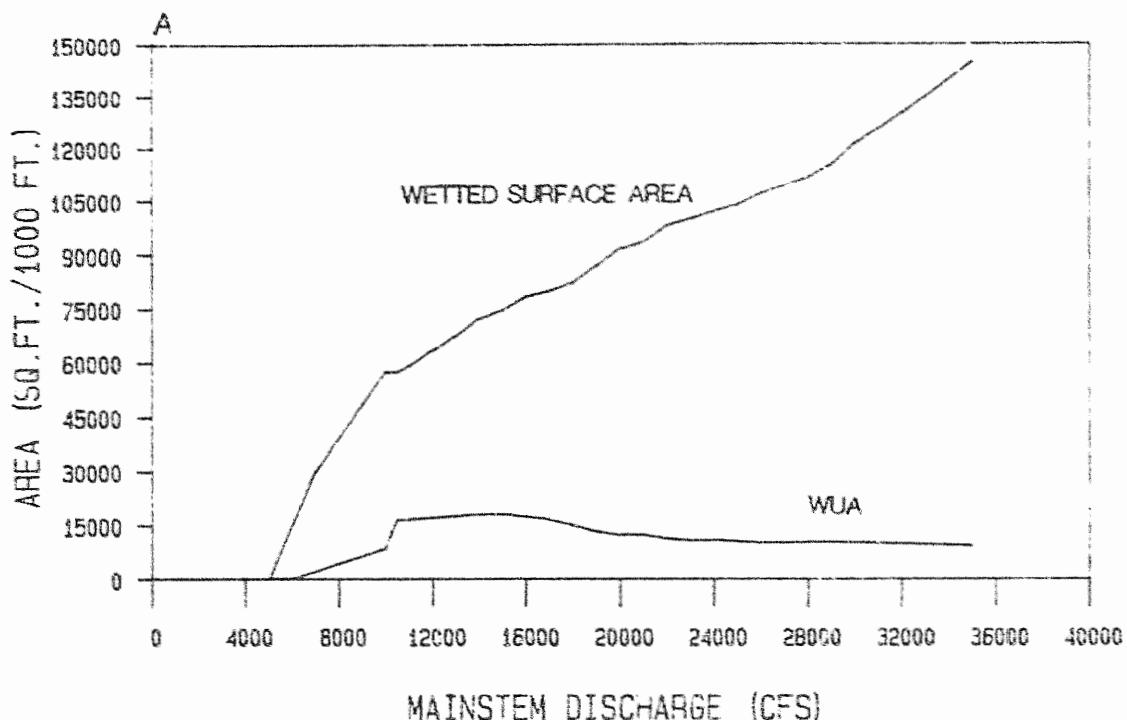


Figure III-35. Projections of gross surface area and WUA of juvenile chinook salmon habitat as a function of discharge for the 132.6L modeling site.

enlargements. At 7,400 cfs clear ponded water exists and the 5,100 cfs photography indicates the site is nearly dry. Digitized surface area measurements of ponded water connected to the mainstem at 7,400 and 5,100 cfs were used as a basis for interpolating surface areas between discharges of 10,000 and 5,000 cfs. WUA was assumed to decrease to zero at a constant rate through this range.

Time series analysis of 1984 site flow and juvenile chinook WUA are presented as Figure III-36. Rearing potential was fairly stable throughout mid-summer 1984 with notable increases being apparent in late spring and early fall when mainstem discharges were approximately half their mid-summer level.

Site 136.0L

Site Description: This site is located approximately 1 mile downstream of Gold Creek along the west bank of the Susitna River (Plate III-7). The study reach is 580 ft long and 80 ft wide with steep banks. Slough 14 enters the channel 20 ft above the study site. Cross sections 1-4 and 6 define shallow high velocity areas while cross section 5 represents a deep, slower velocity area (Figure III-37). The substrate varies from cobble and rubble to gravel throughout the site. Debris and log jams are present along the right bank and provide cover.

The channel has been observed breached at mainstem discharges as low as 5,000 cfs. At moderate to high discharges, the channel appears to be a run. Site flows of 593, 77 and 32 cfs corresponds to mainstem discharges of 23,000, 10,400 and 7,400 cfs.

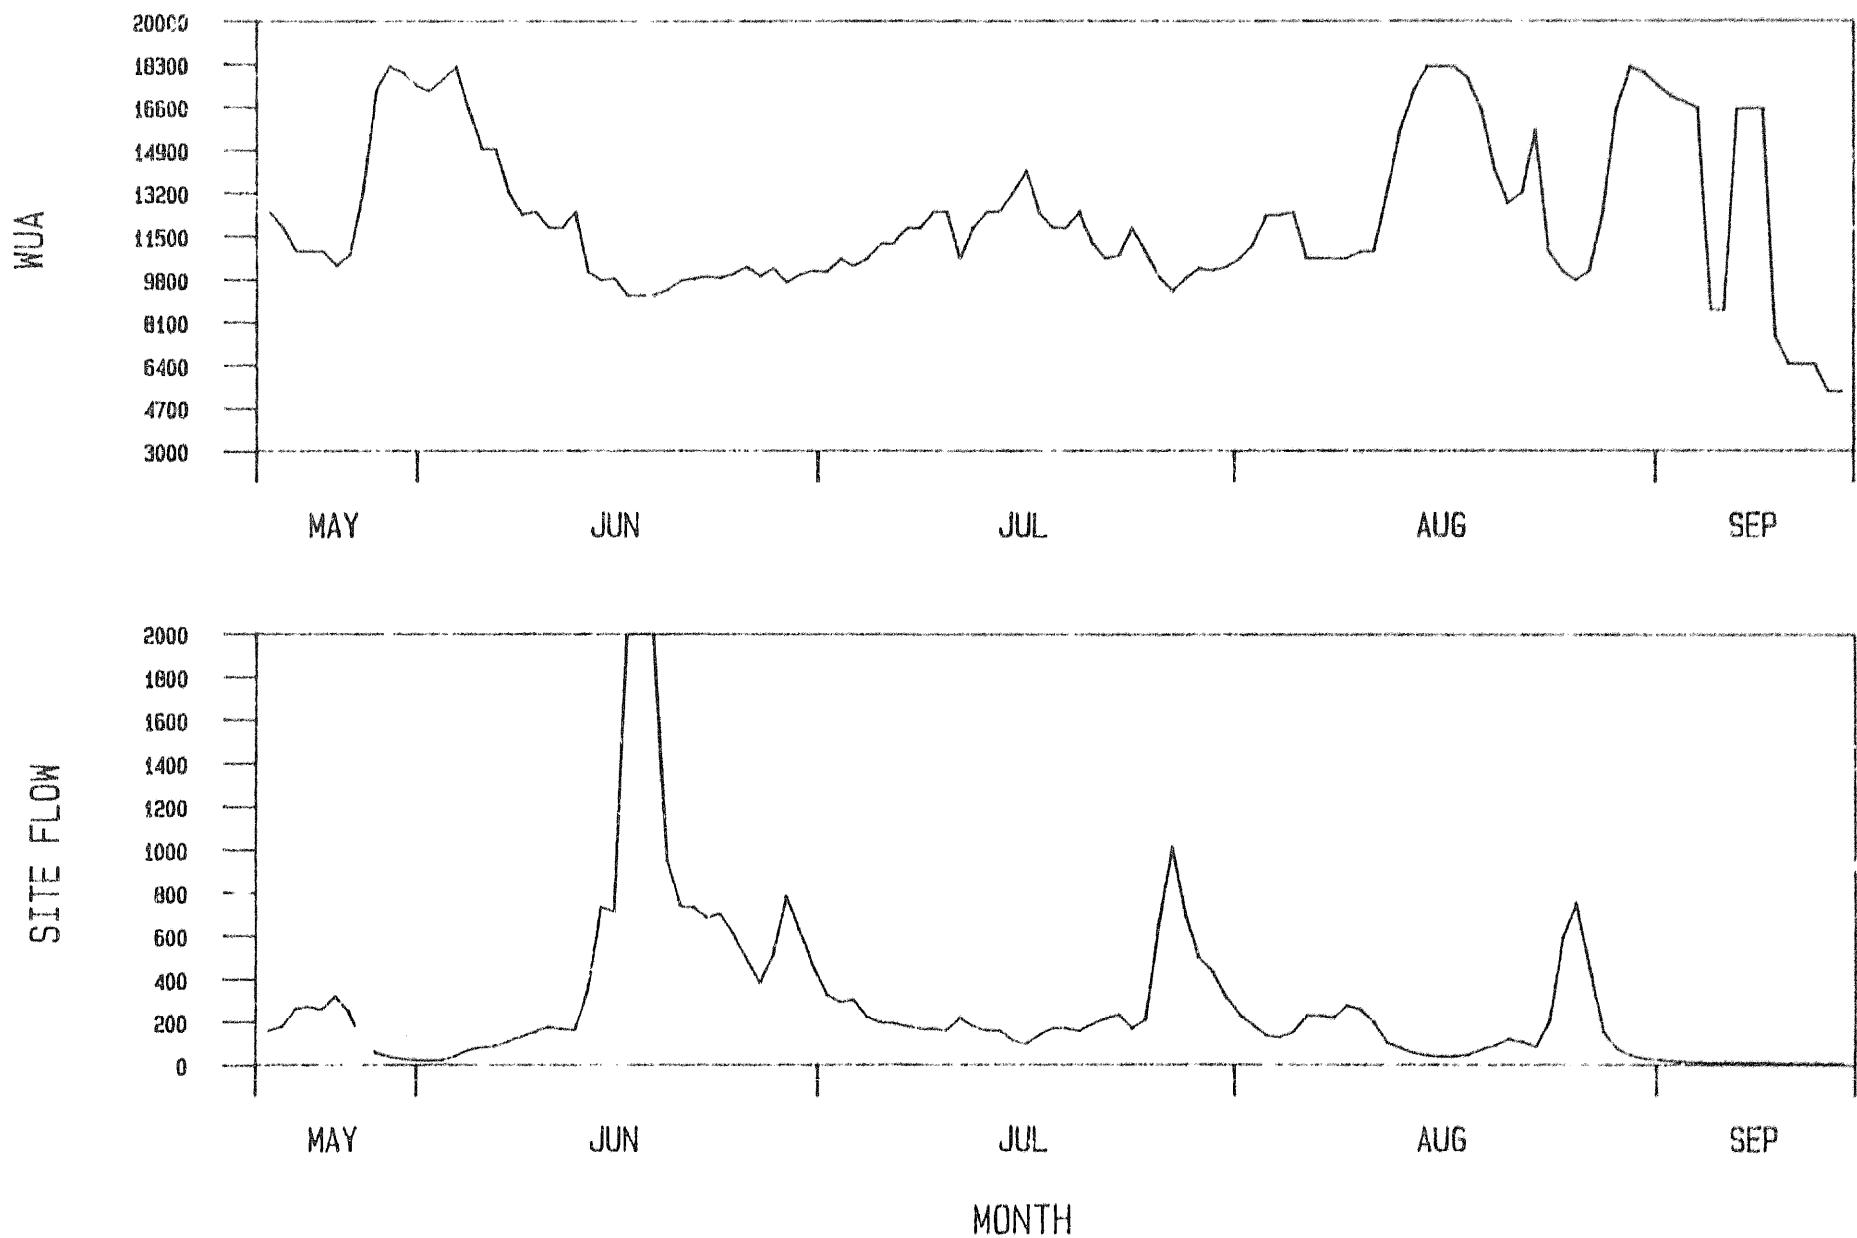


Figure III-36. Time series plots of juvenile chinook salmon WUA as a function of discharge from May 20 to September 15, 1984 for 132.6L modeling site.

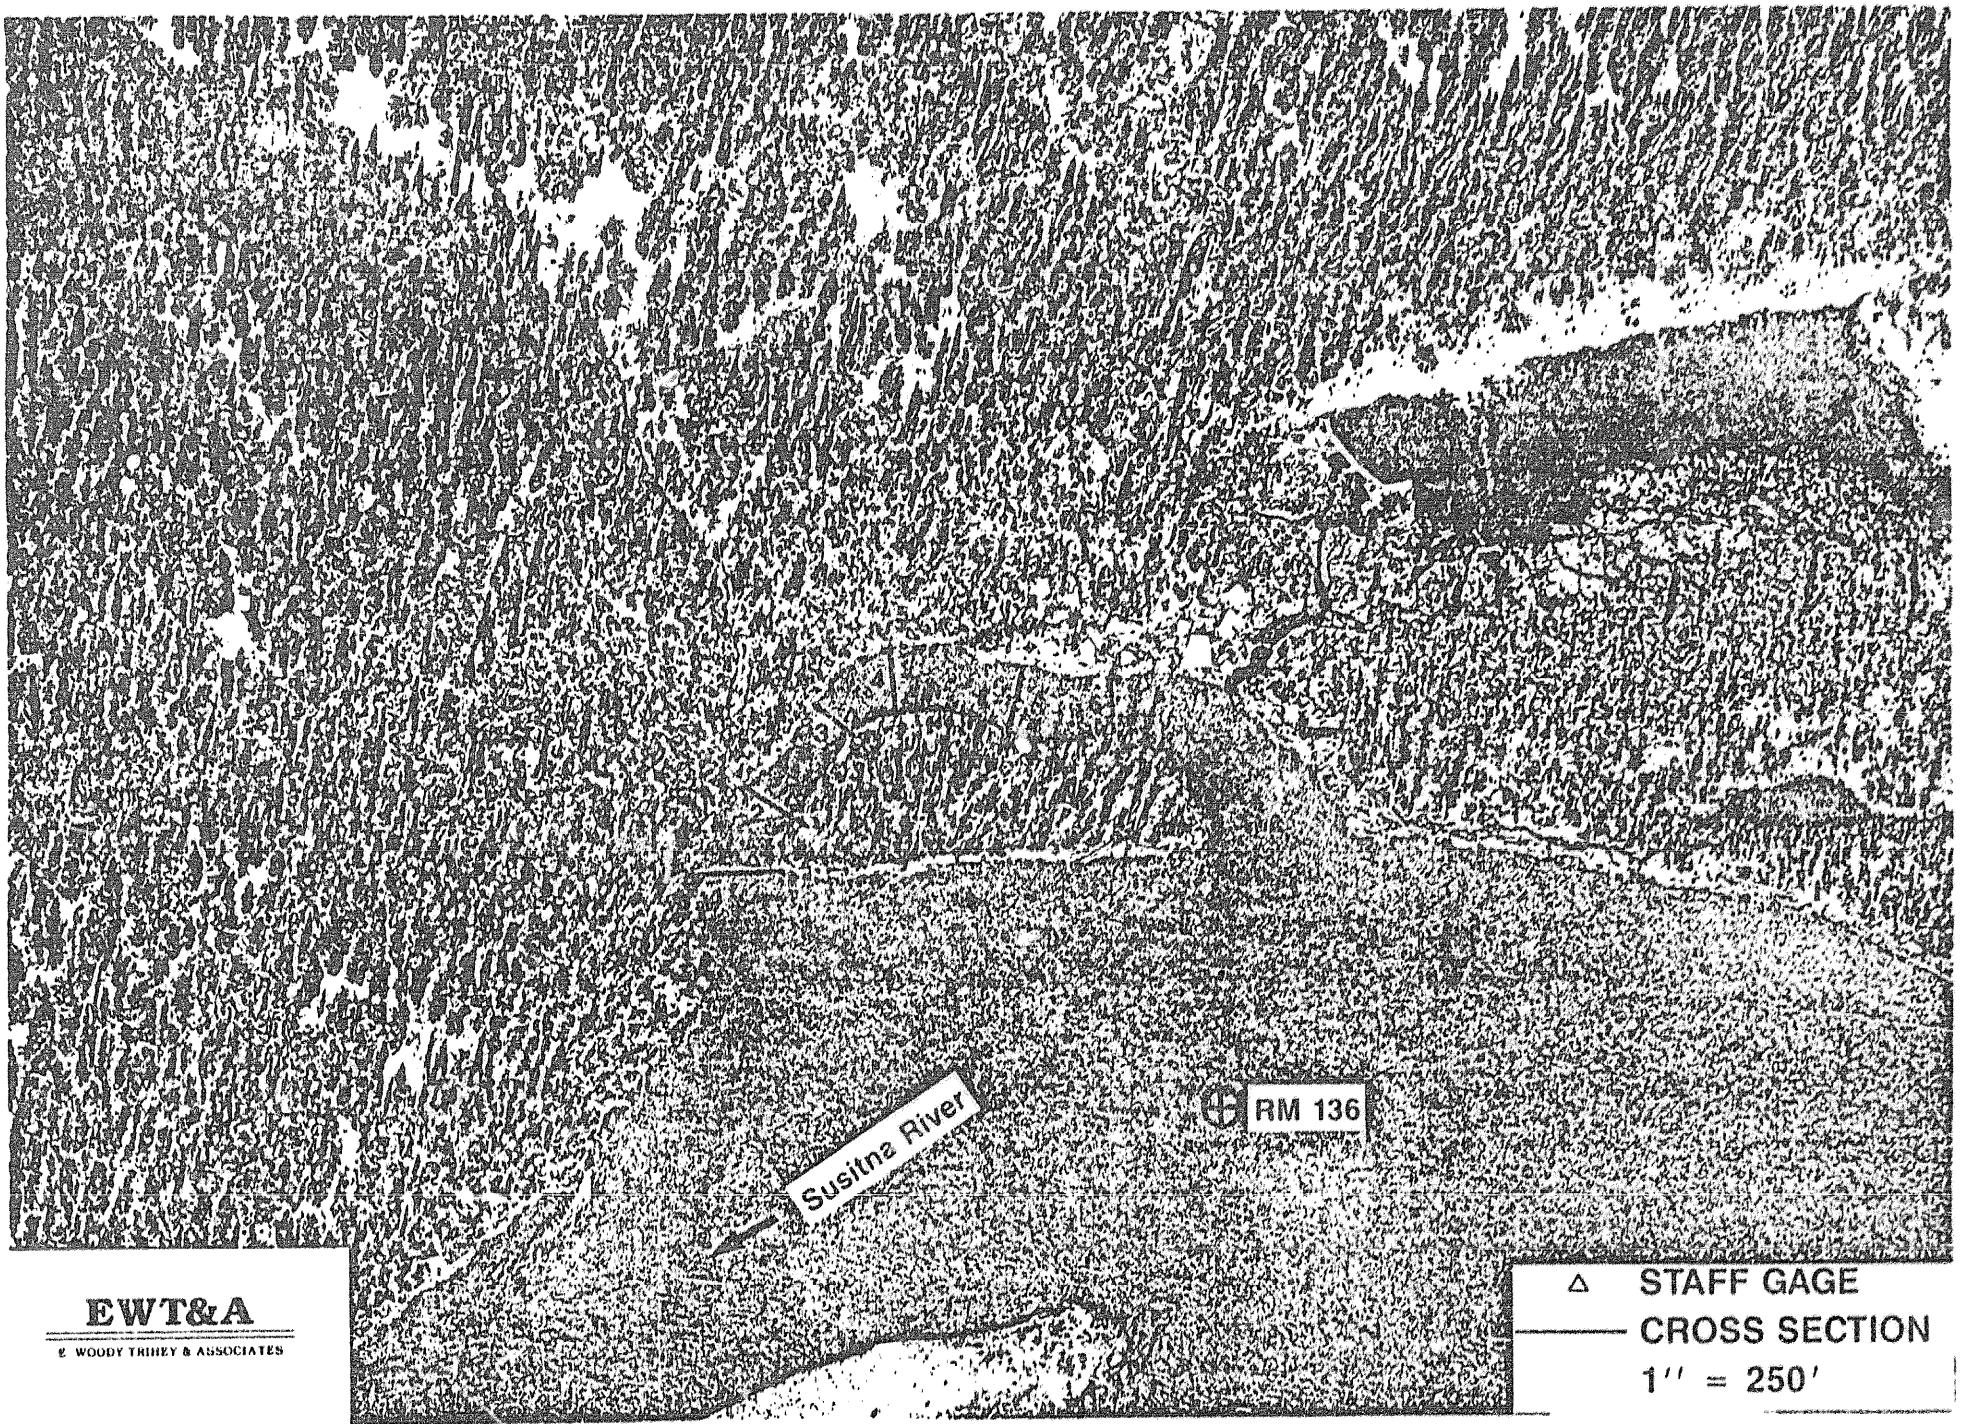


Plate III-7. Modeling site 136.0L on June 1, 1982 at mainstem discharge: 23,000 cfs.

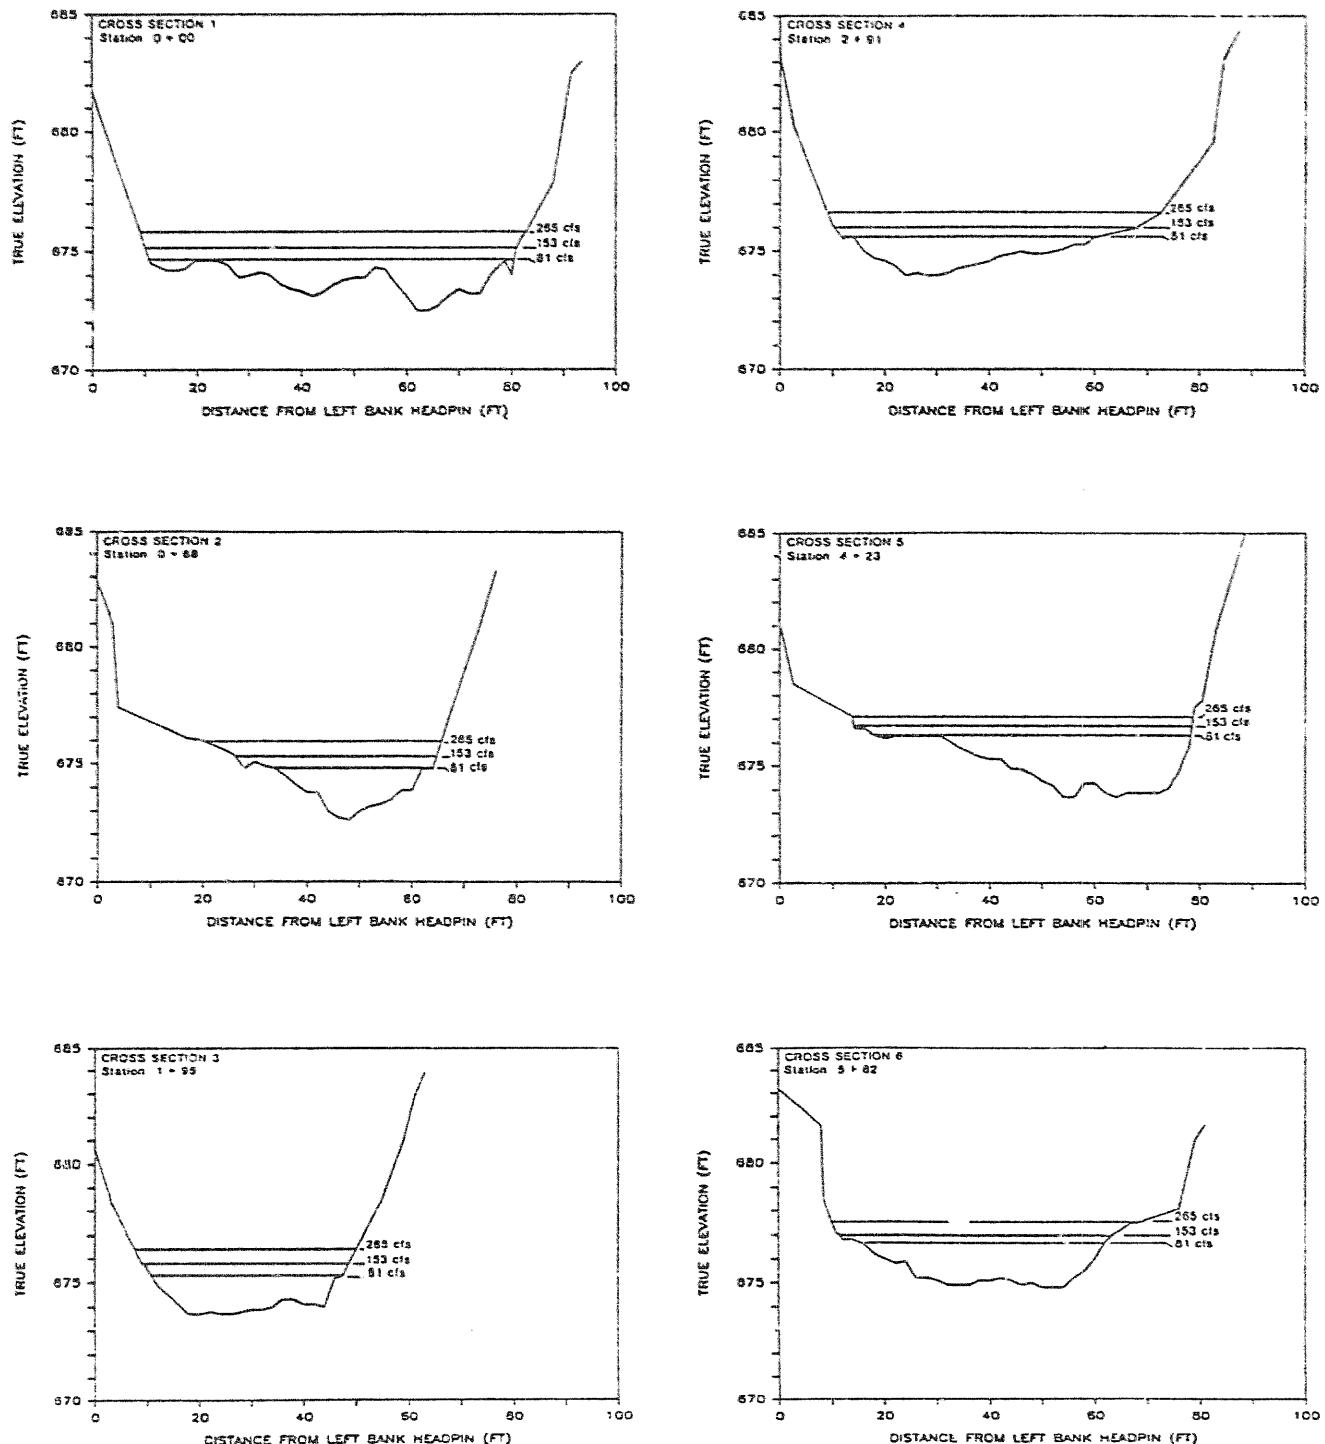
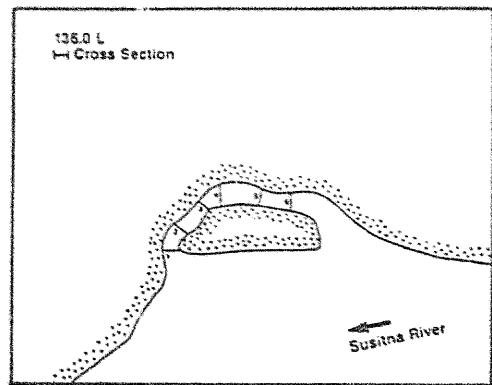


Figure III-37. Cross sections for 136.0_L study site depicting water surface elevations at calibration discharges of 81, 153 and 265 cfs.

This small study site was selected to represent small side channels that remain side channels. An IFG-4 model was selected because of the size of the channel.

Relatively few coho and chum spawners have been observed in the site. Juvenile chinook were caught in the side channel. Access into and passage through the site are not limited throughout the entire range of discharges (5,000 to 35,000 cfs).

Calibration: In order to calibrate the IFG-4 model for this site, three data sets were collected at each cross section (Table III-12).

Table III-12. Hydraulic data available to calibrate the IFG-4 model for site 136.0L.

Date	Flow (cfs)	Discharge (cfs)
840909	81	10600
840901	153	12700
840818	265	15600

No unique problems were encountered at this site following the calibration guideline. A plot depicting the observed and predicted water surface profiles for the calibration flows as well as profiles for the extrapolation limits is shown in Figure III-38. To calibrate the IFG-4 model with respect to stage, comparisons were made between the WSEL vs q curve and the model predicted

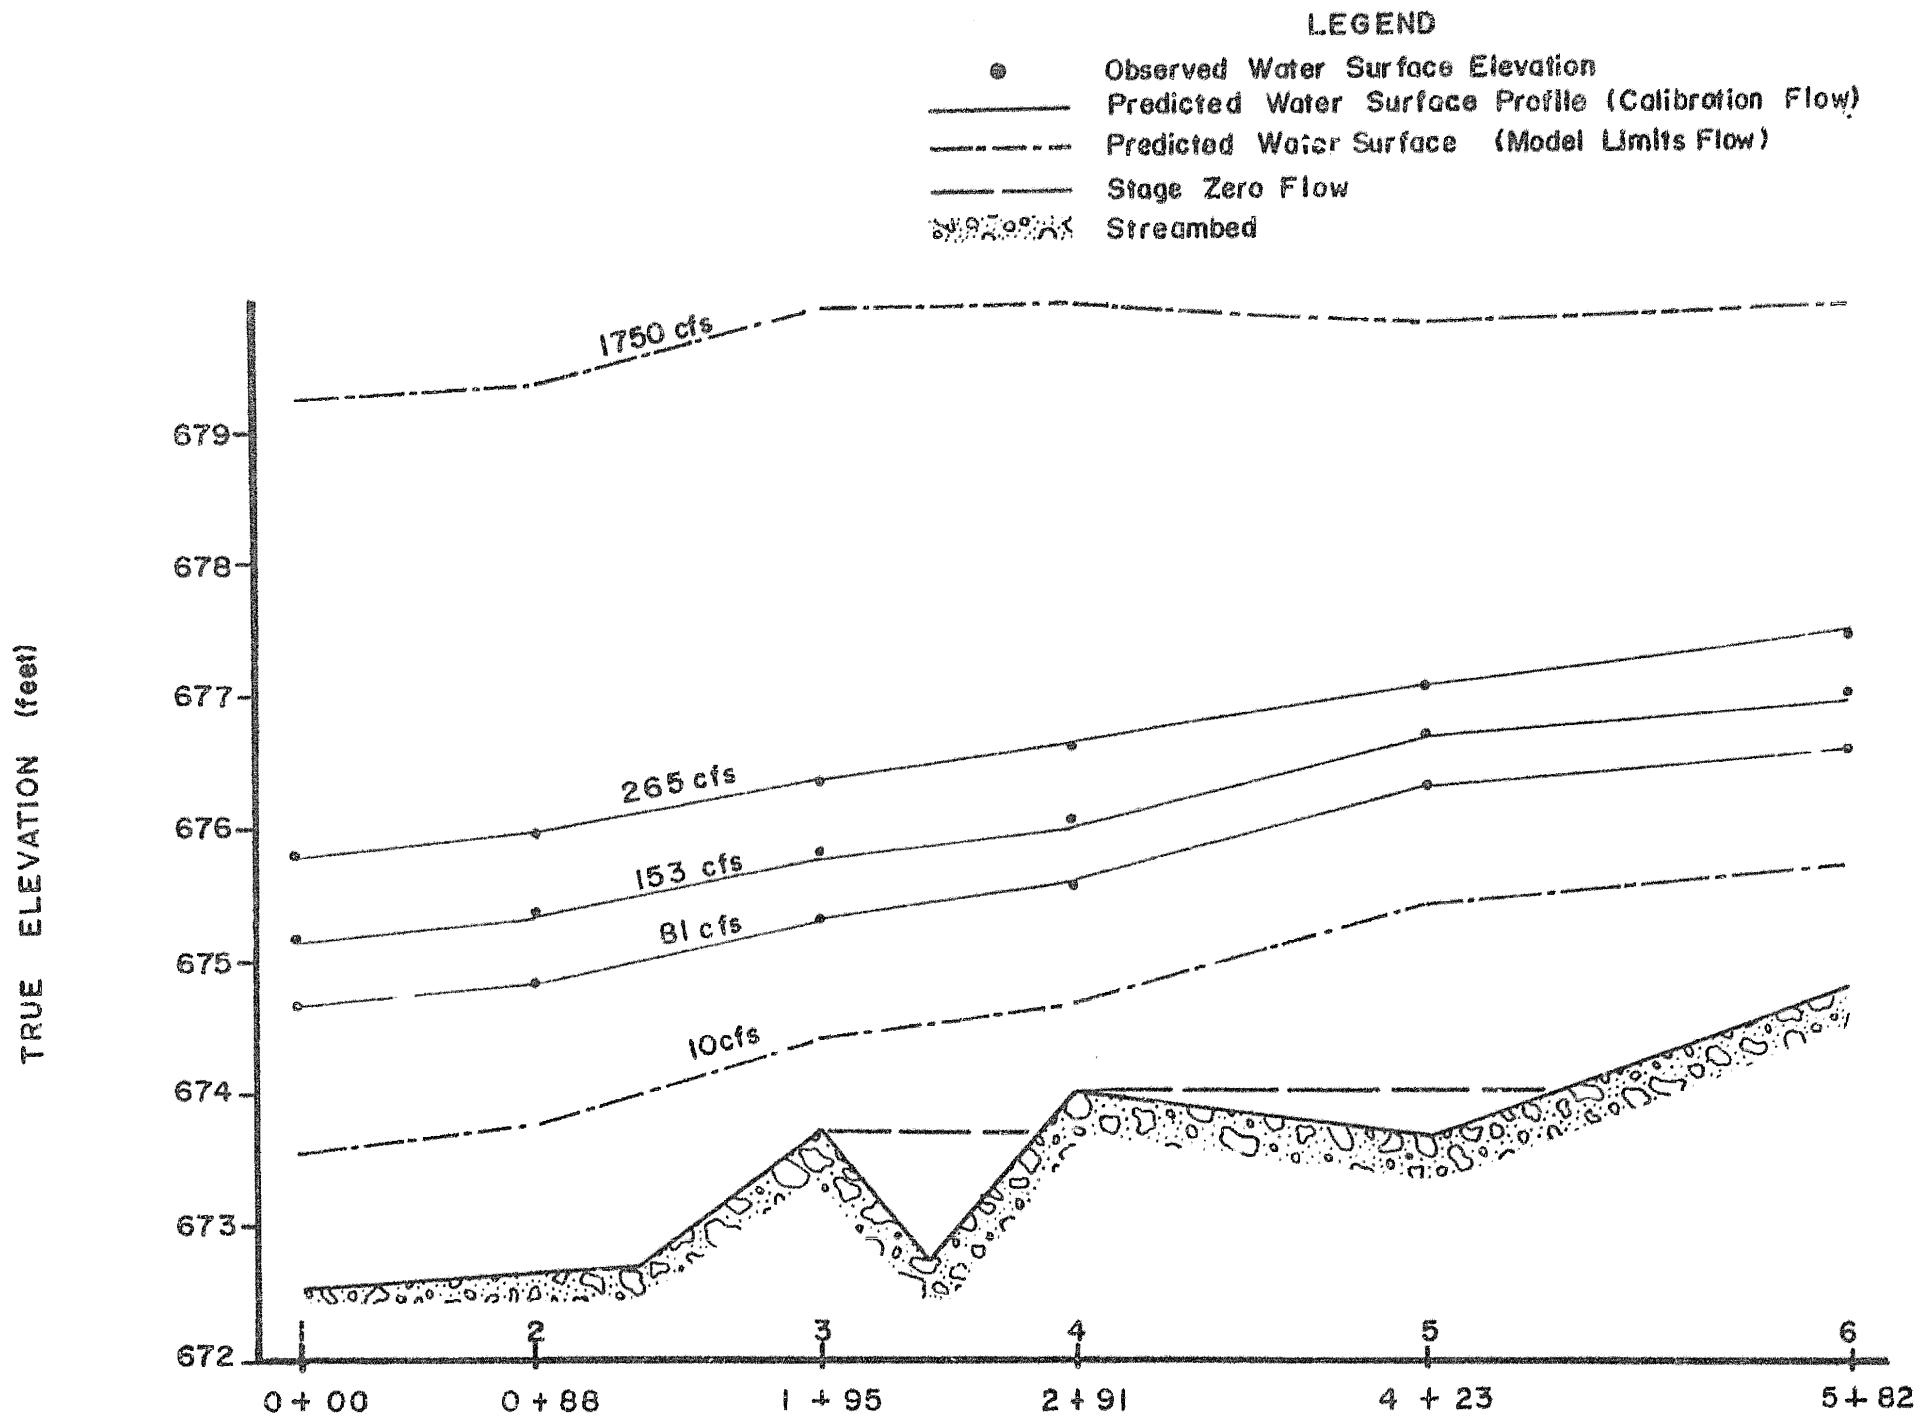



Figure III-38. Comparison of observed and predicted water surface profiles from calibrated model at 136.0L study site.

water surface elevations (Figure III-31). Similar comparisons were made at each cross section however, only the discharge cross section is shown here.

The performance of the calibrated model is evident by comparing the observed and predicted water surface elevations, discharges and velocity adjustment factors (Table B-4.4). The difference in observed and predicted water surface elevations is usually 0.02 ft. The largest difference in observed and predicted discharge is 3 percent. The velocity adjustment factors range from 0.99 to 1.01, nearly a perfect correlation.

Verification: The scatterplots of observed and predicted depths and velocities are shown in Figure B-2.9. There appears to be more scatter in the depths than velocities but a one-to-one relationship can be observed from the plot. The results of the statistical tests are shown in Table B-5. Both depth and velocity comparisons of the RMSE_U is nearly equal to the RMSE (.167 compared to .170 and .157 compared to .165). The index of agreement for both variables is 0.99, indications of how well the hydraulic model is predicting depth.

Application: An excellent rating was assigned for site flows of 10 to 1,750 cfs corresponding to 5,000 to 35,000 cfs mainstem, as shown below in the bar chart.

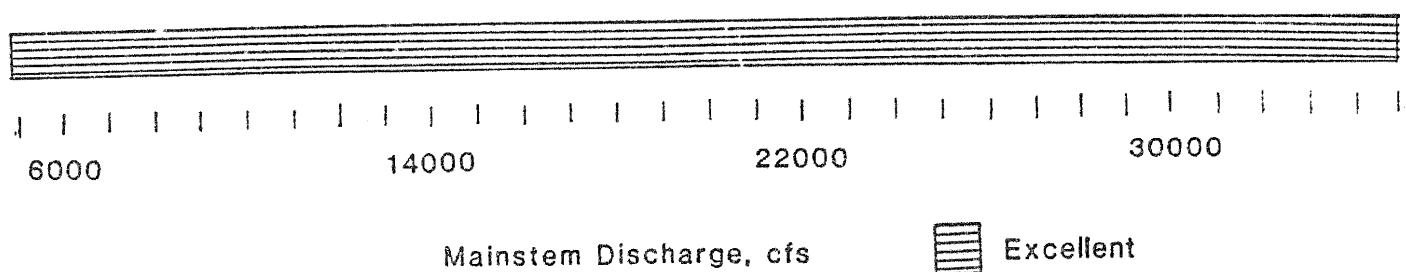

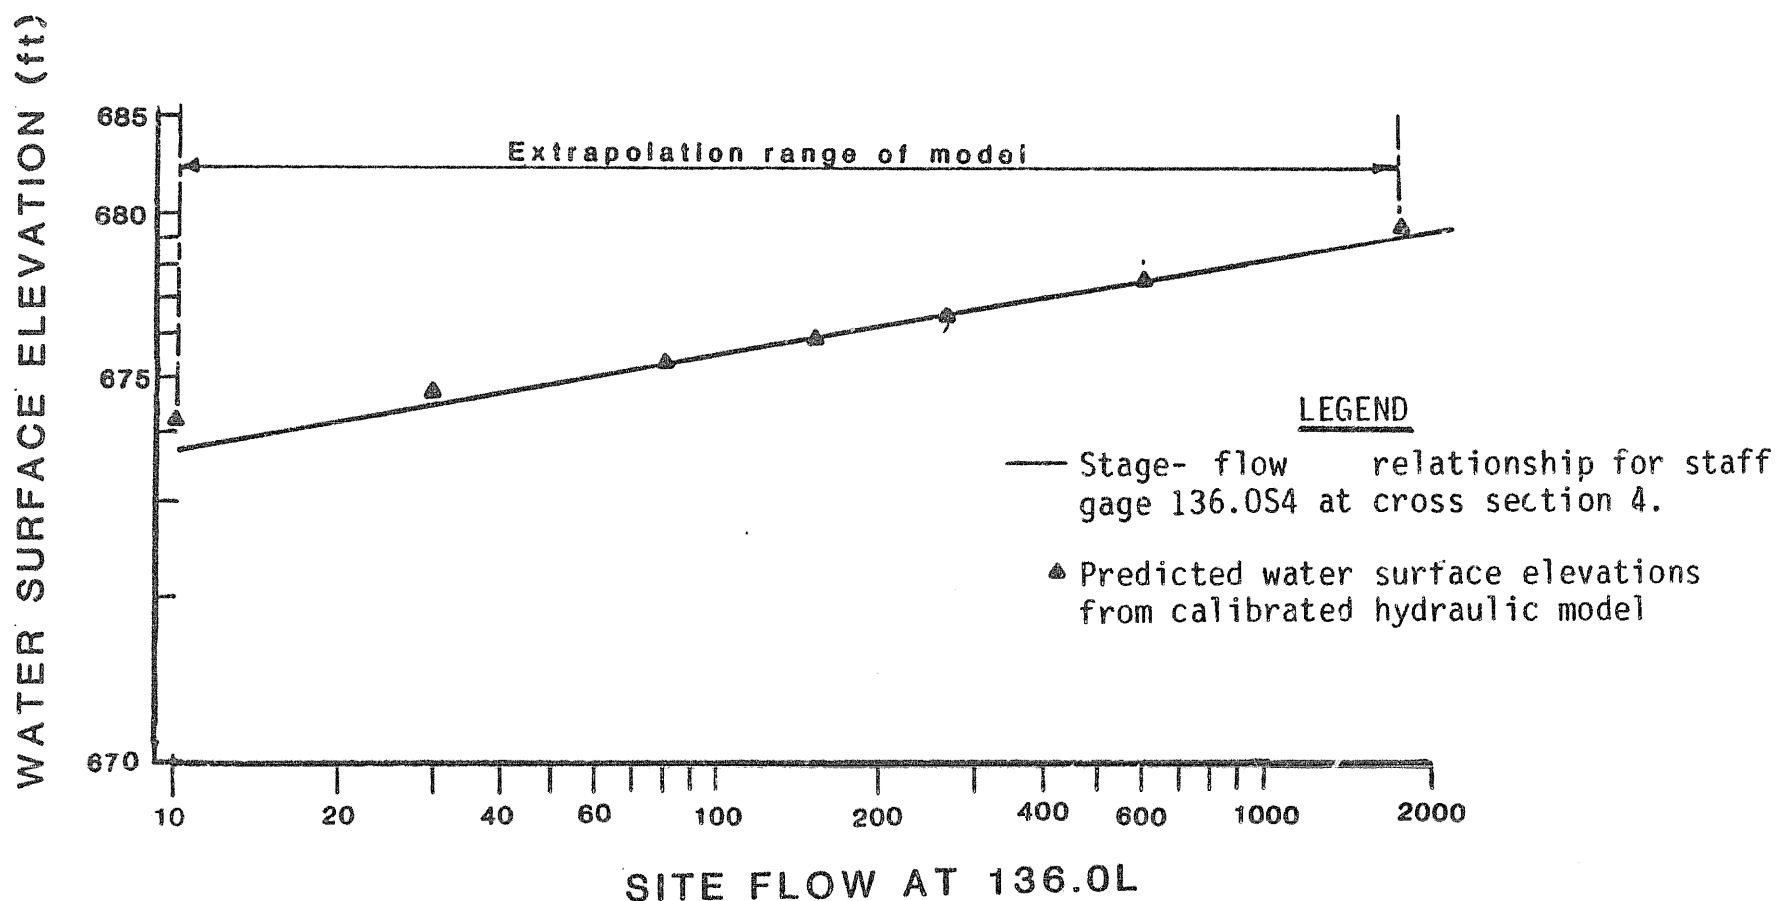


Figure III-39. Comparison between water surface elevations forecast by the calibrated hydraulic model and the stage-flow relationship for 136.0L cross section 4.

Total wetted surface area and WUA forecasts are provided for a mainstem discharge between 5,000 and 35,000 cfs (Figure III-41a and b). In the first figure both curves are plotted using a common vertical scale and are expressed in the same units. An eight fold increase in the vertical scale is used with Figure III-41b. Both the surface area and WUA curves for this site were forecast using an IFG-4 hydraulic model calibrated for mainstem discharges ranging from 5,000 to 35,000 cfs.

Five of the six cross sections established at this small, high gradient side channel were located in riffle zones. The channel cross section lacks the gently sloped stream banks and gravel bars associated with other side channels. Consequently, velocities throughout this site tend to exceed those preferred by juvenile chinook salmon. Hence the rearing habitat potential steadily decreases between 5,000 and 18,000 cfs, but remains at nearly the same level through 35,000 cfs. This is primarily attributed to the large amount of shoreline debris and undercut banks which exist at this site. When this habitat response curve is compared to WUA curves for other sites, it is apparent that this site provides less rearing habitat on a per 1,000 ft basis than most other side channels. However, because the surface area of this side channel is also small, the proportion of the study site possessing suitable chinook habitat is actually greater than the proportion of some of the larger side channels.

The influence of shoreline debris and undercut banks on the temporal stability of chinook rearing habitat at this site is evident in the time series plots presented as Figure III-42. Despite the rather erratic pattern of daily site

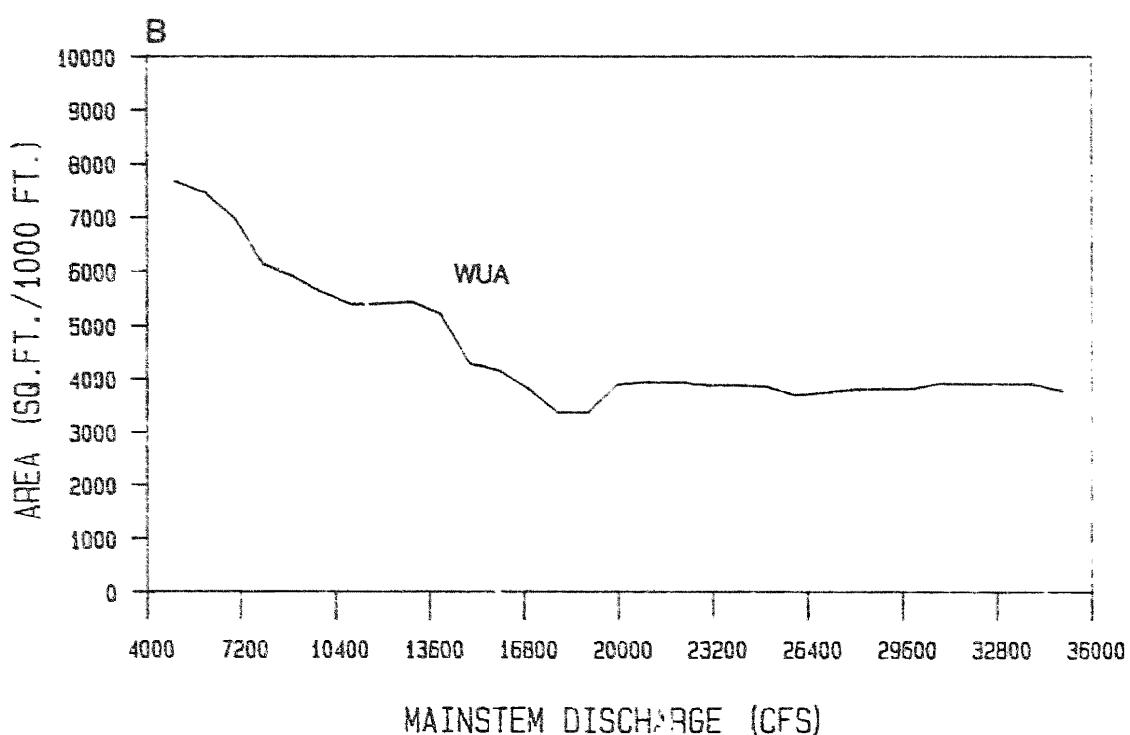
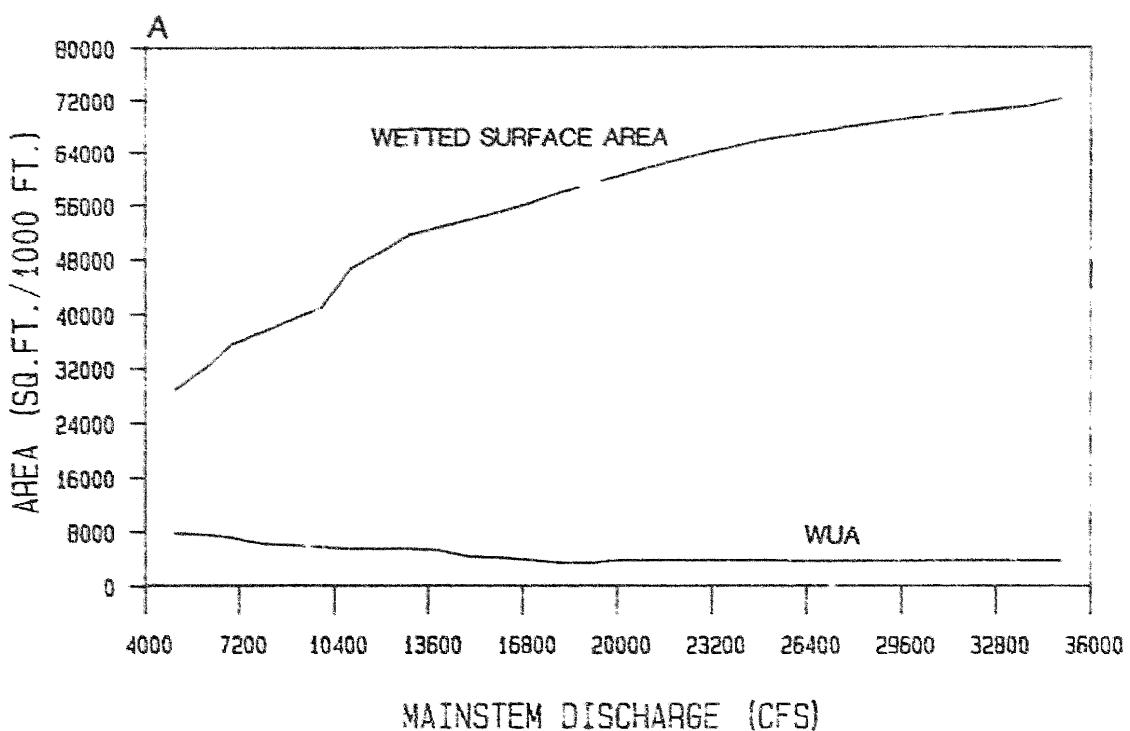


Figure III-41. Projections of gross surface area and WUA of juvenile chinook salmon habitat as a function of discharge for the 135.0L modeling site.

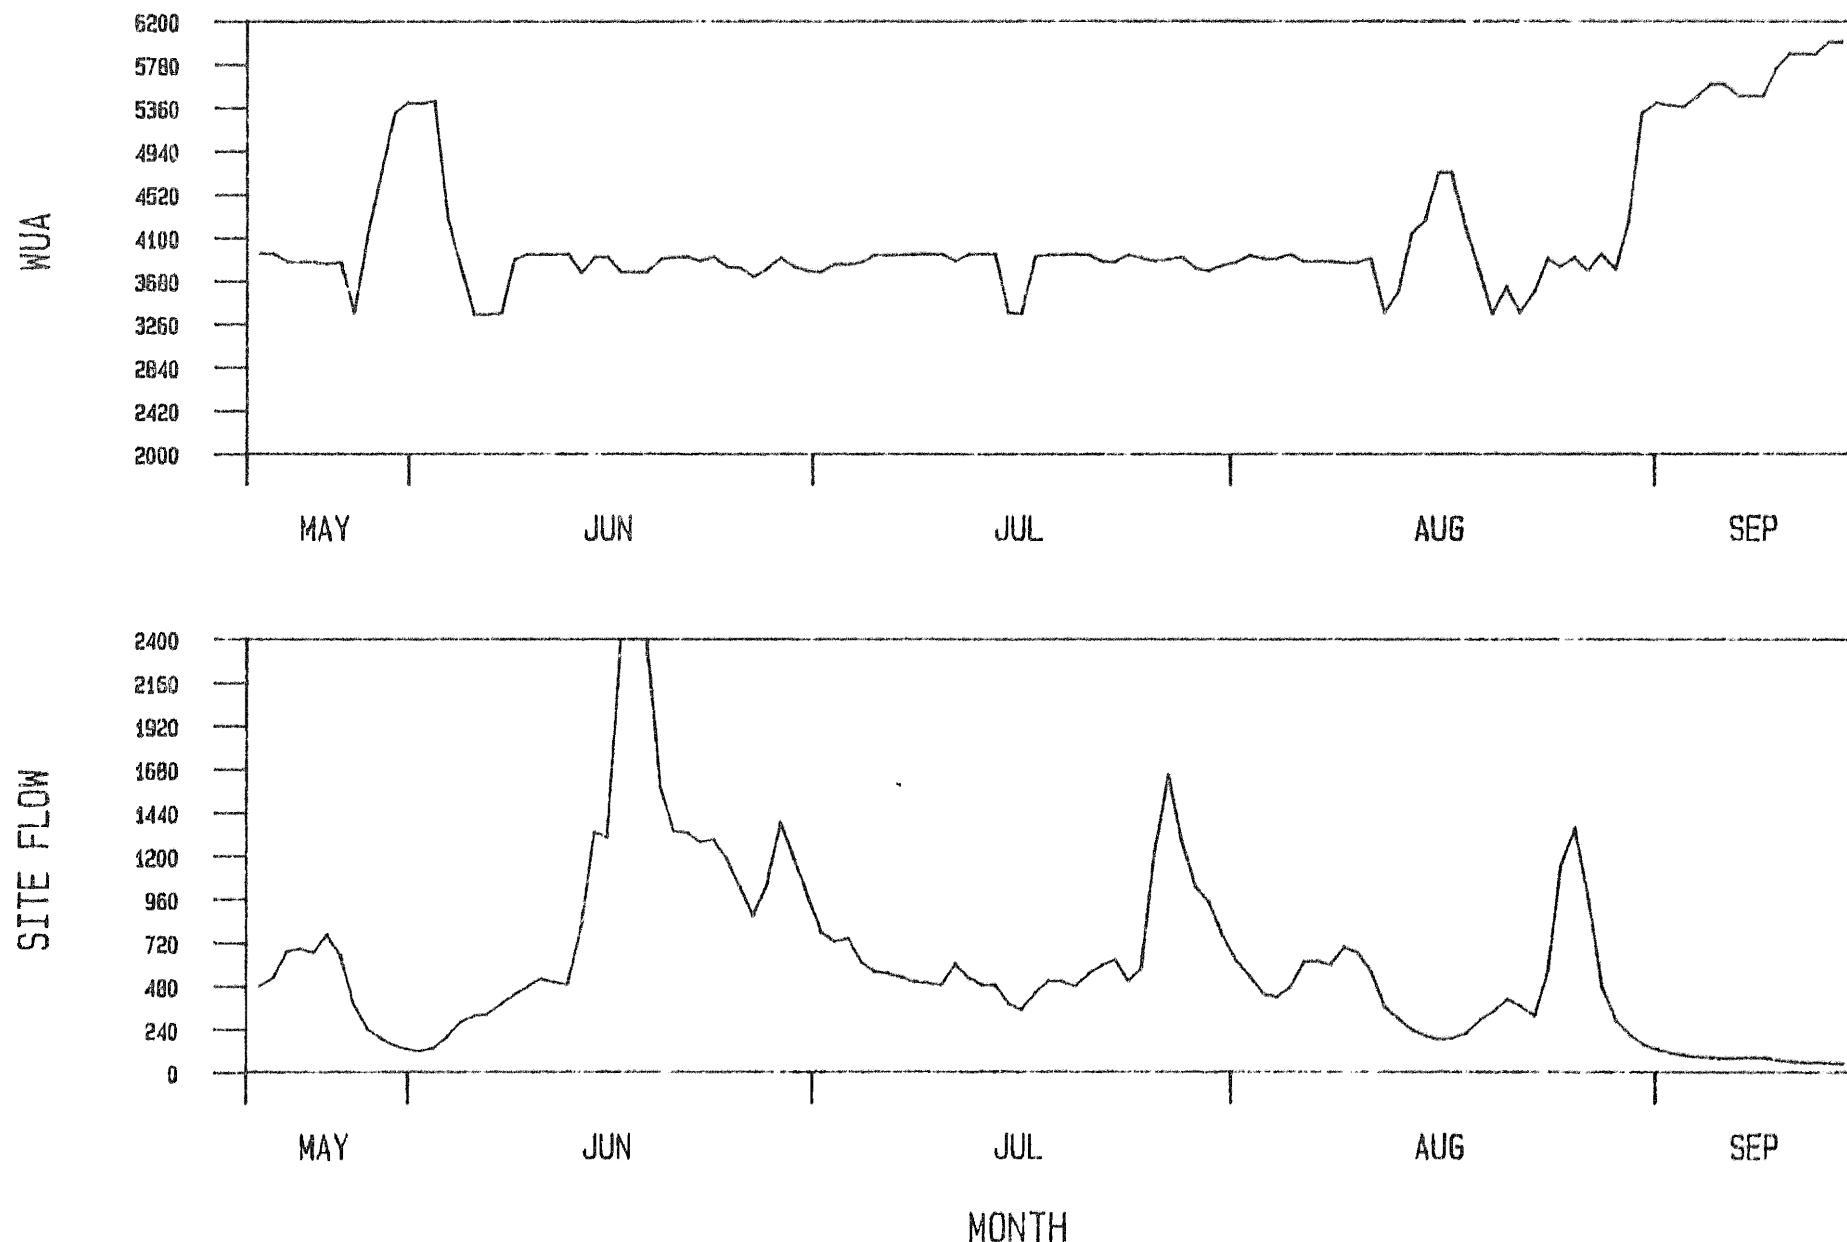



Figure III-42. Time series plots of juvenile chinook salmon WUA as a function of discharge from May 20 to September 15, 1984 for 136.0L modeling site.

flows, corresponding WUA indices are notably stable. Although low early summer and fall streamflows result in an increased habitat potential, this increase is not as pronounced as that which occurs at other side channel sites.

Site 147.1L

Site Description: This site is located on the left of Fat Canoe Island on the west bank of the Susitna River (Plate III-8). The study reach extends the entire length of the site (1,780 ft) and ranges from 350 ft wide at the mouth to 250 ft wide at the head. Six cross sections were established to define the deep, fast velocities in the channel (Figure III-43). The substrate is large cobble and boulder with a thick layer of sand along the right bank of the lower three cross sections. The available cover is provided by the large substrate.

The side channel has been observed breached at discharges as low as 5,000 cfs. Site flows of 6,670, 2,470 and 1,710 cfs correspond to mainstem discharges of 23,000, 10,400 and 7,400 cfs, respectively. This large study site was selected to represent large side channels that remain side channels at low mainstem discharges. An IFG-2 model was selected because of the large size of the channel and its uniform shape. Previous reconnaissance to the site indicated that rearing habitat was limited to the right streambank margin and a limited amount of data would be required to model this site with an IFG-2 model. Shoreline velocities were collected along both streambank margins.

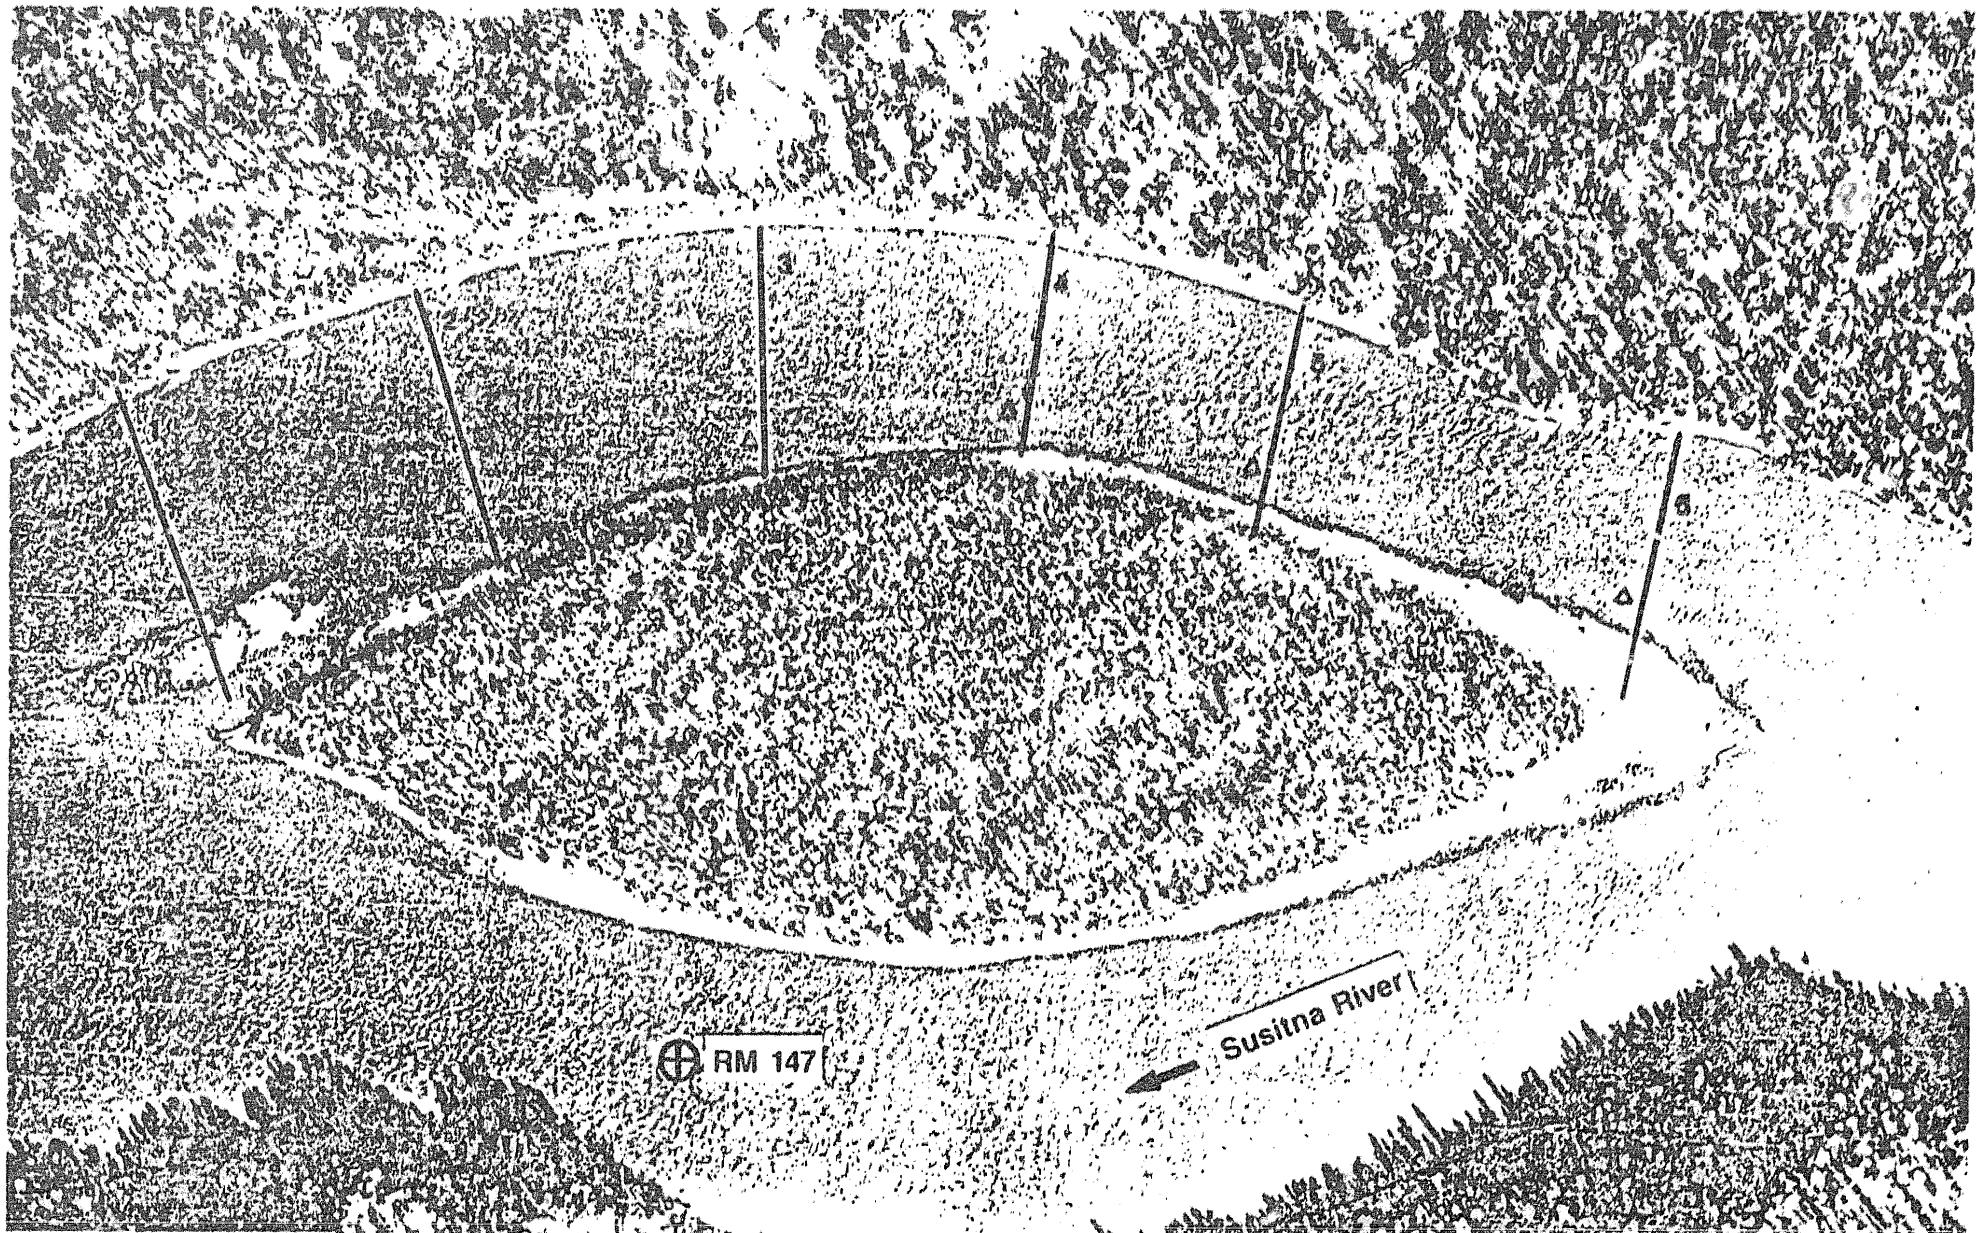

EWT&A

F. WOODY TRIFLEY & ASSOCIATES

△ STAFF GAGE
CROSS SECTION

1'' = 250'

Plate III-8. Modeling site 147.1L on June 1, 1984 at mainstem discharge: 23,000 cfs.

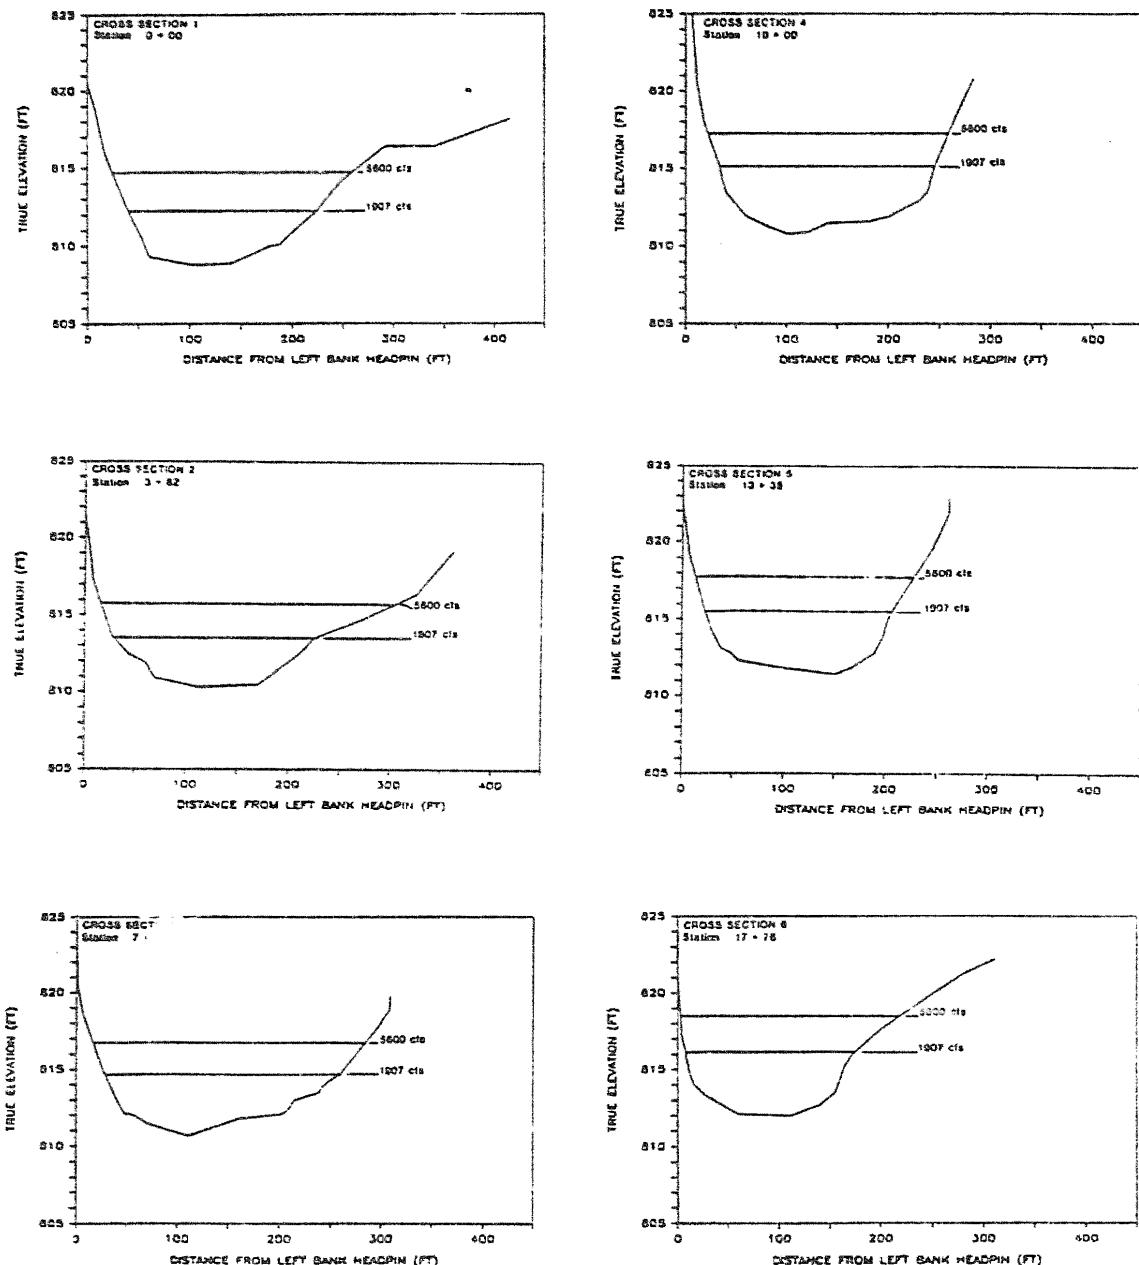
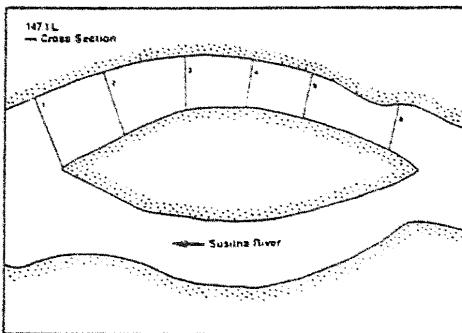


Figure III-43. Cross sections for 147.1L study site depicting water surface elevations at calibration discharges of 1907 and 5600 cfs.

Adult salmon have not been observed at the site however some juveniles were observed along the right bank.

Calibration: The data available to model the site included level surveys for all six cross sections and the hydraulic data summarized in Table III-13.

Table III-13. Hydraulic data available to calibrate the IFG-2 model for site 147.1L.

Date	Flow (cfs)	Discharge (cfs)	Calibration Cross Sections	Type*
840917	1907	8130	2,4 1,3,5	D S
840913	2154	9000	4	D
940907	2650	10,700	1,2,3,4,5,6	S
840829	4742	17,400	5	D
840828	5300	19,000**	1,2,3,4,5,6	S
840821	5600	20,000**	1,2,3,4,5,6	S

* D = Discharge measurements (includes mid channel and shoreline measurements).

S = Shoreline measurements (does not include mid channel measurements)

** = Adjusted to instantaneous discharge

Two models were required to simulate side channel hydraulics over the mainstem range of 5,000 to 35,000 cfs. This is mainly due to the increasing proportion of side channel conveyance in the shelf area along the right bank at high flows. Velocity profiles were developed at each cross section based on the site flows of 1,907 and 5,600 cfs for the low and high flows hydraulic models,

respectively. In calibrating the two models with respect to depth, predicted water surface elevations at cross sections 2 through 6 were compared to water surface elevations calculated from the rating curves over a wide range of flows. Water surface profiles based on IFG-2 output for the calibration flows of 1,907; 2,154; 2,650; 4,742; and 5,300 cfs and for the flows corresponding to mainstem discharges of 5,000 and 35,000 cfs are shown in Figure III-44. Observed water surface elevations for the calibration flows and rating curve water surface elevations for the model limit flows are also shown.

Verification: Figures B-2.9 and B-2.10 show velocity profiles produced by the two IFG-2 models at cross section 2 for calibration flows of 1,907 and 5,600 cfs. The observed velocities for those flows are also plotted. The figures demonstrate that the set of "n" values that produces the proper velocity profile at the low flow does not accurately produce that of the high flow, and vice versa.

Application: The low flow model represents site conditions for mainstem discharges up to 13,500 cfs, while the high flow model is applicable for mainstem discharges greater than 13,500 cfs. This breakpoint corresponds to a site flow of 3,500 cfs. Limits for which the models can be considered excellent exceed the range of available stage information. Models were extrapolated beyond the data range down to 5,000 cfs in the low flow model, and up to 35,000 cfs in the high flow model. The overall rating for both models is excellent.


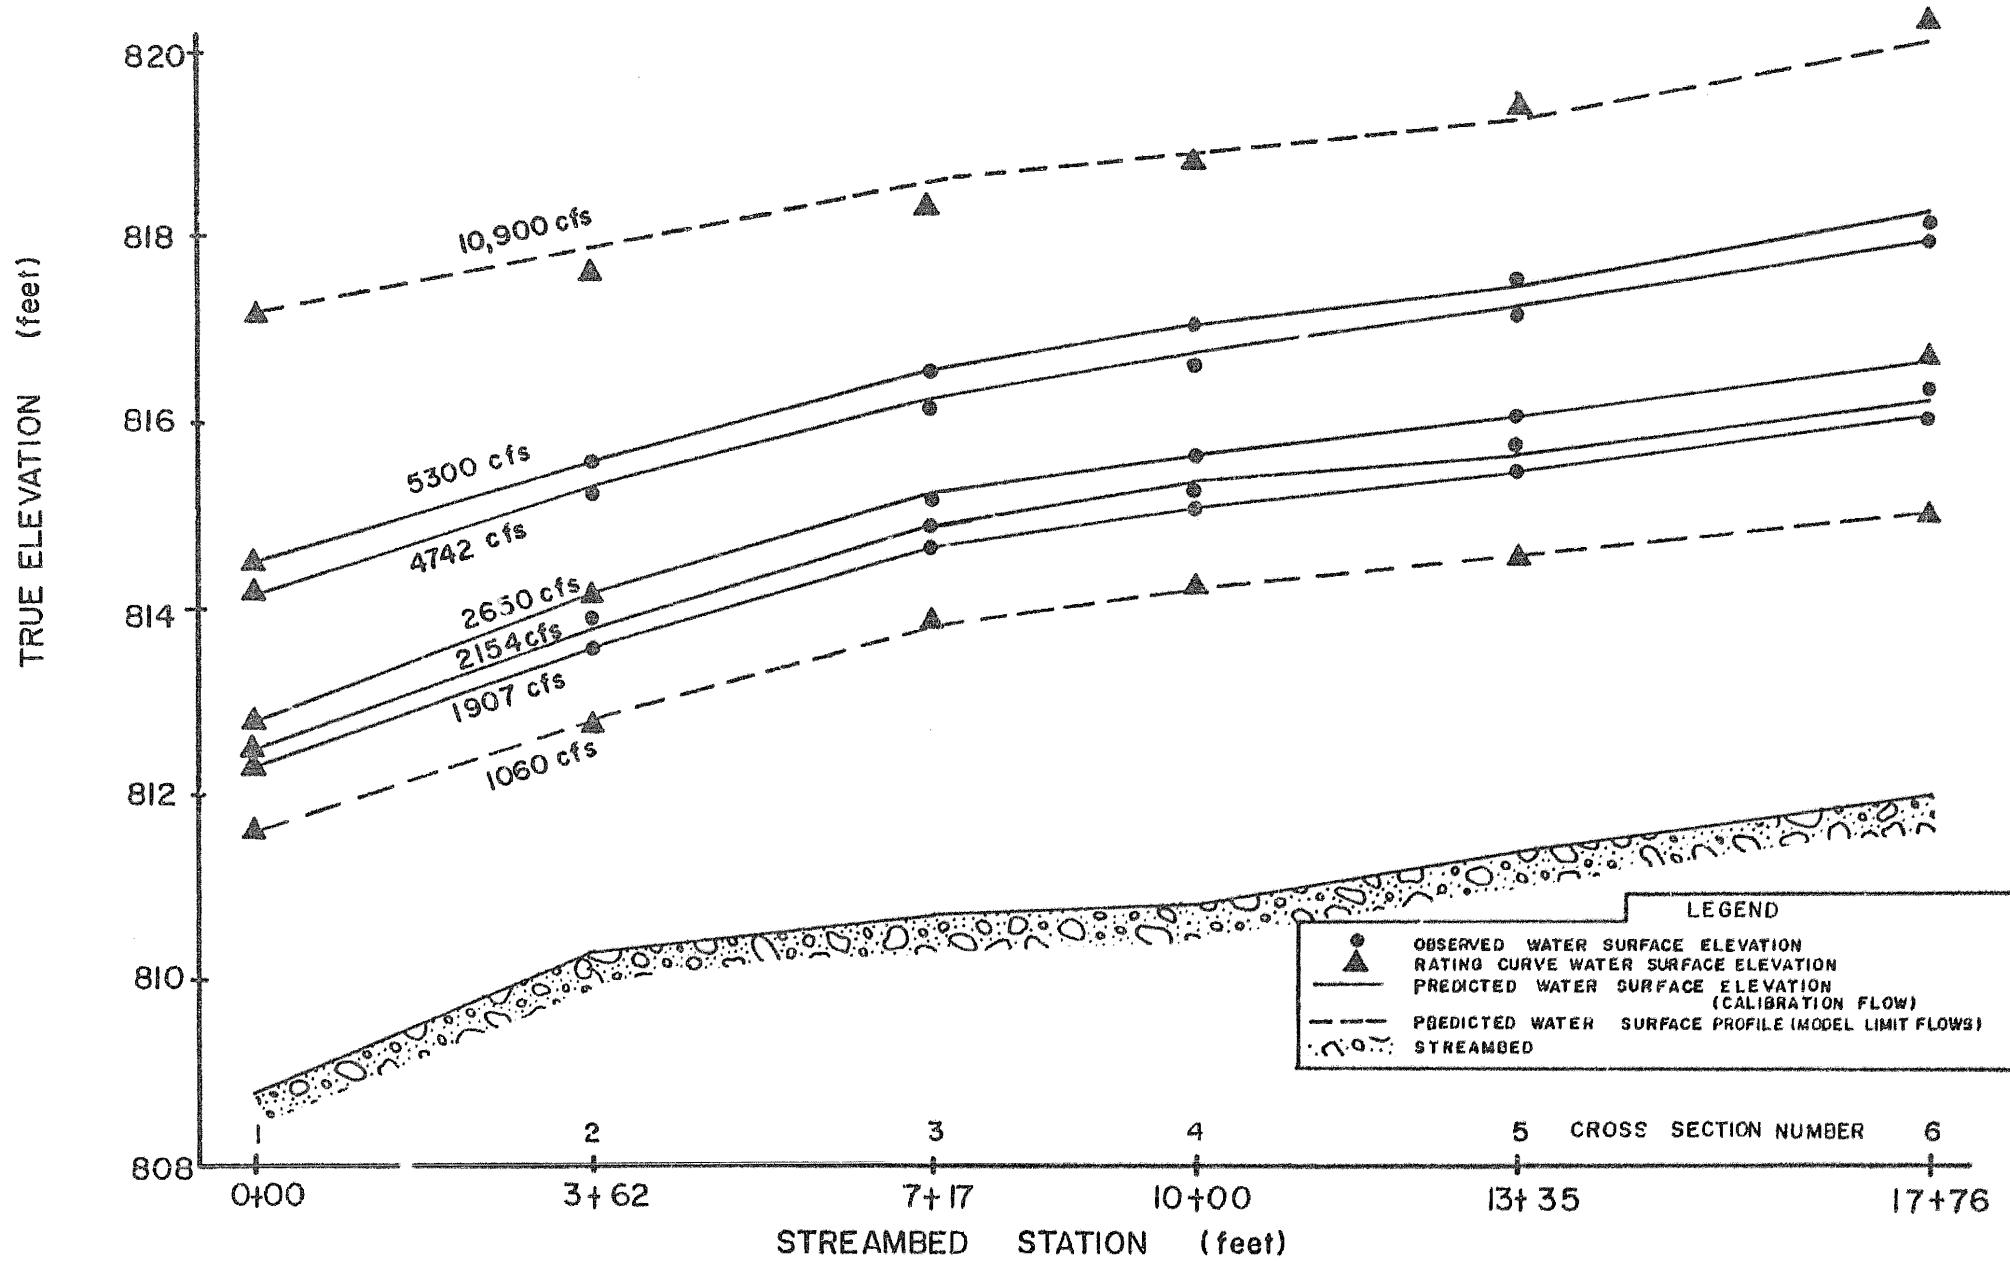


Figure III-44. Comparison of observed and predicted water surface profiles from calibrated model at 147.1L study site.

The application range and ratings are summarized below in the bar chart.

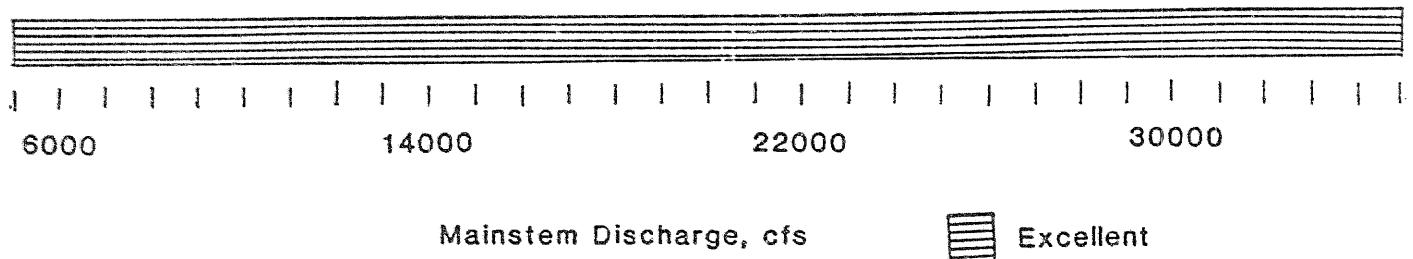

The wetted surface area and juvenile chinook WUA response functions for this study site, shown in Figure III-45a and b may be considered fairly representative of mainstem channel areas. The ratio of juvenile chinook WUA to surface area at this site is very low. Williams (1985) demonstrated that suitable rearing areas in large side channels of the middle river are primarily confined to nearshore zones, due to high (non-suitable) velocities existing elsewhere in the channels. Figure III-45b indicates a slight increase in juvenile chinook WUA with increasing discharge. However when viewed in perspective with wetted surface area, juvenile chinook WUA may be considered relatively constant between 5,000 and 35,000 cfs.

The surface area and WUA response functions were forecast using the high and low flow IFG-2 models previously described and the HABTAT model. Because this large side channel conveys mainstem water at discharges well below 5,000 cfs, only turbid water suitability criteria were used. The separate WUA curves forecast by the high and low flow models were similar within the range of overlap and intersected between 20,000 and 21,000 cfs. Therefore, WUA predicted by the low flow model was used for discharges of up to 20,500 cfs; above this discharge the high flow model was used.

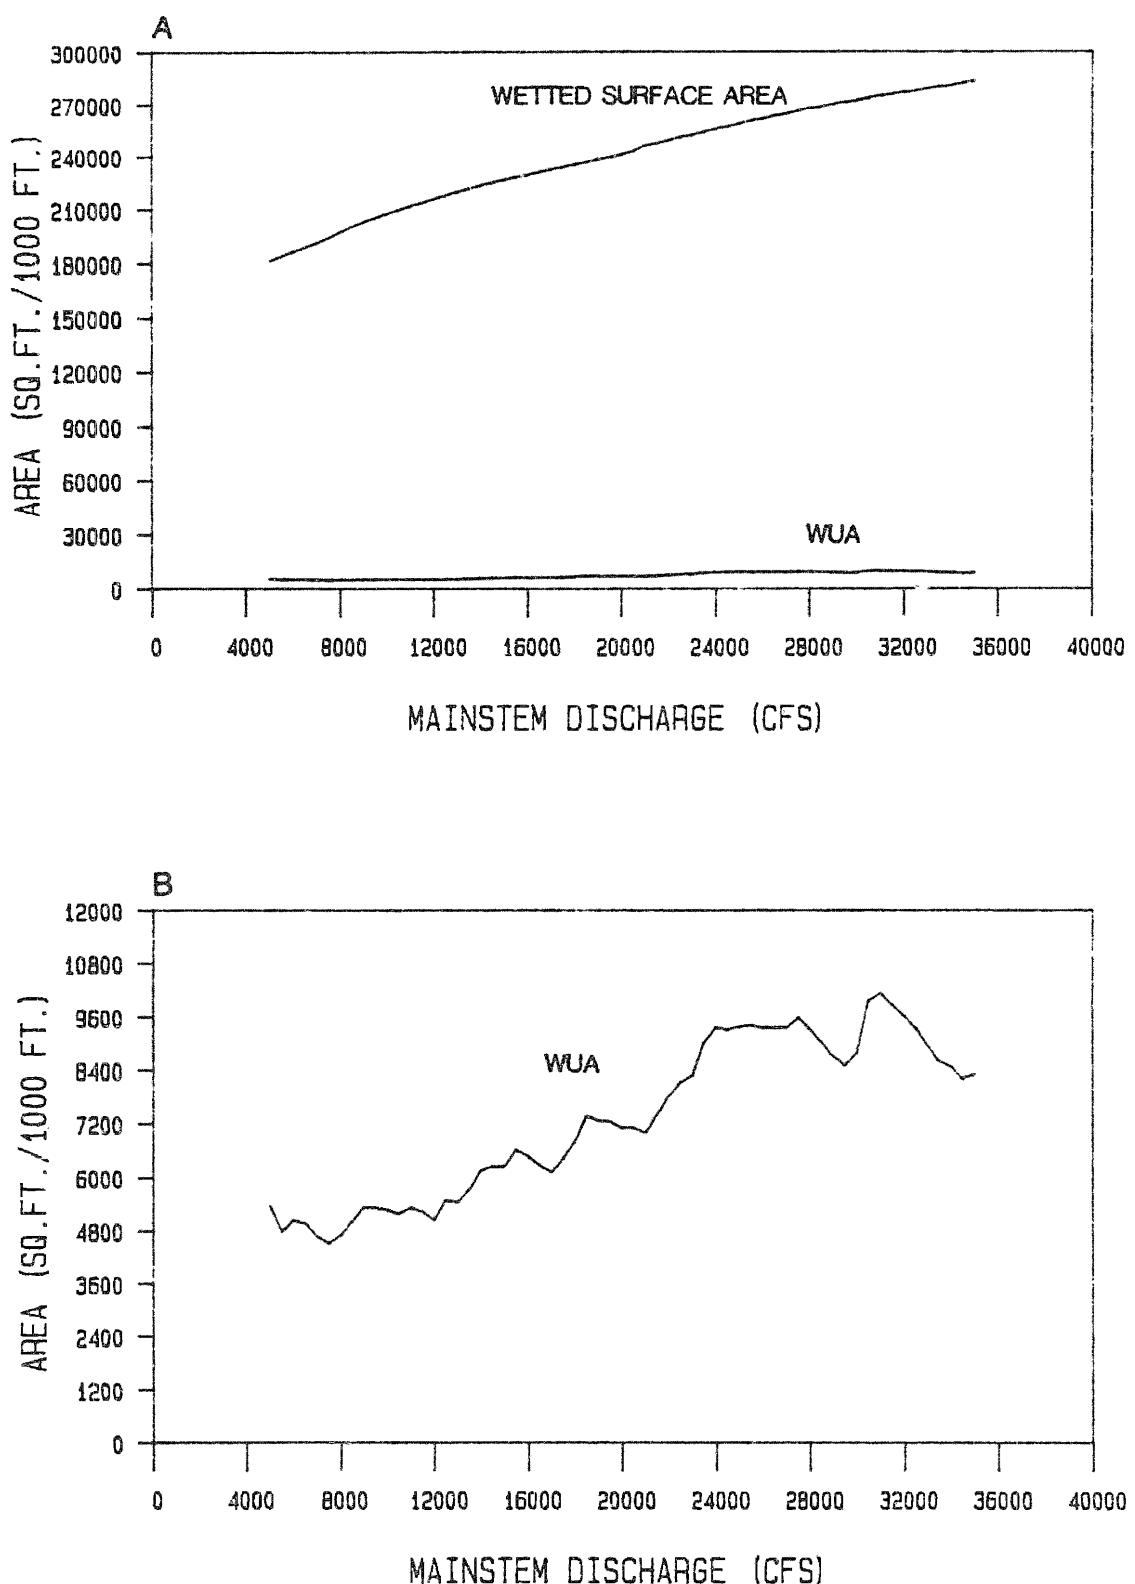


Figure III-45. Projections of gross surface area and WUA of juvenile chinook salmon habitat as a function of discharge for the 147.1L modeling site.

Because of its large size and low breaching discharge, the site flow hydrograph strongly resembles that for the mainstem throughout the open water season (Figure III-46). The time series plot for juvenile chinook WUA responds little to streamflow fluctuation because of the relatively constant amount of shoreline habitat that exist. A similar time series response is evident for the 136.0L site where rearing habitat is also restricted to shoreline margins because of unsuitable mid channel velocities.

A microhabitat
developing in adult
retention - The fin
comes when it is
extinguished to
Macrophytobenthos

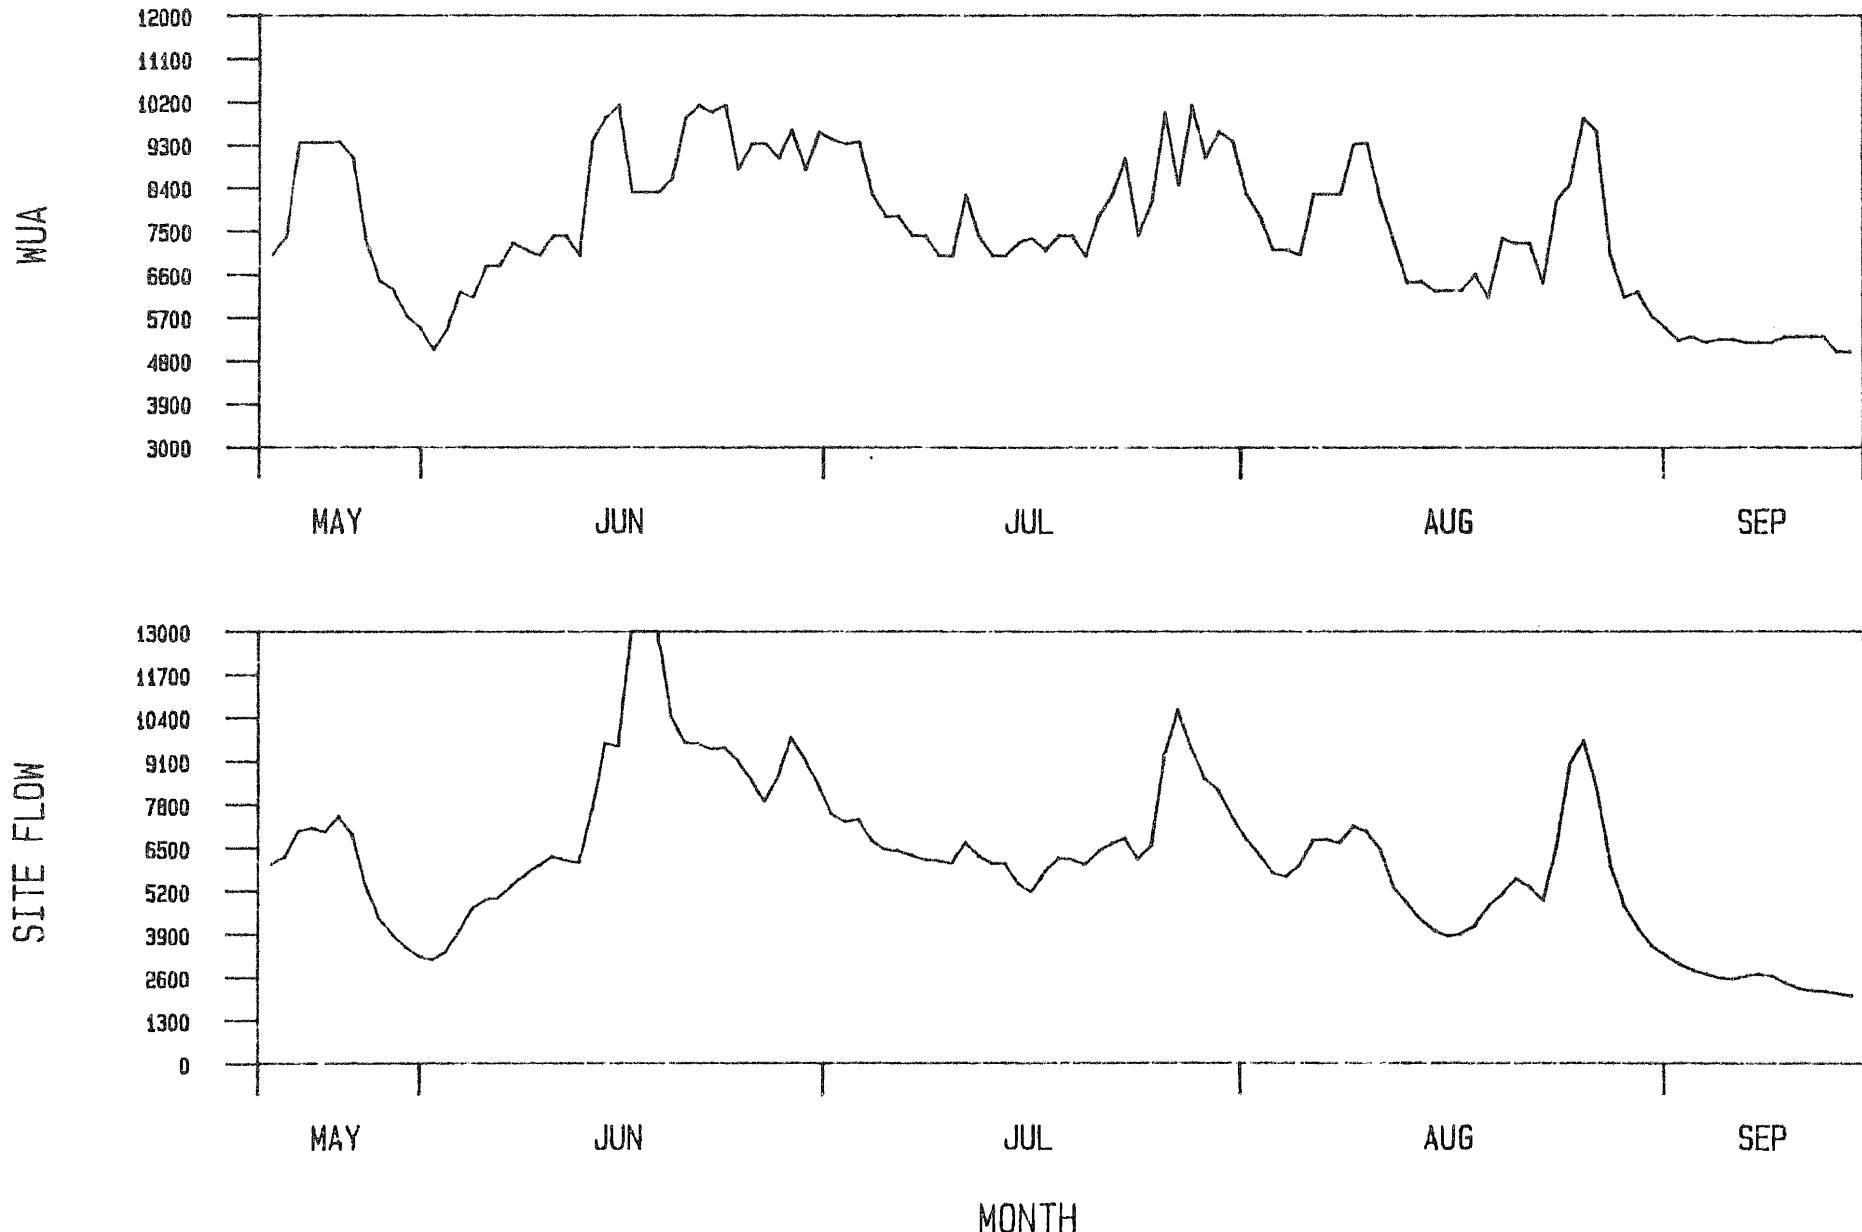


Figure III-46. Time series plots of juvenile chinook salmon WUA as a function of discharge from May 20 to September 15, 1984 for 147.1L modeling site.

REFERENCES

Aaserude, R.J., J. Thiele, and D. Trudgen. 1985. Categorization of aquatic habitats in the Talkeetna-to-Devil Canyon segment of the Susitna River, Alaska. Preliminary draft report. E. Woody Trihey and Associates and Arctic Environmental Information and Data Center, University of Alaska, Fairbanks. Alaska Power Authority. Susitna Hydroelectric Project. 1 vol.

Alaska Department of Fish and Game, Susitna Hydro Aquatic Studies. 1984. Procedures Manual, May 1983 - June 1984. Final draft. Report for Alaska Power Authority, Anchorage, AK 131 pp.

Barrett, B.M., F.M. Thompson, and S.N. Wick. 1984. Report No. 1. Adult anadromous fish investigations, May - October 1983. Susitna Hydro Aquatic Studies, Alaska Department of Fish and Game. Report for Alaska Power Authority, Anchorage, AK. Document 1450. 1 vol.

Bovee, K.D. 1982. A guide to stream habitat analysis using the instream flow incremental methodology. U.S. Fish and Wildlife Service. Instream Flow Information Paper No. 12. 1 vol.

E. Woody Trihey and Associates and Woodward-Clyde Consultants. 1985. Instream flow relationships report. Volume 1. Working draft. Alaska Power Authority. Susitna Hydroelectric Project. 1 vol.

Klinger-Kingsley, S. 1985. Response of aquatic habitat surface areas to mainstem discharge in the Talkeetna-to-Devil Canyon reach of the Susitna River, Alaska. Draft report. E. Woody Trihey and Associates. Alaska Power Authority. Susitna Hydroelectric Project. 1 vol.

Main, R. 1978. IFG-4 program user's manual. U.S. Fish and Wildlife Service. 45 pp.

Milhous, R.T., D.L. Wegner, and T. Waddle. 1984. Users guide to the Physical Habitat Simulation System. U.S. Fish and Wildlife Service. Instream Flow Information Paper 11. FWS/OBS - 81/43 Revised. 475 pp.

Schmidt, D.C., et al. 1984. Report No. 2. Resident and juvenile anadromous fish investigations (May - October 1983). Susitna Hydro Aquatic Studies, Alaska Department of Fish and Game. Report for Alaska Power Authority, Anchorage, AK. Document 1784. 1 vol.

Steward, III, C.R. (In preparation). Middle river aquatic habitat report. E Woody Trihey and Associates. Draft Report. Alaska Power Authority. Susitna Hydroelectric Project. 1 vol.

_____. 1985. Suitability criteria recommended for use in IFR habitat modeling studies of the middle Susitna River. E. Woody Trihey and Associates, Anchorage, AK. Technical memorandum. 11 pp.

Trihey, E.W. 1979. The IFG incremental methodology. Pages 24-44 in G.L. Smith, ed. Workshop in instream flow habitat criteria and modeling. Colorado Water Resources Research Institute, Colorado State University, Fort Collins, CO. Information Series No. 40.

_____. 1980. Field data reduction and coding procedures for use with the IFG-2 and IFG-4 hydraulic simulation models. Instream Flow Service Group. U.S. Fish and Wildlife Service, Fort Collins, CO.

Trihey, E.W., and N.D. Hilliard. 1984. Supplemental guidelines for calibrating the IFG-4 hydraulic model. In Bredthauer, S.R., chairman. Alaska's Water: A critical resource. Proceedings of the Alaska Section, American Water Resources Association. Institute of Water Resources, University of Alaska. Fairbanks, Alaska. Report IWR 106. 1 vol.

Williams, S. 1985. The influence of project flows on hydraulic aspects of mainstem and side channel rearing habitats in the middle river for the period May 20 to September 15. E. Woody Trihey and Associates, Technical Memorandum.

Wilmott, C.J. 1981. On the validation of models, physical geography 2. V.H. Winston and Sons. p. 184-194.

SUMMARY OF HYDRAULIC CONDITIONS
AND HABITAT FORECASTS AT
1984 MIDDLE RIVER STUDY SITES

DRAFT REPORT

Appendix A
Summary of site-specific data collected to develop
relationships between mainstem discharge, site flow
and water surface elevation

Prepared for:

ALASKA POWER AUTHORITY

Prepared by:

N. Diane Hilliard
Shelley Williams
E. Woody Trihey
R. Curt Wilkinson
Cleveland R. Steward, III

May 1985

APPENDIX FIGURES

- Figure A-1.1 Stage discharge curves for cross sections 1, 3, 4, 6, 7 and 9 at site 101.2R.
- Figure A-1.2 Stage discharge curves for cross sections 2 and 5 at site 101.5L.
- Figure A-1.3 Stage discharge curves for cross sections 1, 2, 3, 3a, 4, 5, 6 and 8 at site 112.6L.
- Figure A-1.4 Stage discharge curves for cross sections 1, 2, 4 and 5 at site 119.2R.
- Figure A-1.5 Stage discharge curves for cross sections 1, 2, 4, 5, 6, 7, 8 and 9 at site 132.6L.
- Figure A-1.6 Stage discharge curves for cross sections 1, 2, 3, 5 and 6 at site 136.0L.
- Figure A-1.7 Stage discharge curves for cross sections 1, 2, 3, 5 and 6 at site 147.1L.

APPENDIX TABLES

- Table A-1.1. Summary of site-specific data collected for rating curve analysis at RM 101.2R.
- Table A-1.2. Summary of site-specific data collected for rating curve analysis at RM 101.5L.
- Table A-1.3. Summary of site-specific data collected for rating curve analysis at RM 101.7L.
- Table A-1.4. Summary of site-specific data collected for rating curve analysis at RM 105.8L.
- Table A-1.5. Summary of site-specific data collected for rating curve analysis at RM 112.6L.
- Table A-1.6. Summary of site-specific data collected for rating curve analysis at RM 114.1R.
- Table A-1.7. Summary of site-specific data collected for rating curve analysis at RM 115.0R.
- Table A-1.8. Summary of site-specific data collected for rating curve analysis at RM 118.9L.
- Table A-1.9. Summary of site-specific data collected for rating curve analysis at RM 119.1L.
- Table A-1.10. Summary of site-specific data collected for rating curve analysis at RM 119.2R.
- Table A-1.11. Summary of site-specific data collected for rating curve analysis at RM 125.2R.
- Table A-1.12. Summary of site-specific data collected for rating curve analysis at RM 130.2R.
- Table A-1.13. Summary of site-specific data collected for rating curve analysis at RM 131.3L.
- Table A-1.14. Summary of site-specific data collected for rating curve analysis at RM 131.7L.
- Table A-1.15. Summary of site-specific data collected for rating curve analysis at RM 132.6L.
- Table A-1.16. Summary of site-specific data collected for rating curve analysis at RM 133.8R.
- Table A-1.17. Summary of site-specific data collected for rating curve analysis at RM 136.0L.

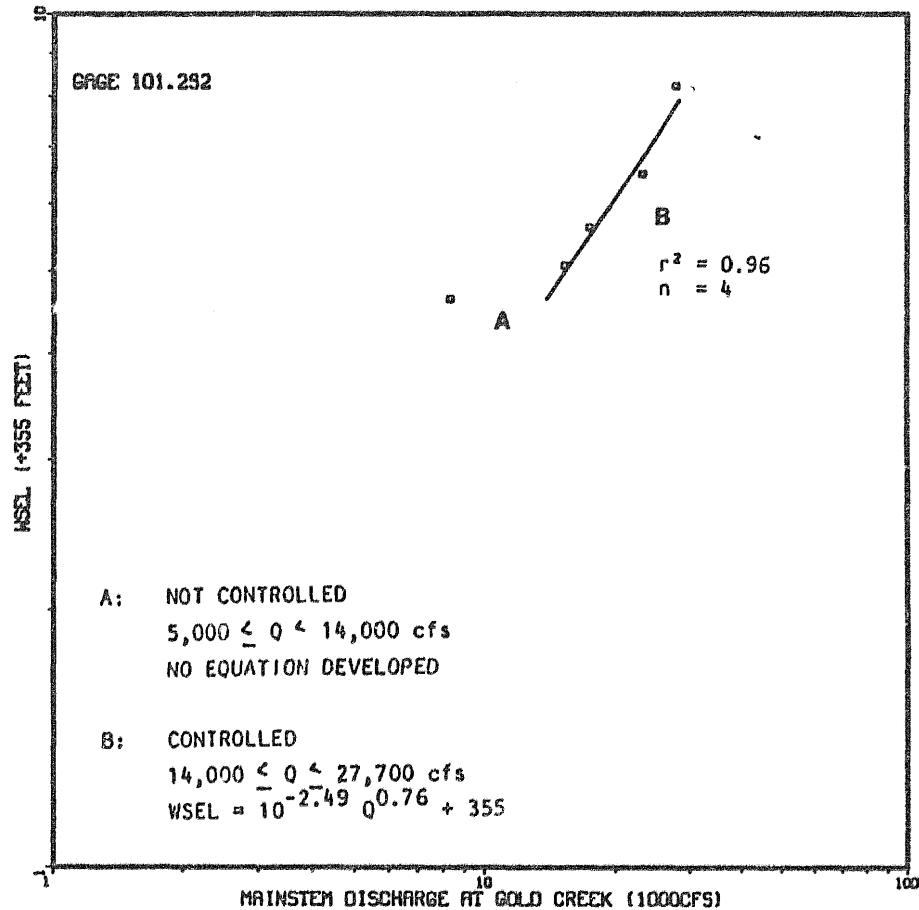
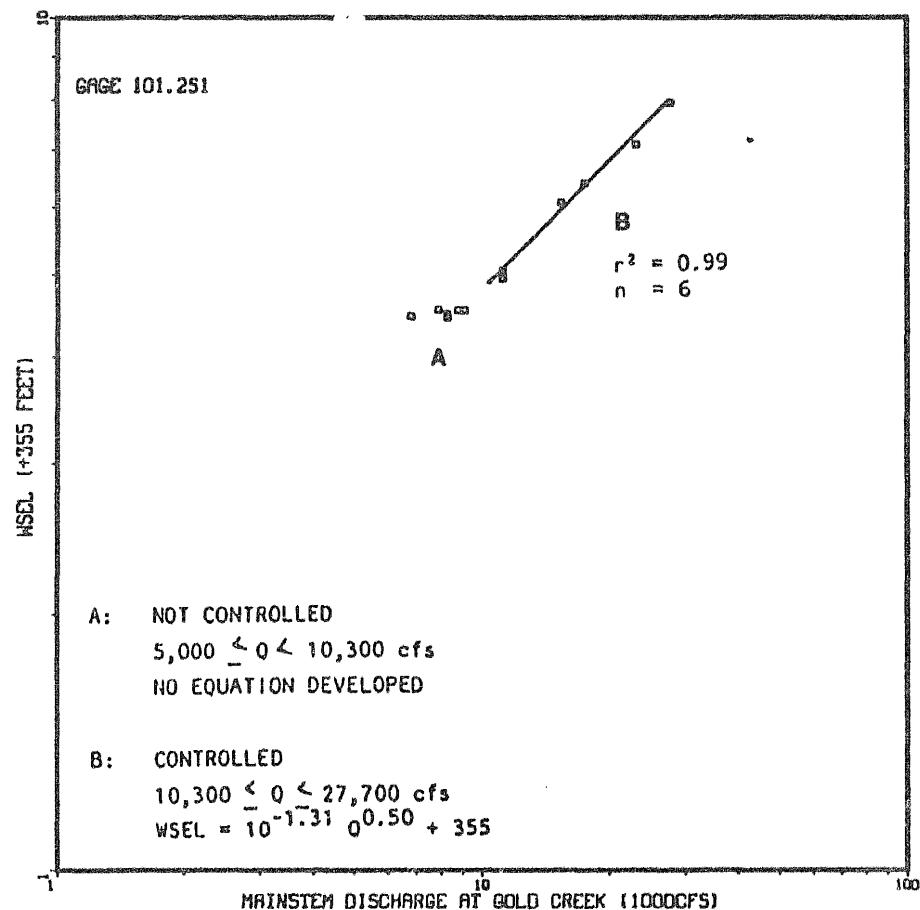


Figure A-1.1 Stage discharge curves for cross sections 1, 3, 4, 6, 7 and 9 at site 101.2R.

- Table A-1.18. Summary of site-specific data collected for rating curve analysis at RM 137.5R.
- Table A-1.19. Summary of site-specific data collected for rating curve analysis at RM 138.7L.
- Table A-1.20. Summary of site-specific data collected for rating curve analysis at RM 139.0L.
- Table A-1.21. Summary of site-specific data collected for rating curve analysis at RM 139.4L.
- Table A-1.22. Summary of site-specific data collected for rating curve analysis at RM 147.1L.

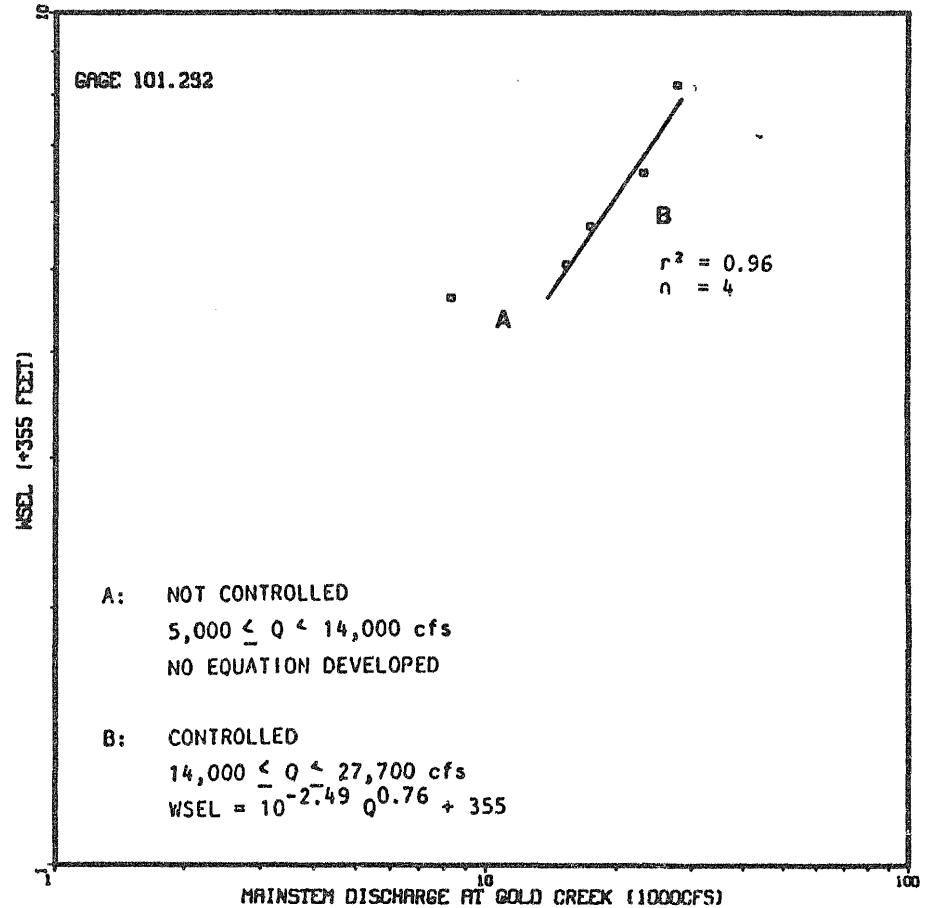
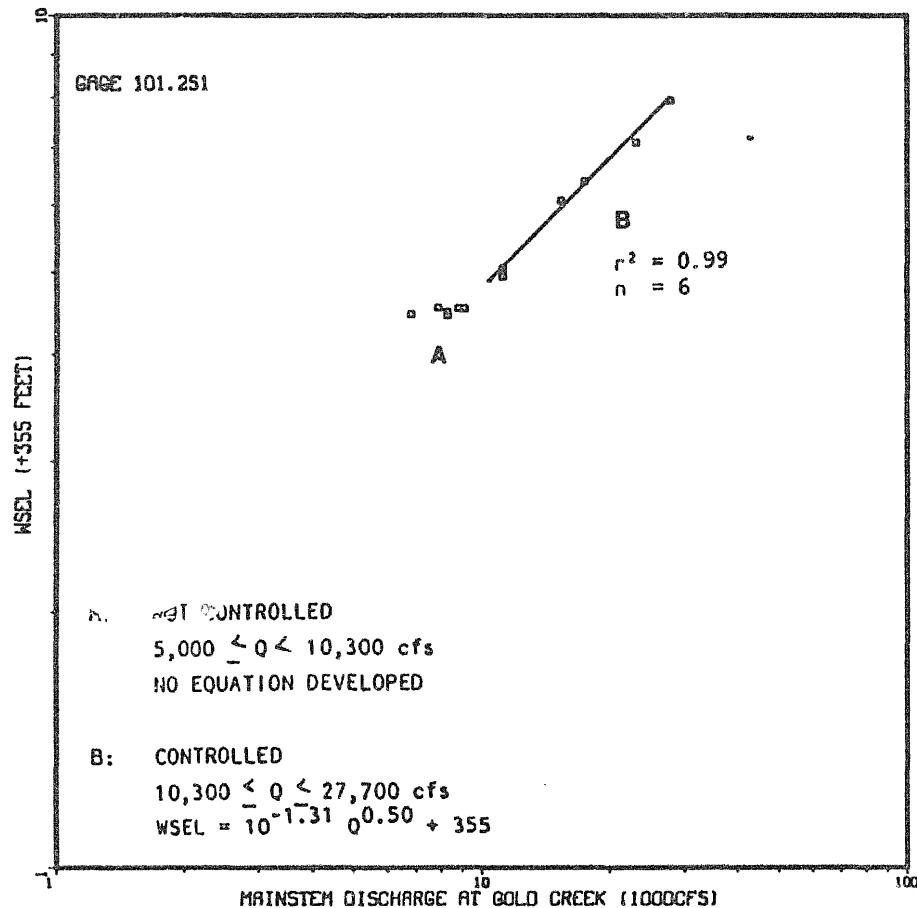


Figure A-1.1 Stage discharge curves for cross sections 1, 3, 4, 6, 7 and 9 at site 101.2R.

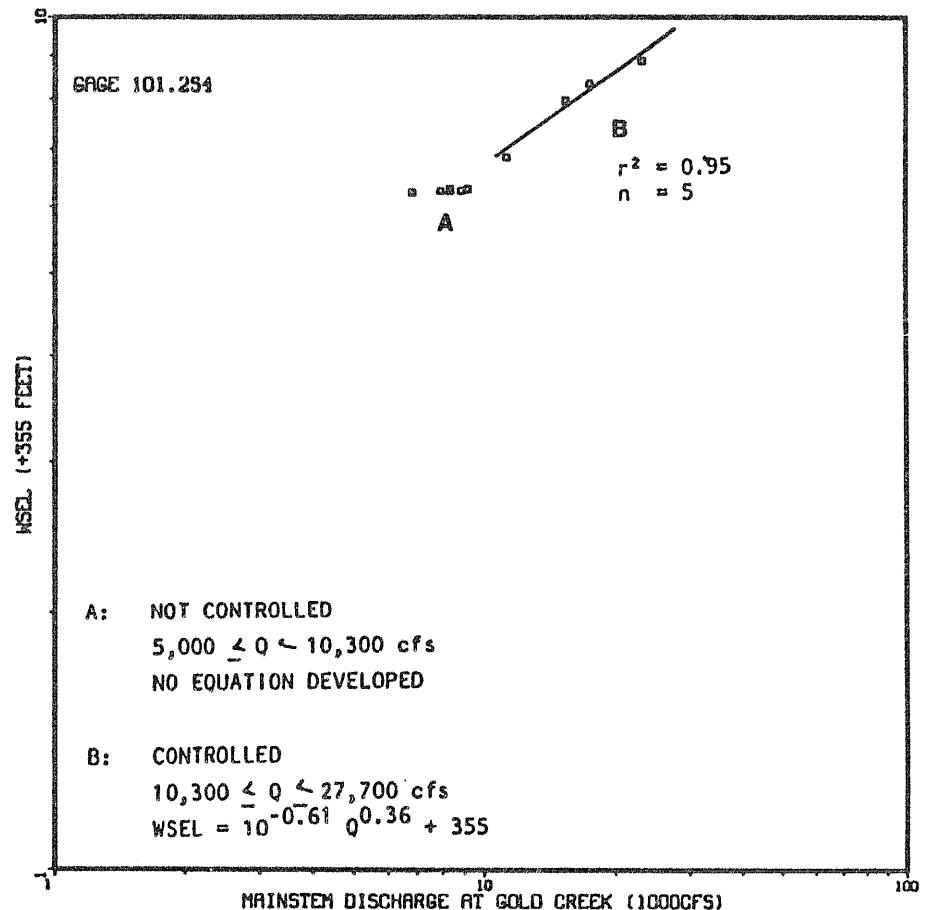
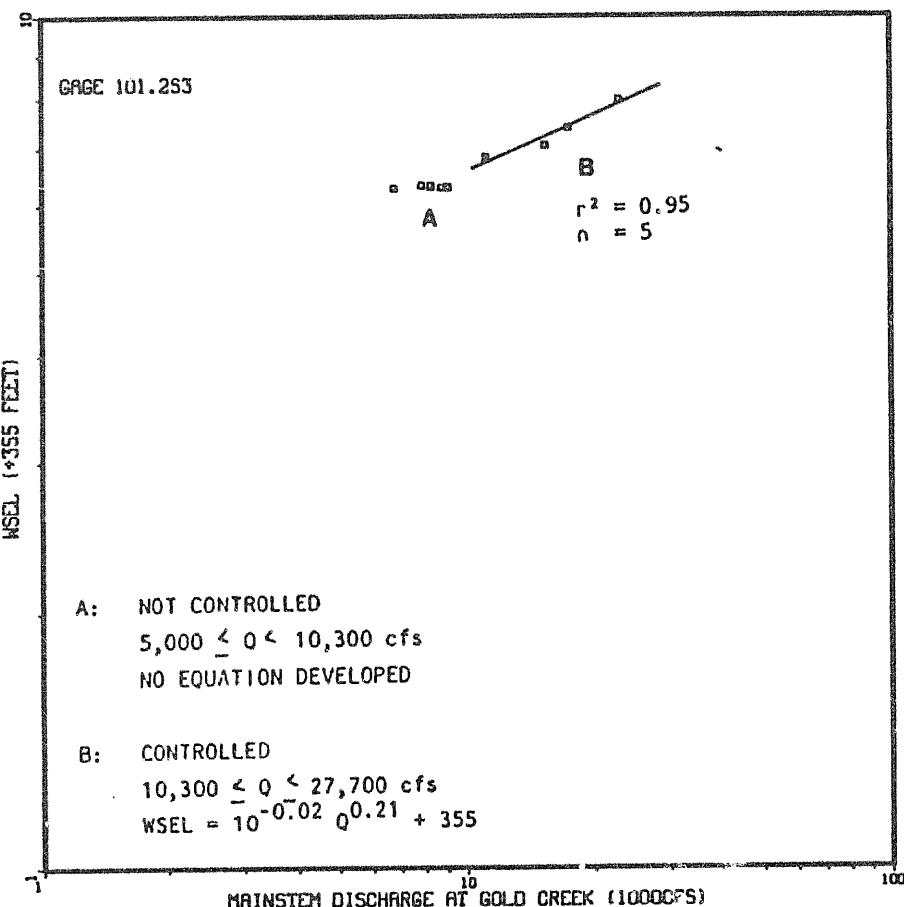


Figure A-1.1 Stage discharge curves for cross sections 1, 3, 4, 6, 7 and 9 at site 101.2R.

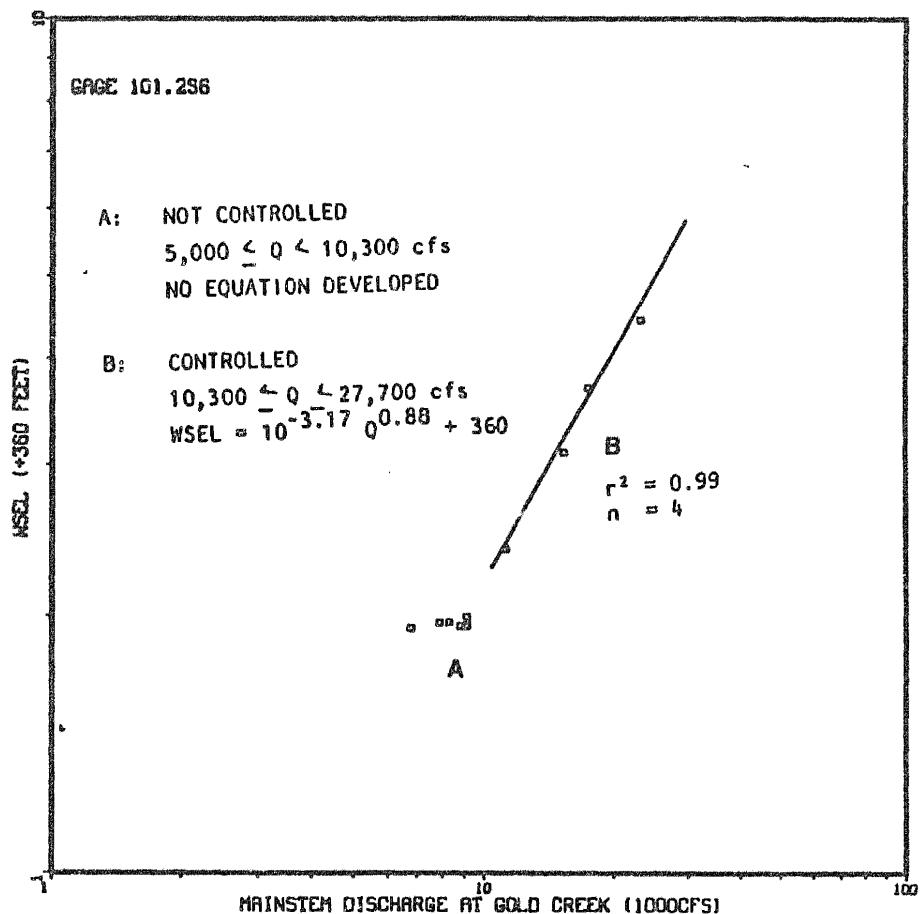
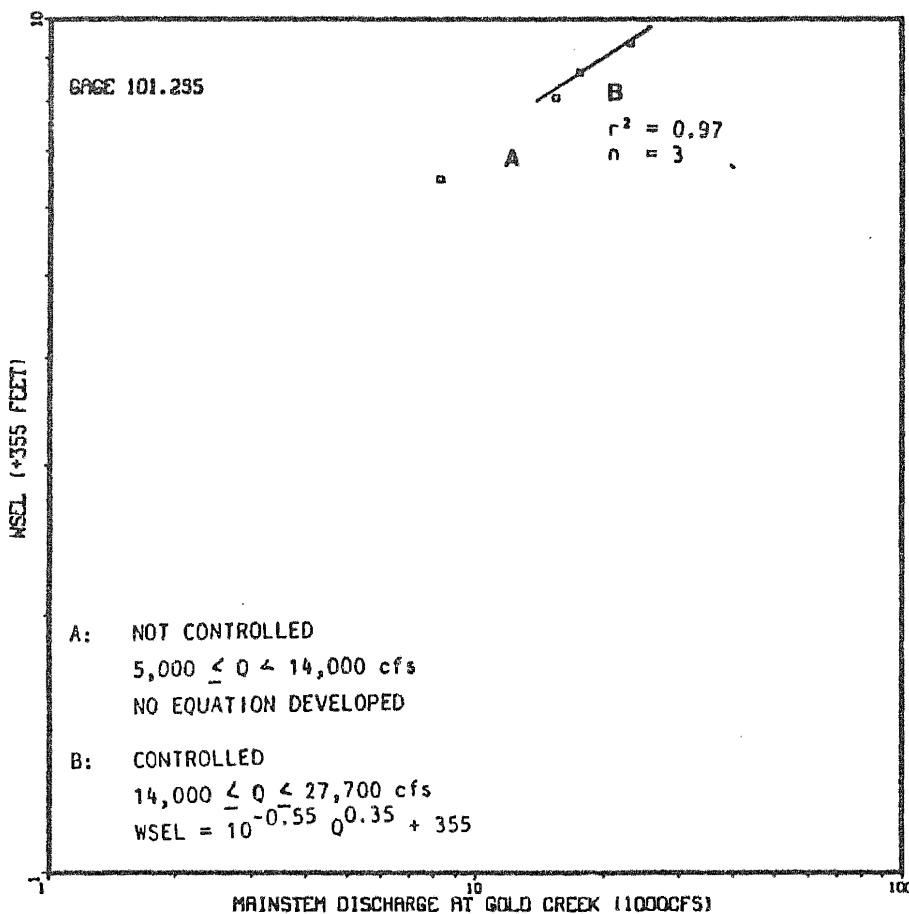


Figure A-1.1 Stage discharge curves for cross sections 1, 3, 4, 6, 7 and 9 at site 101.2R.

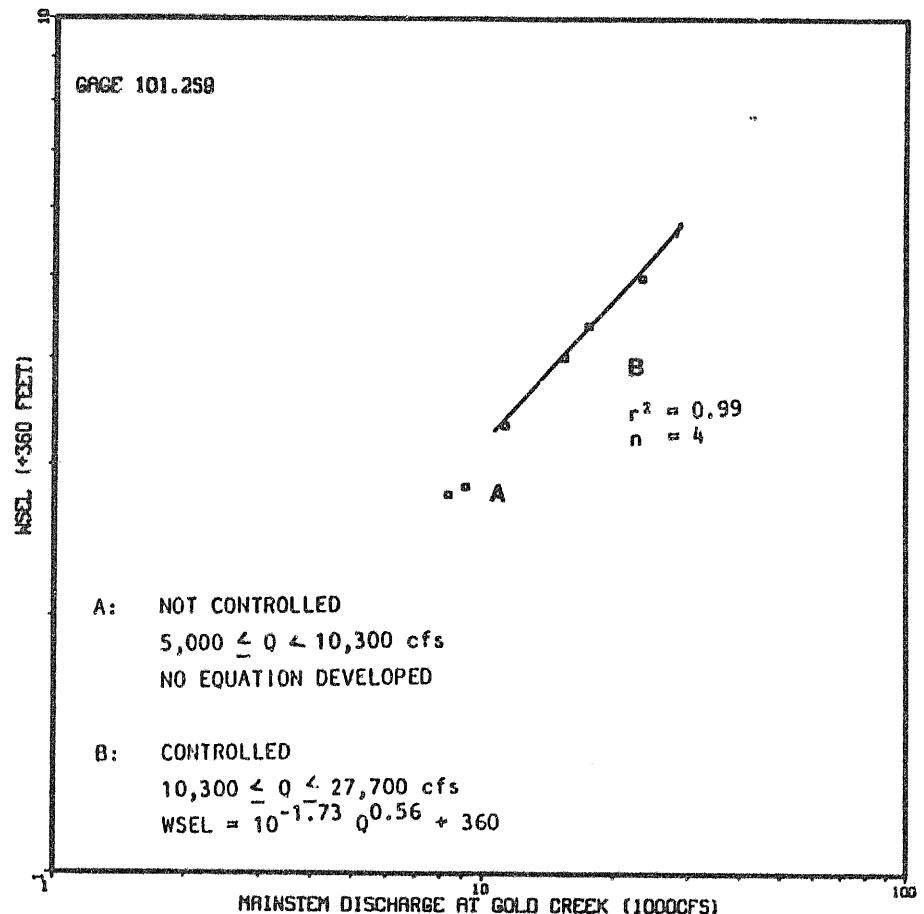
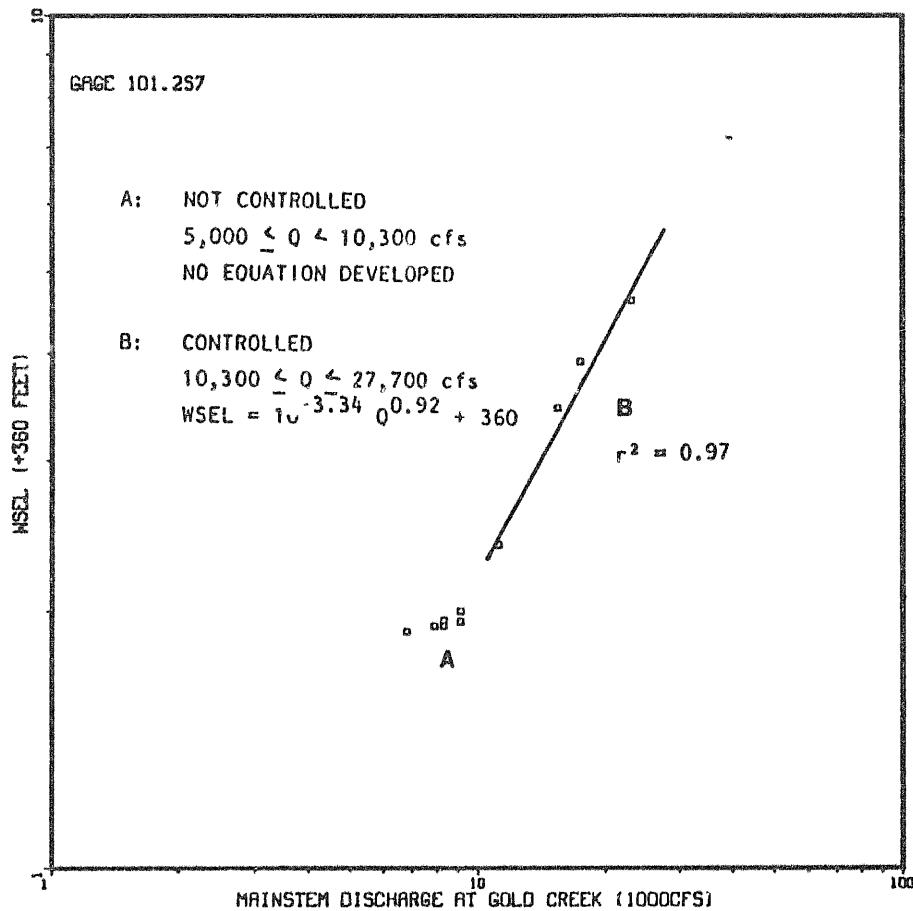


Figure A-1.1 Stage discharge curves for cross sections 1, 3, 4, 6, 7 and 9 at site 101.2R.

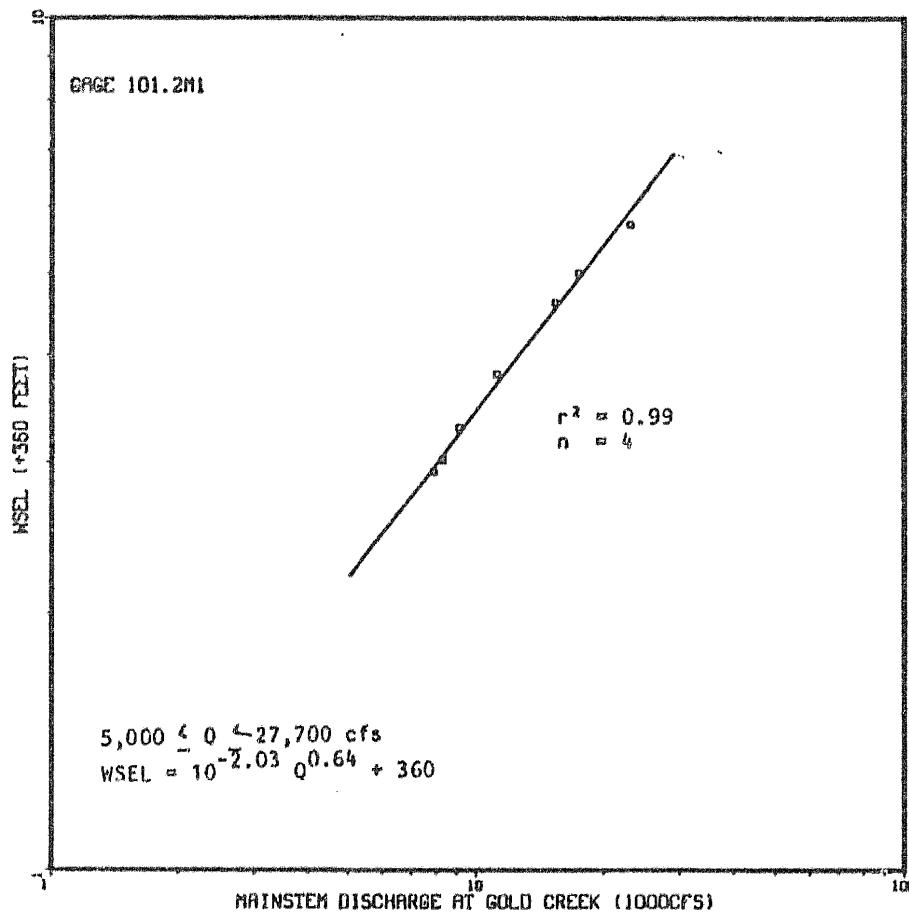


Figure A-1.1 Stage discharge curves for cross sections 1, 3, 4, 6, 7
and 9 at site 101.2R.

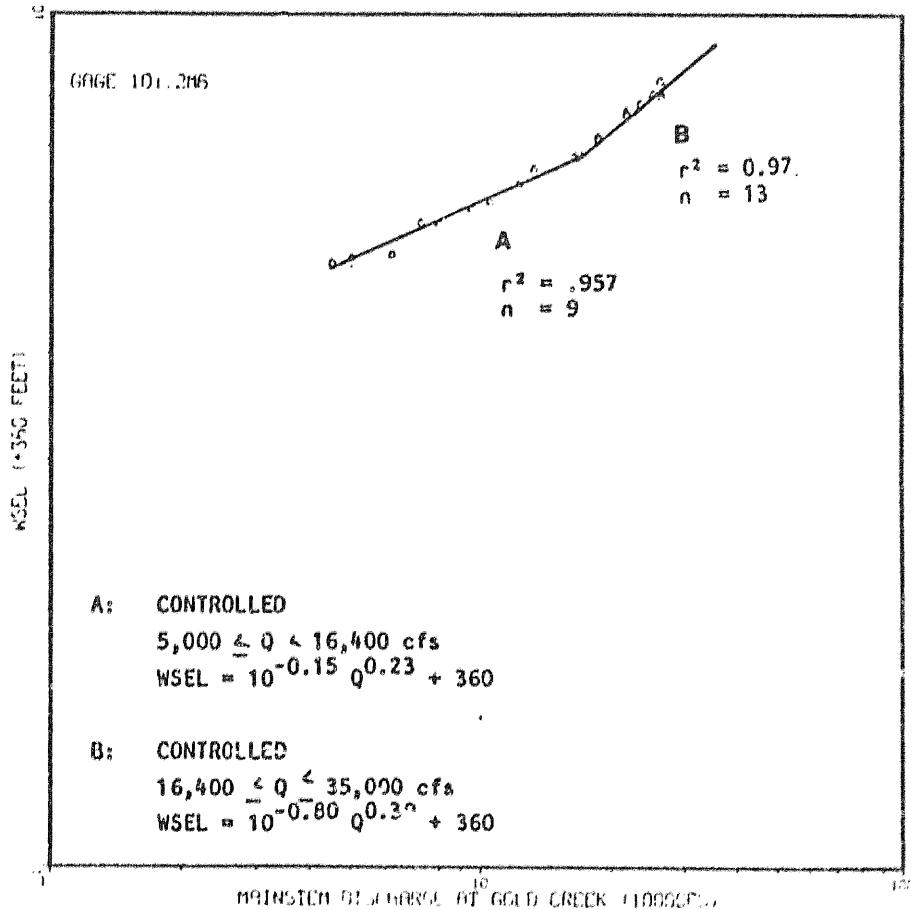
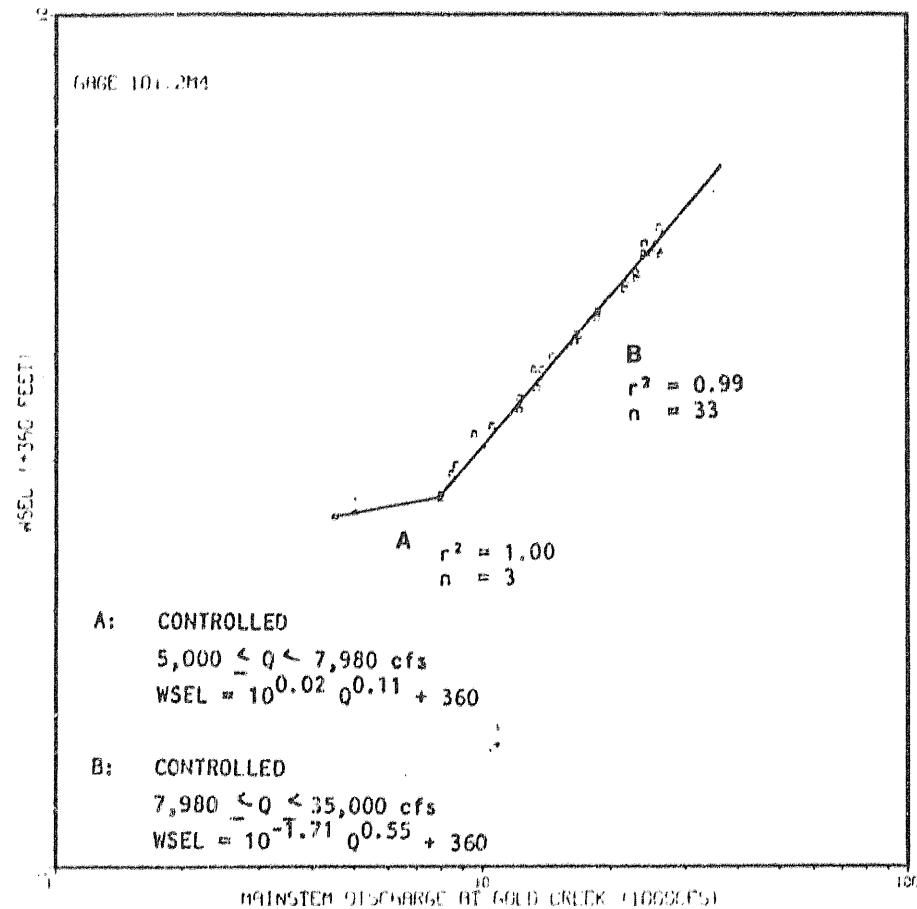


Figure A-1.2 Stage discharge curves for cross sections 2 and 5 at site 101.5L.

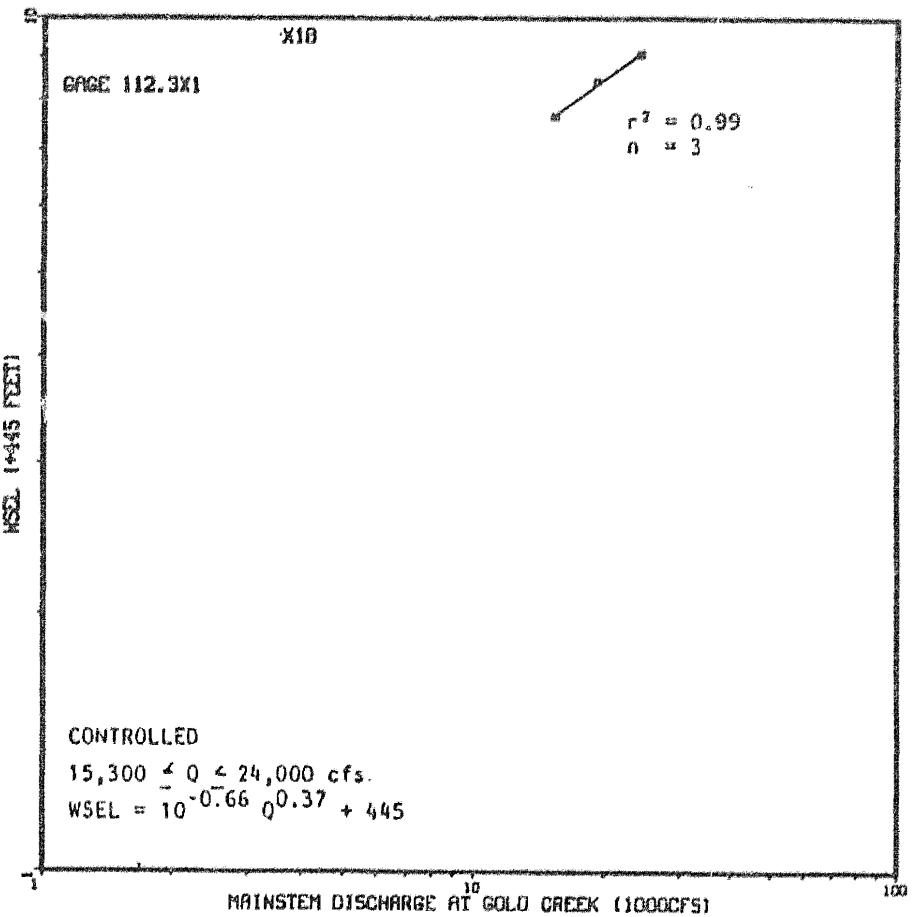
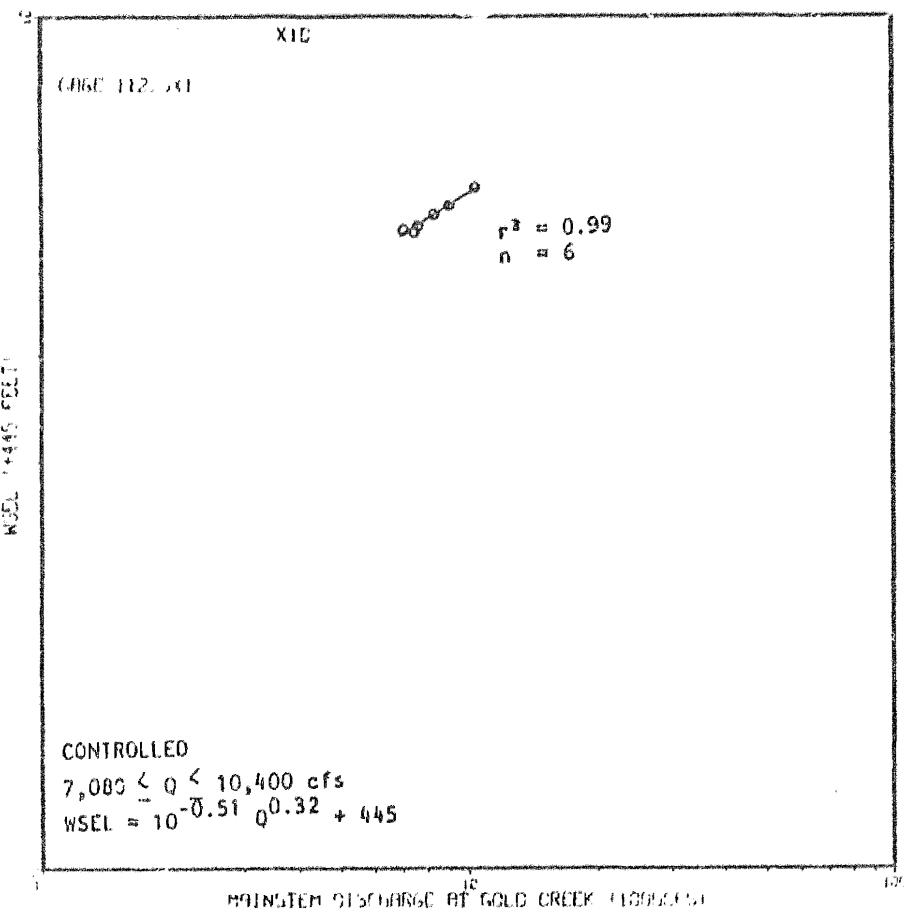


Figure A-1.3

Stage discharge curves for cross sections 1, 2, 3, 3a,
4, 5, 6 and 8 at site 112.6L.

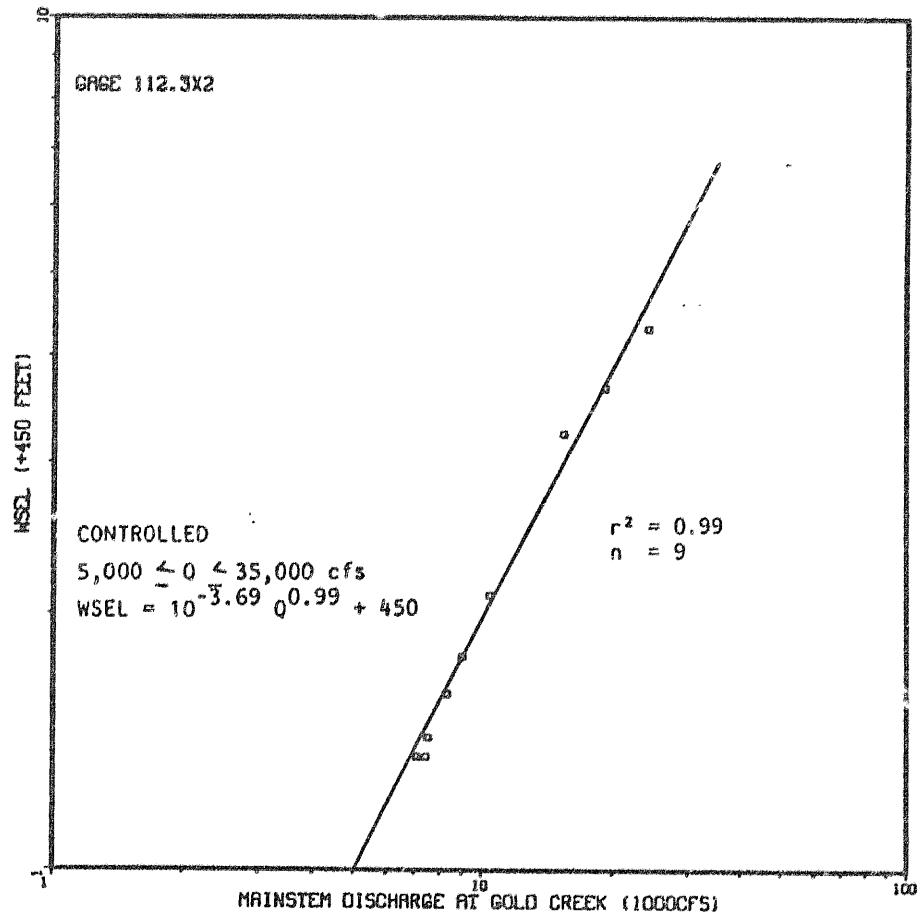
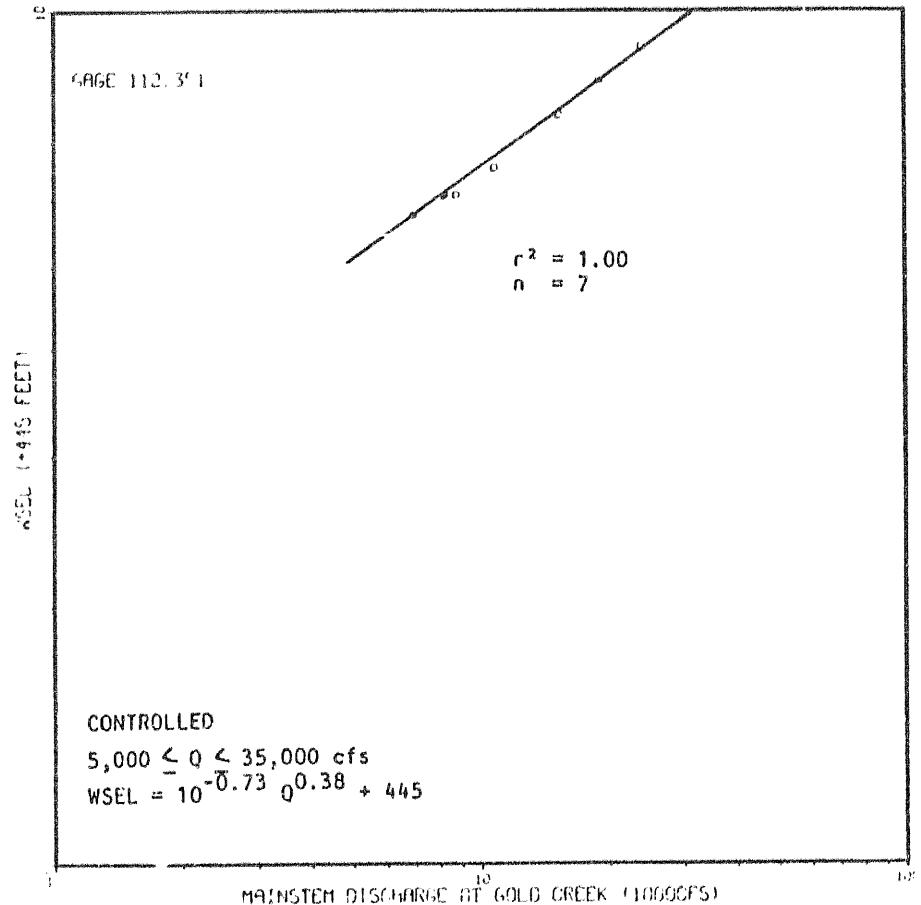


Figure A-1.3 Stage discharge curves for cross sections 1, 2, 3, 3a, 4, 5, 6 and 8 at site 112.6L.

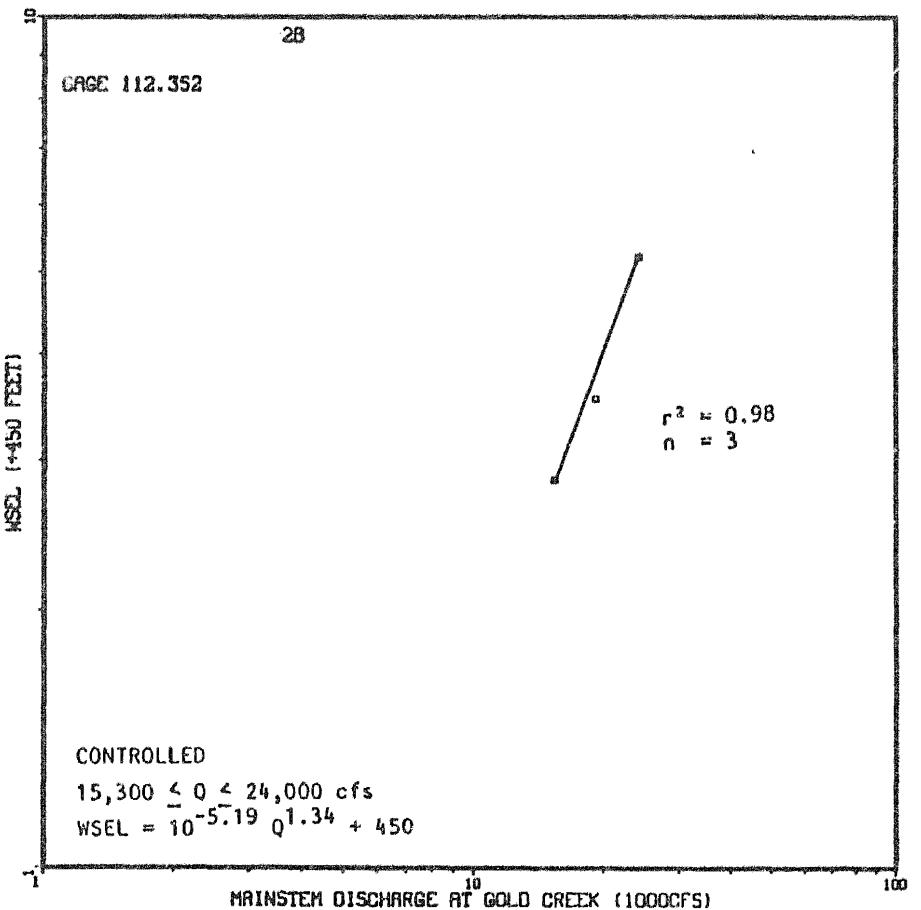
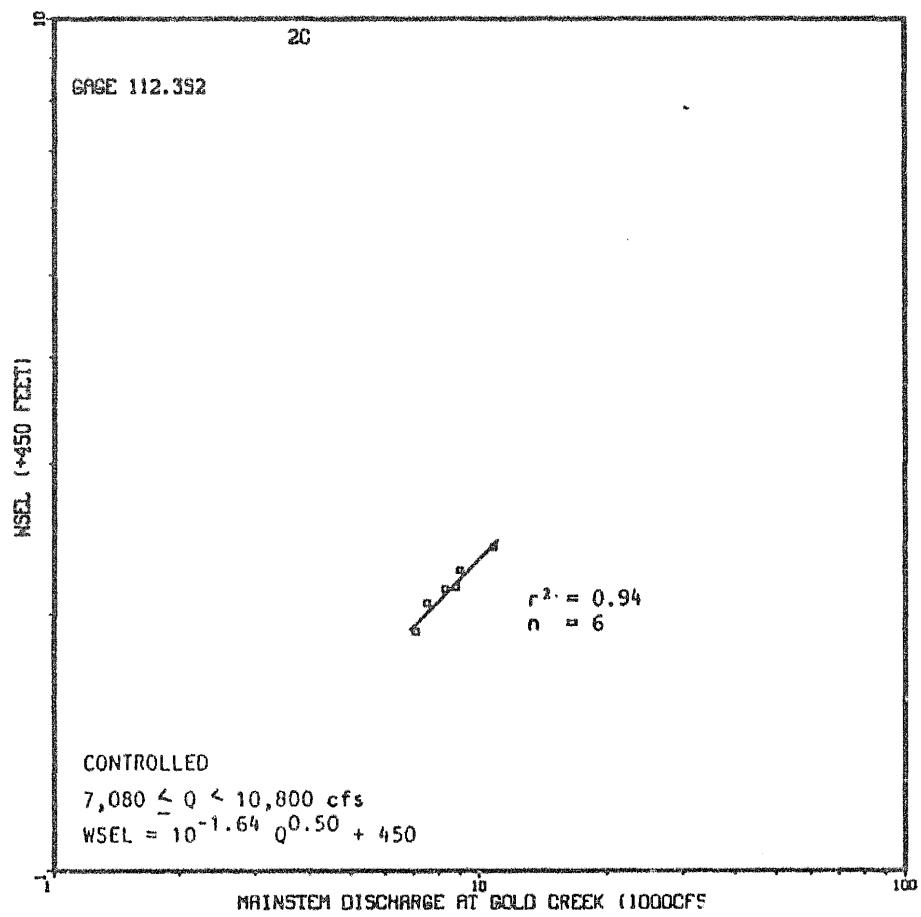


Figure A-1.3 Stage discharge curves for cross sections 1, 2, 3, 3a,
4, 5, 6 and 8 at site 112.6L.

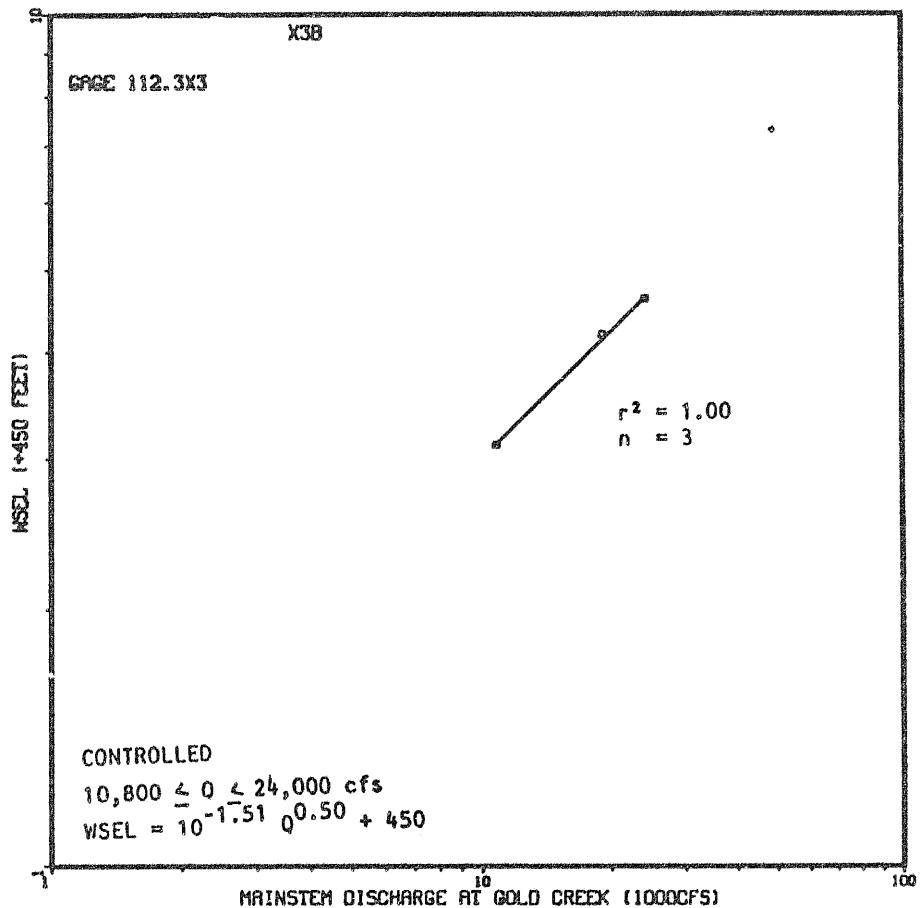
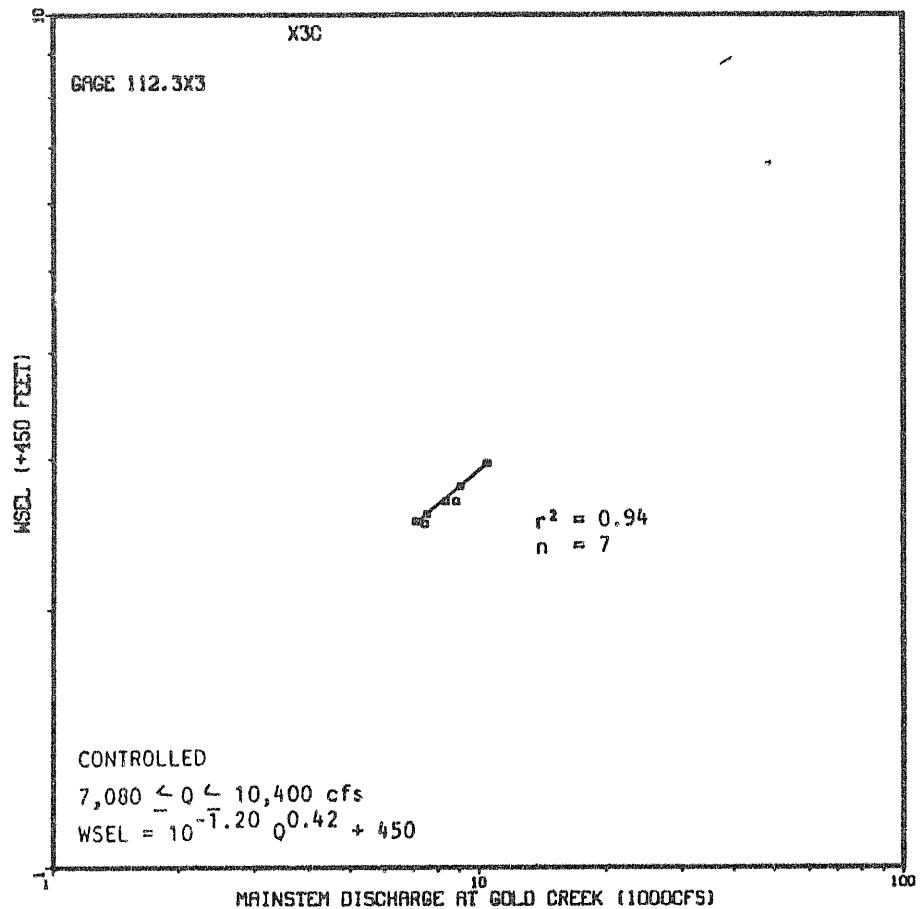


Figure A-1.3 Stage discharge curves for cross sections 1, 2, 3, 3a, 4, 5, 6 and 8 at site 112.6L.

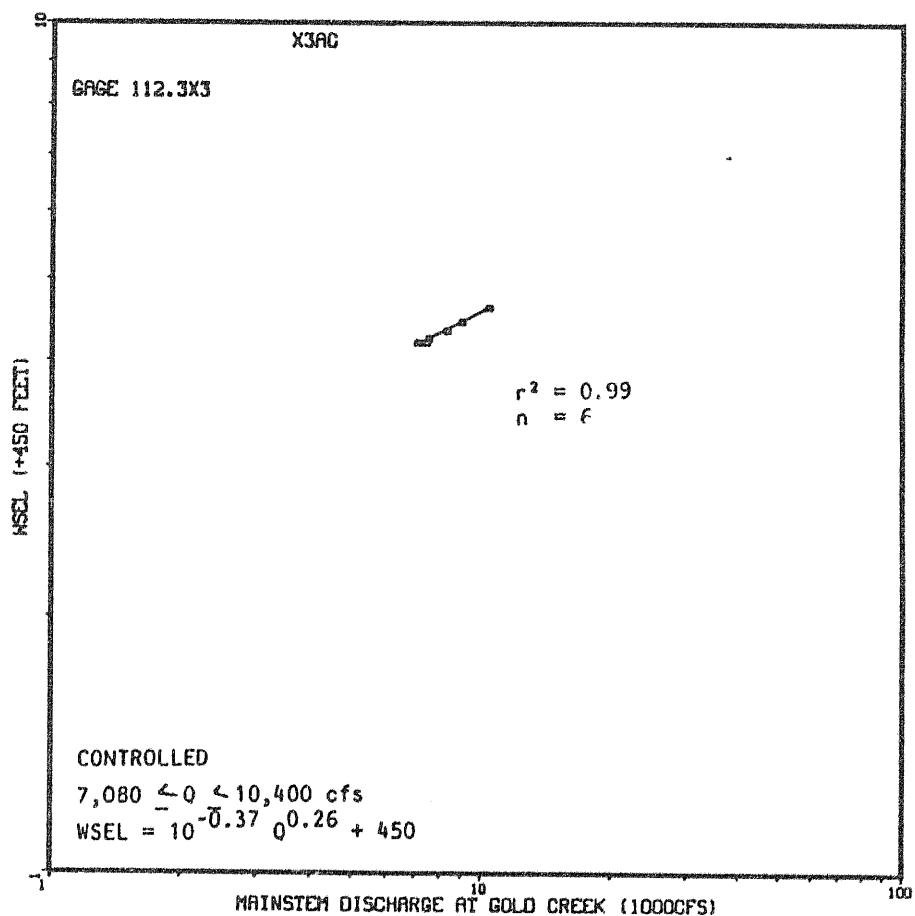
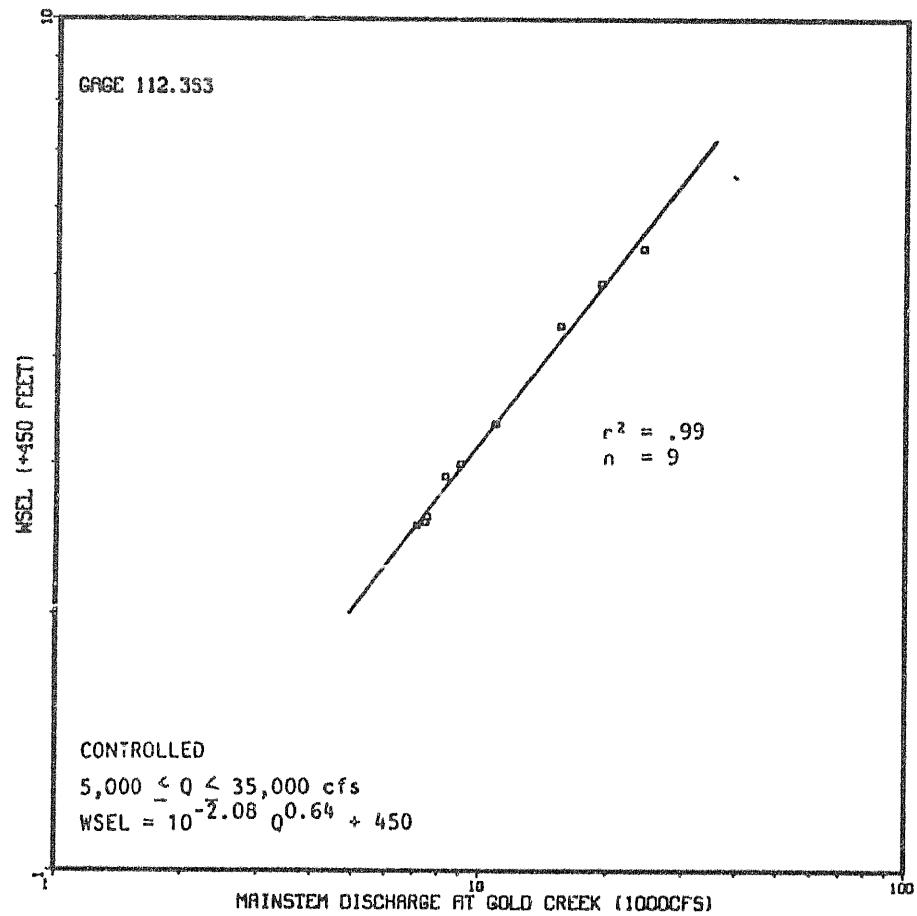


Figure A-1.3 Stage discharge curves for cross sections 1, 2, 3, 3a, 4, 5, 6 and 8 at site 112.6L.

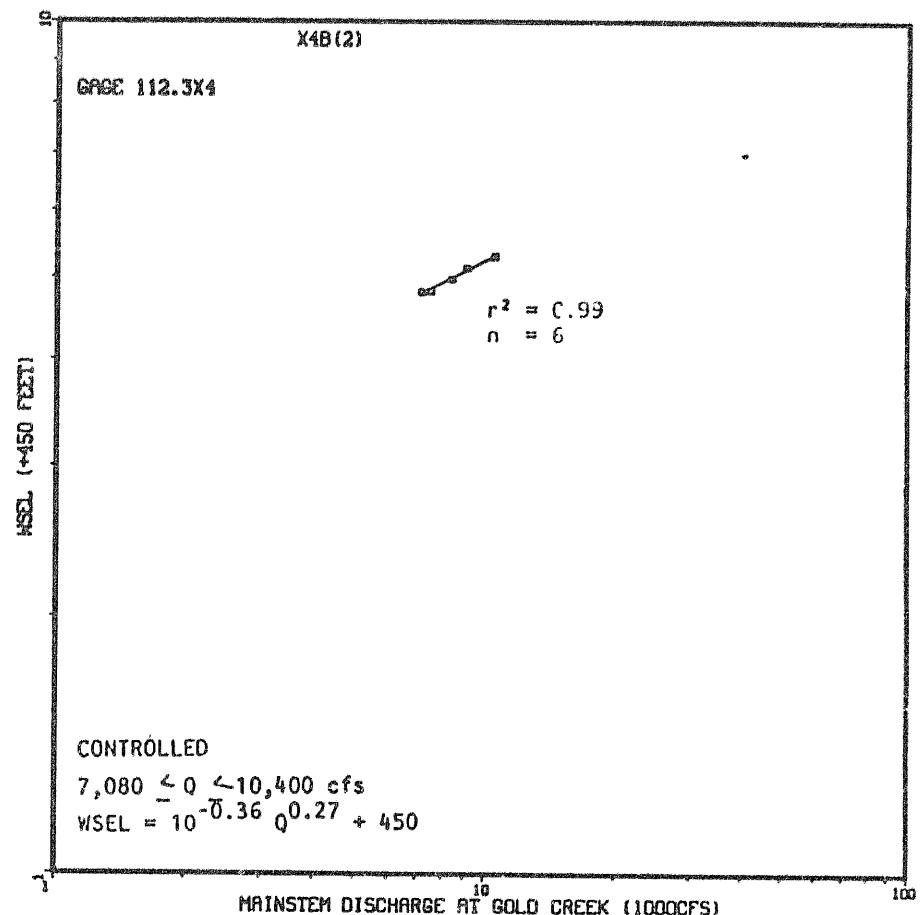
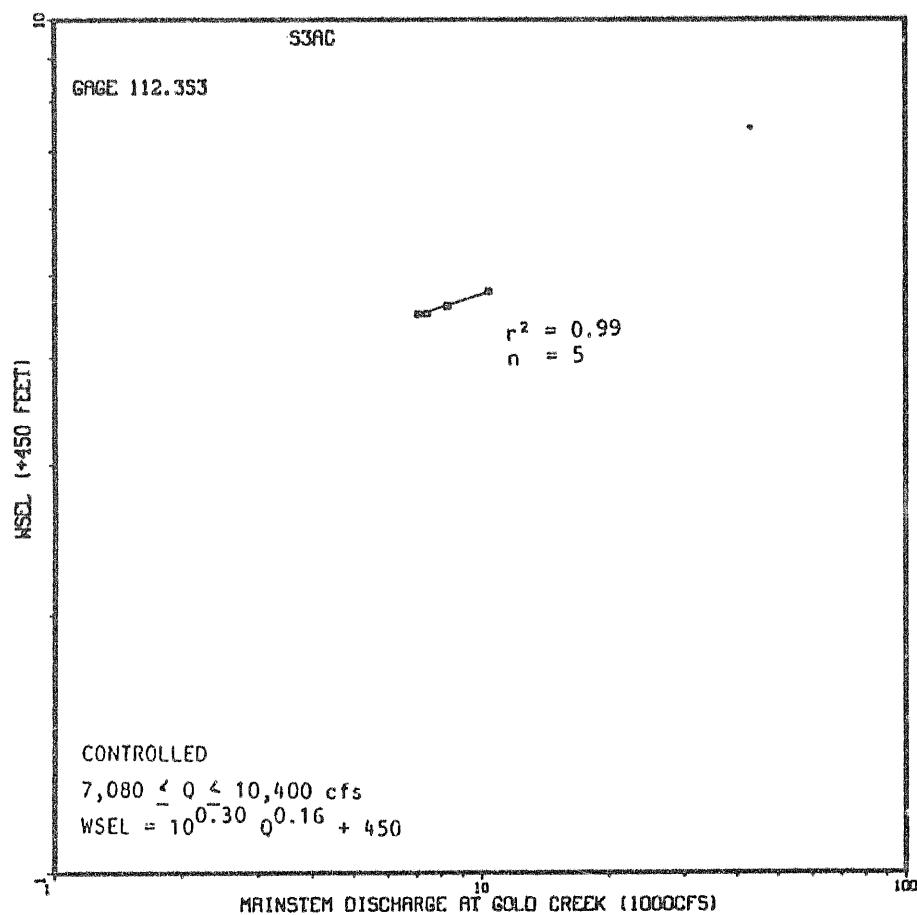


Figure A-1.3 Stage discharge curves for cross sections 1, 2, 3, 3a, 4, 5, 6 and 8 at site 112.6L.

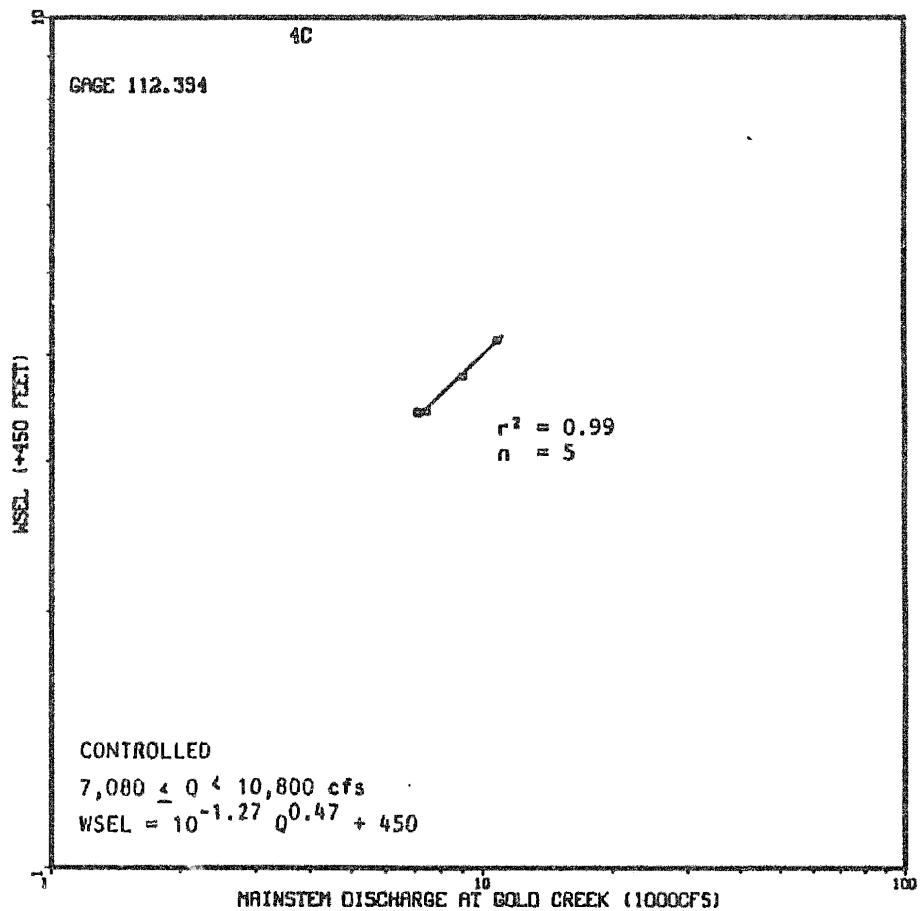
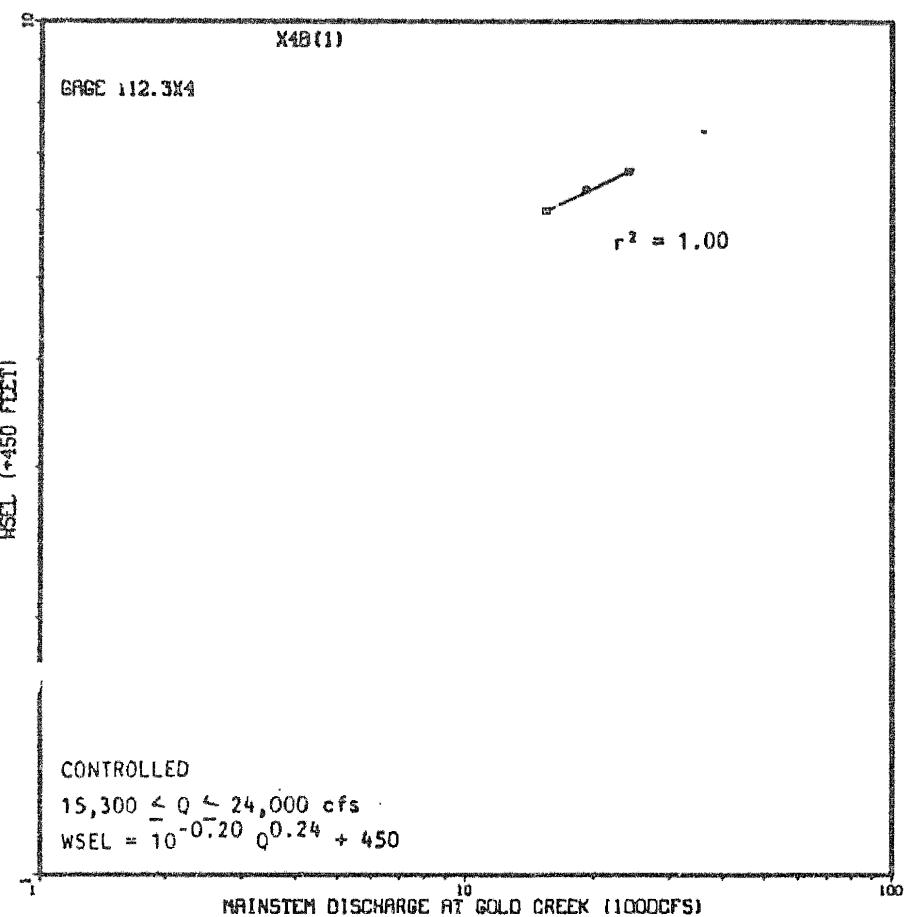


Figure A-1.3 Stage discharge curves for cross sections 1, 2, 3, 3a, 4, 5, 6 and 8 at site 112.6L.

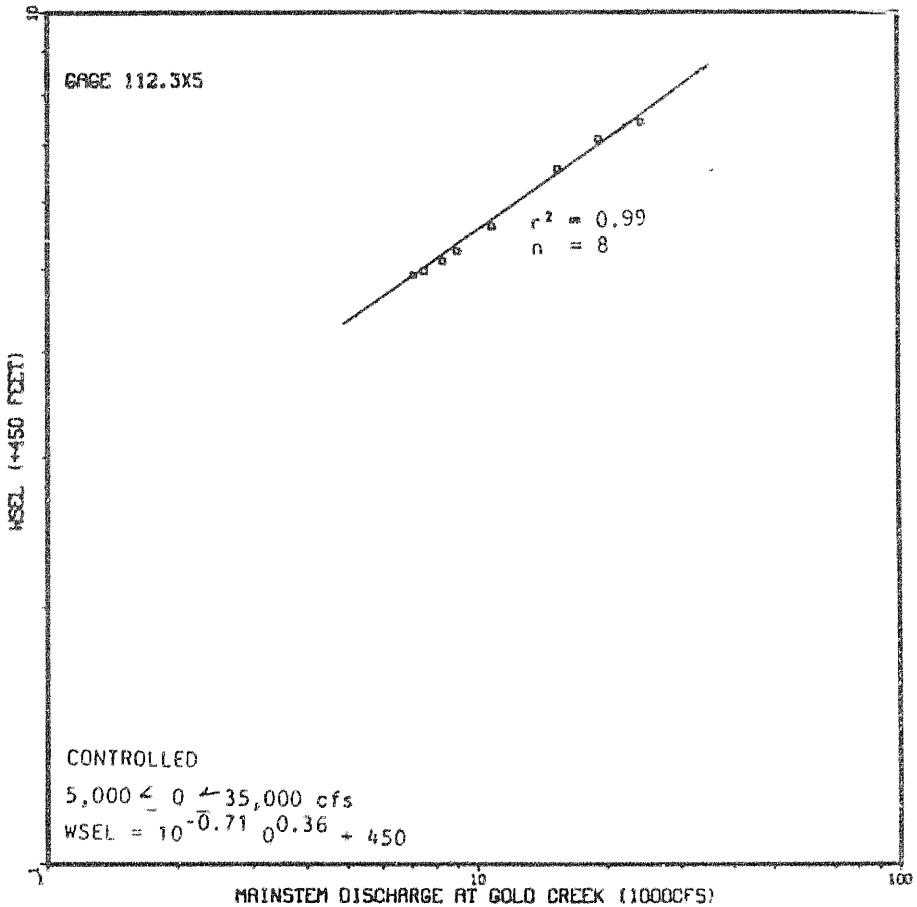
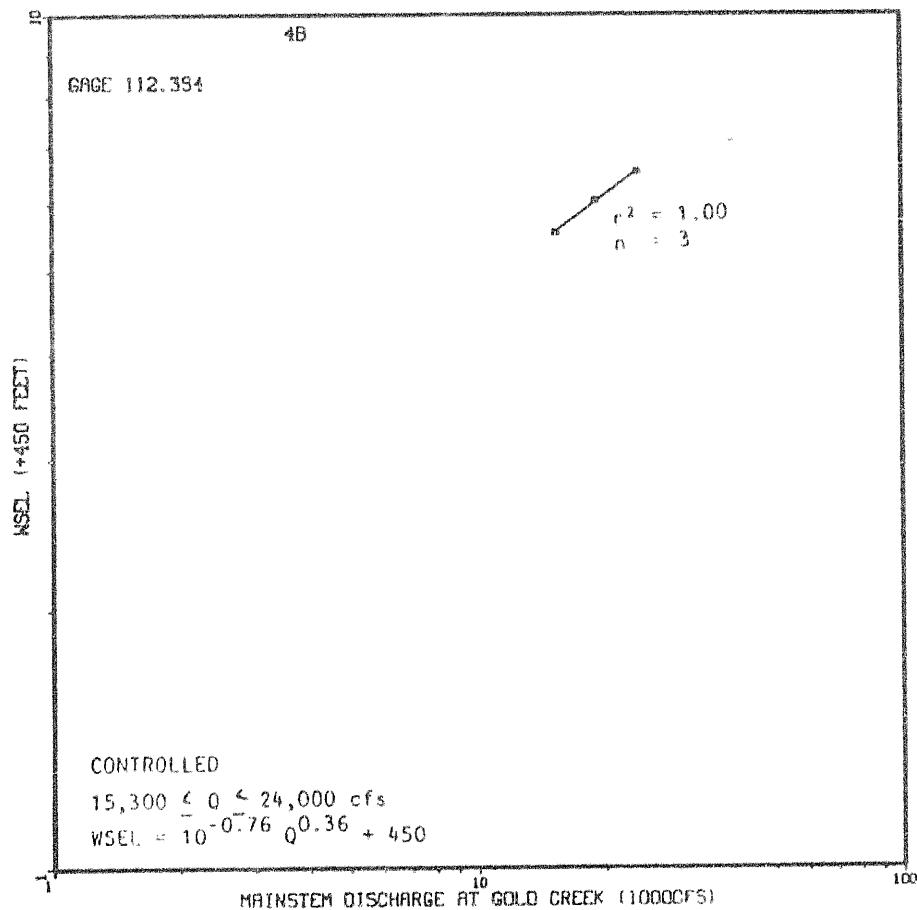


Figure A-1.3 Stage discharge curves for cross sections 1, 2, 3, 3a, 4, 5, 6 and 8 at site 112.6L.

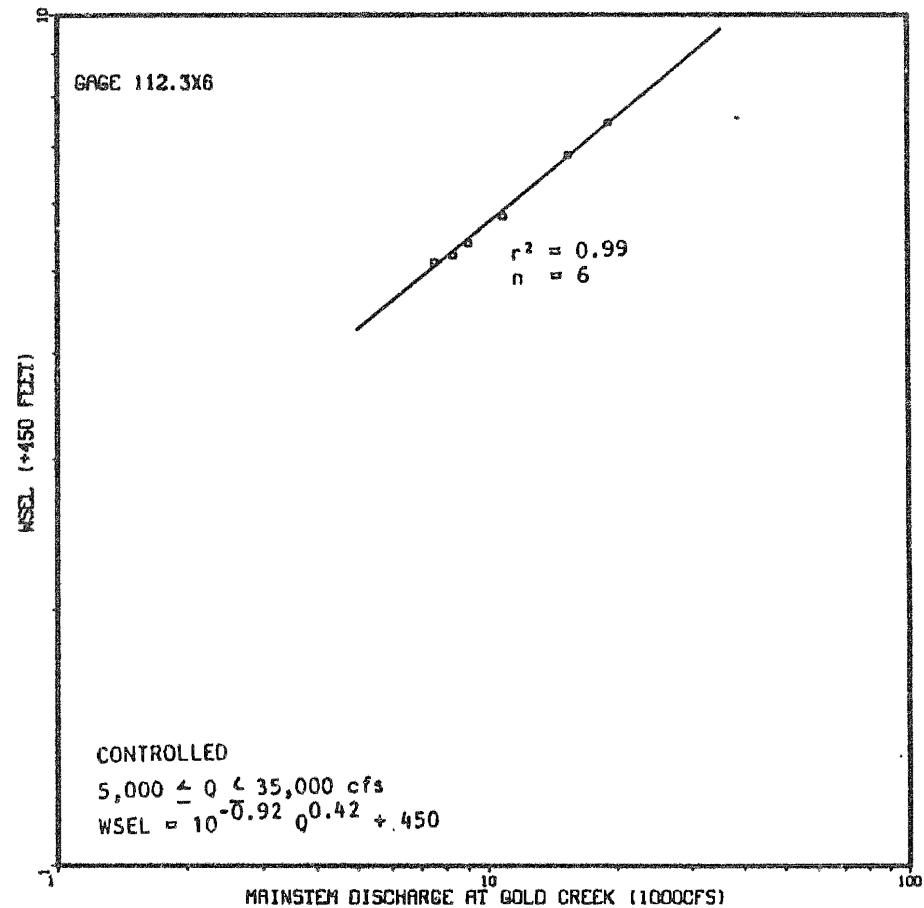
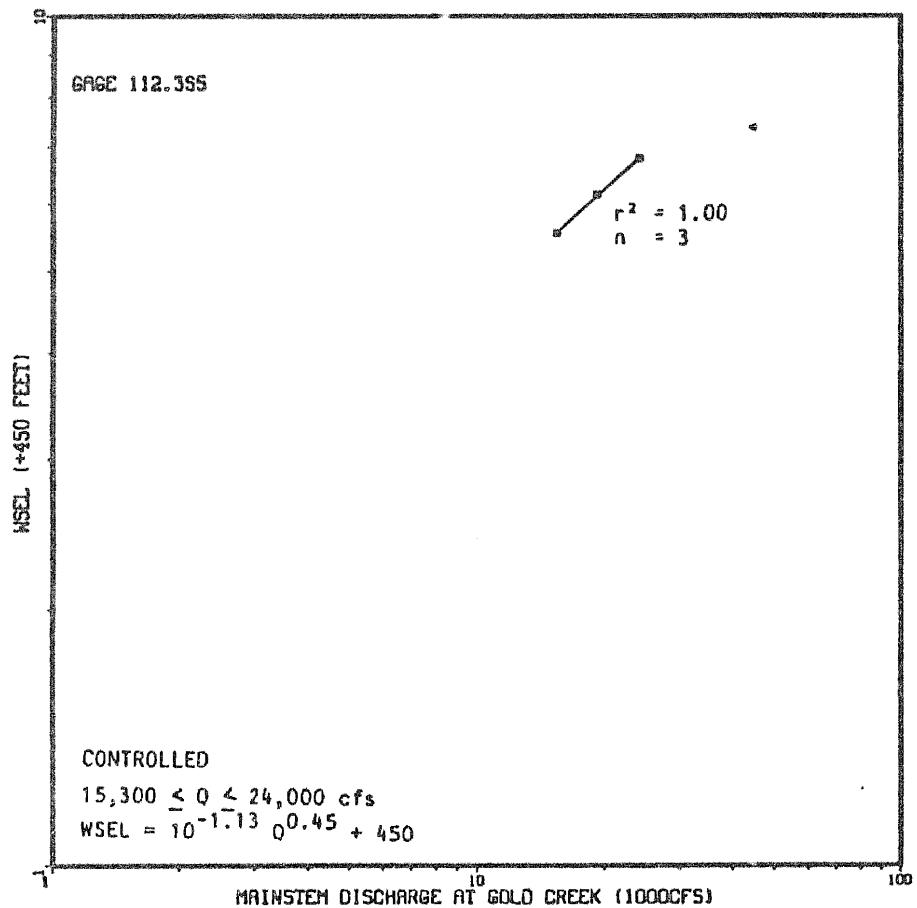


Figure A-1.3 Stage discharge curves for cross sections 1, 2, 3, 3a, 4, 5, 6 and 8 at site 112.6L.

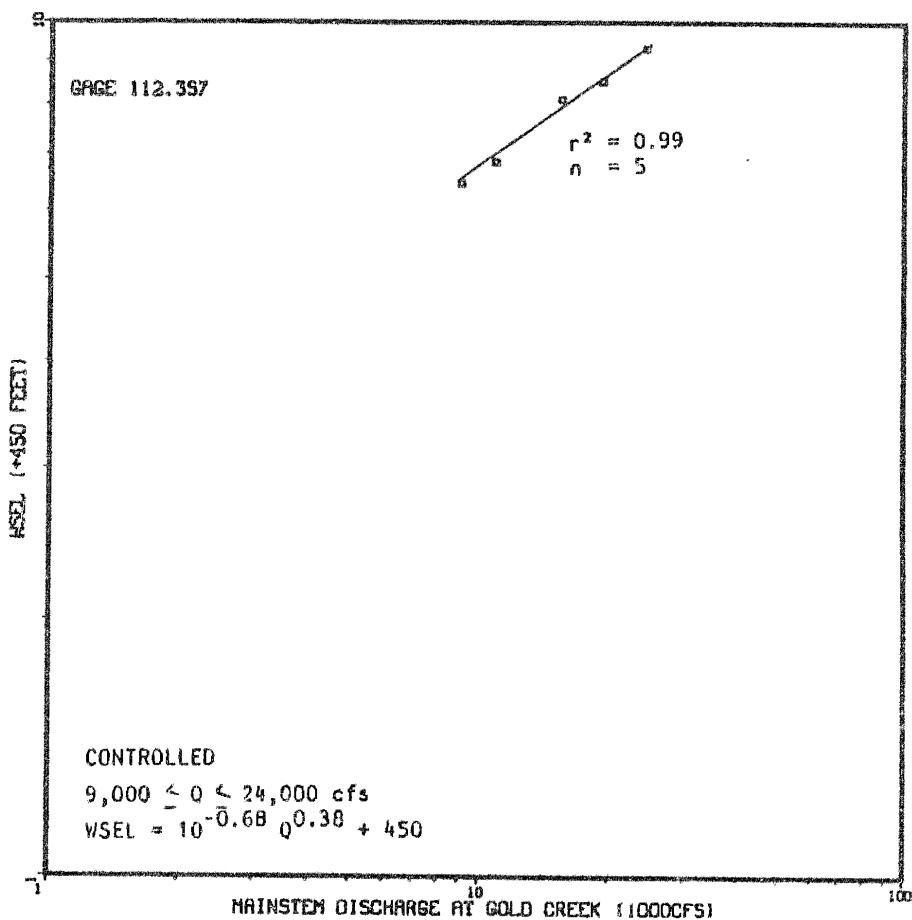
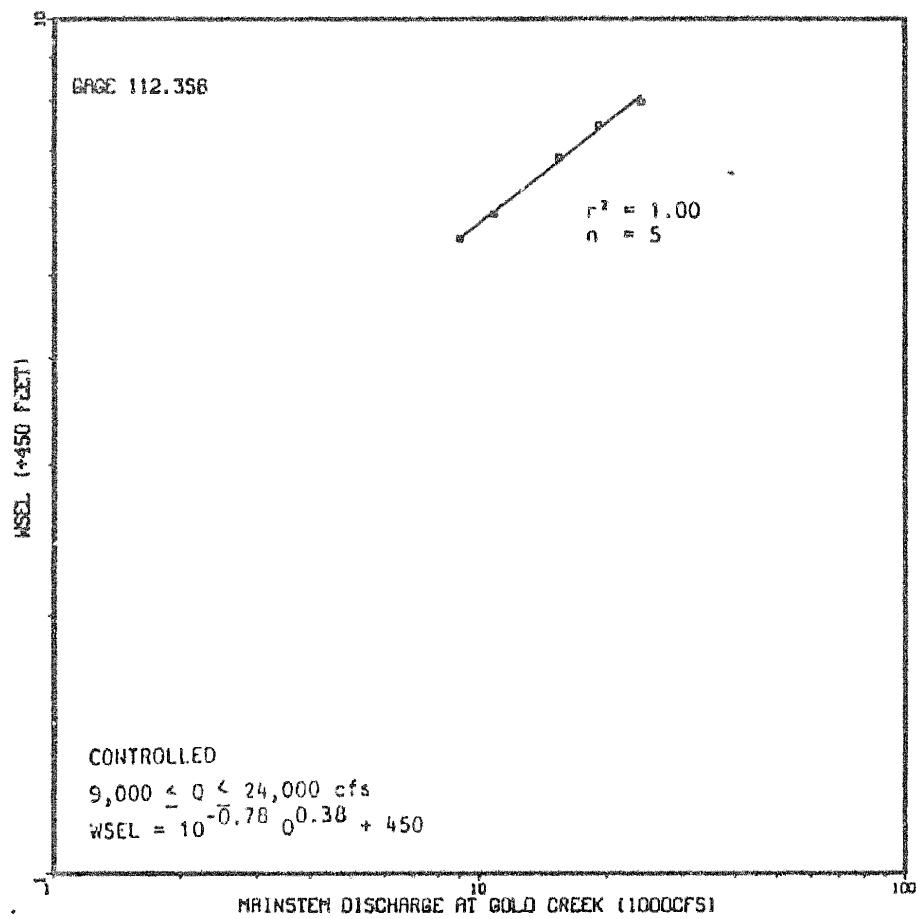


Figure A-1.3 Stage discharge curves for cross sections 1, 2, 3, 3a, 4, 5, 6 and 8 at site 112.6L.

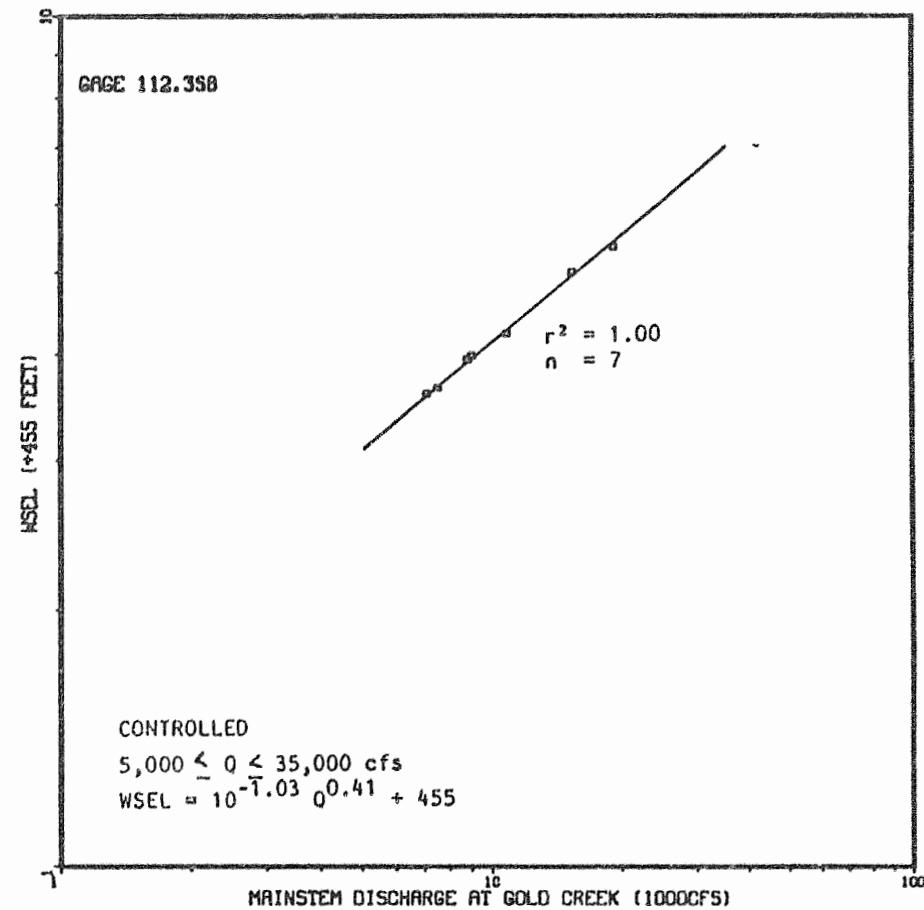
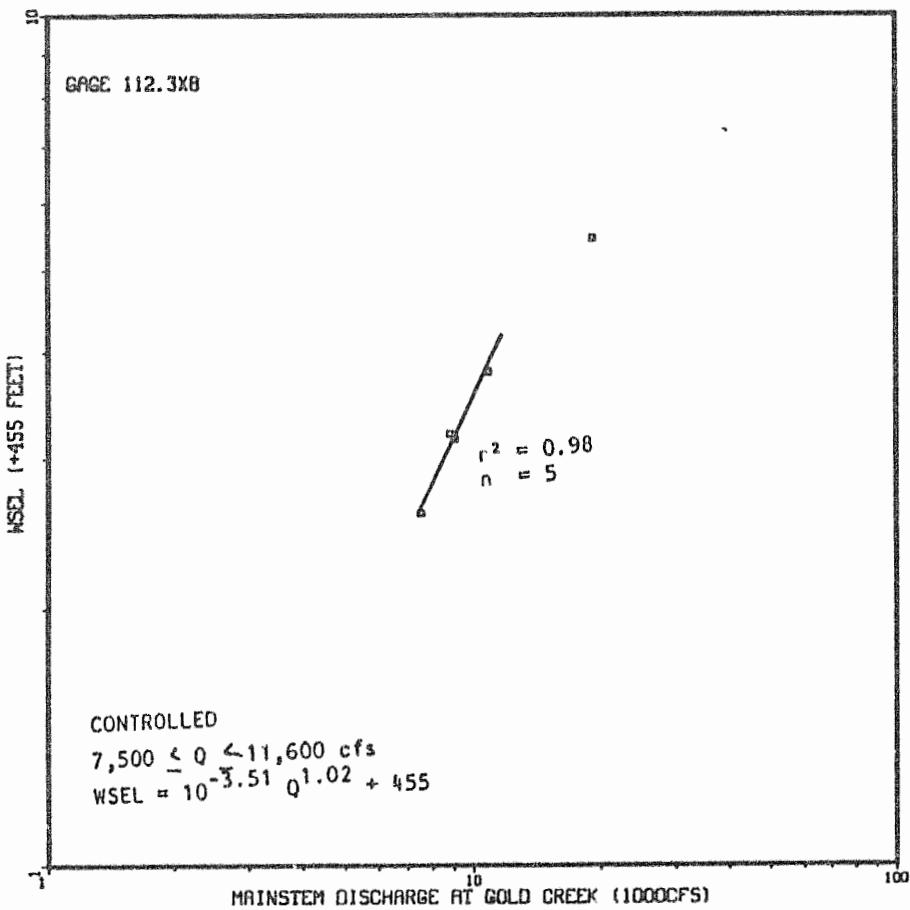


Figure A-1.3 Stage discharge curves for cross sections 1, 2, 3, 3a, 4, 5, 6 and 8 at site 112.6L.

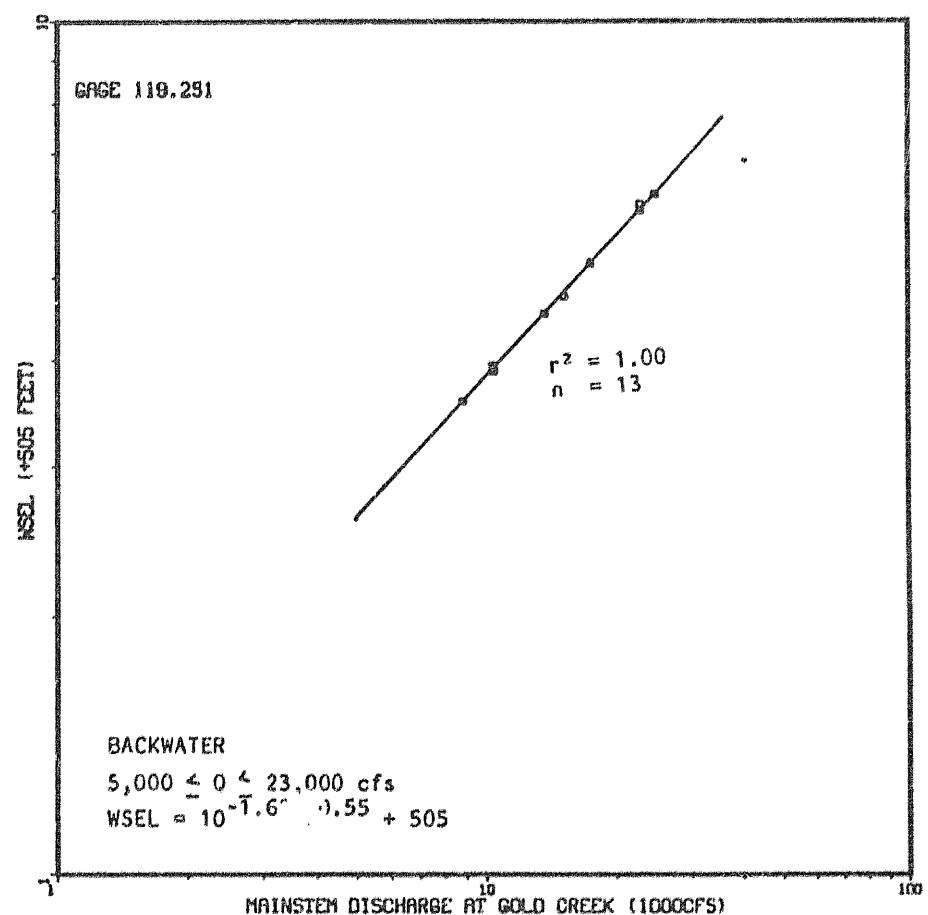
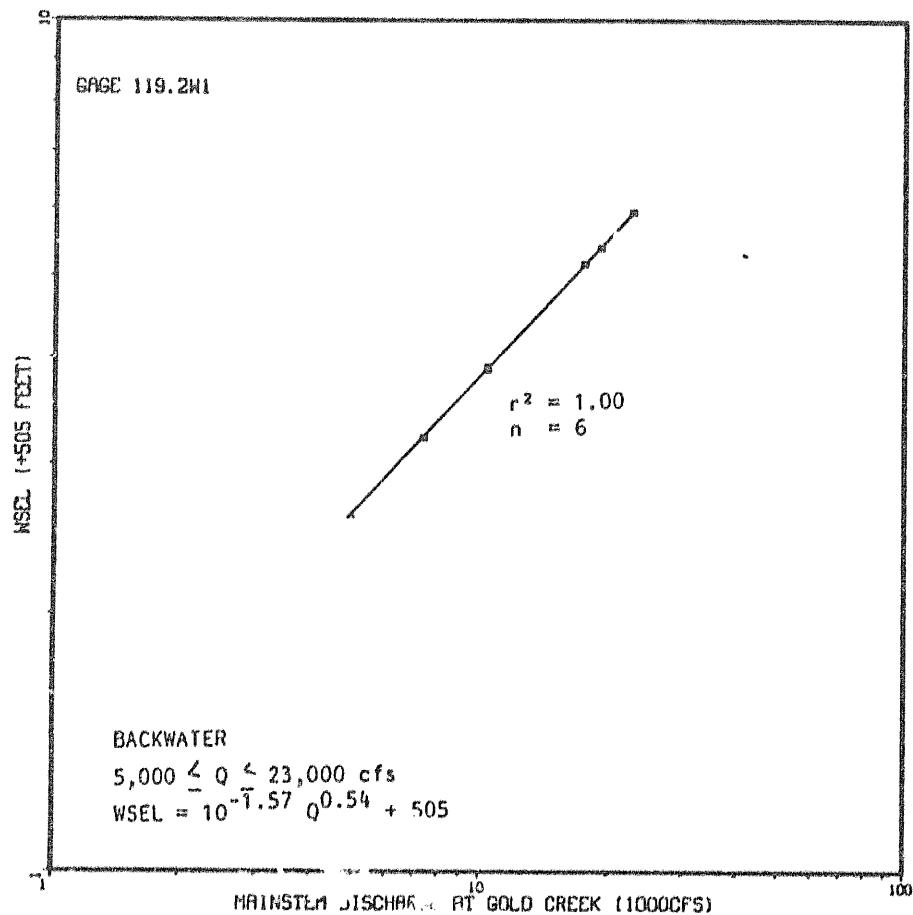


Figure A.1.4 Stage discharge curves for cross sections 1, 2, 4 and 5 at site 119.2R.

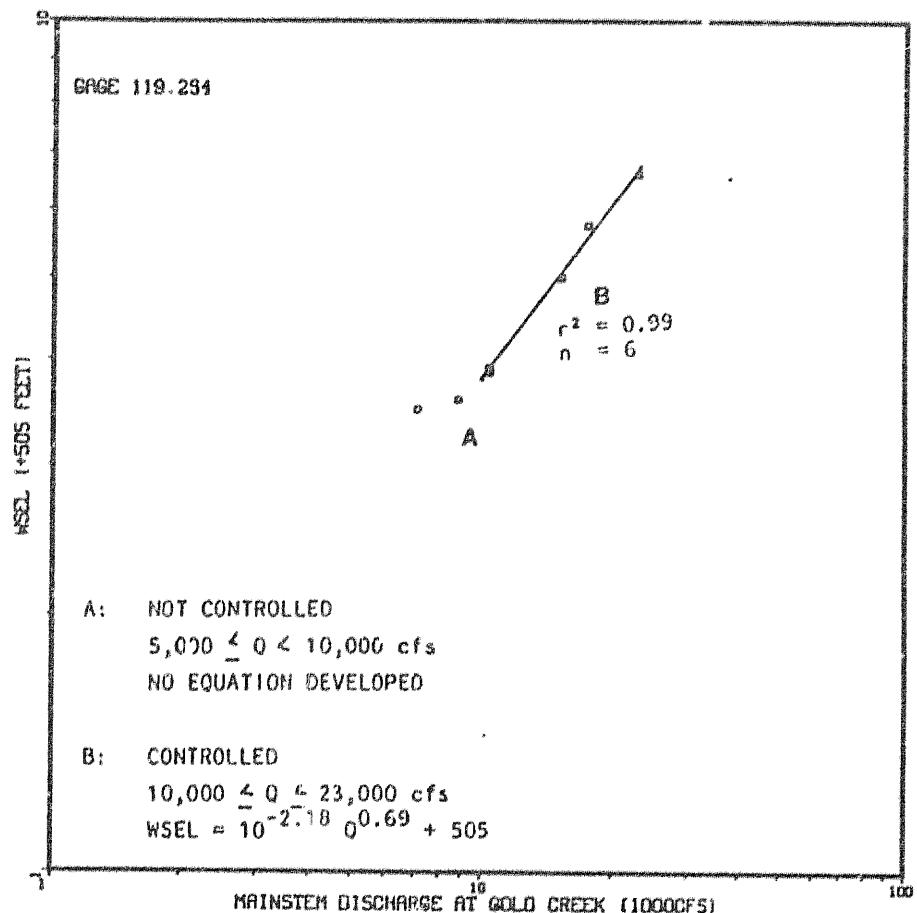
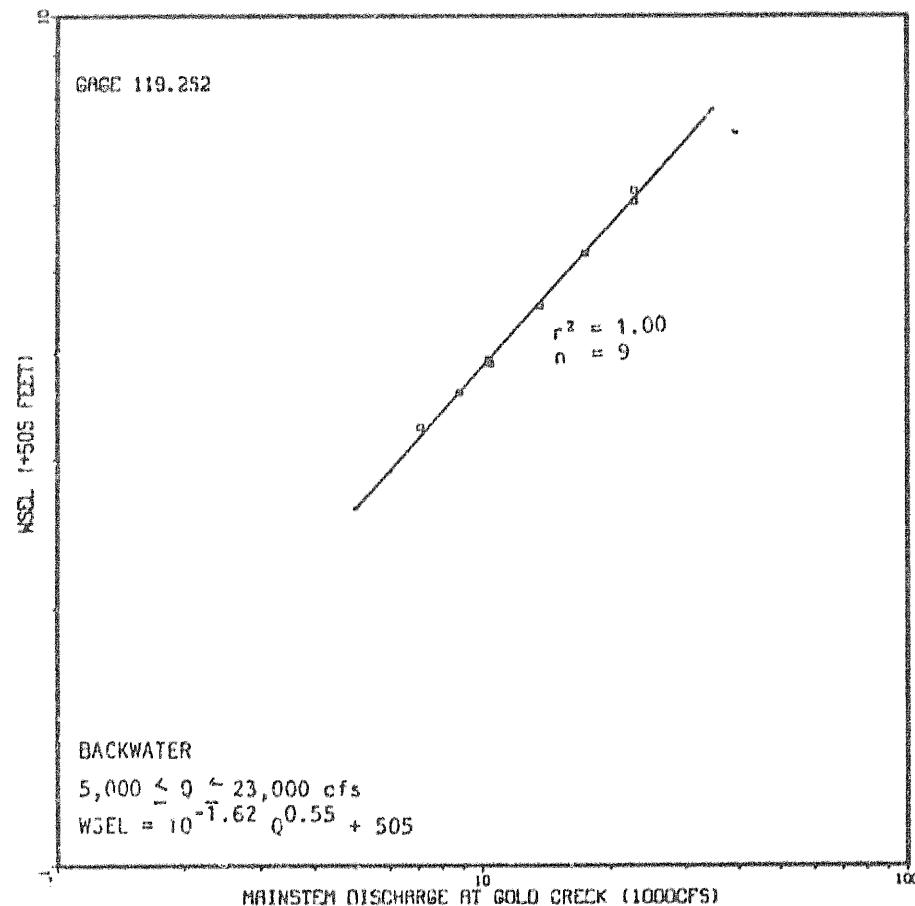


Figure A-1.4 Stage discharge curves for cross sections 1, 2, 4 and 5 at site 119.2R.

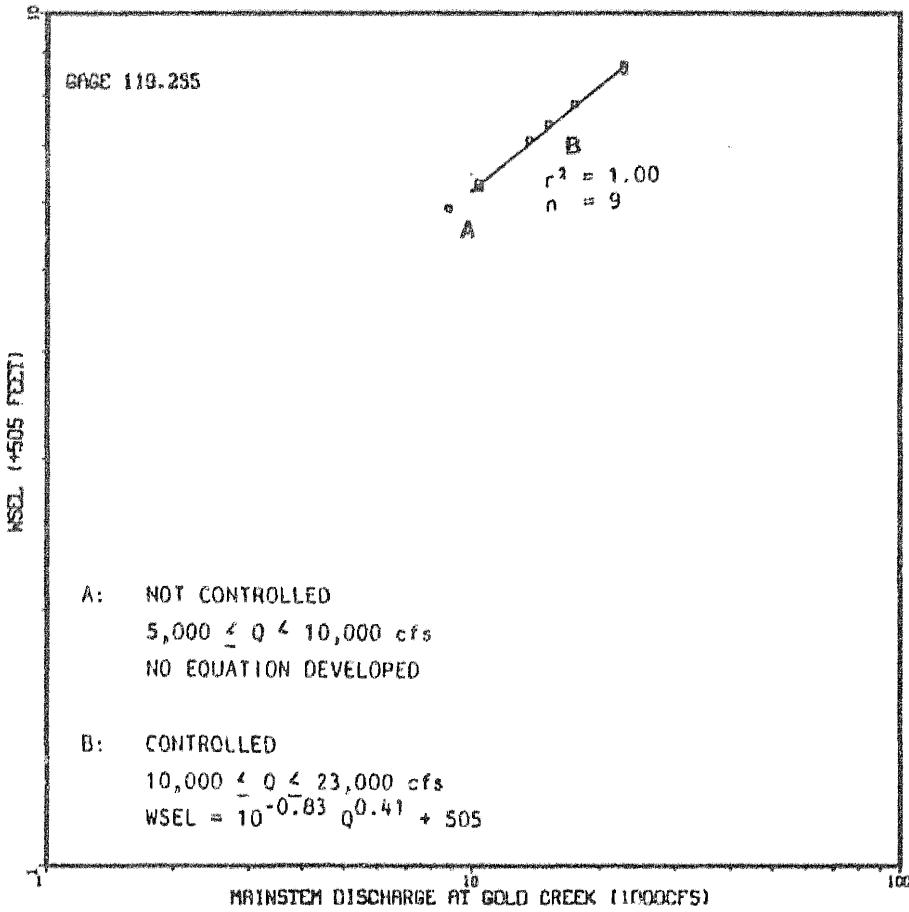


Figure A-1.: Stage discharge curves for cross sections 1, 2, 4 and 5 at site 119.2R.

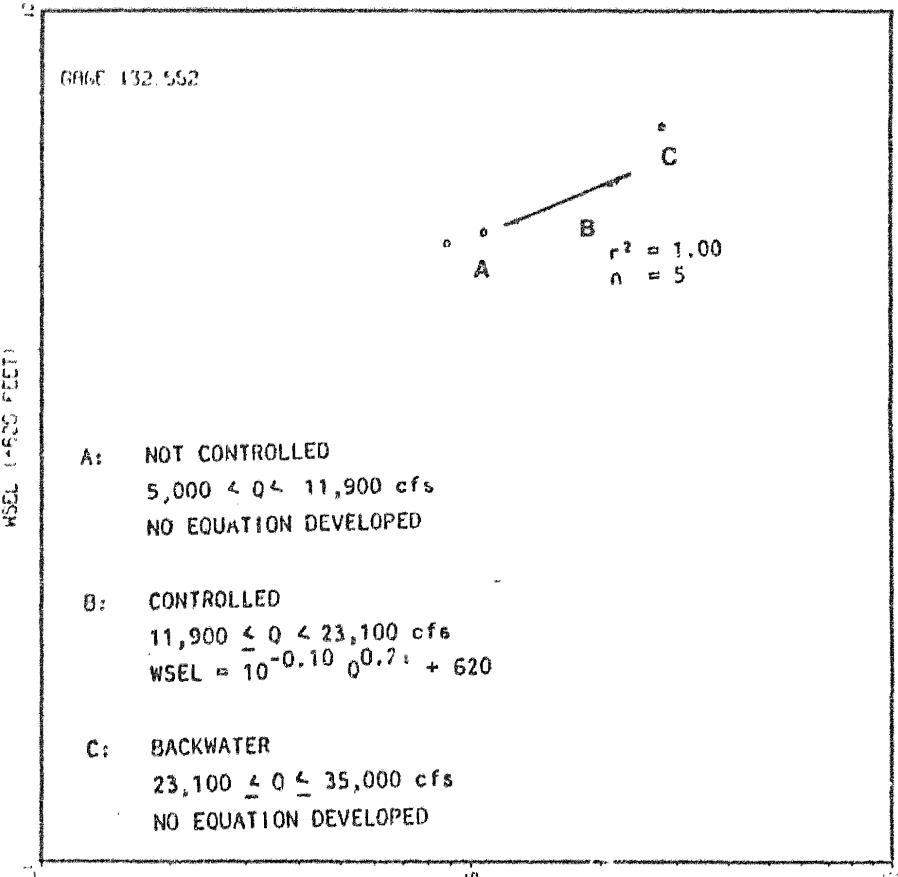
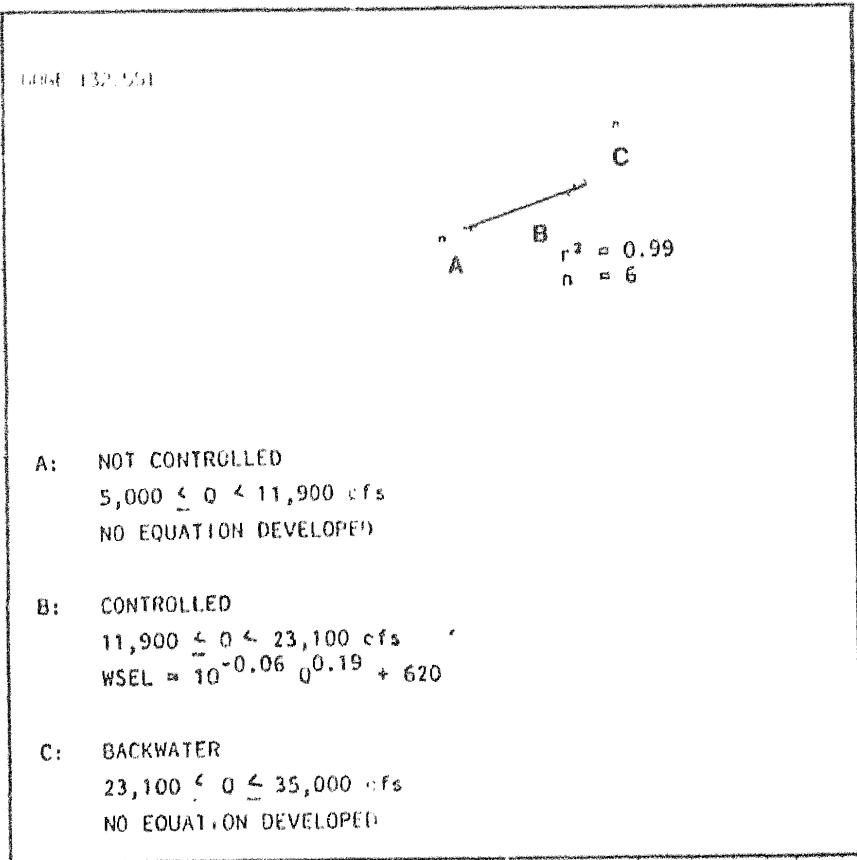


Figure A-1.5 Stage discharge curves for cross sections 1, 2, 4, 5, 6, 7, 8 and 9 at site 132.6L.

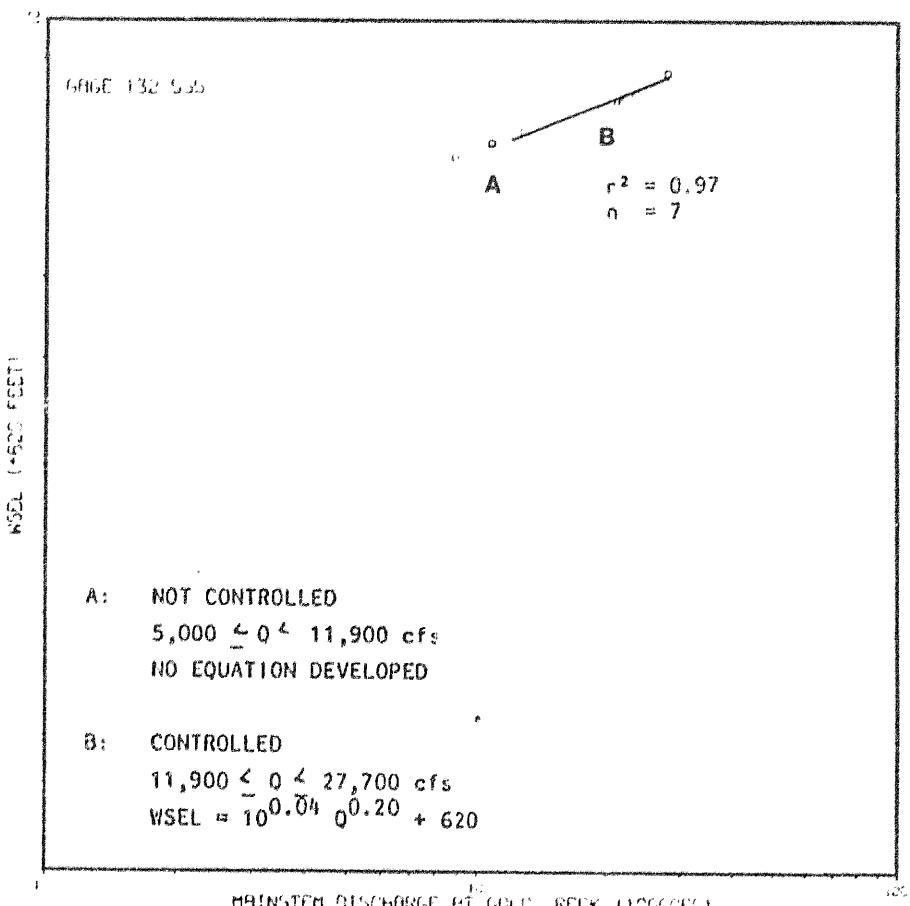
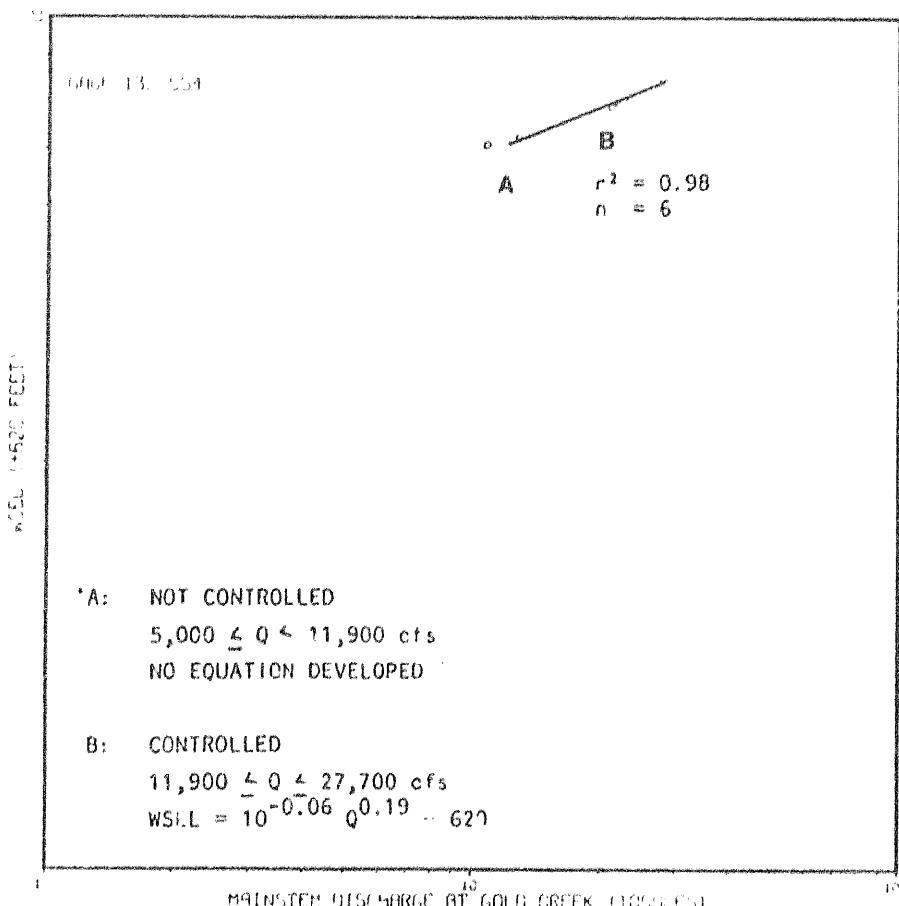


Figure A-1.5

Stage discharge curves for cross sections 1, 2, 4, 5,
 6, 7, 8 and 9 at site 132.6L.

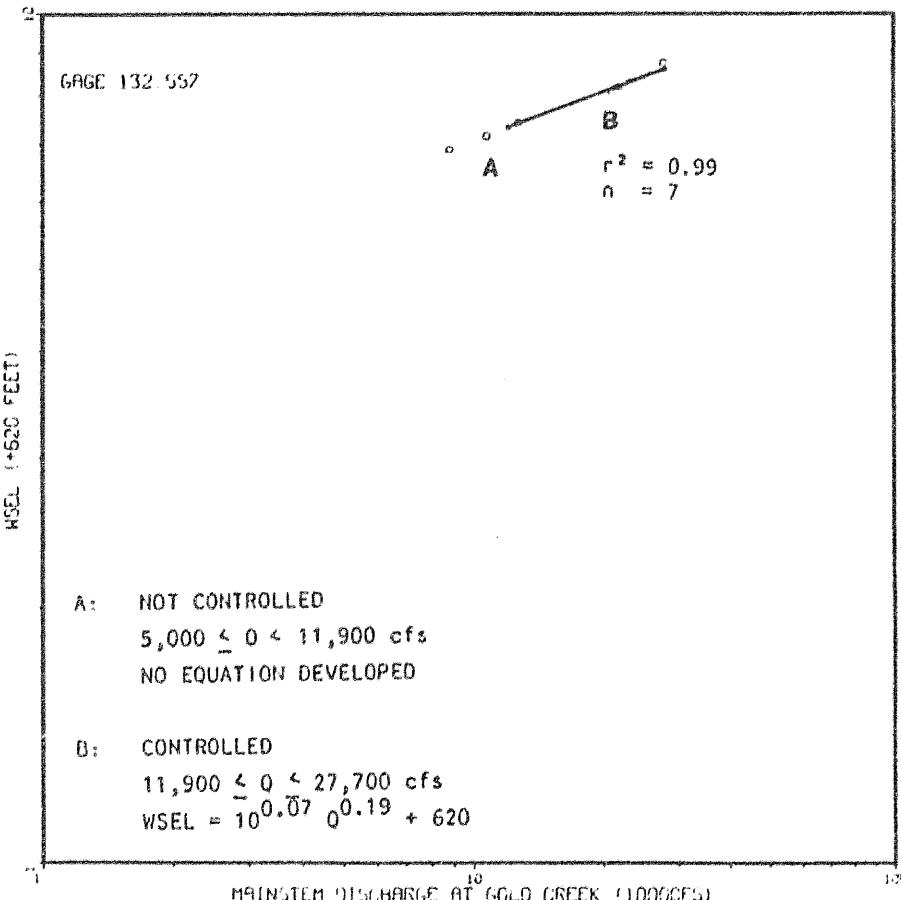
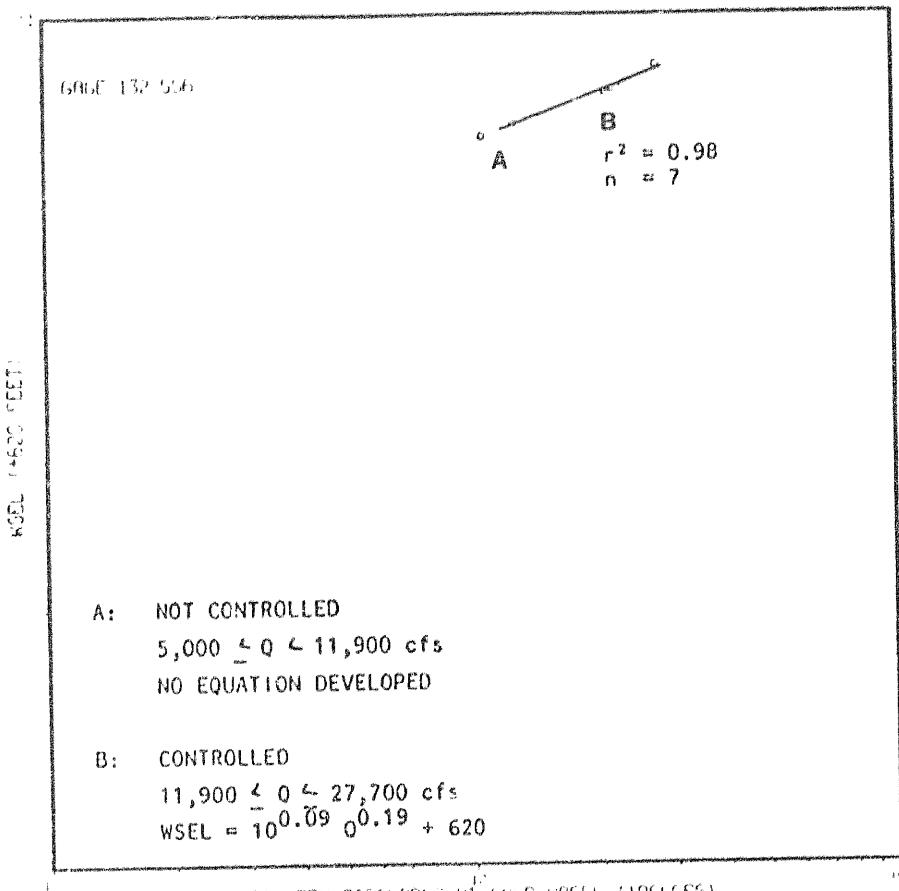


Figure A-1.5 Stage discharge curves for cross sections 1, 2, 4, 5, 6, 7, 8 and 9 at site 132.6L.

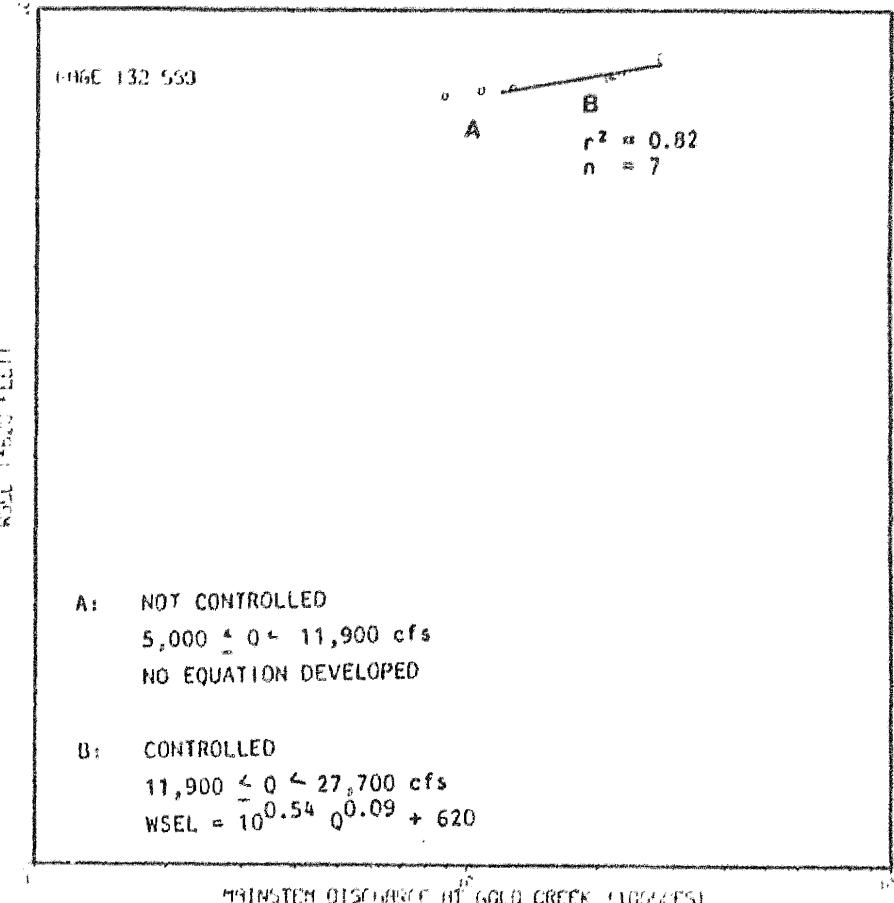
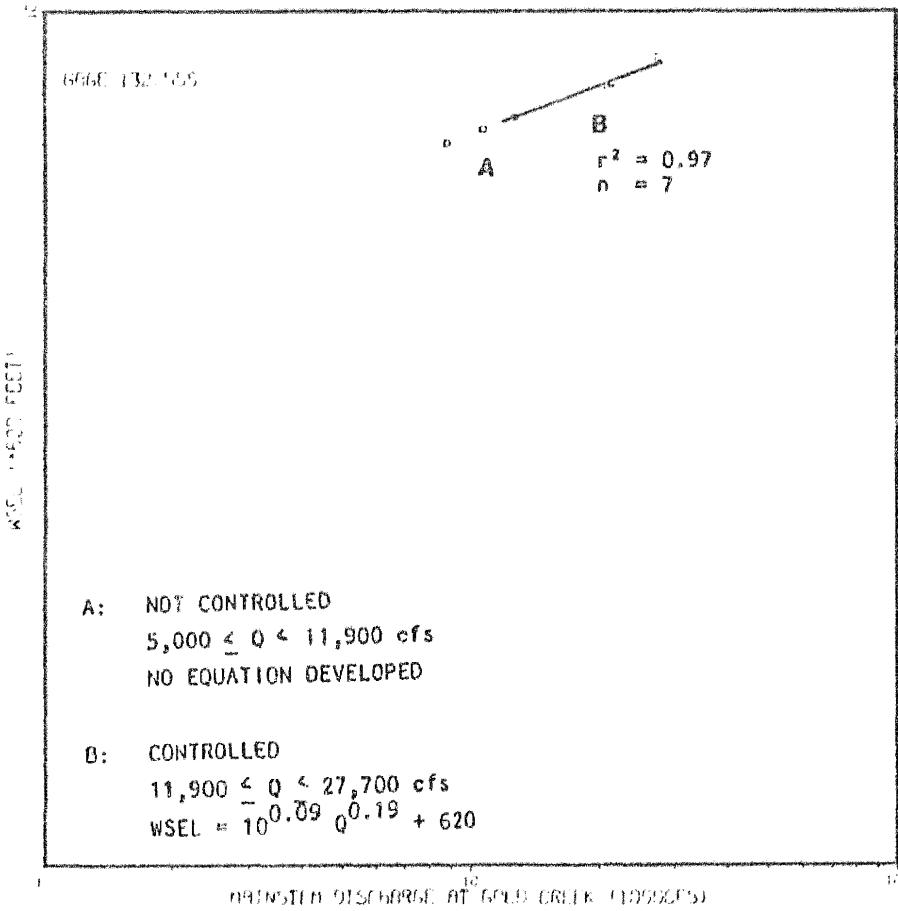


Figure A-1.5

Stage discharge curves for cross sections 1, 2, 4, 5,
 6, 7, 8 and 9 at site 132.6L.

51

(133, 049+, 735W)

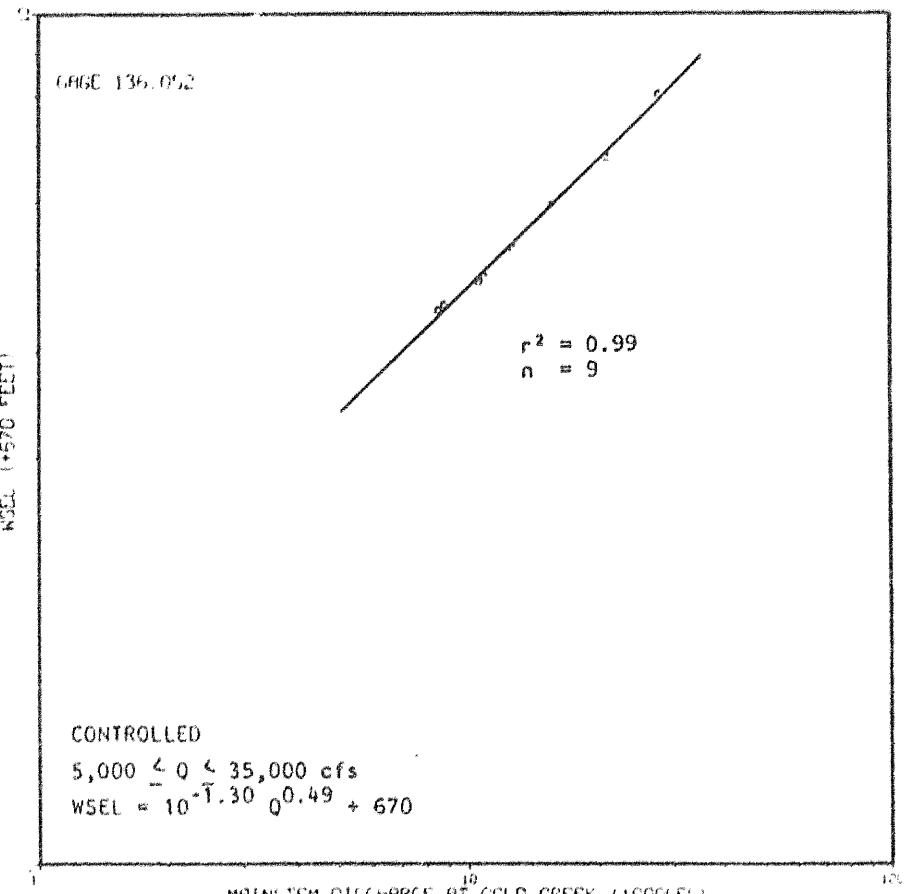
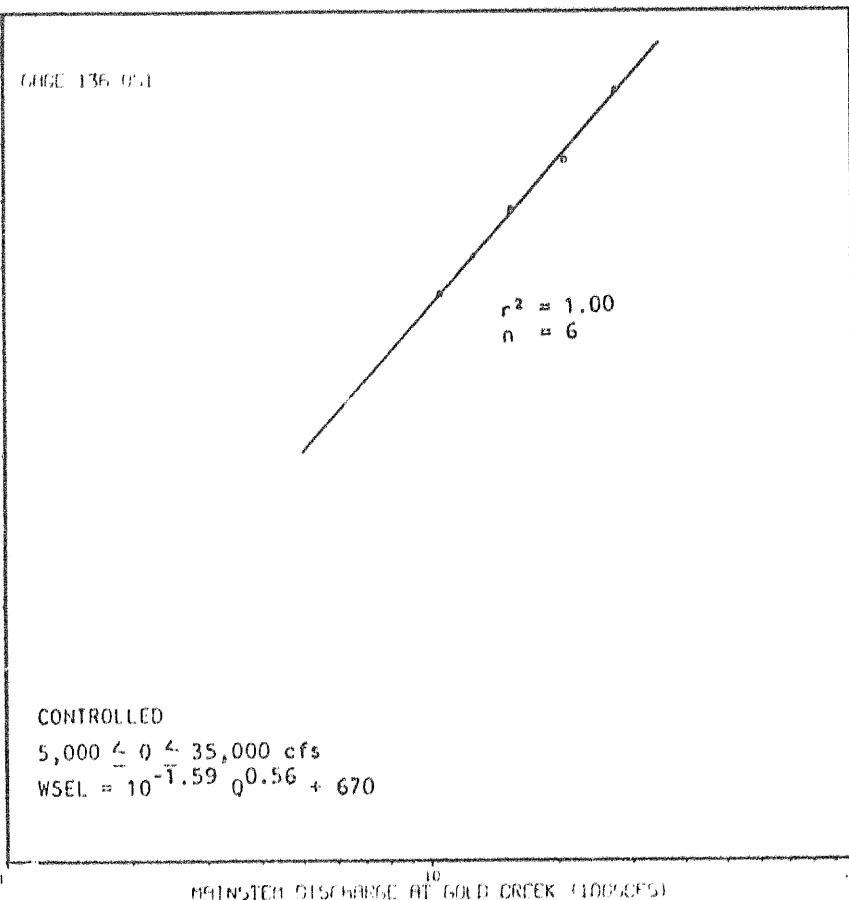


Figure A-1.6 Stage discharge curves for cross sections 1, 2, 3, 5
and 6 at site 136.0L.

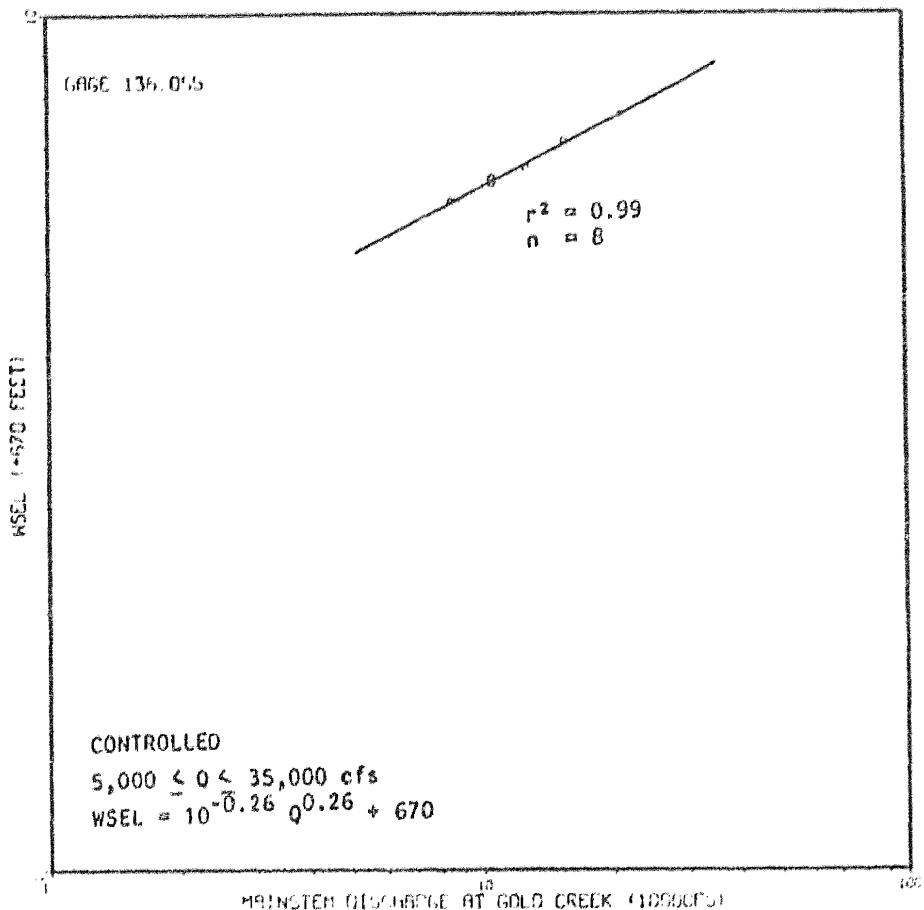
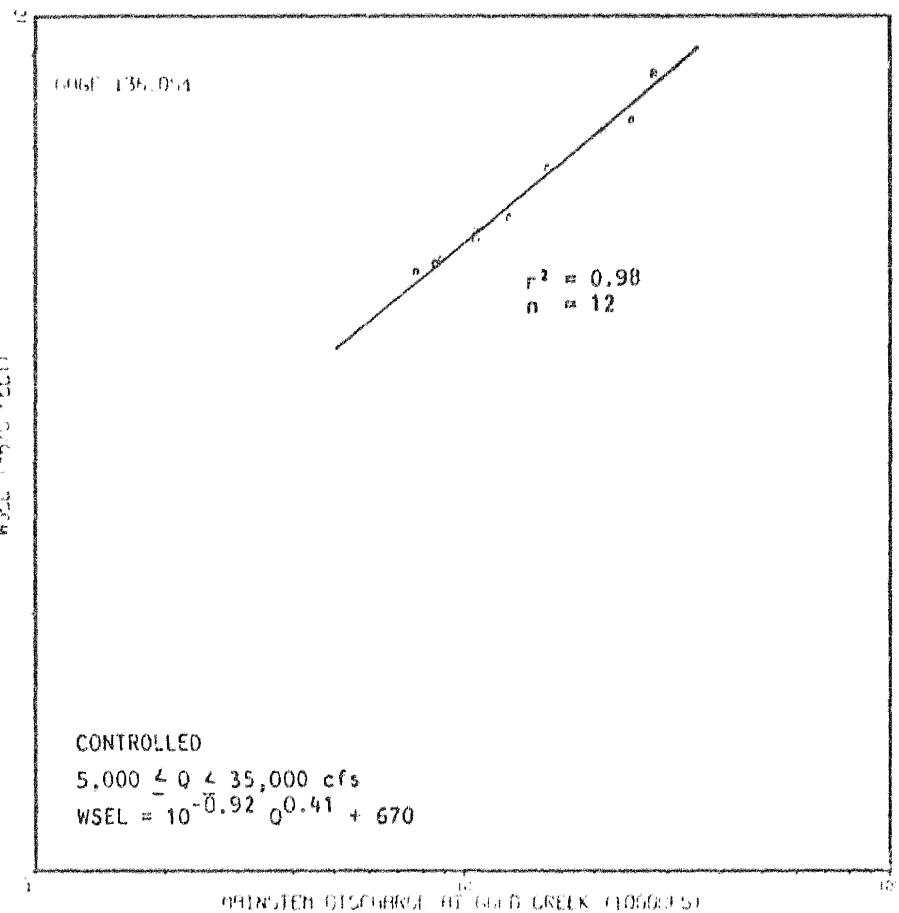


Figure A-1.6

Stage discharge curves for cross sections 1, 2, 3, 5 and 6 at site 136.0L.

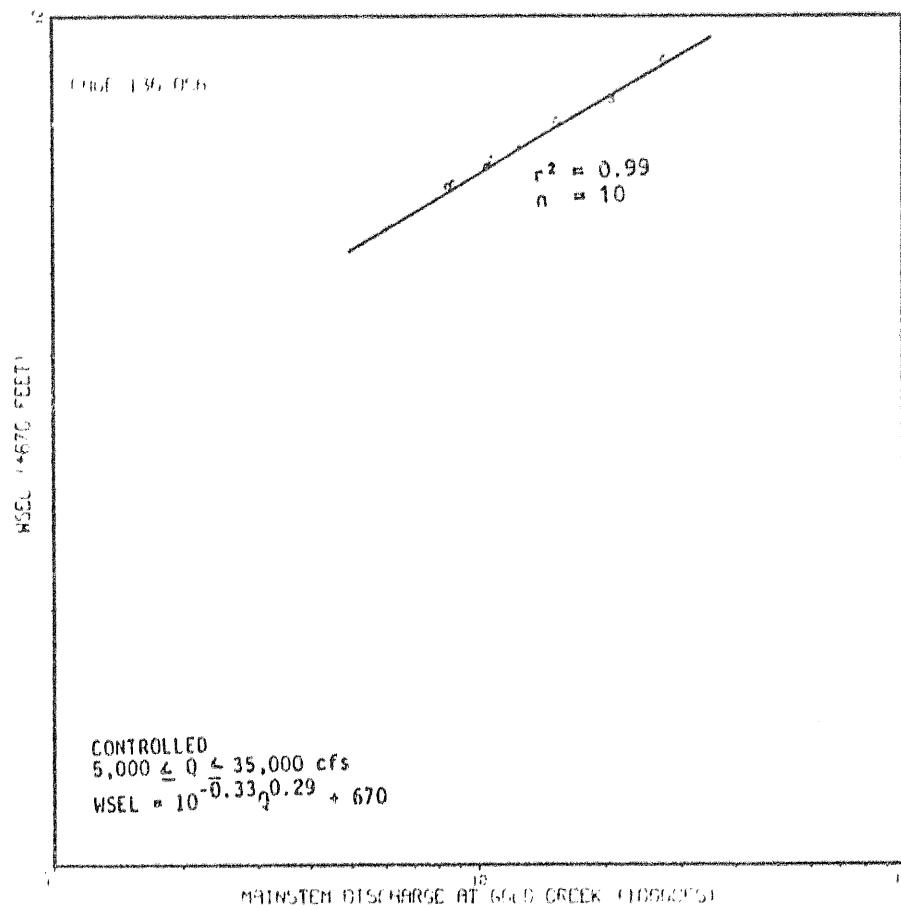


Figure A-1.6 Stage discharge curves for cross sections 1, 2, 3, 5 and 6 at site 136.0L.

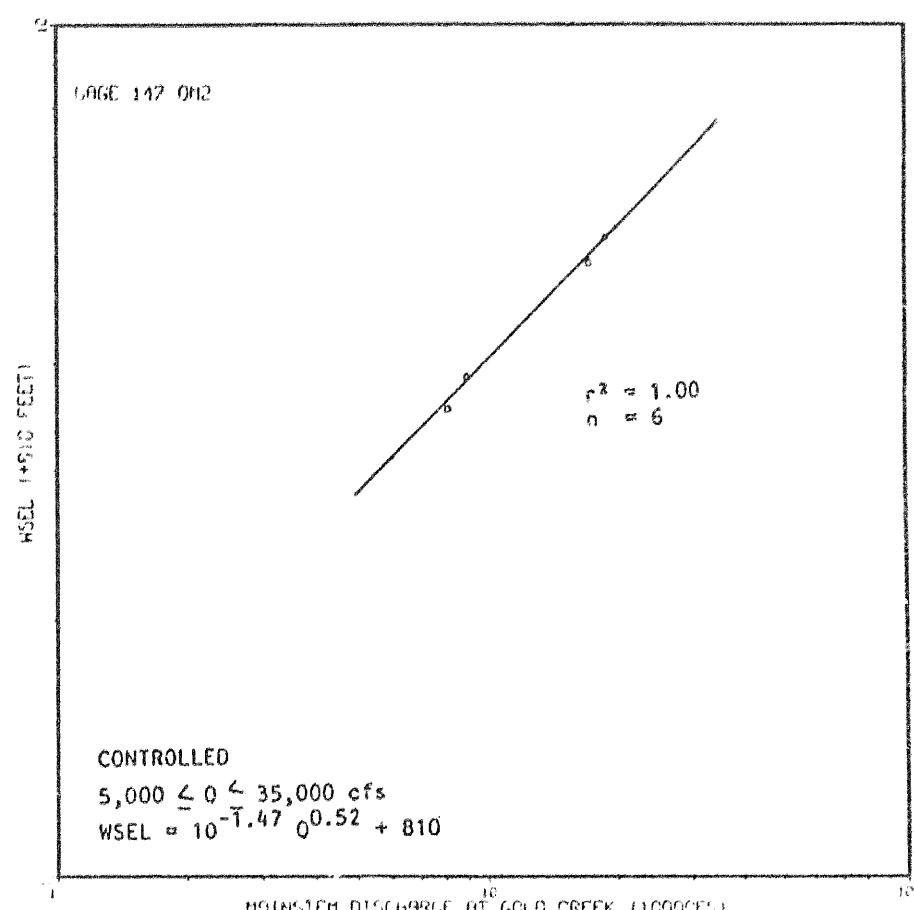
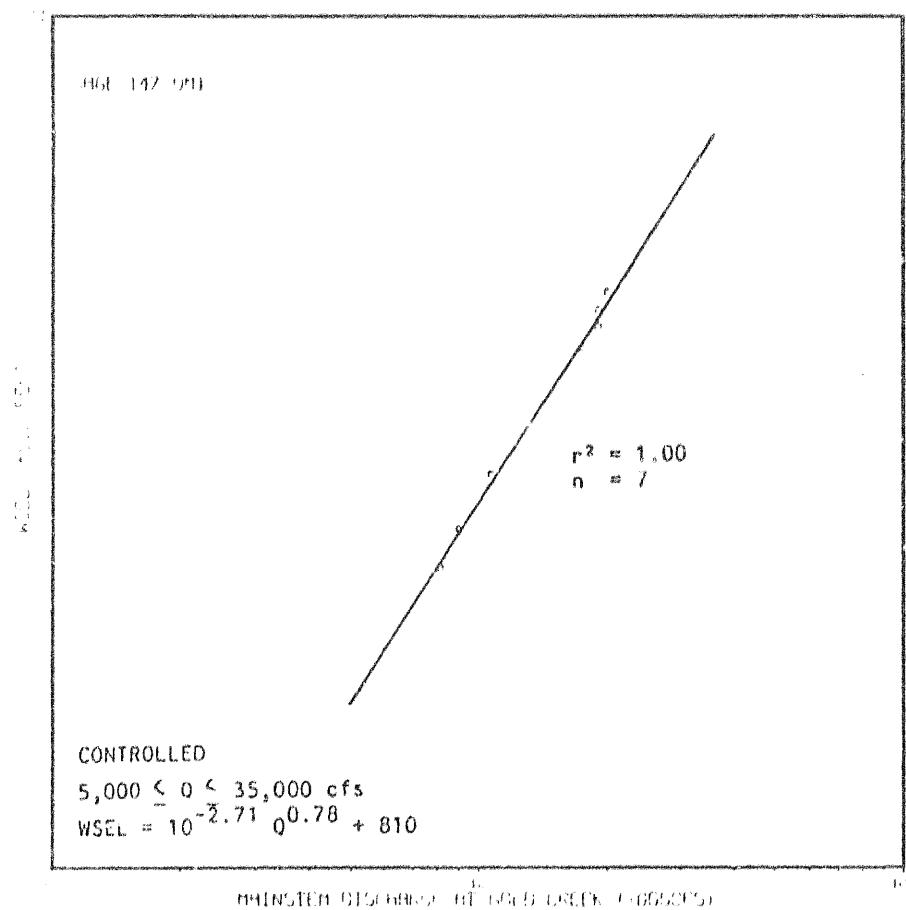


Figure A-1.7 Stage discharge curves for cross sections 1, 2, 3, 5 and 6 at site 147.0L.

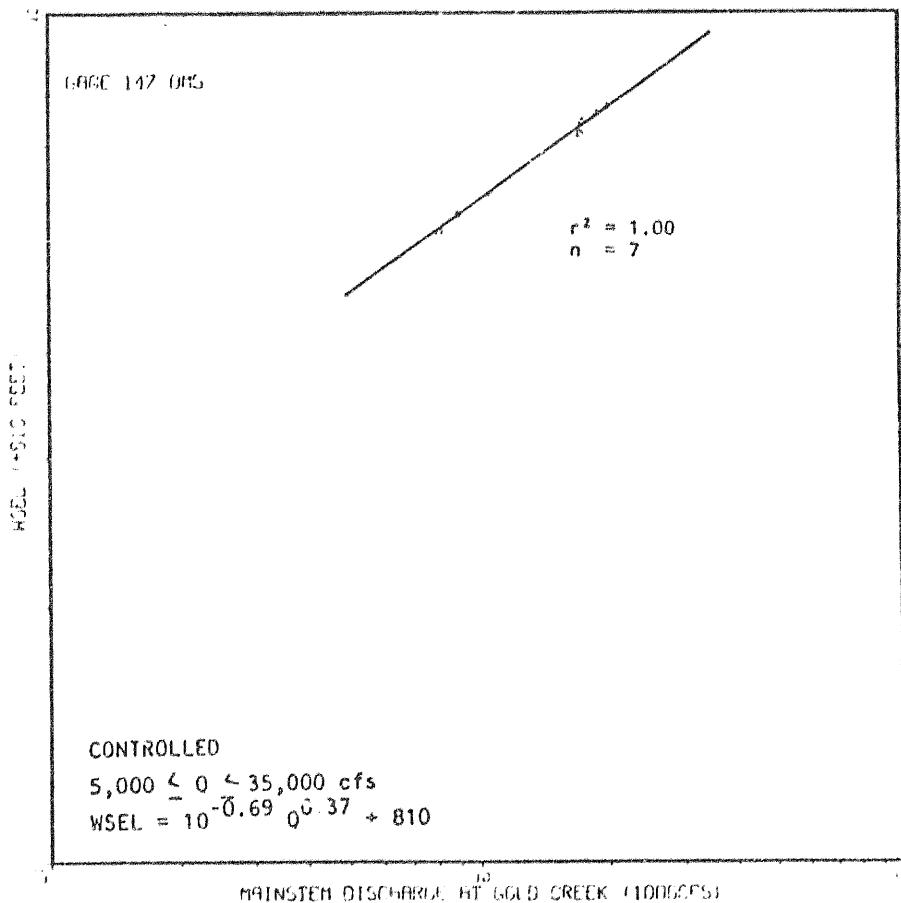
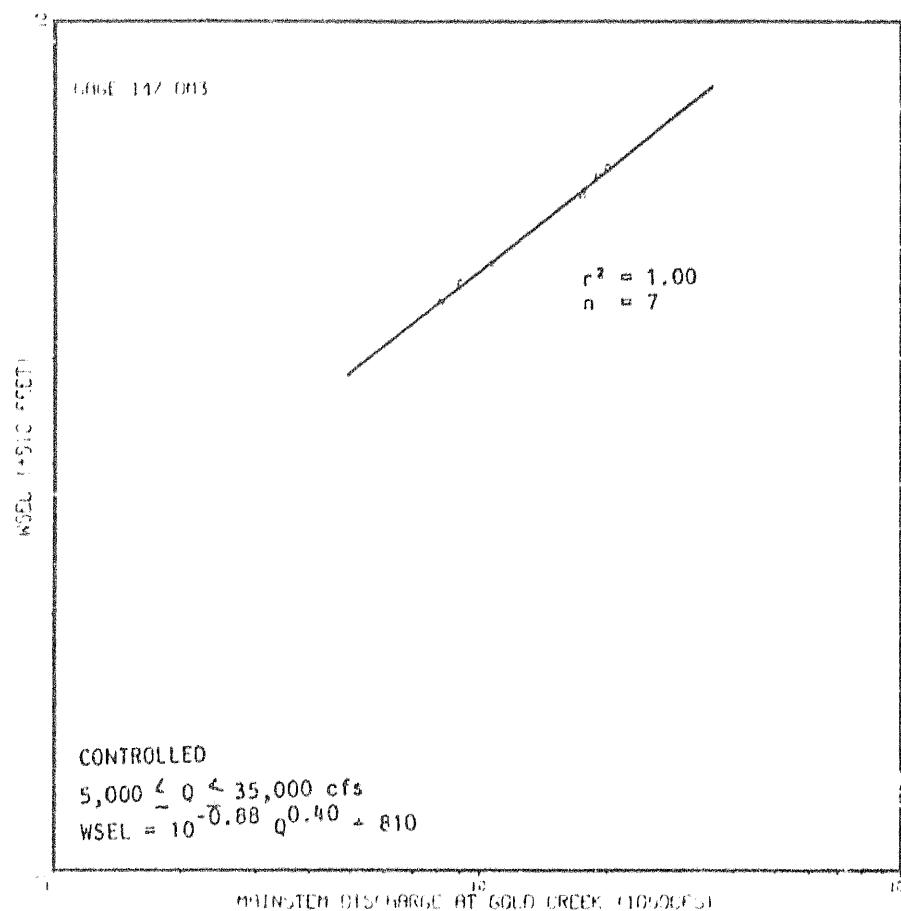


Figure A-1.7 Stage discharge curves for cross sections 1, 2, 3, 5 and 6 at site 147.1L.

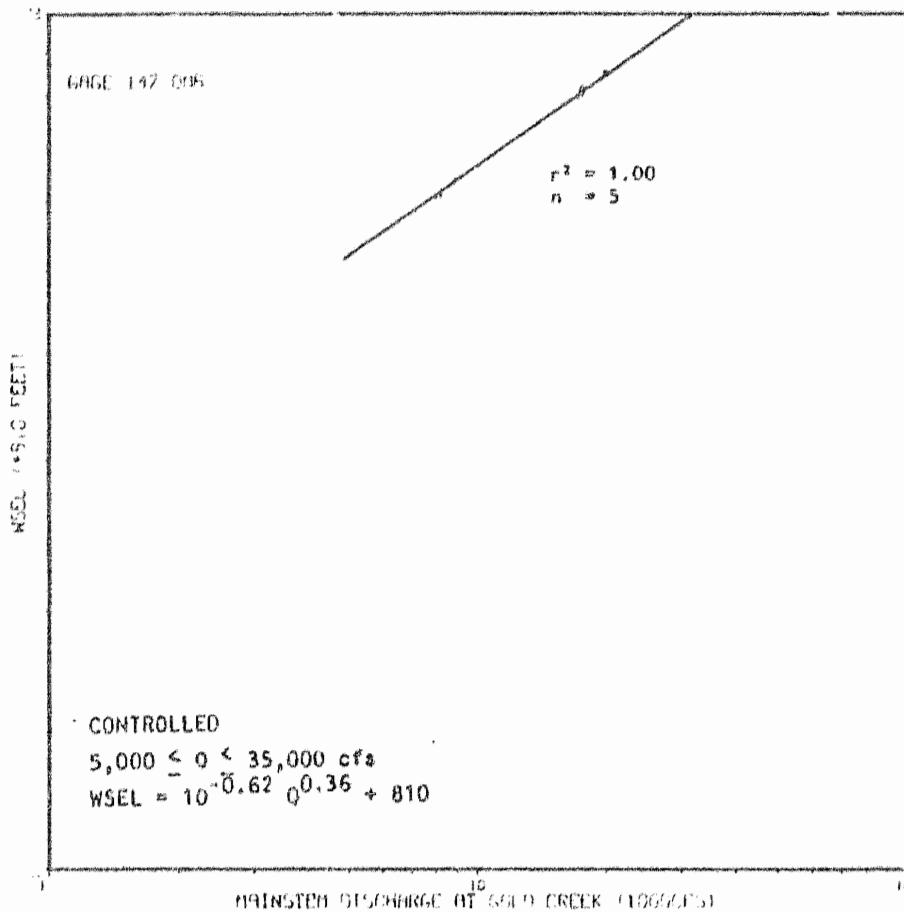


Figure A-1.7 Stage discharge curves for cross sections 1, 2, 3, 5 and 6 at site 147.1L.

Table A-1.1

**Summary of site-specific data collected for rating curve analysis
at R.M. 101.2R.**

Staff Gage Number	Location within site	Date	Time	WSEL (ft)	Flow (cfs)	Discharge (cfs)
101.2S1	Cross Section 1	841006	1200	359.47		6,780
		840925	1300	359.55	0	7,890
		840924	1310	359.46		8,290
		840924	1300	359.50		8,290
		840914	1815	359.54		8,800
		840912	1640	359.54		9,080
		840903	1310	359.55	25	11,200
		840903	1535	360.07		11,200
		840830	1150	361.08	280	15,300
		840829	1712	361.41		17,400
101.2S2	Cross Section 2	840924		359.64		8,290
		840830	1240	360.08	.8	15,300
		840829	1806	360.62		17,400
		840808	1400	361.49		23,000
		840327	1607	363.22		27,700
101.2S3	Cross Section 3	841006	1200	361.28		6,780
		840925	1416	361.33	0	7,890
		840924	1300	361.31		8,290
		840924	1320	361.33		8,290
		840914	1815	361.29		8,800

Table A-1.1 (cont.) Summary of site-specific data collected for rating curve analysis at R.M. 101.2R.

Staff Gage Number	Location within site	Date	Time	WSEL (ft)	Flow (cfs)	Discharge (cfs)
101.2S3 (cont.)	Cross Section 3	840912	1600	361.29		9,080
		840912		361.31		9,080
		840903	1525	361.80		11,200
		840903	1350	361.83	25	11,200
		840830	1445	362.05	286	15,300
		840829	1715	362.40		17,400
		840808	1250	362.97		23,000
101.2S4	Cross Section 4	841006	1155	361.23		6,780
		840925	1407	361.26	.2	7,890
		840924	1325	361.26		8,290
		840924		361.30		8,290
		840914	1820	361.26		8,800
		840912	1515	361.28		9,080
		840912		361.30		9,080
		840903	1422	361.85	27	11,200
		840830	1627	362.97	270	15,300
		840830	1606	362.98	270	15,300
		840829	1718	363.34		17,400
		840808	1245	363.88		23,000
101.2S5	Cross Section 5	840924		361.49		8,290
		840830	1638	363.08	0	15,300
		840829	1647	363.65		17,400
		840808	1355	364.36		23,000

Table A-1.1 (cont.) Summary of site-specific data collected for rating curve analysis at R.M. 101.2R.

Staff Gage Number	Location within site	Date	Time	WSEL (ft)	Flow (cfs)	Discharge (cfs)
101.2S6	Cross Section 6	841006	1150	361.93		6,780
		840925	1340	361.96	.1	7,890
		840924	1330	361.96		8,290
		840914	1830	361.94		8,800
		840912	1336	361.94		9,080
		840912	1345	361.99		9,080
		840903	1452	362.39	26	11,200
		840830	1700	363.10	273	15,300
		840829	1646	363.69		17,400
		840808	1350	364.44		23,000
101.2S7	Cross Section 7	841006	1145	361.89		6,780
		840925	1345	361.92	.4	7,890
		840924	1335	361.92		8,290
		840924		361.95		8,290
		840912	1308	361.94	0	9,080
		840912	1315	362.00		9,080
		840903	1525	362.39	19	11,200
		840830	1800	363.46	255	15,300
		840829	1640	363.92		17,400
		840808	1215	364.62		23,000
101.2S8	Cross Section 8	841006	1145	361.84		6,780
		840925	1315	361.90	1.1	7,890
		840924	1340	361.90		8,290

Table A-1.1 (cont.) Summary of site-specific data collected for rating curve analysis
at R.M. 101.2R.

Staff Gage Number	Location within site	Date	Time	WSEL (ft)	Flow (cfs)	Discharge (cfs)
101.2S8 (cont.)	Cross Section 8	840912	1239	361.95		9,080
		840912	1245	362.01		9,080
		840903	1605	362.41		11,200
		840903		362.43	19	11,200 *
		840903	1605	362.45		11,200
		840830	1750	363.50	236	15,300
		840829	1542	363.92	533	17,400
		840808	1210	364.71		23,000
101.2S9	Cross Section 9	840924	1350	362.77		8,290
		840912	1145	362.83		9,080
		840903	1605	363.34	21	11,200
		840830	1832	364.01	269	15,300
		840829	1818	364.37		17,400
		840808	1200	364.97		23,000
101.2M1	Head	840925	1300	362.93		7,890
		840924		363.02		8,290
		840924	1400	363.03		8,290
		840912	1130	363.30		9,080
		840903	1700	363.81		11,200
		840830	1830	364.62		15,300
		840829	1633	365.01		17,400
		840808	1200	365.72		23,000

* Average of two separate WSEL observations.

Table A-1.2

Summary of site-specific data collected for rating curve analysis
at R.M. 101.5L.

Staff Gage Number	Location within site	Date	Time	WSEL (ft)	Flow (cfs)	Discharge (cfs)
101.2X1	Cross Section 1	841012		361.50	1622	6,210
		841001		361.60	1696	7,830
		840911		361.85	2213	9,330
		840831		362.70	3530	14,300 *
		840820		363.17		18,500
		840825		365.20		28,900
101.2X2 **	Cross Section 2	831103	1525	362.57		4,500
		831027	1655	362.60		5,020
		821012	1633	362.73		7,950
		841002		362.70		7,980
		821009	1030	362.89		8,440
		821007	1415	362.96		8,640
		831011	1445	363.22		9,520
		830916	0940	363.29		10,500
		820822	1630	363.44		12,200
		830911	1010	363.55		12,200
		820823	1124	363.47		12,300
		831001	1505	363.83		13,200
		820909	1250	363.64		13,400
		820813	1420	363.70		13,600
		820927	1825	363.83		13,800

* Instantaneous discharge estimated from time lag analysis.

** Same location as 1982 and 1983 gage 101.2M4.

Table A-1.2 (cont.) Summary of site-specific data collected for rating curve analysis
at R.M. 101.5L.

Staff Gage Number	Location within site	Date	Time	WSEL (ft)	Flow (cfs)	Discharge (cfs)
101.2X2 **	Cross Section 2	820903	1545	363.97		14,600
(cont.)		820831		364.07		16,000
		820807	1347	364.13		16,500
		820808	1950	364.22		16,600
		830529	1045	364.14		17,000
		830720	1835	364.40		18,600
		830722	1850	364.45		18,600
		830720	0900	364.49		18,600
		830822	1220	364.76		21,600
		830805	1635	364.82		21,700
		830619	1125	364.90		23,000
		830619	1830	364.99		23,000
		830617	1142	364.95		23,300
		830621	1730	365.24		24,000
		820920	1450	365.39		24,000
		830807	1450	365.25		25,000
		820715	1110	365.38		25,600
		830808	1920	365.63		26,000
		830703	1645	365.22		26,200
		830706	1405	365.27		26,300
		830828	1052	365.53		26,600

** Same location as 1982 and 1983 gage 101.2M4.

Table A-1.2 (cont.) Summary of site-specific data collected for rating curve analysis
at R.M. 101.5L.

Staff Gage Number	Location within site	Date	Time	WSEL (ft)	Flow (cfs)	Discharge (cfs)
101.2X3 *** Cross Section 5		831103	1520	365.11		4,500
		831027	1650	365.19		5,020
		841012		365.23		6,210
		831020	1645	365.71		7,230
		841002		365.70		7,980
		831011	1441	365.92		9,520
		830916	1020	366.03		10,500
		830911	0930	366.33		12,200
		831001	1530	366.60		13,200
		830716	1145	366.82		16,400
		830529	1045	366.85		17,000
		830720	1830	367.16		18,600
		830722	1825	367.23		18,600
		830822	1255	367.64		21,600
		830805	1630	367.72		21,700
		830619	1120	367.68		23,000
		830617	1735	367.86		23,300
		830807	1455	368.07		24,000
		830808	1900	368.36		26,000
		830703		368.02		26,200
		830706	1400	368.11		26,300
		830828	1055	368.24		26,600

*** Same location as 1983 gage 101.2M6.

Table A-1.3

Summary of site-specific data collected for rating curve analysis
at R.M. 101.7L.

Staff Gage Number	Location within site	Date	Time	WSEL (ft)	Flow (cfs)	Discharge (cfs)
101.8S1	Cross Section 1	841002		366.69		7,980
		840921	1547	367.86		11,400
		840831	1126	368.49		13,600
		840830	1530	368.75		15,300
		840829	1530	369.11		17,400
		840713	1315	369.36		21,200
102.0P1	Cross Section 3	841002		368.21		7,980
		840921	1640	371.43		11,400
		840830	1200	372.35		15,300
		840820		372.80		18,500
		840810	1600	373.92		24,000
		840825	1525	376.15		29,800
102.0P2	Cross Section 4	841002		368.99		7,980
		840820		373.91		18,500
		840810	1600	375.00		24,000
		840825	1525	376.45		29,800

Table A-1.4

**Summary of site-specific data collected for rating curve analysis
at R.M. 105.8L.**

Staff Gage Number	Location within site	Date	Time	WSEL (ft)	Flow (cfs)	Discharge (cfs)
105.6P0	Cross Section 1	840928	1230	397.31		7,320
		841001	1520	397.47		7,830
		840914	1600	397.70		8,800
		840914	1606	397.71		8,800
		840911	1500	397.90		9,330
105.6P1	Cross Section 4	840928	1200	400.11		7,320
		841001	1617	400.22		7,830
		841001	1520	400.23		7,830
		840914	1600	400.38		8,800
		840911	1430	400.51		9,330
		840831	1210	401.43		13,600
		840830	1330	401.68		15,300
		840830	1330	401.74		15,300
		840820	1715	402.10		18,500
		840810	1155	402.94		24,000
		840825	1609	404.62		29,800

Table A-1.5

**Summary of site-specific data collected for rating curve analysis
at R.M. 112.6L.**

Staff Gage Number	Location within site	Date	Time	WSEL (ft)	Flow (cfs)	Discharge (cfs)
112.3X1C (Low Flow)	Cross Section 1 Left Bank	841005	1500	450.60		7,080
		840929	1555	450.60		7,410
		840930	1546	450.66		7,500
		840916		450.84		8,280
		840913		451.00		9,000
		840905	0830	451.31		10,400
112.3Y1B (High Flow)	Cross Section 1 Left Bank	840830		452.67		15,300
		840822	1230	453.42		19,100
		840810		454.06		24,000
112.3S1	Cross Section 1 Right Bank	841005	1500	450.75		7,080
		840916		450.96		8,280
		840914	1520	451.08		8,800
		840904		451.54		10,800
		840830		452.54		15,300
		840822	1248	453.28		19,100
		840810		454.06		24,000

Table A-1.5 (cont.) Summary of site-specific data collected for rating curve analysis at R.M. 112.6L.

Staff Gage Number	Location within site	Date	Time	WSEL (ft)	Flow (cfs)	Discharge (cfs)
112.3K2	Cross Section 2 Left Bank	841005	1500	451.36		7,080
		840929	1600	451.36		7,410
		840930	1540	451.43		7,500
		840916		451.61		8,280
		840913		451.78		9,000
		840905		452.10		10,400
		840830		453.25		15,300
		840822	1330	453.67		19,100
		840810		454.31		24,000
112.3S2C (Low Flow)	Cross Section 2 Right Bank	841005	1500	451.91		7,080
		840930	1540	452.06		7,500
		840916		452.14		8,280
		840914	1620	452.15		3,800
		840913	1700	452.25		9,000
		840904		452.40		10,800
112.3S2B (High Flow)	Cross Section 2 Right Bank	840830		452.85		15,300
		840822	1300	453.55		19,100
		840810		455.22		24,000

Table A-1.5 (cont.) Summary of site-specific data collected for rating curve analysis
at R.M. 112.6L.

Staff Gage Number	Location within site	Date	Time	WSEL (ft)	Flow (cfs)	Discharge (cfs)
112.3X3C (Low Flow)	Cross Section 3 Left Bank	841005	1500	452.54		7,080
		840929	1605	452.52		7,410
		840930	1512	452.59		7,500
		840916		452.68		8,280
		840914	1620	452.68		8,800
		840913		452.79		9,000
		840905		452.97		10,400
112.3X3B (High Flow)	Cross Section 3 Left Bank	840904		453.12		10,800
		840822	1352	454.20		19,100
		840810		454.62		24,000
112.3S3	Cross Section 3 Right Bank	841005	1500	452.54		7,080
		840929	1640	452.56		7,410
		840930	1534	452.60		7,500
		840916		452.90		8,280
		840913	1700	453.00		9,000
		840904		453.35		10,800
		840830		454.37		15,300
		840822	1352	454.91		19,100
		840810	1540	455.39		24,000

Table A-1.5 (cont.) Summary site-specific data collected for rating curve analysis at R.M. 112.6L.

Staff Gage Number	Location within site	Date	Time	WSEL (ft)	Flow (cfs)	Discharge (cfs)
112.3X3AC	Cross Section 3A Left Bank	841005	1500	454.21		7,080
		840929	1610	454.21		7,410
		840930	1430	454.26		7,500
				454.35		8,280
		840913		454.46		9,000
		840905		454.63		10,400
112.3S3AC	Cross Section 3A Right Bank	841005	1500	454.51		7,080
		840929	1620	454.52		7,410
		840916		454.60		8,280
		840916		454.61		8,280
		840905		454.79		10,400
112.3X4B (2)	Cross Section 4 (Low Flow) Left Bank	841005	1500	454.81		7,080
		840929	1615	454.82		7,410
		840916		454.98		8,280
		840913	1700	455.14		9,000
		840905		455.30		10,400
		840905		455.31		10,400
112.3X4B (1)	Cross Section 4 (Low Flow) Left Bank	840830		456.00		15,300
		840822	1430	456.36		19,100
		840810		456.67		24,000

Table A-1.5 (cont.) Summary of site-specific data collected for rating curve analysis at R.M. 112.6L.

Staff Gage Number	Location within site	Date	Time	WSEL (ft)	Flow (cfs)	Discharge (cfs)
112.3S4C (Low Flow)	Cross Section 4 Right Bank	841005	1500	453.42		7,080
		841005	1522	453.43		7,080
		840929	1635	453.43		7,410
		840913	1700	453.77		9,000
		840904		454.17		10,800
112.3S4B (High Flow)	Cross Section 4 Right Bank	840830		455.56		15,300
		840822	1330	456.06		19,100
		840810		456.54		24,000
112.3X5	Cross Section 5 Left Bank	841005	1500	454.92		7,080
		840930	1320	454.97		7,500
		840916		455.11		8,280
		840913	1700	455.25		9,000
		840904		455.61		10,800
		840830		456.56		15,300
		840822	1445	457.10		19,100
		840810		457.43		24,000
112.3S5	Cross Section 5 Right Bank	840830		455.56		15,300
		840822	1350	456.16		19,100
		840810		456.80		24,000

A
B
C

Table A-1.5 (cont.) Summary of site-specific data collected for rating curve analysis at R.M. 112.6L.

Staff Gage Number	Location within site	Date	Time	WSEL (ft)	Flow (cfs)	Discharge (cfs)
112.3X6	Cross Section 6 Left Bank	840930	1130	455.13		7,500
		840916		455.22		8,280
		840913	1700	455.39		9,000
		840904		455.80		10,800
		840830		456.83		15,300
		840822	1510	457.47		19,100
112.3S6	Cross Section 6 Right Bank	840913	1700	455.53		9,000
		840904		455.91		10,800
		840830		456.87		15,300
		840822	1420	457.49		19,100
		840810		457.98		24,000
112.3X7	Cross Section 7 Left Bank	841012		455.17	215	6,210
		840930	1030	455.70	355	7,500
		840916		455.94		8,280
		840913	1700	456.19	721	9,000
		840904		456.79	1430	10,800
		840830			2980	15,300
		840822	1540	458.70		19,100
		840810		459.36		24,000

Table A-1.5 (cont.) Summary of site-specific data collected for rating curve analysis at R.M. 112.6L.

Staff Gage Number	Location within site	Date	Time	WSEL (ft)	Flow (cfs)	Discharge (cfs)
112.3S7	Cross Section 7	841012		215	6,210	
	Right Bank	840930		355	7,500	
		840913		456.47	721	9,000
		840904		456.85	1450	10,800
		840830		458.13	2980	15,300
		840822	1445	458.52		19,100
		840810		459.31		24,000
112.3X8	Cross Section 8	840930	1018	457.59		7,500
	Left Bank	840914	1515	458.21		8,800
		840913	1700	458.17		9,000
		840904	1109	458.79		10,800
		840904	1048	458.80		10,800
		840822	1625	460.45		19,100
112.3S8	Cross Section 8	841005	1505	458.60		7,080
	Right Bank	840930		458.66		7,500
		840914	1515	458.95		8,800
		840913	1700	458.99		9,000
		840904		459.24		10,800
		840830		460.01		15,300
		840822	1500	460.36		19,100

Table A-1.6

Summary of site-specific data collected for rating curve analysis
at R.M. 114.1R.

Staff Gage Number	Location within site	Date	Time	WSEL (ft)	Flow (cfs)	Discharge (cfs)
114.0P1	Cross Section 2	841005	1130	468.44		7,080
		840926	1153	468.39		7,680
		841001	1447	468.43		7,830
		840914	1650	468.60		8,800
		840911	1240	468.87		9,330
		840823	1200	471.00		17,900
		840812		471.14		19,000

Table A-1.7

Summary of site-specific data collected for rating curve analysis
at R.M. 115.0R.

Staff Gage Number	Location within site	Date	Time	WSEL (ft)	Flow (cfs)	Discharge (cfs)
114.9P1	Cross Section 1	840926	1300	474.46		7,680
		841001		474.41		7,830
		840914	1540	474.48		8,800
		840911	1145	474.48		9,330
		840920	1120	474.52		10,400
		840816	1353	475.55		14,500
		830526	1830	475.77		16,000
		840823	1425	476.23		17,900
		830720	1305	476.06		18,600
		830715	1330	476.39		18,600
		830611	1930	476.19		19,000
		830613	1155	476.35		19,900
		830612	1830	476.40		20,000
		830803	1245	476.81		21,600
		830805	1435	476.74		21,700
		830806	1933	477.04		23,800
		830824	1530	477.31		24,700
		830808	1134	477.38		26,000
		830825	1115	477.58		27,400
		830826	1755	478.70		31,700

Table A-1.8

Summary of site-specific data collected for rating curve analysis
at R.M. 118.9L.

Staff Gage Number	Location within site	Date	Time	WSEL (ft)	Flow (cfs)	Discharge (cfs)
118.9P1	Cross Section 2	841004	1720	507.53		7,380
		840930		507.52		7,500
		840926	1528	507.61		7,680
		840914	1500	507.86		8,800
		840914	1300	507.91		8,800
		840910	1735	508.02		9,890
		840922	1414	508.16		10,300
		840831	1300	508.94		13,600
		840815	1400	509.24		15,100
		840815	1415	509.25		15,100
		840823	1645	509.76		17,900
		840812	1500	509.90		19,000

Table A-1.9

Summary of site-specific data collected for rating curve analysis
at R.M. 119.11.

Staff Gage Number	Location within site	Date	Time	WSEL (ft)	Flow (cfs)	Discharge (cfs)
119.1PI	Cross Section 2	841004		509.25		7,380
		841004	1645	509.27		7,380
		840930	1655	509.27		7,500
		840926	1708	509.33		7,680
		841001	1000	509.35		7,830
		840914	1111	509.58		8,800
		840910	1810	509.76		9,890
		840922		509.94		10,300
		840815		511.05		15,100
		840812		511.83		19,000

Table A-1.10

Summary of site-specific data collected for rating curve analysis
at R.M. 119.2R.

Staff Gage Number	Location within site	Date	Time	WSEL (ft)	Flow (cfs)	Discharge (cfs)
119.2W1	Mouth	840928		508.23		7,320
		840906		508.89		10,300
		840922	1523	508.92		10,300
		840819	1045	510.19		17,400
		840812		510.41		19,000
		840824	1029	510.95		22,700
119.2S1	Cross Section 1	840914	1330	508.58		8,800
		840906		508.88		10,300
		840906		508.89		10,300
		840922	1515	508.93		10,300
		840922	1520	508.95		10,300
		840905	1805	508.89	0	10,400
		840831	1514	509.54		13,600
		840815		509.76		15,100
		840819	1045	510.20	317	17,400
		840819	1215	510.22		17,400
		840824	1030	511.00		22,700
		840824	1225	511.11		22,700
		840809		511.27		24,500

Table A-1.10 (cont.) Summary of site-specific data collected for rating curve analysis at R.M. 119.2R.

Staff Gage Number	Location within site	Date	Time	WSEL (ft)	Flow (cfs)	Discharge (cfs)
119.2S2	Cross Section 2	841005	0915	508.28		7,080
		840914	1330	508.60		8,800
		840906		508.90		10,300
		840922	1500	508.94		10,300
		840905	1730	508.90	0	10,400
		840831	1525	509.56		13,600
		840819	1335	510.26	338	17,400
		840824	1030	511.05		22,700
		840824	1224	511.24		22,700
119.2S3	Cross Section 3	841005	0930	508.28		7,080
		840914	1330	508.60		8,800
		840906		508.89		10,300
		840922	1500	508.95		10,300
		840905	1700	508.90	0	10,400
		840831	1526	509.54	71	13,600
		840815		509.75		15,100
		840819	1430	510.27	300	17,400
		840824	1112	511.13		22,700
		840824	1145	511.19	1090	22,700
		840824	1220	511.24		22,700
		840809		511.42		24,500

Table A-1.10 (cont.) Summary of site-specific data collected for rating curve analysis at R.M. 119.2R.

Staff Gage Number	Location within site	Date	Time	WSEL (ft)	Flow (cfs)	Discharge (cfs)
119.2S4	Cross Section 4	841005	0945	508.49		7,080
		840914	1330	508.59		8,800
		840906		508.86		10,300
		840922	1510	508.92		10,300
		840905	1645	508.88	.2	10,400
		840815		509.99		15,100
		840819	1330	510.75	348	17,400
		840824	1041	511.61		22,700
119.2S5	Cross Section 5	840914	1330	510.90		8,800
		840906		511.25		10,300
		840922	1515	511.33		10,300
		840905	1600	511.25	.2	10,400
		840831	1702	512.10		13,600
		840815		512.43		15,100
		840819	1640	512.83	317	17,400
		840824	1042	513.56		22,700
		840824	1229	513.70		22,700

Table A-1.11

**Summary of site-specific data collected for rating curve analysis
at R.M. 125.2R.**

Staff Gage Number	Location within site	Date	Time	WSEL (ft)	Flow (cfs)	Discharge (cfs)
125.0P1	Cross Section 1	840929		555.84		7,410
		840930	1255	556.21		7,500
		840913		556.39		9,000
		840910		556.54		9,890
		840831	1744	557.25		13,600
		840814		557.61		16,100
		840819	1710	557.91		17,400
		840822	1440	558.02		19,100
125.0P2	Cross Section 2	841018	1200	555.39	8	4,300
		841012		557.10	169	6,210
		840929		557.50		7,410
		840930	1255	557.59		7,500
		840926	1921	557.67	329	7,680
		840915	1150	557.86		8,520
		840913	1400	557.97	657	9,000
		840910	1650	558.12		9,890
		840831	1736	558.82		13,600
		840814		559.24		16,100
		840819	1700	559.47		17,400
		840822	1615	559.69		19,100

Table A-1.12

Summary of site-specific data collected for rating curve analysis
at R.M. 130.2R.

Staff Gage Number	Location within site	Date	Time	WSEL (ft)	Flow (cfs)	Discharge (cfs)
129.8P1	Cross Section 2	841004	1445	605.71		7,380
		840927		605.70		7,470
		840930		605.70		7,500
		840926	1615	605.66		7,680
		840915	1015	605.74		8,520
		840910	1535	605.86		9,890
		840816		606.39		14,500
		840814	1550	606.56		16,100
		840814		606.57		16,100
		840821	1745	606.97		19,900
		840821	1745	606.99		19,900
		840811		607.63		22,500
		840827	1110	608.60		27,700
		840826	1556	609.01		31,700

Table A-1.13

Summary of site-specific data collected for rating curve analysis
at R.M. 131.3L.

Staff Gage Number	Location within site	Date	Time	WSEL (ft)	Flow (cfs)	Discharge (cfs)
131.1P1	Cross Sect on 3	840928		616.26		7,320
		841004	1150	616.26		7,380
		840927		616.25		7,470
		840926	1430	616.24		7,680
		840913	1700	616.29		9,000
		840907	1830	616.37		10,700
		840902		616.49		11,800
		840814	1445	617.06		16,100
		840814		617.07		16,100
		840821	1644	617.68		19,900
131.1P2	Cross Section 1	840929	1830	614.30		7,410
		840927		614.31		7,470
		840926	1405	614.33		7,680
		840913	1730	614.50		9,000
		840907	1830	614.96		10,700
		840902		615.26		11,800

Table A-1.14

Summary of site-specific data collected for rating curve analysis
at R.M. 131.7L.

Staff Gage Number	Location within site	Date	Time	WSEL (ft)	Flow (cfs)	Discharge (cfs)
131.5S3	Cross Section 3	841012		616.35	2.9	6,210
		840927	1234	616.67	20	7,470
		840919	1407	616.92	57	9,390
		840907	1750	617.13	87	10,700
		840902	1720	617.32	159	11,800
		840831	1700	617.58	247	13,600
		840817		617.51	248	14,800
		840828	1330	618.11	625	21,000
		840811		618.18		22,500
		840827	1124	619.38		27,700

Table A-1.15

Summary of site-specific data collected for rating curve analysis
at R.M. 132.6L.

Staff Gage Number	Location within site	Date	Time	WSEL (ft)	Flow (cfs)	Discharge (cfs)
132.5S1	Cross Section 1	840907		625.36		10,700
		840901	1010	625.52	29	12,700
		840828	1146	626.09		21,000
		840708	1250	626.05	131	21,500
		840707	1700	626.15		21,900
		840711	1500	626.23		23,100
		840827	1145	627.27		27,700
132.5S2	Cross Section 2	840914	1310	625.33		8,800
		840907	1500	625.49		10,700
		840907		625.50		10,700
		840901	1040	625.65	28	12,700
		840828	1147	626.27		21,000
		840708	1330	626.28	146	21,500
		840707	1700	626.34		21,900
		840711	1500	626.41		23,100
		840827	1145	627.29		27,700
		840827	1145	627.31		27,700
132.5S3	Cross Section 3	840907		625.94	10	10,700
		840901	1051	626.28	27	12,700
		840828	1206	627.16		21,000
		840708	1415	627.29	170	21,500
		840707	1700	627.14		21,900
		840711	1505	627.39		23,100

Table A-1.15 (cont.) Summary of site-specific data collected for rating curve analysis
at R.M. 132.6L.

Staff Gage Number	Location within site	Date	Time	WSEL (ft)	Flow (cfs)	Discharge (cfs)
132.5S4	Cross Section 4	840907	1415	627.08		10,700
		840901	1112	627.23	26	12,700
		840828	1154	627.86		21,000
		840708	1445	627.95	150	21,500
		840707	1700	627.96		21,900
		840711	1505	628.05		23,100
		840827	1149	628.47		27,700
132.5S5	Cross Section 5	840914	1335	626.90		8,800
		840907	1400	627.17		10,700
		840907		627.19		10,700
		840901	1127	627.41	27	12,700
		840828	1156	628.06		21,000
		840708	1600	628.10	136	21,500
		840707	1700	628.14		21,900
		840711	1510	628.23		23,100
		840827	1150	628.67		27,700
		840827	1154	628.68		27,700
132.5S6	Cross Section 6	840907		627.18		10,700
		840907	1330	627.19		10,700
		840901	1146	627.43	27	12,700
		840901	1003	627.44	27	12,700
		840828	1158	628.09		21,000
		840708	1635	628.16	120	21,500
		840707	1635	628.16		21,900
		840711	1510	628.27		23,100
		840827	1153	628.71		27,700

Table A-1.15 (cont.) Summary of site-specific data collected for rating curve analysis
at R.M. 132.0L.

Staff Gage Number	Location within site	Date	Time	WSEL (ft)	Flow (cfs)	Discharge (cfs)
132.5S7	Cross Section 7	840914	1345	626.91		8,800
		840907		627.16		10,700
		840907	1300	627.17		10,700
		840901	1204	627.43	24	12,700
		840901	1001	627.44	24	12,700
		840828	1200	628.11		21,000
		840708	1700	628.17	136	21,500
		840707		628.20		21,900
		840711	1515	628.30		23,100
		840827	1156	628.74		27,700
132.5S8	Cross Section 8	840914	1345	627.00		8,800
		840907		627.27		10,700
		840901	1000	627.50	33	12,700
		840901		627.51	33	12,700
		840828	1202	628.17		21,000
		840708	1740	628.20	129	21,500
		840707		628.24		21,900
		840711	1515	628.33		23,100
		840827	1158	628.83		27,700
132.5S9	Cross Section 9	840914	1400	627.92		8,800
		840907	1200	628.04		10,700
		840901	0958	628.10	22	12,700
		840901	1245	628.12	22	12,700
		840828	1204	628.33		21,000
		840708	1800	628.40	149	21,500
		840707	1700	628.37		21,900
		840711	1515	628.47		23,100
		840827	1200	628.84		27,700

A-60

Table A-1.16

Summary of site-specific data collected for rating curve analysis
at R.M. 133.8R.

Staff Gage Number	Location within site	Date	Time	WSEL (ft)	Flow (cfs)	Discharge (cfs)
133.7P1	Cross Section 3	840926	1215	649.23		7,680
		840925	1735	649.26		7,890
		840911	1755	649.42		9,330
		840919	1605	649.46		9,390
		840910	1505	649.45		9,890
		840910	1830	649.47		9,890
		840922	1555	649.52		10,300
		840920	1720	649.57		10,400
		840814		650.27		16,100
		840814	1150	650.32		16,100
		840821	1530	650.71		19,100
		840828	1542	650.72		21,000
		840824	1550	651.43		22,700
		840827	1245	651.84		27,700
		840827	1245	651.86		27,700
		840827	1030	651.98		27,700
		840825	1425	652.48		29,800
		840826		652.72		31,700

Table A-1.17

**Summary of site-specific data collected for rating curve analysis
at R.M. 136.0L.**

Staff Gage Number	Location within site	Date	Time	WSEL (ft)	Flow (cfs)	Discharge (cfs)
136.0S1	Cross Section 1	840909	1113	674.64	76	10,600
		840901	1605	675.14	150	12,700
		840818	1100	675.81	246	15,600
		840818	1100	675.85		15,600
		840828	1724	676.67		21,000
		840827	1604	678.06		27,700
136.0S2	Cross Section 2	840915	1745	674.49		8,520
		840914	1100	674.56		8,800
		840909		674.84		10,600
		840909	1155	674.88	80	10,600
		840908		674.92		10,900
		840901	1710	675.31	162	12,700
		840818	1130	675.97	281	15,600
		840828	1725	676.78		21,000
		840827	1603	678.04		27,700
136.0S3	Cross Section 3	840915	1520			8,520
		840914	1130	675.02		8,800
		840909	1228	675.31	79	10,600
		840909		675.32		10,600
		840908		675.36		10,900
		840901	1750	675.77	149	12,700
		840818	1145	676.39	241	15,600
		840828	1610	676.99	413	21,000
		840827	1608	678.21		27,700

Table A-1.17 (cont.) Summary of site-specific data collected for rating curve analysis
at R.M. 136.0L.

Staff Gage Number	Location within site	Date	Time	WSEL (ft)	Flow (cfs)	Discharge (cfs)
136.0S4	Cross Section 4	841003	1645	675.03		7,680
		840915	1745	675.15		8,520
		840914	1145	675.21		8,800
		840909		675.48		10,600
		840909	1340	675.61	88	10,600
		840908		675.61		10,900
		840901	1800	675.82	154	12,700
		840818	1324	676.65	253	15,600
		840828	1622	677.36	413	21,000
		840811	1815	677.56		24,500
		840827	1615	678.54		27,700
		840827	1616	678.60		27,700
136.0S5	Cross Section 5	840915	1745	676.04		8,520
		840914	1200	676.05		8,800
		840909		676.33		10,600
		840909	1405	676.43	79	10,600
		840908		676.38		10,900
		840901	1830	676.61	153	12,700
		840818	1330	677.10	273	15,600
		840828	1700	677.62		21,000

Table A-1.17 (cont.) Summary of site-specific data collected for rating curve analysis
at R.M. 136.0L.

Staff Gage Number	Location within site	Date	Time	WSEL (ft)	Flow (cfs)	Discharge (cfs)
136.0S6	Cross Section 6	840915	1745	676.30		8,520
		840914	1215	676.35		8,800
		840909	1440	676.63	84	10,600
		840909		676.64		10,600
		840909	1440	676.67		10,600
		840908		676.78		10,900
		840901	1900	676.97	154	12,700
		840818	1400	677.53	288	15,600
		840828	1730	677.96		21,000
		840827	1617	678.91		27,700

Table A-1.18

Summary of site-specific data collected for rating curve analysis
at R.M. 137.5R.

Staff Gage Number	Location within site	Date	Time	WSEL (ft)	Flow (cfs)	Discharge (cfs)
137.4P1	Cross Section 1	840928		690.03		7,320
		840929	1540	690.02		7,410
		841003	1600	690.02		7,680
		840914	1230	690.05		8,800
		840910	1335	690.02		9,890
		840902		690.22		11,800
		840812	1630	692.02		19,000
		840812	1630	692.13		19,000
		840821	1509	692.19		19,900
		840828	1749	692.15		21,000
		840828	1751	692.17		21,000
		840827	1545	693.52		27,700
		840826	1500	695.16		31,700
137.4P2	Cross Section 2	840928		690.71		7,320
		840929	1540	690.64		7,410
		841003	1600	690.70		7,680
		840914	1230	690.71		8,800
		840910	1335	690.76		9,890
		840812	1630	692.01		19,000
		840812	1650	692.02		19,000
		840821	1508	692.19		19,900

Table A-1.19

Summary of site-specific data collected for rating curve analysis
at R.M. 138.7L.

Staff Gage Number	Location within site	Date	Time	WSEL (ft)	Flow (cfs)	Discharge (cfs)
138.7P1	Cross Section 2	840910	1325	706.04		9,890
		840920	1642	706.26		10,400
		840902		706.55		11,800
		840816	1450	707.25		14,500
		840815	1535	707.40		15,100
		840823	1500	707.77		17,900
		840812	1230	708.06		19,000
		840812		708.10		19,000
		840821	1502	708.20		19,900

Table A-1.20

**Summary of site-specific data collected for rating curve analysis
at R.M. 139.0L.**

Staff Gage Number	Location within site	Date	Time	WSEL (ft)	Flow (cfs)	Discharge (cfs)
139.0P1	Cross Section 2	840910	1320	708.96		9,890
		840920	1328	708.97		10,400
		840902		708.99		11,800
		840816	1430	709.53		14,500
		840823	1218	709.96		17,900
		840812	1410	710.31		19,000
		840812		710.33		19,000
		840828	1817	710.31		21,000
		840826	1447	712.62		31,700

Table A-1.21

Summary of site-specific data collected for rating curve analysis
at R.M. 139.4L.

Staff Gage Number	Location within site	Date	Time	WSEL (ft)	Flow (cfs)	Discharge (cfs)
139.4P1	Cross Section 2	840929	1610	712.63		7,410
		841003	1310	712.72		7,680
		840918	1707	712.83		8,370
		840910	1300	712.89		9,890
		840902		713.38		11,800
		840816	1512	713.64		14,500
		840823	1100	714.00		17,900
		840812	1545	714.18		19,000
		840821	1458	714.38		19,900

Table A-1.22

Summary of site-specific data collected for rating curve analysis
at R.M. 147.1L.

Staff Gage Number	Location within site	Date	Time	WSEL (ft)	Flow (cfs)	Discharge (cfs)
147.0M1	Cross Section 1	840917		812.25		8,130
		840913	0930	812.50		9,000
		840907	1312	812.90		10,700
		840829	1600	814.08		17,400
		840813		814.33		19,000
		840828	1910	814.53		19,000 *
		840821	1150	814.75		20,000 *
147.0M2	Cross Section 2	840917		813.54		8,130
		840913	0930	813.87		9,000
		840829	1600	815.25		17,400
		840813		815.36		17,600
		840828	1922	815.63		19,000 *
		840821	1210	815.77		20,000 *
147.0M3	Cross Section 3	840917		814.67		8,130
		840913	0930	814.92		9,000
		840907	1250	815.19		10,700
		840829	1600	816.24		17,400
		840813		816.34		17,600
		840828	1940	816.59		19,000 *
		840821	1225	816.74		20,000 *

A-69

* Instantaneous discharge estimated from time lag analysis.

Table A-1.22 (cont.) Summary of site-specific data collected for rating curve analysis
at R.M. 147.1L.

Staff Gage Number	Location within site	Date	Time	WSEL (ft)	Flow (cfs)	Discharge (cfs)
147.0M4	Cross Section 4	840917		815.12	1860	8,130
		840913	0930	815.34	2236	9,000
		840907	1233	815.72		10,700
		840829	1600	816.69	4740	17,400
		840813		816.89		17,600
		840828	1950	817.09		19,000 *
		840821	1235	817.24		20,000 *
		840709	1230	817.46		21,400
147.0M5	Cross Section 5	840917		815.54		8,130
		840913	0930	815.80		9,000
		840907	1220	816.13		10,700
		840829	1600	817.20		17,400
		840813		817.44		17,600
		840828	2000	817.61		19,000 *
		840821	1247	817.76		20,000 *
147.0M6	Cross Section 6	840917		816.13		8,130
		840913	0930	816.38		9,000
		840829	1600	818.00		17,400
		840813		818.18		17,600
		840821	1256	818.51		20,000 *

* Instantaneous discharge estimated from time lag analysis.

SUMMARY OF HYDRAULIC CONDITIONS
AND HABITAT FORECASTS AT
1984 MIDDLE RIVER STUDY SITES

DRAFT REPORT

Appendix B
Data supporting calibration and application
of IFG hydraulic models

Prepared for:

ALASKA POWER AUTHORITY

Prepared by:

N. Diane Hilliard
Shelley Williams
E. Woody Trihey
R. Curt Wilkinson
Cleveland R. Steward, III

May 1985

APPENDIX FIGURES

- Figure B-1.1 Streambed profile at site 101.2R - main channel.
- Figure B-1.2 Streambed profile at site 101.2R - left channel.
- Figure B-1.3 Streambed profile at site 101.2R - right channel.
- Figure B-2.1 Scatterplots of observed and predicted depths and velocities from the calibrated IFG-4 hydraulic model at 101.2R.
- Figure B-2.2 Comparison of observed velocities and velocities predicted by low flow IFG-2 model at site 101.5L, cross section 5.
- Figure B-2.3 Comparison of observed velocities and velocities predicted by high flow IFG-2 model at site 101.5L, cross section 5.
- Figure B-2.4 Comparison of observed velocities and velocities predicted by low flow IFG-2 model at site 112.6L, cross section 7.
- Figure B-2.5 Comparison of observed velocities and velocities predicted by high flow IFG-2 model at site 112.6L, cross section 7.
- Figure B-2.6 Comparison of observed velocities and predicted IFG-2 model at site 119.2R, cross section 3.
- Figure B-2.7 Scatterplots of observed and predicted depths and velocities from the calibrated IFG-4 hydraulic model at 131.7L.
- Figure B-2.8 Comparison of observed velocities and velocities predicted by high flow IFG-2 model at site 132.6L, cross section
- Figure B-2.9 Comparison of observed velocities and velocities predicted by high flow IFG-2 model at site 136.0L, cross section
- Figure B-2.10 Comparison of observed velocities and velocities predicted by low flow IFG-2 model at site 147.1L, cross section 2.
- Figure B-2.11 Comparison of observed velocities and velocities predicted by high flow IFG-2 model at site 147.1L, cross section 2.

APPENDIX TABLES

- Table B-1.1. Streambed profile at site 101.2R - main channel.
- Table B-1.2. Streambed profile at site 101.2R - left channel.
- Table B-1.3. Streambed profile at site 101.2R - right channel.
- Table B-2.1. Cross section elevations, substrate and cover data at site 101.5R.
- Table B-2.2. Cross section elevations, substrate and cover data at site 101.2L.
- Table B-2.3. Cross section elevations, substrate and cover data at site 112.6L.
- Table B-2.4. Cross section elevations, substrate and cover data at site 119.2R.
- Table B-2.5. Cross section elevations, substrate and cover data at site 131.7L.
- Table B-2.6. Cross section elevations, substrate and cover data at site 132.6L.
- Table B-2.7. Cross section elevations, substrate and cover data at site 136.0L.
- Table B-2.8. Cross section elevations, substrate and cover data at site 147.1L.
- Table B-3.1. IFG-4 calibration velocities (ft/sec) at site 101.2R.
- Table B-3.2. IFG-4 calibration velocities (ft/sec) at site 131.7L.
- Table B-3.3. IFG-4 calibration velocities (ft/sec) at site 132.6L.
- Table B-3.4. IFG-4 calibration velocities (ft/sec) at site 136.0L.
- Table B-4.1. Comparison between observed and predicted water surface elevations, discharges, and velocities for site 101.2R hydraulic model.
- Table B-4.2. Comparison between observed and predicted water surface elevations, discharges, and velocities for site 131.7L hydraulic model.
- Table B-4.3. Comparison between observed and predicted water surface elevations, discharges, and velocities for site 132.6L hydraulic model.

- Table B-4.4. Comparison between observed and predicted water surface elevations, discharges, and velocities for site 136.0L hydraulic model.
- Table B-5. Statistics evaluating predictive capability of IFG-4 hydraulic models.
- Table B-6.1. Mainstem discharge, site flow and water surface elevation (WSEL), wetted (gross) surface area and juvenile chinook usable area (WUA) forecast for the site at 101.2R.
- Table B-6.2. Mainstem discharge, site flow and water surface elevation (WSEL), wetted (gross) surface area and juvenile chinook usable area (WUA) forecast for the site at 101.5L.
- Table B-6.3. Mainstem discharge, site flow and water surface elevation (WSEL), wetted (gross) surface area and juvenile chinook usable area (WUA) forecast for the site at 112.6L.
- Table B-6.4. Mainstem discharge, site flow and water surface elevation (WSEL), wetted (gross) surface area and juvenile chinook usable area (WUA) forecast for the site at 119.2R.
- Table B-6.5. Mainstem discharge, site flow and water surface elevation (WSEL), wetted (gross) surface area and juvenile chinook usable area (WUA) forecast for the site at 131.7L.
- Table B-6.6. Mainstem discharge, site flow and water surface elevation (WSEL), wetted (gross) surface area and juvenile chinook usable area (WUA) forecast for the site at 132.6L.
- Table B-6.7. Mainstem discharge, site flow and water surface elevation (WSEL), wetted (gross) surface area and juvenile chinook usable area (WUA) forecast for the site at 136.0L.
- Table B-6.8. Mainstem discharge, site flow and water surface elevation (WSEL), wetted (gross) surface area and juvenile chinook usable area (WUA) forecast for the site at 147.1L.

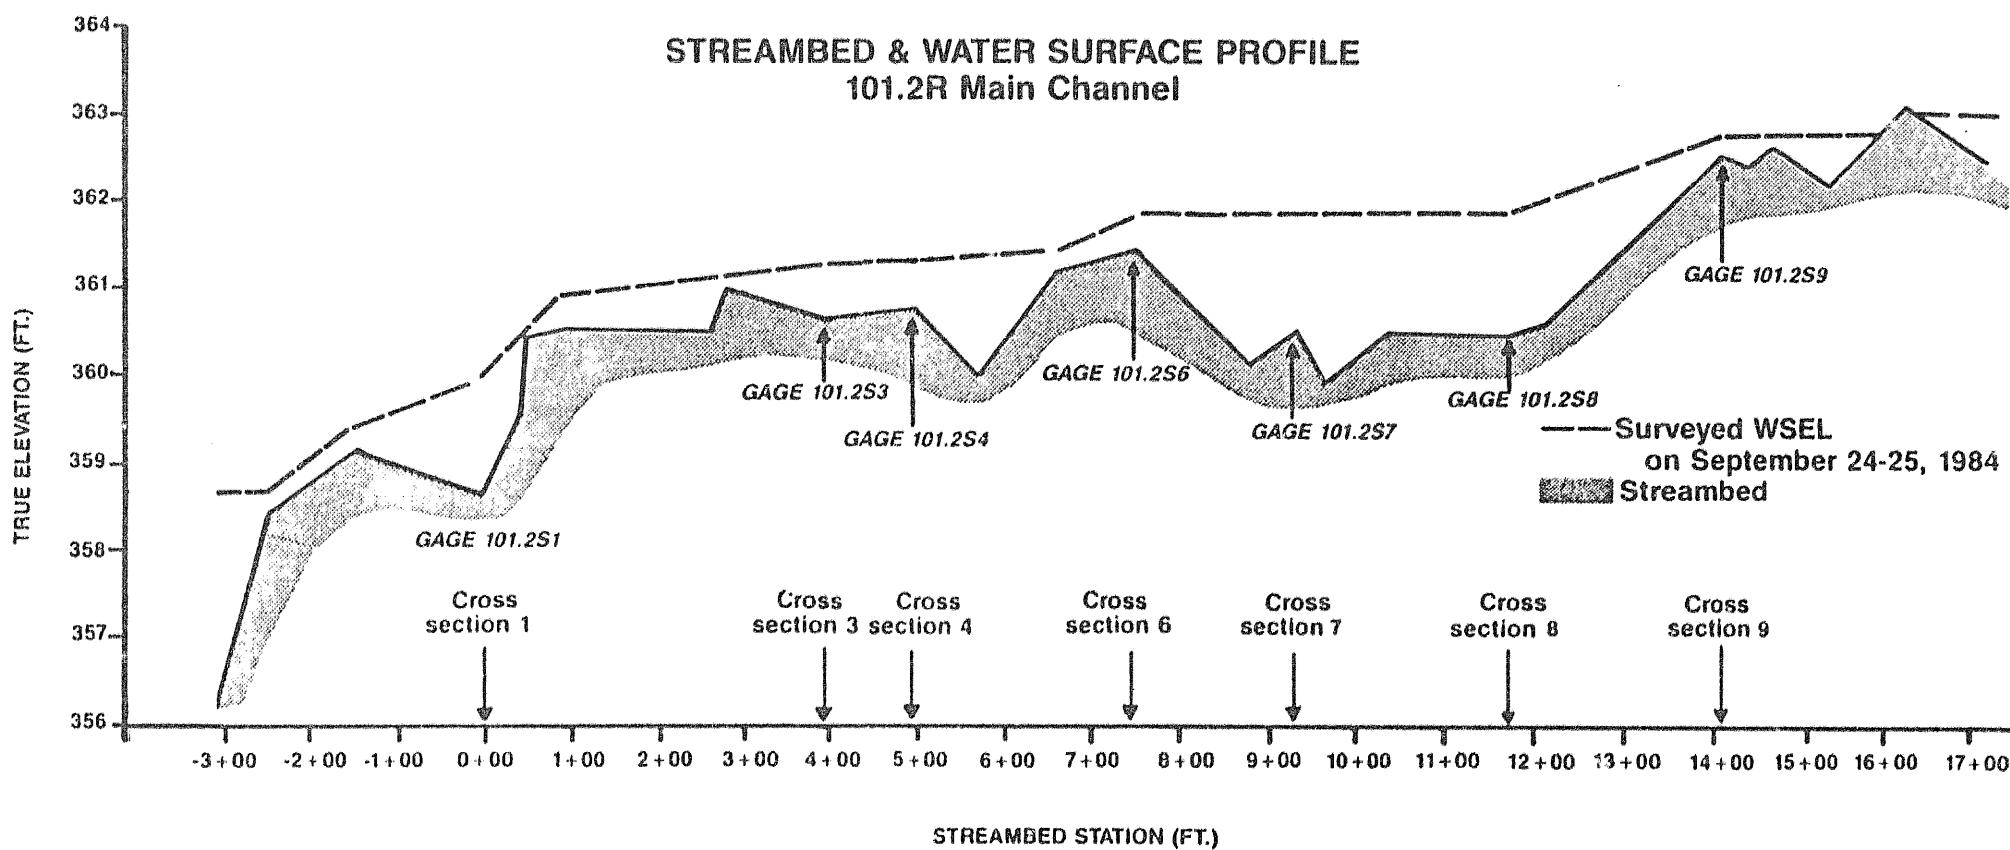


Figure B-1.1 Streambed profile at site 101.2R - main channel.

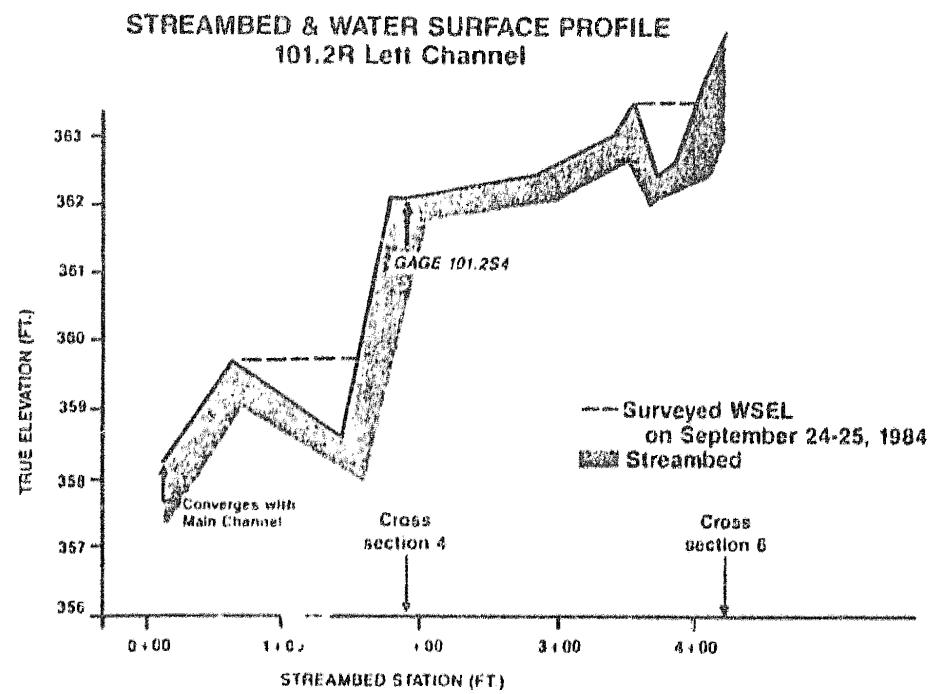


Figure B-1.2 Streambed profile at site 101.2R - left channel.

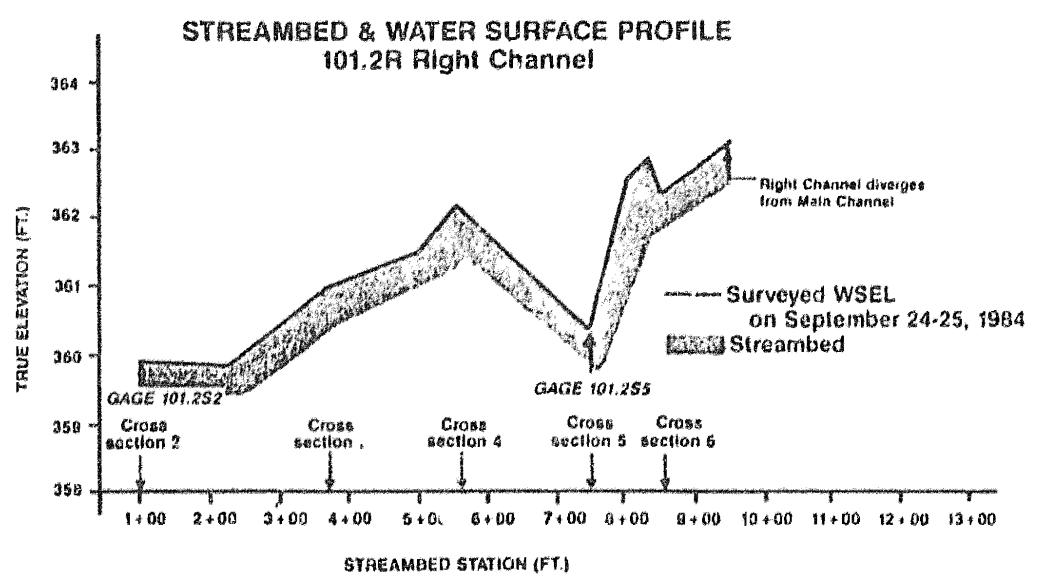


Figure B-1.3 Streambed profile at site 101.2R - right channel.

Table B-1.1. Streambed profile at site 101.2R main channel; surveyed on August 24-25, 1984 (TBM ID: R&M LRX-6 LB 1980).

Streambed Station (ft)	Streambed Elevation (ft)	WSEL (ft)	Comments
-3+05	356.15	358.67	Pool
-2+45	358.44	358.67	Riffle
.1+45	359.17	359.45	Riffle
0+00	358.68	359.55	Cross section 1 - SG 101.2S1
0+43	359.52	360.45	Transition
0+50	360.49	360.50	Transition
0+88	360.56	360.95	
2+60	360.51	361.17	Pool
2+80	361.01	361.19	Pool
3+93	360.69	361.33	Cross section 3 - SG 101.2S3
5+95	360.81	361.26	Cross section 4 - SG 101.2S4
6+70	360.01	361.40	Pool
7+63	361.24	361.58	Riffle
8+50	361.48	361.96	Cross section 6 - SG 101.2S6
9+80	360.14	361.96	Pool
10+33	360.45	361.92	Cross section 7 - SG 101.2S7
10+65	359.91	361.92	Pool
11+40	360.51	361.92	Riffle
12+75	360.49	361.90	Cross section 8 - SG 101.2S8
13+15	360.62	362.05	Pool
15+10	362.54	362.79	Cross section 9 - SG 101.2S9B
15+43	362.44	362.79	Pool
15+70	362.67	362.80	Transition
16+38	362.22	362.80	Pool
17+15	363.13	DRY	
18+25	362.47	363.05	

Table B-1.2. Streambed profile at site 101.2R left channel; surveyed on August 24-25, 1984 (TBM ID: R&M LRX-6 LB 1980).

Streambed Station (ft)	Streambed Elevation (ft)	WSEL (ft)	Comments
0+20	358.24	359.50	Left channel converges with main channel
1+25	359.75	359.70	Pool
2+78	358.64	360.20	Pool
3+53	362.13	DRY	
3+78	362.13	DRY	Cross section 3 - SG 101.2S3
5+65	362.48	DRY	Cross section 4 - SG 101.2S4
6+78	363.07	DRY	
6+88	362.25	DRY	
7+13	363.52	DRY	
7+50	362.49	DRY	
7+70	362.68	DRY	
8+13	363.86	DRY	
8+45	364.59	DRY	Cross section 6 - SG 101.2S6

Table B-1.3. Streambed profile at site 101.2R right channel; surveyed on August 24-25, 1984 (TBM ID: R&M LRX-6 LB 1980).

Streambed Station (ft)	Streambed Elevation (ft)	WSEL (ft)	Comments
0+00			Cross section 1
0+96	359.92	DRY	Cross section 2 - SG 101.2S2
2+29	359.88	DRY	
3+71	361.08	DRY	Cross section 3
5+01	361.52	DRY	
5+55	362.15	DRY	
5+62	362.17	DRY	Cross section 4
7+51	362.37	362.05	Cross section 5 - SG 101.2S5, Pool
8+06	362.57	DRY	
8+31	362.87	DRY	
8+56	362.33	DRY	
9+56	363.11	DRY	Diverges from main channel

Table B-2.1

Cross section elevations, substrate and
cover data at site 101.2R.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 1	0.0	366.10	1	8.4	LB Headpin
Station 0+00	2.0	365.60	1	8.4	Top of bank
	8.0	362.10	7	4.3	Bottom of bank
	16.6	361.10	7	4.3	
	18.0	360.80	7	4.3	
	20.0	360.60	7	4.3	
	22.0	360.40	7	4.3	
	24.0	360.10	7	4.3	
	26.0	359.90	7	4.3	
	28.0	359.60	7	4.3	
	30.0	359.70	7	4.3	LWE
	32.0	359.40	7	4.3	
	34.0	359.50	7	4.3	
	36.0	359.50	7	4.3	
	38.0	359.50	7	4.3	
	40.0	359.40	7	4.3	
	42.0	359.30	7	4.3	
	43.0	359.40	7	4.3	
	44.0	359.30	7	4.3	
	46.0	359.30	7	4.3	
	48.0	359.20	7	4.3	
	50.0	359.10	7	4.3	
	52.0	359.00	7	4.3	
	54.0	358.80	7	4.3	
	55.0	358.70	7	4.3	
	56.0	358.60	7	4.3	
	58.0	358.60	7	4.3	
	60.0	358.80	7	4.3	
	62.0	358.90	7	4.3	
	64.0	358.90	7	4.3	
	65.0	359.00	7	4.3	
	66.0	359.00	7	4.3	
	68.0	359.10	7	4.3	
	70.0	359.30	7	4.3	
	72.0	359.50	7	4.3	
	73.0	359.50	7	4.3	RWE
	74.0	359.60	7	4.3	
	76.0	359.90	7	4.3	
	78.0	360.10	7	4.3	
	80.0	360.20	7	4.3	
	82.0	360.30	7	4.3	

Table B-2.1 (cont.) Cross section elevations, substrate and cover data at site 101.2R.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 1	84.0	360.70	7	4.3	
Station 0+00	86.0	360.60	7	4.3	
(cont.)	88.0	360.70	7	4.2	
	90.0	360.70	7	4.2	
	92.0	360.90	7	4.2	
	94.0	361.00	7	4.2	
	96.0	361.10	7	4.2	
	98.0	361.10	7	4.2	
	124.0	361.80	2	4.2	
	148.0	361.20	2	4.2	
	218.0	362.90	10	8.1	
	249.5	361.60	10	8.1	
	272.0	361.10	10	5.2	
	274.0	360.90	10	5.2	
	276.0	360.90	10	5.2	
	278.0	360.70	10	5.2	
	282.0	360.60	10	5.2	
	285.0	360.20	10	5.2	LWE
	286.0	360.20	10	5.2	
	290.0	360.20	10	5.2	
	293.0	360.10	10	5.2	
	294.0	360.20	10	5.2	
	298.0	360.20	10	5.2	
	302.0	360.30	10	5.2	
	306.0	360.30	10	5.2	
	308.0	360.20	10	5.2	RWE
	310.0	360.40	10	5.2	
	314.0	360.70	10	5.2	
	318.0	360.90	10	5.2	
	322.0	360.90	10	5.2	
	323.0	361.10	10	5.2	
	334.0	361.50	1	5.2	Bottom of bank
	350.0	363.70	1	5.2	
	357.0	368.30	1	8.3	RB Headpin
Cross Section 2	297.5	362.25	7	5.2	Top of LB stake
Station 0+98	323.5	361.35	7	5.2	
	356.5	359.86	8	5.2	
	393.0	361.74	8	5.2	
	401.0	363.77	1	8.3	
	409.5	367.97	1	8.3	Top of bank
	410.0	373.68	1	8.3	RB Headpin

Table B-2.1 (cont.) Cross section elevations, substrate and cover data at site 101.2R.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 3	0.0	366.20	1	8.4	LB Headpin
Station 3+74	5.0	365.00	1	2.1	Top of bank
	14.0	362.20	1	1.1	
	16.0	362.20	1	1.1	
	20.0	362.40	1	1.1	
	24.0	362.20	1	1.1	
	28.0	362.20	1	1.1	
	32.0	362.20	1	1.1	
	36.0	362.10	1	1.1	
	40.0	362.00	1	1.1	
	44.0	362.10	1	1.1	
	46.0	362.20	1	1.1	
	48.0	362.00	1	1.1	
	49.0	362.30	1	1.1	
	50.0	362.60	1	1.1	
	54.0	362.70	1	1.1	
	67.0	362.50	9	5.2	
	77.0	363.20	8	5.2	
	87.5	362.60	8	5.3	
	90.0	362.30	8	5.3	
	92.0	362.10	8	5.3	
	96.0	362.20	8	5.3	
	100.0	362.00	8	5.3	
	104.0	362.00	8	5.3	
	108.0	361.80	8	5.3	
	114.0	361.70	8	5.3	
	116.0	361.70	8	5.2	
	118.0	361.40	8	5.2	
	120.0	361.30	8	5.2	LWE
	122.0	361.10	8	5.2	
	124.0	361.10	8	5.2	
	126.0	360.80	8	5.2	
	128.0	361.00	8	5.2	
	130.0	360.80	8	5.2	
	132.0	360.80	8	5.2	
	134.0	360.70	8	5.2	
	136.0	360.80	8	5.2	
	136.5	360.70	8	5.2	
	138.0	360.90	8	5.2	
	140.0	360.70	8	5.2	
	142.0	360.80	8	5.2	

Table B-2.1 (cont.) Cross section elevations, substrate and cover data at site 101.2R.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 3	144.0	360.90	8	5.2	
Station 3+74	146.0	360.90	8	5.2	
(cont.)	148.0	360.80	8	5.2	
	150.0	360.90	8	5.2	
	152.0	361.00	8	5.2	
	154.0	361.10	8	5.2	
	156.0	361.20	8	5.2	
	158.0	361.10	8	5.2	
	160.0	361.20	8	5.2	
	162.0	361.30	8	5.2	RWE
	164.0	361.10	8	5.2	
	166.0	361.20	8	5.2	
	168.0	361.30	8	5.2	
	170.0	361.30	8	5.2	
	172.0	361.40	8	5.2	
	174.0	361.50	8	5.2	
	176.0	361.40	8	5.2	
	178.0	361.50	8	5.2	
	180.0	361.50	8	5.2	
	182.0	361.50	8	5.2	
	184.0	361.60	8	5.2	
	186.0	361.70	8	5.2	
	188.0	361.70	8	5.2	
	189.5	361.80	8	5.2	
	192.0	361.80	8	5.2	
	196.0	361.80	8	5.2	
	200.0	362.10	8	5.2	
	204.0	362.00	8	5.2	
	208.0	362.10	8	5.2	
	212.0	362.30	8	5.2	
	216.0	362.50	8	5.2	
	220.0	362.50	8	5.2	
	224.0	362.60	8	5.2	
	227.0	362.60	10	5.2	
	322.0	362.60	10	4.2	
	339.0	362.60	10	4.2	
	340.0	362.40	10	4.2	
	344.0	362.40	10	4.2	
	347.5	362.50	10	4.2	
	352.0	362.40	10	4.2	
	356.0	362.60	10	4.2	

Table B-2.1 (cont.) Cross section elevations, substrate and cover data at site 101.2R.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 3	376.5	362.60	8	7.2	Bottom of bank
Station 3+74	381.0	366.50	1	9.4	Top of bank
(cont.)	381.5	367.10	1	9.4	RB Headpin
Cross Section 4	0.0	366.10	1	8.3	LB Headpin
Station 5+64	3.0	364.90	1	2.2	Top of bank
	7.0	363.50	10	5.3	
	23.0	363.40	10	5.2	
	62.0	363.70	2	8.4	Bottom of bank
	111.0	364.80	2	5.2	
	123.0	363.30	10	5.3	
	147.0	363.00	10	5.3	
	151.0	362.50	10	5.3	
	155.0	362.40	10	5.3	
	159.0	362.40	10	5.3	
	163.0	361.90	10	5.3	
	164.0	361.70	10	5.3	
	166.0	361.60	10	5.3	
	168.0	361.50	10	5.3	
	170.0	361.40	10	5.3	
	172.0	361.30	8	5.3	LWE
	174.0	361.10	8	5.3	
	176.0	361.00	8	5.3	
	178.0	361.00	8	5.3	
	180.0	361.10	8	5.3	
	182.0	361.20	8	5.3	
	184.0	361.10	8	5.3	
	186.0	361.10	7	5.3	
	188.0	361.20	7	5.3	
	190.0	361.00	7	5.3	
	192.0	360.90	7	5.3	
	194.0	360.90	7	5.3	
	196.0	361.00	10	5.3	
	198.0	360.80	10	5.3	
	200.0	360.80	10	5.3	
	202.0	360.80	10	5.3	
	204.0	360.70	10	5.3	
	206.0	360.70	10	5.3	
	208.0	360.90	10	5.3	
	210.0	361.00	10	5.3	
	212.0	361.00	10	5.3	

Table B-2.1 (cont.) Cross section elevations, substrate and cover data at site 101.2R.

Location Within Site	Hor	Bed			Comments
	Dist (ft)	Elev (ft)	Sub	Cov	
Cross Section 4	214.0	361.10	10	5.3	
Station 5+64	216.0	361.10	10	5.3	
(cont.)	218.0	361.10	10	5.3	
	220.0	361.40	10	5.3	
	222.0	361.50	10	5.3	
	224.0	361.30	10	5.3	
	226.0	361.30	10	5.3	RWE
	228.0	361.60	10	5.3	
	230.0	361.40	10	5.3	
	232.0	361.60	10	5.3	
	234.0	361.70	10	5.3	
	236.0	361.80	10	5.3	
	238.0	361.80	10	5.3	
	240.0	361.90	10	5.3	
	243.0	362.30	10	5.3	
	247.0	362.20	10	5.3	
	251.0	362.40	10	5.3	
	255.0	362.80	10	6.3	
	259.0	362.80	10	6.3	
	263.0	362.90	10	6.3	
	266.2	363.00	10	6.3	
	331.0	364.70	12	5.2	
	362.0	364.00	10	5.2	
	369.0	363.00	10	5.2	
	383.0	362.90	10	5.3	
	387.0	362.70	10	5.3	
	389.0	362.90	10	5.3	
	391.0	362.90	10	5.3	
	393.0	362.90	10	5.3	
	394.0	363.00	10	5.3	
	408.0	363.50	2	5.2	
	413.0	364.80	1	9.3	Bottom of bank
	416.0	368.00	1	8.4	Top of bank
	419.0	369.10	1	8.4	RB Headpin

Table B-2.1 (cont.) Cross section elevations, substrate and cover data at site 101.2R.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 5	194.0	365.52	1	1.1	Top of sand bar
Station 7+51	198.0	364.56	1	1.1	
	207.0	364.40	1	1.1	
	211.5	364.43	1	1.1	
	230.0	361.65	1	1.1	
	238.5	362.10	1	1.1	Bottom of cut bank
	244.0	369.17	1	1.1	Top of cut bank
	256.0	373.72	1	1.1	RB Headpin
Cross Section 6	0.0	365.40	1	5.2	LB Headpin
Station 8+37	29.0	365.10	2	5.2	
	42.0	363.90	10	5.2	
	62.0	362.90	10	5.3	
	66.0	362.80	10	5.3	
	70.0	362.60	10	5.3	
	74.0	362.40	10	5.3	
	78.0	363.00	10	5.3	
	80.0	362.30	10	5.3	
	82.0	362.10	10	5.3	
	84.0	362.20	10	5.3	
	86.0	362.00	10	5.3	
	88.0	362.00	10	5.3	LWE
	90.0	361.90	10	5.3	
	92.0	361.90	10	5.3	
	94.0	361.90	10	5.3	
	96.0	361.90	10	5.3	
	98.0	361.80	10	5.3	
	100.0	361.90	10	5.3	
	102.0	361.90	10	5.3	
	104.0	361.90	10	5.3	
	106.0	361.80	10	5.3	
	108.0	361.90	10	5.3	
	110.0	361.70	8	5.3	
	112.0	361.70	8	5.3	
	114.0	361.80	8	5.3	
	116.0	361.90	8	5.3	
	118.0	361.70	8	5.3	
	120.0	361.80	8	5.3	
	122.0	361.70	8	5.3	
	124.0	361.70	8	5.3	
	126.0	361.70	8	5.3	

Table B-2.1 (cont.) Cross section elevations, substrate and cover data at site 101.2R.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 6	128.0	361.60	8	5.3	
Station 8+37	129.0	361.70	8	5.3	
(cont.)	130.0	361.70	8	5.3	
	132.0	361.60	8	5.3	
	134.0	361.60	8	5.3	
	136.0	361.60	8	5.3	
	138.0	361.60	8	5.3	
	140.0	361.60	8	5.3	
	142.0	361.60	8	5.3	
	144.0	361.50	8	5.3	
	146.0	361.60	8	5.3	
	148.0	361.60	8	5.3	
	150.0	361.60	8	5.3	
	152.0	361.60	8	5.3	
	154.0	361.70	8	5.3	
	155.0	361.60	8	5.3	
	156.0	361.70	8	5.3	
	158.0	361.70	8	5.3	
	160.0	361.70	8	5.3	
	162.0	361.60	8	5.3	
	164.0	361.70	8	5.3	
	166.0	361.80	8	5.3	
	168.0	361.90	8	5.3	
	170.0	362.10	8	5.3	
	172.0	362.00	8	5.3	
	173.5	362.00	8	5.3	RWE
	176.0	362.10	8	5.3	
	178.0	362.00	8	5.3	
	180.0	362.30	8	5.3	
	182.0	362.40	8	5.3	
	186.0	362.40	8	5.3	
	190.0	362.50	8	5.3	
	194.0	362.50	8	5.3	
	198.0	362.50	8	5.3	
	202.0	362.70	8	5.3	
	206.0	362.90	8	5.3	
	209.0	363.10	8	5.2	
	211.5	363.50	10	5.2	
	248.5	363.10	10	5.2	
	250.0	363.00	10	5.2	
	252.0	362.70	10	5.2	

Table B-2.) (cont.) Cross section elevations, substrate and cover data at site 101.2R.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 6	254.0	362.90	10	5.2	
Station 8+37	256.0	363.00	10	5.2	
(cont.)	258.0	362.70	10	7.2	
	260.0	362.70	10	7.2	
	262.0	363.10	10	7.2	
	266.0	364.70	10	7.2	
	272.0	365.60	2	9.3	
	276.0	369.60	1	8.4	
	278.0	370.20	1	8.4	RB Headpin
Cross Section 7	0.0	365.20	1	5.1	LB Headpin
Station 10+23	43.0	364.00	2	5.2	
	79.0	363.60	10	5.2	
	80.0	363.40	10	5.2	
	82.0	363.30	10	5.2	
	84.0	363.20	10	5.2	
	86.0	362.90	10	5.2	
	90.0	362.50	10	5.2	
	92.0	362.50	10	5.2	
	94.0	362.30	10	5.2	
	96.0	362.00	10	5.2	
	98.0	361.90	10	5.2	LWE
	100.0	361.50	10	5.2	
	102.0	361.80	10	5.2	
	104.0	360.80	10	5.2	
	106.0	360.70	10	5.2	
	108.0	360.60	10	5.2	
	110.0	360.60	10	5.2	
	112.0	360.20	10	5.2	
	114.0	360.40	10	5.2	
	115.0	360.40	10	5.2	
	116.0	360.30	10	5.2	
	118.0	360.40	10	5.2	
	120.0	360.20	10	5.2	
	122.0	360.50	10	5.2	
	124.0	360.50	10	5.2	
	126.0	360.70	10	5.2	
	128.0	360.80	10	5.2	
	130.0	360.60	10	5.2	
	132.0	360.40	10	5.2	
	134.0	360.70	10	5.2	

Table B-2.1 (cont.) Cross section elevations, substrate and cover data at site 101.2R.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 7	136.0	360.30	10	5.2	
Station 10+23	140.0	360.40	10	5.2	
(cont.)	141.0	360.50	10	5.2	
	142.0	360.70	10	5.2	
	144.0	360.50	10	5.2	
	148.0	360.00	10	5.2	
	151.0	360.20	10	5.2	
	152.0	360.20	10	5.2	
	156.0	360.10	10	5.2	
	158.0	360.40	10	5.2	
	160.0	360.10	10	5.2	
	164.0	360.30	10	5.2	
	166.0	360.50	10	5.2	
	168.0	360.30	10	5.2	
	172.0	360.20	10	5.2	
	174.0	360.60	10	5.2	
	176.0	360.30	10	5.2	
	180.0	360.60	10	5.2	
	182.0	361.10	10	5.2	
	184.0	360.80	10	5.2	RWE
	188.0	361.10	10	5.2	
	190.0	361.60	10	5.2	
	192.0	361.50	10	5.2	
	194.0	361.90	10	5.2	
	196.0	361.90	10	5.2	
	198.0	362.00	10	5.2	
	200.0	362.00	10	5.2	
	202.0	362.10	10	5.2	
	203.0	361.90	2	5.2	
	204.0	362.10	2	5.2	
	206.0	362.40	2	5.2	
	208.0	362.50	2	5.2	
	210.0	362.70	2	5.2	
	214.0	363.00	2	5.2	
	218.0	363.40	2	5.2	
	222.0	363.40	2	5.2	
	224.0	363.50	2	5.1	
	256.5	366.40	1	9.4	Bottom of cut bank
	262.0	370.00	1	8.4	Top of bank
	264.0	374.10	1	8.4	RB Headpin

Table B-2.1 (cont.) Cross section elevations, substrate and cover data at site 101.2R.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 8	0.0	366.10	1	8.2	LB Headpin
Station 12+79	7.0	365.90	4	1.1	
	27.0	363.60	2	1.1	
	34.0	363.90	2	1.1	
	40.0	363.50	2	1.1	
	42.0	363.40	2	1.1	
	44.0	363.20	2	1.1	
	48.0	362.90	2	5.1	
	52.0	362.70	2	5.1	
	54.0	362.60	7	5.1	
	56.0	362.50	7	5.1	
	60.0	362.20	7	5.1	
	62.0	362.30	7	5.1	
	64.0	362.20	7	5.1	
	66.0	362.10	7	5.1	
	68.0	362.00	7	5.1	
	70.0	362.00	7	5.1	
	72.0	362.00	7	5.1	
	73.4	361.90	7	5.1	
	74.0	362.00	11	5.1	LWE
	76.0	361.80	11	5.1	
	78.0	361.90	11	5.1	
	80.0	361.80	11	5.1	
	82.0	361.70	11	5.1	
	84.0	361.70	11	5.1	
	88.0	361.80	11	5.1	
	92.0	361.60	11	5.1	
	96.0	361.80	11	5.1	
	100.0	361.50	11	5.1	
	104.0	361.30	11	5.1	
	108.0	361.20	11	5.1	
	112.0	361.10	11	5.1	
	116.0	361.10	11	5.1	
	118.0	361.90	11	5.1	
	120.0	360.80	11	5.1	
	121.5	361.00	11	5.1	
	124.0	360.80	11	5.1	
	128.0	360.60	11	5.1	
	132.0	360.60	11	5.1	
	136.0	360.50	11	5.1	
	140.0	360.40	11	5.1	

Table B-2.1 (cont.) Cross section elevations, substrate and cover data at site 10i.2R.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 8	144.0	360.40	11	5.1	
Station 12+79	145.0	360.50	11	5.1	
(cont.)	148.0	360.50	11	5.1	
	152.0	360.60	11	5.1	
	156.0	360.50	11	5.1	
	160.0	360.80	11	5.1	
	164.0	361.00	11	5.1	
	168.0	361.20	11	5.1	
	172.0	361.50	11	5.1	
	176.0	361.90	11	5.1	
	178.0	361.90	11	5.1	
	179.0	362.00	12	5.1	RWE
	180.0	362.20	12	5.1	
	182.0	362.30	12	5.1	
	184.0	362.20	12	5.2	
	188.0	362.80	12	5.2	
	192.0	363.10	12	5.2	
	196.0	363.50	12	5.2	
	213.5	364.10	12	5.1	
	221.5	365.50	1	9.4	
	224.0	369.60	1	8.4	RB Headpin
Cross Section 9	0.0	366.10	12	5.2	LB Headpin
Station 14+62	27.5	363.50	12	5.3	
	36.5	364.00	12	5.3	
	40.0	363.90	12	5.3	
	44.0	363.70	12	5.3	
	48.0	363.60	12	5.3	
	52.0	363.60	12	5.3	
	56.0	363.80	12	5.3	
	60.0	363.70	12	5.3	
	64.0	363.50	12	5.3	
	68.0	363.40	12	5.3	
	72.0	363.80	12	5.3	
	80.0	363.30	12	5.3	
	82.0	363.20	12	5.3	
	84.0	363.20	12	5.3	
	88.0	363.30	12	5.3	
	92.0	363.10	12	5.3	
	94.0	363.00	12	5.3	
	96.0	363.10	12	5.3	

Table B-2.1 (cont.) Cross section elevations, substrate and cover data at site 101.2R.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 9	100.0	363.10	12	5.3	
Station 14+62	104.0	363.00	12	5.3	
(cont.)	108.0	363.10	12	5.3	
	112.0	363.10	12	5.3	
	116.0	362.90	12	5.3	
	119.5	362.80	12	5.3	LWE
	120.0	363.00	12	5.3	
	124.0	362.70	12	5.3	
	127.5	362.50	10	5.3	
	128.0	362.80	10	5.3	
	132.0	362.50	10	5.3	
	136.0	362.60	10	5.3	
	140.0	362.90	10	5.3	
	142.0	362.70	10	5.3	
	144.0	362.80	10	5.3	
	148.0	362.60	10	5.3	
	152.0	362.70	10	5.3	
	156.0	362.80	10	5.3	
	158.0	362.70	10	5.3	
	160.0	363.00	10	5.3	
	162.0	363.00	10	5.3	
	166.0	363.00	10	5.3	
	168.0	362.90	10	5.3	
	170.0	362.90	10	5.3	
	174.0	363.00	10	5.3	
	176.0	362.80	10	5.3	
	178.0	363.00	10	5.3	
	182.0	363.00	10	5.3	RWE
	184.0	363.10	10	5.3	
	186.0	363.00	10	5.3	
	188.0	363.20	10	5.3	
	190.0	363.80	10	5.3	
	192.4	364.00	10	5.3	
	197.0	364.60	10	4.2	
	212.0	366.80	1	9.4	
	215.0	371.30	1	8.4	
	216.5	371.50	1	8.4	RB Headpin

Date of survey: Sept. 12, 1984.
 Reference elevation: R&M LRX-6 1980.

Table B-2.2

Cross section elevations, substrate and
cover data at site 101.5L.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 1	0.0	367.60	1	8.2	LB Headpin
Station 0+00	10.0	362.80	1	8.2	
	19.0	362.60	1	8.2	
	42.0	361.60	1	8.2	LWE
	119.0	358.00	7	5.2	
	176.0	357.50	7	5.2	
	259.0	358.00	7	5.2	
	278.0	359.30	7	5.2	
	297.0	361.10	7	5.2	
	301.0	361.30	7	5.2	RWE
	307.0	363.00	7	5.2	
	317.0	363.10	7	5.2	
	429.0	364.60	1	8.1	
	451.0	365.00	1	8.1	
	467.0	365.70	1	8.1	RB Headpin
Cross Section 2	0.0	368.20	1	8.2	LB Headpin
Station 12+23	12.0	367.90	1	8.2	Top of bank
	14.0	364.60	1	8.2	
	21.0	362.80	1	8.2	LWE
	58.0	360.90	1	8.2	
	104.0	360.50	10	5.2	
	251.0	361.00	10	5.2	
	288.0	361.10	10	5.2	
	325.0	361.20	10	5.2	
	367.0	362.60	10	5.2	RWE
	425.0	365.90	8	4.1	
	437.0	366.80	1	8.1	RB Headpin
Cross Section 3*	0.0	370.80	1	8.2	LB Headpin
Station 19+16	62.0	364.80	12	6.2	
	78.0	362.00	12	6.2	
	116.0	360.90	10	5.2	
	126.0	361.00	10	5.2	
	136.0	361.30	10	5.2	
	156.0	361.30	10	5.2	
	186.0	360.60	10	5.2	

Table B-2.2 (cont.) Cross section elevations, substrate and cover data at site 101.5L.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 3*	206.0	360.90	10	5.2	
Station 19+16	246.0	362.30	10	5.2	
(cont.)	276.0	363.80	1	8.1	
	306.0	364.80	1	8.1	
	416.0	366.60	1	8.1	Next to HP
	417.0	368.00	1	8.1	RB Headpin
Cross Section 4*	0.0	369.80	1	8.2	LB Headpin
Station 24+47	21.0	367.50	1	8.2	
	58.0	364.50	12	6.2	
	88.0	361.40	10	5.2	
	108.0	361.30	10	5.2	
	128.0	361.90	10	5.2	
	158.0	360.90	10	5.2	
	188.0	362.40	10	5.2	
	218.0	362.90	10	5.2	
	248.0	363.40	10	5.2	
	278.0	363.40	10	5.2	
	338.0	364.50	8	4.1	
	413.0	364.70	8	4.1	
	461.0	365.90	8	4.1	
	466.0	368.10	1	8.1	RB Headpin
Cross Section 5	0.0	372.40	1	8.2	LB Headpin
Station 31+08	24.0	369.90	1	8.2	
	74.0	365.70	1	8.2	LWE
	103.0	364.80	12	6.2	
	140.0	364.20	10	5.2	
	165.0	364.10	10	5.2	
	252.0	361.40	10	5.2	
	344.0	364.00	10	5.2	
	399.0	365.60	10	5.2	RWE
	430.0	368.60	8	4.1	
	463.0	369.70	1	8.1	
	466.0	370.50	1	8.1	RB Headpin

Date of survey: Oct. 2, 1984.

Reference elevation: R&M Alcap 101.2W1 LB 1982.

* Cross section not surveyed but determined from discharge measurement.

Table B-2.3

Cross section elevations, substrate and
cover data at site 112.6L.

Location Within Site	Ker Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 1	0.0	456.36	1	1.1	LB Headpin
Station 0+00	1.0	456.20	1	1.1	
	10.0	453.90	1	1.1	
	11.0	453.66	8	5.1	
	20.0	452.10	8	5.1	
	23.0	451.46	9	5.2	
	40.0	451.50	9	5.2	
	60.0	451.60	9	5.2	
	63.0	451.57	9	5.2	
	80.0	451.10	9	5.2	
	85.0	450.86	9	5.2	LWE
	97.0	449.08	9	5.2	
	100.0	449.20	9	5.2	
	119.0	449.91	9	5.3	
	120.0	449.70	9	5.3	
	125.0	448.48	9	5.3	
	149.0	447.70	9	5.3	
	150.0	447.70	9	5.3	
	180.0	448.30	9	5.3	
	200.0	448.70	9	5.3	
	202.0	448.71	11	5.3	
	230.0	450.03	9	5.2	
	260.0	450.30	9	5.2	
	264.0	450.32	7	4.1	
	290.0	449.00	7	4.2	
	293.0	449.12	3	1.1	
	315.0	447.66	3	1.1	
	337.0	446.74	9	5.2	
	340.0	446.70	9	5.2	
	370.0	447.10	9	5.2	
	374.0	447.22	9	5.2	
	397.0	449.34	8	5.2	
	400.0	449.30	8	5.2	
	428.0	449.04	9	5.2	
	440.0	449.50	9	5.2	
	462.5	450.35	9	5.2	
	480.0	451.00	9	5.2	
	480.5	450.97	9	5.2	RWE
	495.0	455.12	1	1.1	

Table B-2.3 (cont.) Cross section elevations, substrate and cover data at site 112.6L.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 1	505.0	455.36	1	1.1	
Station 0+00	513.5	460.08	1	1.1	
(cont.)	520.5	460.24	1	1.1	RB Headpin
Cross Section 2	0.0	459.95	3	1.1	LB Headpin
Station 3+97	1.0	458.90	3	1.1	
	4.0	455.70	3	1.1	
	21.0	455.50	3	1.1	
	35.0	451.75	9	5.2	
	47.0	451.37	9	5.2	LWE
	55.0	450.87	9	5.3	
	75.0	450.70	9	5.3	
	95.0	450.60	9	5.3	
	106.0	450.46	9	5.3	
	115.0	450.10	9	5.3	
	124.0	449.65	9	5.3	
	135.0	449.80	9	5.3	
	157.0	450.10	9	5.3	
	160.0	450.20	9	5.3	
	170.0	450.60	9	5.3	
	180.0	450.90	9	5.3	
	187.0	451.25	9	5.3	
	190.0	451.00	9	5.3	
	198.0	450.30	9	5.3	
	239.0	450.70	9	5.3	
	240.0	450.70	9	5.3	
	290.0	450.70	9	5.3	
	311.0	450.70	9	5.3	
	340.0	450.70	9	5.3	
	376.0	450.70	9	5.3	
	390.0	450.60	9	5.3	
	440.0	450.40	9	5.3	
	444.0	450.40	8	5.3	
	480.0	450.90	8	5.3	
	500.0	451.20	8	5.3	
	502.0	451.20	8	5.3	
	520.0	450.80	8	5.3	
	539.0	450.40	9	5.3	
	540.0	450.50	9	5.3	
	545.0	451.10	9	5.3	
	547.0	451.30	9	5.3	RWE

Table B-2.3 (cont.) Cross section elevations, substrate and cover data at site 112.6L.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 2	550.0	452.30	9	5.3	
Station 3+97	560.0	455.60	3	1.1	
(cont.)	567.0	460.78	3	1.1	RB Headpin
Cross Section 3	0.0	463.77	3	1.1	LB Headpin
Station 8+36	1.0	463.10	3	1.1	
	10.0	457.11	3	1.1	Bottom of cut bank
	48.0	452.80	9	5.3	LWE
	50.0	452.80	9	1.1	
	70.0	452.40	9	5.3	
	90.0	452.10	9	5.3	
	94.0	452.00	9	5.2	
	110.0	451.90	9	5.2	
	121.0	451.80	9	5.2	
	130.0	452.00	9	5.2	
	150.0	452.40	9	5.2	
	169.0	452.80	9	5.2	RWE
	170.0	452.80	9	5.2	
	200.0	453.10	9	5.2	
	223.0	453.40	9	5.2	
	230.0	453.60	9	5.2	
	267.0	454.71	7	4.3	
	309.0	453.27	9	5.3	
	310.0	453.30	9	5.3	
	335.0	452.80	9	5.3	LWE
	340.0	452.60	9	5.3	
	370.0	451.60	9	5.3	
	400.0	450.60	9	5.3	
	403.0	450.46	9	5.3	
	420.0	450.30	9	5.3	
	438.0	450.11	12	6.3	
	440.0	450.10	12	6.3	
	460.0	450.50	12	6.3	
	480.0	450.90	12	6.3	
	485.0	450.95	9	5.3	
	500.0	451.90	9	5.3	
	516.0	452.86	12	6.3	RWE
	520.0	453.00	12	6.3	
	589.0	455.57	12	1.1	
	596.0	459.72	1	1.1	Edge of vegetation
	598.5	464.73	1	1.1	RB Headpin

Table B-2.3 (cont.) Cross section elevations, substrate and cover data at site 112.6L.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 3A	0.0	458.34	9	5.3	LB Headpin
Station 10+38	1.0	458.10	9	5.3	
	11.0	455.94	9	5.3	
	20.0	454.90	9	5.3	
	27.0	454.21	9	5.3	LWE
	40.0	453.90	9	5.3	
	51.0	453.56	9	5.3	
	60.0	453.30	9	5.3	
	80.0	452.80	9	5.3	
	83.0	452.74	9	5.3	
	98.0	451.82	9	5.3	
	100.0	452.00	9	5.3	
	116.0	453.54	9	5.3	
	120.0	453.30	9	5.3	
	149.0	454.23	9	5.3	RWE
	150.0	454.30	9	5.3	
	169.0	455.82	9	5.2	
	179.0	454.92	9	5.2	LWE
	180.0	454.90	9	5.2	
	199.0	452.79	9	5.2	
	220.0	455.00	9	5.2	
	223.0	454.96	9	5.2	RWE
	255.0	454.60	9	5.2	
	289.0	454.10	9	5.3	LWE
	290.0	454.10	9	5.3	
	299.0	453.20	9	5.3	
	325.0	453.50	9	5.3	
	330.0	453.50	9	5.3	
	370.0	453.90	9	5.3	
	384.0	454.00	9	5.3	
	403.0	453.10	9	5.3	
	410.0	453.50	9	5.3	
	416.0	453.80	9	5.3	
	432.0	453.22	9	5.3	
	446.0	453.49	9	5.3	
	450.0	453.40	9	5.3	
	481.0	452.36	9	5.3	
	490.0	452.50	9	5.3	
	529.0	453.11	9	5.3	
	530.0	453.10	9	5.3	
	570.0	453.40	9	5.3	

Table B-2.3 (cont.) Cross section elevations, substrate and cover data at site 112.6L.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 3A	589.0	453.62	9	5.3	
Station 10+38	610.0	453.90	9	5.3	
(cont.)	621.0	454.11	9	5.3	RWE
	669.0	455.79	9	5.3	
	670.0	456.00	9	5.3	
	679.0	457.34	9	5.3	
	693.5	460.06	9	5.3	RB Headpin
Cross Section 4	0.0	459.33	9	5.3	LB Headpin
Station 12+92	1.0	458.80	9	5.3	
	5.0	456.97	9	5.3	
	13.0	455.20	9	5.3	LWE
	15.0	454.90	9	5.3	
	27.0	453.40	9	5.3	
	30.0	453.40	9	5.3	
	47.0	453.49	9	5.3	
	60.0	453.80	9	5.3	
	86.0	454.20	9	5.3	
	90.0	454.40	9	5.3	
	110.0	455.20	9	5.2	RWE
	148.0	456.89	9	5.2	
	177.0	455.22	9	5.2	LWE
	200.0	454.30	9	5.2	
	208.0	453.92	9	5.3	
	230.0	453.58	12	6.3	
	260.0	453.90	12	6.3	
	262.0	453.94	9	5.3	
	290.0	453.90	9	5.3	
	320.0	453.90	9	5.3	
	341.0	453.93	9	5.3	
	350.0	453.80	9	5.3	
	380.0	453.80	9	5.3	
	408.0	453.85	9	5.3	
	410.0	453.80	9	5.3	
	440.0	454.10	9	5.3	
	446.0	454.25	9	5.3	
	470.0	455.00	9	5.3	
	472.0	455.13	7	4.3	RWE
	520.0	456.36	7	4.2	
	556.0	456.26	7	4.2	
	570.0	456.10	7	4.2	

Table B-2.3 (cont.) Cross section elevations, substrate and cover data at site 112.6L.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 4	600.0	455.80	7	4.2	
Station 12+92	630.0	455.40	7	4.2	
(cont.)	636.0	455.27	7	4.2	
	650.0	455.30	7	4.2	
	670.0	455.20	7	4.2	
	690.0	455.20	7	4.2	
	693.0	455.19	3	1.1	
	710.0	456.10	3	1.1	
	729.0	456.99	3	1.1	
	730.0	457.30	3	1.1	
	738.0	459.56	3	1.1	RB Headpin
Cross Section 5	0.0	459.26	3	8.3	LB Headpin
Station 15+41	1.0	458.60	3	8.3	
	3.0	457.19	3	8.3	
	10.0	455.90	3	8.3	
	14.0	455.11	3	1.1	LWE
	20.0	453.50	9	5.2	
	31.0	453.54	9	5.2	
	40.0	453.70	9	5.2	
	70.0	454.32	9	5.2	
	100.0	453.90	9	5.2	
	130.0	453.40	9	5.3	
	160.0	453.40	9	5.3	
	195.0	453.30	9	5.3	
	200.0	453.30	9	5.3	
	240.0	453.40	9	5.3	
	277.0	453.47	9	5.3	
	280.0	453.50	9	5.3	
	310.0	453.90	9	5.3	
	318.0	453.97	9	5.3	
	340.0	454.20	9	5.3	
	370.0	454.60	9	5.3	
	380.0	454.71	9	5.3	
	400.0	455.30	9	5.3	
	405.0	455.38	9	5.2	RWE
	433.0	456.26	9	5.2	
	440.0	456.30	9	5.2	
	490.0	456.40	9	5.2	
	491.0	456.43	9	5.2	
	510.0	456.20	9	5.2	

Table B-2.3 (cont.) Cross section elevations, substrate and cover data at site 112.6L.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 5	545.0	455.76	9	5.2	
Station 15+41	570.0	456.20	9	5.2	
(cont.)	580.0	456.40	9	5.2	
	586.0	456.46	9	5.2	
	595.0	456.20	9	5.2	
	607.0	455.66	3	1.1	
	610.0	455.80	3	1.1	
	630.0	456.60	3	1.1	
	648.0	457.30	3	1.1	
	653.0	461.50	3	1.1	RB Headpin
Cross Section 6	0.0	460.88	1	1.1	LE Headpin
Station 19+86	1.0	460.80	1	7.2	
	20.0	457.87	1	7.2	
	30.0	456.50	1	7.2	
	38.0	455.26	9	7.2	LWE
	40.0	455.20	9	7.2	
	60.0	454.70	9	7.2	
	80.0	454.07	9	5.2	
	110.0	453.00	9	5.2	
	114.0	452.99	9	5.2	
	140.0	452.70	9	5.2	
	154.0	452.64	9	5.2	
	180.0	452.70	9	5.2	
	220.0	452.80	9	5.2	
	240.0	452.92	9	5.2	
	260.0	453.20	9	5.2	
	284.0	453.51	9	5.2	
	290.0	453.70	9	5.2	
	315.0	454.57	9	5.2	
	320.0	454.70	9	5.2	
	350.0	455.20	9	5.2	
	355.0	455.34	9	5.2	RWE
	370.0	456.20	9	5.2	
	390.0	457.32	9	5.2	
	414.0	457.97	9	5.2	
	435.0	460.90	9	5.2	RB Headpin

Table B-2.3 (cont.) Cross section elevations, substrate and cover data at site 112.6L.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 7	0.0	466.59	12	9.3	LB Headpin
Station 30+34	1.0	461.31	12	9.3	
	10.0	459.10	12	9.3	
	11.0	458.81	12	5.3	
	20.0	458.20	12	5.3	
	40.0	457.00	12	5.3	
	46.0	456.59	12	5.3	
	50.0	456.50	12	5.3	
	60.0	456.40	12	5.3	
	70.0	456.30	12	5.3	
	80.0	456.10	12	5.3	
	90.0	455.95	12	6.3	LWE
	110.0	455.50	12	6.3	
	140.0	454.80	12	6.3	
	143.0	454.68	9	5.3	
	175.0	452.90	9	5.3	
	180.0	452.80	9	5.3	
	208.0	452.54	12	6.3	
	210.0	452.50	12	6.3	
	238.0	452.97	9	5.3	
	240.0	453.00	12	6.3	
	270.0	453.70	9	5.3	
	271.0	453.71	9	5.3	
	298.0	454.67	9	5.2	
	300.0	454.80	9	5.3	
	320.0	455.70	9	5.2	
	326.0	456.04	9	5.2	RWE
	330.0	456.20	9	5.2	
	350.0	457.40	9	5.2	
	354.0	457.55	12	6.2	
	370.0	457.90	12	6.2	
	379.5	458.08	12	6.2	
	390.0	458.90	12	6.2	
	410.0	460.50	12	6.2	
	411.0	460.56	12	6.2	
	421.0	463.38	12	6.2	RB Headpin

Table B-2.3 (cont.) Cross section elevations, substrate and cover data at site 112.6L.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 8	0.0	470.80	1	8.2	Bottom of cut bank
Station 40+98	1.0	469.10	1	8.2	
	3.0	465.81	1	9.2	
	7.0	463.60	1	8.3	
	10.0	463.10	1	8.3	
	25.0	460.70	1	8.3	
	27.0	457.86	9	5.3	LWE
	30.0	459.90	9	5.3	
	38.0	458.60	9	5.3	
	40.0	458.20	9	5.3	
	42.0	457.70	9	5.3	
	50.0	457.40	9	5.3	
	52.0	457.30	9	5.3	
	70.0	457.20	9	5.3	
	80.0	457.80	9	5.3	
	82.0	457.90	9	5.3	
	85.0	457.72	9	5.2	
	90.0	458.40	9	5.2	
	91.0	458.50	9	5.2	
	110.0	458.40	9	5.2	
	120.0	458.40	9	5.2	
	122.0	457.94	7	4.3	
	124.0	458.40	7	4.3	
	141.0	458.15	7	4.3	
	160.0	458.30	7	4.3	
	164.0	458.30	7	4.3	
	200.0	458.35	9	5.3	
	220.0	458.00	9	5.3	
	248.0	457.38	9	5.3	
	260.0	457.30	9	5.3	
	280.0	457.07	9	5.3	
	300.0	457.60	9	5.3	
	302.0	457.74	9	5.3	
	360.0	457.80	9	5.3	
	362.0	457.82	9	5.3	
	380.0	458.20	9	5.3	
	400.0	458.60	9	5.3	
	410.0	458.75	9	5.3	RWE
	430.0	459.10	9	5.3	
	437.0	459.20	9	5.3	

Table B-2.3 (cont.) Cross section elevations, substrate and cover data at site 112.6L.

Location Within Site	Hor	Bed			
	Dist (ft)	Elev (ft)	Sub	Cov	Comments
Cross Section 8	450.0	459.50	9	5.3	
Station 40+98	460.0	459.80	9	5.3	
(cont.)	470.0	460.10	9	5.3	
	524.0	461.39	9	5.2	
	579.0	462.90	9	5.2	
	580.0	463.00	9	5.2	
	602.5	465.83	9	5.2	RB Headpin

Date of survey: Sept. 16, 1984.

Reference elevation: R&M LRX-16 RB 1980.

Table B-2.4

Cross section elevations, substrate and
cover data at site 119.2R.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section at Mouth Station -3+51	0.0	511.00	1	7.1	Bottom of bank
	47.0	508.71	1	7.1	
	104.0	508.25	1	7.1	LWE
	130.0	507.20	1	7.1	
	163.0	506.91	1	7.1	
	184.0	507.05	1	7.1	
	194.0	509.55	1	7.1	
	198.0	508.15	12	9.1	RWE
Cross Section 1 Station 0+00	203.0	511.23	12	9.1	Half way up bank
	0.0	514.94	1	8.2	LB Headpin
	10.5	510.12	1	7.1	
	26.0	508.92	1	7.1	LWE
	32.0	508.40	1	7.1	
	84.0	508.00	1	7.1	
	152.0	506.30	1	7.1	
	168.0	506.20	1	7.1	
	180.0	508.83	1	7.1	RWE
Cross Section 2 Station 3+80	195.0	514.63	1	8.3	RB Headpin
	0.0	513.53	1	8.2	LB Headpin
	29.5	510.56	1	5.1	
	39.5	508.89	1	5.1	LWE
	48.5	507.94	3	6.1	
	76.0	507.00	3	6.1	
	92.0	506.40	3	6.1	
	108.0	506.50	4	6.1	
	125.0	505.03	4	6.1	
	149.0	508.85	13	5.2	RWE
Cross Section 3 Station 5+96	162.0	514.21	13	5.2	RB Headpin
	0.0	513.69	3	8.2	LB Headpin
	10.0	513.48	3	8.2	
	36.5	510.73	11	8.1	
	59.0	508.90	11	5.2	LWE
	87.5	508.20	11	5.2	
	117.0	508.04	11	5.2	
	147.0	506.75	11	5.2	
	161.0	508.87	11	5.2	RWE
	172.0	511.73	11	5.2	
	173.0	516.86	11	8.4	RB Headpin

Table B-2.4 (cont.) Cross section elevations, substrate and cover data at site 119.2R.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 4	0.0	515.26	11	8.1	LB Headpin
Station 9+93	18.5	513.71	11	8.1	
	52.0	512.71	11	5.2	
	65.0	511.98	11	5.2	
	85.0	509.82	11	5.2	
	120.0	509.90	11	6.2	LWE
	137.0	507.90	11	6.2	RWE
	151.0	508.86	11	6.3	
	173.0	512.28	11	6.3	
	176.0	513.79	11	8.4	RB Headpin
Cross Section 5	0.0	515.52	3	6.2	LB Headpin
Station 14+46	27.5	514.36	3	6.2	
	57.5	513.72	11	6.2	
	90.0	513.68	8	6.2	
	149.0	512.72	10	6.2	
	158.0	512.72	10	6.2	
	179.5	512.27	10	6.3	
	193.5	511.42	10	6.3	
	223.0	511.21	10	6.3	LWE
	246.5	510.42	10	6.2	
	293.5	511.21	10	6.2	RWE
	303.0	513.89	1	6.1	
	306.0	515.57	1	6.1	RB Headpin

Date of survey: Sept. 6, 1984.

Reference elevation: USGS A107 1965.

Table B-2.5

Cross section elevations, substrate and
cover data at site 131.7L.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 1	0.0	622.20	1	8.5	LB Headpin
Station 0+00	1.0	621.90	1	8.5	Beside headpin
	8.0	619.30	12	8.2	
	26.0	616.90	12	5.2	
	29.0	616.10	12	5.2	LWE
	32.0	616.30	12	5.2	
	36.0	615.60	12	5.2	
	40.0	615.00	12	1.1	
	44.0	614.60	12	1.1	
	48.0	614.30	12	1.1	
	52.0	614.50	12	1.1	
	56.0	614.80	12	1.1	
	60.0	614.60	1	1.1	
	64.0	614.30	1	1.1	
	68.0	614.00	1	1.1	
	72.0	614.00	1	1.1	
	76.0	614.10	1	1.1	
	80.0	614.60	1	1.1	
	84.0	614.50	1	1.1	
	88.0	614.30	1	1.1	
	92.0	614.10	1	1.1	
	96.0	614.10	1	1.1	
	100.0	614.10	1	1.1	
	104.0	614.20	1	1.1	
	108.0	614.30	1	1.1	
	112.0	614.40	1	1.1	
	116.0	614.40	1	1.1	
	120.0	614.70	1	1.1	
	124.0	614.80	1	1.1	
	128.0	615.00	1	1.1	
	132.0	615.10	1	1.1	
	136.0	615.40	1	1.1	
	140.0	615.50	1	1.1	
	144.0	615.50	1	1.1	
	148.0	615.50	1	1.1	
	152.0	615.50	1	1.1	
	156.0	615.60	1	1.1	
	160.0	615.70	1	1.1	
	164.0	615.90	1	1.1	
	168.0	615.90	1	1.1	
	172.0	615.70	1	1.1	

Table B-2.5 (cont.) Cross section elevations, substrate and cover data at site 131.7L.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 1	176.0	615.80	1	1.1	
Station 0+00	180.0	615.80	1	1.1	
(cont.)	184.0	615.50	1	1.1	
	188.0	615.40	1	1.1	
	192.0	615.20	1	1.1	
	196.0	615.20	1	1.1	
	200.0	615.20	1	1.1	
	204.0	615.20	1	1.1	
	208.0	615.20	1	1.1	
	212.0	615.30	1	1.1	
	216.0	615.40	1	1.1	
	220.0	615.60	1	1.1	
	224.0	615.50	1	1.1	
	228.0	615.80	1	1.1	
	232.0	616.20	1	1.1	
	234.0	616.50	1	1.1	
	236.0	616.90	1	1.1	
	237.0	616.80	1	1.1	
	251.0	618.80	1	8.2	Bottom of bank
	258.0	621.10	1	8.2	
	263.0	624.00	1	8.2	RB Headpin
Cross Section 2	0.0	620.90	1	8.2	LB Headpin
Station 2+45	1.0	620.60	1	8.2	Beside headpin
	2.0	619.40	12	8.2	
	14.0	616.90	12	5.2	
	18.0	616.50	12	5.2	LWE
	22.0	615.90	12	5.2	
	26.0	615.80	12	5.2	
	30.0	615.60	12	5.2	
	34.0	615.60	10	5.2	
	38.0	615.60	10	5.2	
	42.0	615.80	10	5.2	
	46.0	616.00	10	5.2	
	50.0	616.40	10	5.2	
	54.0	616.30	10	5.2	
	58.0	616.50	10	5.2	
	62.0	616.20	10	5.2	
	66.0	616.30	10	5.2	
	70.0	616.30	10	5.2	
	73.0	616.20	10	5.2	

Table B-2.5 (cont.) Cross section elevations, substrate and cover data at site 131.7L.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 2	78.0	616.30	10	5.2	
Station 2+45	81.0	616.30	10	5.2	
(cont.)	86.0	616.40	10	5.2	
	90.0	616.00	10	5.2	
	94.0	616.20	10	5.2	
	98.0	616.10	10	5.2	
	102.0	616.20	10	5.2	
	106.0	615.90	10	5.2	
	110.0	615.90	10	5.2	
	114.0	615.80	10	5.2	
	118.0	616.00	10	5.2	
	122.0	616.10	10	5.2	
	126.0	616.00	10	5.2	
	130.0	616.00	10	5.2	
	134.0	616.10	10	5.2	
	138.0	616.20	10	5.2	
	142.0	616.00	10	5.2	
	147.0	615.70	10	5.2	
	150.0	615.80	10	5.2	
	153.0	615.70	10	5.2	
	158.0	615.90	10	5.2	
	161.0	615.80	10	5.2	
	166.0	616.40	10	5.2	
	169.0	616.20	10	5.2	
	174.0	616.50	10	5.2	
	177.0	616.20	10	5.2	
	182.0	616.40	10	5.2	
	186.0	616.40	10	5.2	
	190.0	616.50	10	5.2	
	194.0	616.50	10	5.2	
	198.0	616.40	10	5.2	
	202.0	616.50	10	5.2	
	206.0	616.60	10	5.2	
	210.0	616.70	10	5.2	
	214.0	616.60	10	5.2	
	218.0	616.60	10	5.2	
	222.0	616.80	10	4.2	
	227.0	616.80	10	4.2	
	231.0	616.80	10	4.2	
	235.0	616.80	10	4.2	
	239.0	616.90	10	4.2	

Table B-2.5 (cont.) Cross section elevations, substrate and cover data at site 131.7L.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 2	256.0	617.10	1	4.2	
Station 2+45	301.0	622.17	1	8.2	Beside headpin
(cont.)	301.0	622.24	1	8.2	RB Headpin
Cross Section 3	0.0	621.80	1	9.4	LB Headpin
Station 6+45	0.0	621.57	1	9.4	Beside headpin
	2.0	621.60	1	6.1	
	15.0	617.60	1	6.1	
	24.0	617.50	1	6.2	
	26.0	617.20	1	6.2	
	28.0	617.10	1	6.2	
	30.0	617.10	1	6.2	
	32.0	617.10	1	6.2	
	34.0	616.60	12	6.2	LWE
	36.0	616.80	12	6.2	
	38.0	616.60	12	6.2	
	40.0	616.60	12	6.2	
	44.0	616.60	12	6.2	
	48.0	616.70	12	6.1	
	52.0	616.40	12	6.1	
	56.0	616.10	12	6.1	
	60.0	616.20	12	6.1	
	64.0	616.50	12	6.1	
	68.0	616.10	12	6.1	
	72.0	616.00	12	6.1	
	76.0	615.80	12	6.1	
	80.0	615.50	12	6.1	
	84.0	615.40	12	6.1	
	88.0	615.20	12	6.1	
	92.0	615.20	12	6.1	
	96.0	615.00	12	6.1	
	100.0	614.80	12	6.1	
	104.0	614.70	12	6.1	
	108.0	614.90	12	6.1	
	112.0	614.60	12	6.1	
	116.0	614.70	12	6.1	
	120.0	614.60	12	6.1	
	124.0	614.80	12	6.1	
	128.0	614.70	12	6.1	
	132.0	614.90	12	6.1	
	136.0	614.90	12	6.1	

Table B-2.5 (cont.) Cross section elevations, substrate and cover data at site 131.7L.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 3	140.0	615.00	12	6.1	
Station 6+45	144.0	615.00	12	6.1	
(cont.)	148.0	615.20	12	6.1	
	152.0	615.20	12	6.1	
	156.0	615.30	12	6.1	
	160.0	615.30	12	6.1	
	164.0	615.60	12	6.1	
	168.0	615.60	12	6.1	
	172.0	615.80	12	6.1	
	176.0	615.80	12	7.1	
	180.0	616.10	12	7.1	
	184.0	616.30	12	7.1	
	188.0	616.50	12	7.1	
	192.0	616.70	1	7.1	
	196.0	616.50	1	7.1	
	198.0	616.80	1	7.1	
	200.0	616.60	1	7.1	
	202.0	617.00	1	7.1	
	206.0	617.10	1	7.1	
	208.0	616.90	1	7.1	
	210.0	617.00	1	7.1	
	212.0	617.10	1	7.1	
	214.0	617.20	1	7.1	
	216.0	617.40	1	7.1	
	218.0	617.50	1	7.1	
	260.0	620.90	1	8.2	Bottom of bank
	266.0	622.80	1	8.2	Top of bank
	273.0	623.11	1	8.2	Beside headpin
	273.0	623.30	1	8.2	RB headpin
Cross Section 4	0.0	623.00	1	2.2	LB Headpin
Station 9+45	1.0	621.66	1	2.2	Beside headpin
	7.0	620.00	1	2.2	
	25.0	617.50	1	6.2	
	27.0	617.40	1	6.2	
	28.0	616.70	12	6.2	LWE
	30.0	616.60	12	6.2	
	32.0	616.20	12	6.2	
	34.0	616.10	12	6.2	
	36.0	615.70	12	6.1	
	38.0	615.90	12	6.1	

Table B-2.5 (cont.) Cross section elevations, substrate and cover data at site 131.7L.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 4	41.0	615.60	12	6.1	
Station 9+45	43.0	614.90	11	6.1	
(cont.)	45.0	615.00	11	6.1	
	48.0	614.20	11	6.1	
	52.0	614.10	11	6.1	
	54.0	614.00	11	6.1	
	55.0	613.80	11	6.1	
	56.0	613.90	11	6.1	
	57.0	613.80	11	6.1	
	58.0	613.90	11	6.1	
	60.0	614.20	11	6.1	
	64.0	614.70	8	6.1	
	68.0	614.80	8	6.1	
	72.0	615.20	8	6.1	
	76.0	615.40	8	6.1	
	80.0	615.70	8	6.1	
	84.0	615.80	8	6.1	
	88.0	615.70	8	6.1	
	92.0	615.90	8	6.1	
	96.0	616.20	8	6.1	
	100.0	615.90	8	6.1	
	104.0	616.00	8	6.1	
	108.0	616.20	8	6.1	
	112.0	616.10	8	6.1	
	116.0	616.10	8	6.1	
	120.0	616.10	8	4.2	
	124.0	616.00	8	4.2	
	126.0	616.10	8	4.2	
	130.0	616.30	8	4.2	
	134.0	616.40	8	4.2	
	138.0	616.60	8	4.2	
	140.0	616.70	8	4.2	
	144.0	616.90	8	4.2	
	148.0	617.00	8	4.2	
	152.0	617.20	8	4.2	
	157.0	617.30	2	4.2	RWE
	163.0	617.30	2	1.1	
	167.0	617.40	2	1.1	
	171.0	617.30	2	1.1	
	175.0	617.40	2	1.1	
	179.0	617.60	2	1.1	

Table B-2.5 (cont.) Cross section elevations, substrate and cover data at site 131.7L.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 4	216.0	619.90	2	1.1	
Station 9+45	231.0	619.90	2	1.1	
(cont.)	283.0	621.20	2	1.1	
	302.5	623.66	2	8.1	Beside headpin
	303.0	623.97	2	8.1	RB Headpin
Cross Section 5	0.0	622.89	1	8.4	LB Headpin
Station 11+90	0.0	622.39	1	8.4	Beside headpin
	4.0	622.30	1	9.3	
	7.0	618.00	1	9.3	
	9.0	617.10	12	7.3	LWE
	12.0	615.50	12	7.3	
	14.0	615.30	12	7.3	
	18.0	615.90	12	7.3	
	22.0	615.80	12	5.2	
	26.0	614.40	12	5.2	
	30.0	614.40	12	5.2	
	34.0	614.70	12	5.2	
	38.0	614.90	10	5.2	
	42.0	615.50	10	5.2	
	46.0	615.40	10	5.2	
	50.0	615.50	10	5.2	
	54.0	615.90	10	5.2	
	58.0	615.80	10	5.2	
	62.0	615.90	10	5.2	
	66.0	616.00	10	5.2	
	70.0	616.10	10	5.2	
	74.0	616.70	10	5.2	
	78.0	617.10	8	5.2	
	82.0	617.30	8	5.2	
	86.0	617.30	8	5.2	
	90.0	617.50	8	5.2	
	94.0	617.50	8	5.2	
	98.0	617.50	8	5.2	
	102.0	617.50	8	5.2	
	106.0	617.40	8	5.2	
	110.0	617.50	8	5.2	
	114.0	617.50	8	5.2	
	118.0	617.50	8	5.2	
	122.0	617.50	8	5.2	
	126.0	617.60	8	5.2	

Table B-2.5 (cont.) Cross section elevations, substrate and cover data at site 131.7L.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 5	130.0	617.60	8	4.2	
Station 11+90	134.0	617.70	8	4.2	
(cont.)	138.0	617.90	8	4.2	
	142.0	617.80	8	4.2	
	146.0	618.10	8	4.2	
	150.0	618.10	8	4.2	
	154.0	618.10	8	4.2	
	156.0	618.20	8	4.2	
	276.0	620.10	1	4.2	
	380.0	621.50	1	8.1	
	391.0	623.42	1	8.1	Beside headpin
	391.0	623.69	1	8.1	RB Headpin
Cross Section 6	0.0	628.02	1	8.4	LB Headpin
Station 16+30	0.0	627.74	1	8.4	Beside headpin
	1.0	623.10	8	8.4	
	11.0	619.40	8	5.2	
	14.0	618.70	8	5.2	LWE
	17.0	618.30	8	5.2	
	20.0	618.10	8	5.2	
	22.0	618.00	8	5.2	
	26.0	618.00	8	5.2	
	30.0	617.90	8	5.2	
	34.0	617.80	8	5.2	
	37.0	617.60	8	5.2	
	42.0	617.80	8	5.2	
	46.0	617.70	8	5.2	
	50.0	617.80	8	5.2	
	54.0	617.80	8	5.2	
	58.0	617.10	8	5.2	
	62.0	616.70	8	5.2	
	66.0	616.30	8	5.2	
	70.0	616.50	8	5.2	
	74.0	617.00	8	5.2	
	78.0	617.80	8	5.2	
	82.0	618.20	7	5.2	
	86.0	618.40	7	5.2	
	90.0	618.50	6	5.2	
	92.0	618.80	6	5.2	
	96.0	618.90	6	5.2	
	98.0	618.90	6	5.3	

Table B-2.5 (cont.) Cross section elevations, substrate and cover data at site 131.7L.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 6	104.0	618.90	6	5.3	
Station 16+30	106.0	619.20	6	5.3	
(cont.)	110.0	619.10	6	5.3	
	114.0	619.10	6	5.3	
	117.0	619.10	6	5.3	RWE
	122.0	619.00	6	5.3	
	126.0	619.00	6	5.3	
	130.0	619.00	6	5.3	
	138.0	619.00	6	5.3	
	146.0	619.00	6	5.3	
	151.0	619.10	6	5.3	
	154.0	619.20	6	5.3	
	162.0	619.40	6	5.3	
	166.0	619.60	6	5.3	
	170.0	619.40	6	5.3	
	174.0	618.90	6	5.3	
	178.0	618.90	6	5.3	
	182.0	618.90	6	5.3	
	188.0	618.90	6	5.3	
	192.0	618.80	6	5.3	
	196.0	618.80	6	5.3	
	200.0	619.00	6	5.3	
	204.0	618.80	6	5.3	
	208.0	618.90	6	5.3	
	212.0	619.00	6	5.3	
	216.0	618.90	6	5.3	
	220.0	619.20	6	5.3	
	224.0	619.20	6	5.3	
	228.0	619.20	6	5.3	
	232.0	619.20	6	5.3	
	236.0	619.10	6	5.3	
	240.0	619.10	6	5.3	
	244.0	619.10	6	5.2	
	246.0	619.10	6	5.2	
	248.0	619.10	6	5.2	
	252.0	619.30	6	5.2	
	256.0	619.30	6	5.2	
	260.0	619.30	6	5.2	
	264.0	619.30	6	5.2	
	268.0	619.40	6	5.2	
	272.0	619.40	6	5.2	

Table B-2.5 (cont.) Cross section elevations, substrate and cover data at site 131.7L.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 6	276.0	619.40	6	5.2	
Station 16+30	280.0	619.30	6	5.2	
(cont.)	284.0	619.50	6	5.2	
	342.0	622.40	1	5.2	
	358.0	622.92	1	8.2	Beside headpin
	358.0	623.17	1	8.2	RB Headpin
Cross Section 7	0.0	626.66	1	5.2	LB Headpin
Station 19+05	2.0	626.21	1	5.2	Beside headpin
	8.0	620.40	1	5.2	
	10.0	620.00	8	5.2	
	14.0	619.70	8	5.2	
	18.0	619.90	8	5.2	
	20.0	619.90	8	5.2	
	24.0	620.10	8	5.2	
	28.0	620.10	8	5.2	
	32.0	620.10	8	5.2	
	36.0	620.00	8	5.2	
	40.0	619.80	8	5.2	
	44.0	620.20	8	5.2	
	48.0	620.10	8	5.2	
	51.0	620.40	6	5.2	LWE
	54.0	620.90	6	5.2	
	71.0	621.20	8	5.3	
	84.0	620.90	8	5.2	
	88.0	620.20	8	5.2	
	92.0	619.50	8	5.2	
	96.0	619.30	8	5.2	
	100.0	619.10	8	4.2	
	104.0	619.50	8	4.2	
	108.0	620.10	8	4.2	
	112.0	620.20	8	4.2	
	116.0	620.00	8	4.2	
	120.0	620.10	8	4.2	
	124.0	620.10	8	4.2	
	128.0	620.10	8	4.2	
	132.0	620.00	6	5.2	
	136.0	619.50	6	5.2	
	140.0	619.70	6	5.2	
	144.0	619.90	6	5.2	
	148.0	620.00	6	5.2	

Table B-2.5 (cont.) Cross section elevations, substrate and cover data at site 131.7L.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 7	152.0	620.00	6	5.2	
Station 19+05	156.0	619.90	6	5.2	
(cont.)	160.0	619.90	6	5.2	
	164.0	620.00	6	5.2	
	168.0	619.80	6	5.2	
	172.0	619.70	6	5.2	
	176.0	619.70	6	5.2	
	178.0	619.70	6	5.2	
	182.0	619.80	6	5.2	
	186.0	619.80	6	5.2	
	190.0	619.80	6	5.2	
	194.0	620.00	6	5.2	
	198.0	620.10	6	5.2	
	202.0	620.10	6	6.2	
	208.0	620.00	6	6.2	
	212.0	619.90	6	6.2	
	216.0	620.00	6	6.2	
	220.0	620.00	6	6.2	
	224.0	620.10	6	6.2	
	228.0	620.00	6	6.2	
	232.0	619.90	6	6.2	
	236.0	620.10	6	6.2	
	240.0	620.10	6	6.2	
	244.0	620.10	6	6.2	
	248.0	620.10	6	6.2	
	254.0	620.10	6	6.2	
	258.0	620.10	6	6.2	
	262.0	620.10	6	6.2	
	266.0	620.10	6	6.2	
	270.0	620.00	6	6.2	
	274.0	620.10	6	6.2	
	278.0	620.00	6	6.2	
	282.0	620.20	6	6.2	
	285.0	620.00	6	6.2	
	288.0	620.20	6	6.2	
	290.0	620.00	6	6.2	
	294.0	620.40	6	6.2	RWE
	298.0	620.20	6	6.2	
	302.0	620.70	6	5.2	
	305.0	620.70	6	5.2	
	311.0	620.40	6	5.2	

Table B-2.5 (cont.) Cross section elevations, substrate and cover data at site 131.7L.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 7	315.0	620.40	6	5.2	
Station 19+05	319.0	620.40	6	5.2	
(cont.)	323.0	620.40	6	5.2	
	327.0	620.40	6	5.2	
	331.0	620.40	6	5.2	
	335.0	620.40	6	5.2	
	339.0	620.40	6	5.2	
	343.0	620.40	6	5.2	
	347.0	620.40	6	5.2	
	351.0	620.40	6	5.2	
	355.0	620.50	6	5.2	
	359.0	620.50	6	5.2	
	362.0	620.50	6	5.2	
	367.0	620.70	6	5.2	
	414.0	622.60	10	5.2	
	432.0	623.26	10	8.4	Beside headpin
	432.0	623.83	10	8.4	RB Headpin

Date of survey: Sept. 27, 1984.

Reference elevation: R&M Alcap 131.1S1 RB 1982.

Table B-2.6

Cross section elevations, substrate and
cover data at site 132.6L.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 1	0.0	630.20	1	2.5	LB Headpin
Station 0+00	8.7	626.10	1	2.5	
	9.0	625.50	1	2.5	
	9.3	625.50	1	2.5	
	9.5	625.20	10	5.2	
	10.0	625.40	10	5.2	
	12.0	625.30	10	5.2	
	14.0	625.30	10	5.2	
	16.0	625.50	10	5.2	
	18.0	625.20	10	5.2	LWE
	20.0	625.40	10	5.2	
	21.0	625.30	10	5.2	
	24.0	625.00	10	5.2	
	28.0	625.20	10	5.3	
	29.0	625.00	10	5.3	
	31.0	624.80	10	5.3	
	32.0	625.30	10	5.3	
	33.0	625.00	10	5.3	
	36.0	624.90	10	5.3	
	39.0	625.20	10	5.3	
	40.0	625.30	10	5.3	
	43.0	625.30	10	5.3	
	44.0	625.20	10	5.3	
	47.0	625.20	10	5.3	
	48.0	624.80	10	5.3	
	51.0	625.10	10	5.3	
	52.0	624.90	10	5.3	
	55.0	624.90	10	5.3	
	56.0	624.60	10	5.3	
	59.0	624.80	10	5.3	
	60.0	624.60	10	5.2	
	63.0	624.90	10	5.2	
	64.0	624.60	10	5.2	
	67.0	624.70	10	5.2	
	68.0	624.70	10	5.2	
	70.0	624.60	10	5.2	
	72.0	624.70	10	5.2	
	74.0	624.90	10	5.2	
	76.0	625.00	10	2.2	RWE
	77.8	625.50	10	2.2	
	78.0	625.50	10	2.2	

Table B-2.6 (cont.) Cross section elevations, substrate and cover data at site 132.6L.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 1	80.0	626.10	10	2.2	
Station 0+00	83.0	627.70	1	8.3	Top of bank
(cont.)	98.0	627.80	1	8.3	
	109.0	630.20	1	8.3	RB Headpin
Cross Section 2	0.0	630.30	1	2.5	LB Headpin
Station 1+24	4.0	627.10	1	9.3	Bottom of bank
	18.5	626.60	1	5.2	
	31.5	626.30	1	5.3	
	32.0	626.20	1	5.3	
	34.0	626.00	1	5.3	
	36.0	625.80	1	5.3	
	37.0	625.70	1	5.3	LWE
	38.0	625.40	1	5.3	
	40.0	625.30	1	5.3	
	42.0	625.20	1	5.3	
	44.0	625.30	10	5.3	
	46.0	625.20	10	5.3	
	48.0	625.10	10	5.3	
	50.0	624.80	10	5.3	
	52.0	624.70	10	5.2	
	54.0	624.50	10	5.2	
	56.0	624.60	10	5.2	
	58.0	624.60	10	5.2	
	60.0	624.50	10	5.2	
	62.0	624.70	10	5.2	
	64.0	624.60	10	5.2	
	66.0	624.60	10	5.2	
	68.0	624.60	10	5.2	
	70.0	624.70	10	5.3	
	72.0	625.00	10	5.3	
	74.0	625.00	10	5.3	
	76.0	625.30	10	5.3	RWE
	78.0	625.70	10	5.3	
	80.0	625.90	10	5.3	
	82.0	626.10	10	5.3	
	84.0	626.00	10	5.2	
	86.0	626.20	10	5.2	
	88.0	626.20	10	5.2	
	90.0	626.20	10	5.2	
	92.0	626.20	10	5.2	

Table B-2.6 (cont.) Cross section elevations, substrate and cover data at site 132.6L.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 2	96.0	626.10	10	5.2	
Station 1+24	100.0	626.00	10	5.2	
(cont.)	104.0	626.30	10	5.2	
	111.5	627.30	1	5.1	Top of bank
	139.0	629.60	1	5.1	
	161.0	630.90	1	5.1	RB Headpin
Cross Section 3	0.0	631.16	1	2.5	LB Headpin
Station 2+46	8.5	629.80	1	2.5	
	23.0	627.30	1	2.5	
	23.5	626.90	8	5.2	
	24.0	626.90	8	5.2	
	26.0	626.30	8	5.2	
	28.0	626.20	8	5.3	
	30.0	626.00	8	5.3	LWE
	32.0	626.10	8	5.3	
	34.0	625.90	8	5.3	
	36.0	625.90	8	5.3	
	38.0	625.80	8	5.3	
	40.0	625.30	8	5.3	
	42.0	624.90	8	5.3	
	44.0	625.10	8	5.3	
	46.0	625.10	8	5.3	
	48.0	625.40	8	5.3	
	50.0	625.80	8	5.3	
	52.0	625.80	8	5.3	
	54.0	626.10	8	5.3	RWE
	58.0	626.50	1	5.2	
	62.0	627.00	1	5.2	
	66.0	627.00	1	5.2	
	70.0	627.20	1	5.2	
	74.0	627.10	1	5.2	
	78.0	627.10	1	5.2	
	80.0	626.80	1	5.2	
	82.0	627.00	1	5.2	
	84.0	627.00	1	5.2	
	86.0	626.90	1	5.2	
	88.0	627.00	1	5.2	
	90.0	627.30	1	5.2	
	90.3	627.30	1	5.2	

Table B-2.6 (cont.) Cross section elevations, substrate and cover data at site 132.6L.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 3	95.0	628.10	1	5.1	
Station 2+46	104.4	628.10	1	5.1	
(cont.)	139.5	630.25	1	5.1	RB Headpin
Cross Section 4	0.0	631.00	1	2.5	LB Headpin
Station 3+90	17.6	628.00	1	2.3	
	18.0	627.50	8	2.3	Bottom of bank
	20.0	627.50	8	2.3	
	22.0	627.40	8	5.3	
	24.0	627.50	8	5.3	
	30.0	627.20	8	5.3	
	32.0	627.20	8	5.3	
	34.0	627.10	8	5.3	
	36.0	627.10	8	5.3	
	38.0	627.10	8	5.3	
	40.0	627.10	8	5.3	LWE
	42.0	627.00	8	5.3	
	44.0	627.20	8	5.3	
	46.0	626.80	8	5.3	
	48.0	626.50	8	5.3	
	50.0	626.30	8	5.2	
	51.0	626.30	8	5.2	
	53.0	626.10	8	5.2	
	55.0	626.30	8	5.2	
	57.0	626.30	8	5.2	
	59.0	626.30	8	5.2	
	61.0	626.30	8	5.2	
	62.0	626.30	8	5.3	
	64.0	626.70	8	5.3	
	66.0	626.80	8	5.3	
	68.0	627.00	8	5.3	
	70.8	627.10	10	5.3	RWE
	72.0	627.20	10	5.3	
	74.0	627.10	10	5.3	
	76.0	627.20	10	5.3	
	78.0	627.20	10	5.3	
	80.0	627.20	10	5.3	
	84.0	627.20	10	5.3	
	86.0	627.10	10	5.3	
	88.0	627.20	10	5.3	
	90.0	627.30	10	5.3	

Table B-2.6 (cont.) Cross section elevations, substrate and cover data at site 132.6L.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 4	92.0	627.10	10	5.3	
Station 3+90	94.0	627.40	10	5.3	
(cont.)	96.0	627.20	10	5.3	
	98.0	627.20	10	5.2	
	102.0	627.40	10	5.2	
	106.0	627.40	10	5.2	
	110.0	627.40	10	5.2	
	114.0	627.40	10	5.2	
	118.0	627.70	10	5.2	
	122.0	627.80	10	5.1	
	124.0	627.80	10	5.1	
	126.0	627.80	10	5.1	
	128.0	627.80	10	5.1	
	130.0	627.80	1	5.1	
	132.0	628.00	1	5.1	
	152.0	628.00	1	5.1	
	162.5	629.00	1	5.1	
	182.0	629.10	1	5.1	
	199.0	630.00	1	5.1	RB Headpin
Cross Section 5	0.0	631.00	1	2.5	LB Headpin
Station 5+11	40.0	628.10	1	3.2	
	43.5	627.80	1	3.2	Top of bank
	44.0	627.15	10	3.2	LWE
	46.0	626.80	10	3.2	
	48.0	626.50	10	5.2	
	50.0	626.60	10	5.2	
	52.0	626.60	10	5.2	
	54.0	626.20	10	5.2	
	56.0	626.40	10	5.2	
	58.0	626.60	10	5.2	
	60.0	626.40	10	5.2	
	62.0	626.40	10	5.2	
	66.0	626.50	10	5.2	
	68.0	626.60	10	5.2	
	70.0	626.60	10	5.2	
	74.0	626.30	10	5.2	
	78.0	626.40	10	5.2	
	80.0	626.40	10	5.2	
	82.0	626.70	10	5.2	
	86.0	626.60	10	5.2	

Table B-2.6 (cont.) Cross section elevations, substrate and cover data at site 132.6L.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 5	90.0	626.40	10	5.2	
Station 5+11	92.0	626.60	10	5.2	
(cont.)	94.0	626.50	10	5.2	
	98.0	626.60	10	5.2	
	102.0	626.60	10	5.2	
	104.0	626.50	10	5.2	
	106.0	626.70	10	5.2	
	110.0	626.70	10	5.2	
	114.0	626.70	10	5.2	
	116.0	626.80	10	5.2	
	118.0	626.90	10	5.2	
	122.0	627.10	10	5.2	
	124.0	627.19	10	6.1	RWE
	126.0	627.30	10	6.1	
	128.0	627.20	10	6.1	
	130.0	627.30	10	6.1	
	134.0	627.20	10	6.1	
	136.0	627.10	10	6.1	
	138.0	627.30	10	5.1	
	140.0	627.40	10	5.1	
	142.0	627.40	10	5.1	
	144.0	627.60	10	5.1	
	146.0	627.20	10	5.1	
	148.0	627.60	10	5.1	
	150.0	627.50	10	1.1	
	152.0	627.40	10	1.1	Bottom of bank
	154.0	627.50	10	1.1	
	156.0	628.10	10	1.1	
	162.5	629.00	1	1.1	Top of bank
	182.0	629.10	1	5.1	
	210.0	630.00	1	5.1	RB Headpin
Cross Section 6	0.0	631.80	1	2.5	LB Headpin
Station 6+94	25.0	629.10	1	2.3	
	29.0	628.20	1	2.3	
	30.0	628.00	1	2.3	LWE
	32.0	627.40	1	2.2	
	34.0	626.30	11	2.2	
	36.0	626.60	11	5.2	
	38.0	626.60	11	5.2	
	42.0	627.10	8	5.2	

Table B-2.6 (cont.) Cross section elevations, substrate and cover data at site 132.6L.

Location Within Site	Hor	Bed	Sub	Cov	Comments
	Dist (ft)	Elev (ft)			
Cross Section 6	44.0	627.20	8	5.2	
Station 6+94	46.0	627.00	8	5.1	
(cont.)	50.0	626.20	10	5.1	
	54.0	625.70	10	5.1	
	56.0	625.40	10	5.1	
	58.0	625.20	11	5.1	
	62.0	625.10	11	5.1	
	66.0	625.20	11	5.1	
	68.0	625.40	11	5.1	
	70.0	625.10	11	5.1	
	72.5	625.20	1	5.1	
	74.0	625.20	1	5.1	
	76.0	625.30	1	5.1	
	78.0	625.60	1	5.1	
	80.0	625.70	1	5.1	
	82.0	625.70	1	5.1	
	84.0	625.90	1	5.1	
	86.0	626.00	1	5.1	
	88.0	626.00	1	5.1	
	90.0	626.00	1	1.1	
	92.0	626.20	1	1.1	
	94.0	626.30	1	1.1	
	96.0	626.50	1	1.1	
	98.0	626.40	1	1.1	
	100.0	626.70	1	1.1	
	102.0	626.80	1	1.1	
	104.0	626.90	1	1.1	
	106.0	627.10	1	1.1	RWE
	108.0	627.20	1	1.1	
	110.0	627.30	1	1.1	
	112.0	627.30	1	1.1	
	114.0	627.50	1	1.1	
	116.0	627.60	1	1.1	
	118.0	627.80	1	1.1	
	120.0	627.90	1	1.1	
	122.0	628.10	1	1.1	
	124.0	628.20	1	1.1	
	139.0	629.00	1	1.1	
	160.0	629.20	1	8.2	
	181.5	629.40	1	8.2	RB Headpin

Table B-2.6 (cont.) Cross section elevations, substrate and cover data at site 132.6L.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 7	0.0	631.60	1	2.5	LB Headpin
Station 8+52	18.2	628.20	1	2.2	
	20.0	627.90	1	2.1	
	22.0	627.60	1	6.2	
	22.6	627.40	1	6.2	
	23.5	627.60	1	6.2	
	24.0	626.90	1	6.2	LWE
	26.0	626.90	1	6.2	
	28.0	626.50	1	6.2	
	30.0	626.60	1	5.2	
	32.0	626.60	1	5.2	
	34.0	626.50	1	5.2	
	36.0	626.50	1	5.2	
	40.0	625.00	1	5.2	
	44.0	624.70	1	5.2	
	48.0	624.80	1	5.2	
	52.0	624.70	1	5.2	
	56.0	624.70	1	5.2	
	58.0	624.60	1	5.2	
	60.0	624.70	1	5.2	
	62.0	624.90	1	5.2	
	64.0	624.80	1	5.2	
	66.0	625.10	1	5.2	
	68.0	625.30	1	5.2	
	70.0	625.40	1	1.1	
	72.0	625.60	1	1.1	
	74.0	625.70	1	1.1	
	76.0	625.90	1	1.1	
	78.0	626.00	1	1.1	
	80.0	626.10	1	1.1	
	82.0	626.40	1	1.1	
	84.0	626.60	1	1.1	
	86.0	626.80	1	1.1	
	88.0	627.00	1	1.1	
	90.0	627.10	1	1.1	
	92.0	627.20	1	1.1	RWE
	94.0	627.30	1	1.1	
	96.0	627.60	1	1.1	
	98.0	627.60	1	1.1	
	100.0	627.60	1	1.1	
	102.0	627.90	1	1.1	

Table B-2.6 (cont.) Cross section elevations, substrate and cover data at site 132.6L.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 7	104.0	627.90	1	1.1	
Station 8+52	106.0	627.90	1	1.1	
(cont.)	108.0	628.20	1	1.1	
	116.0	628.30	1	1.1	
	121.5	627.60	1	1.1	
	131.5	629.40	2	1.1	
	145.0	629.50	1	5.1	
	168.5	630.60	1	5.1	RB Headpin
Cross Section 8	0.0	633.40	1	2.5	LB Headpin
Station 9+79	18.0	628.20	1	7.2	
	20.0	627.30	1	7.2	
	21.0	627.30	1	7.2	LWE
	22.0	627.10	1	7.2	
	24.0	626.90	1	5.2	
	26.0	627.00	1	5.2	
	28.0	626.80	11	5.2	
	31.0	627.00	11	5.2	
	32.0	626.70	11	5.2	
	33.0	626.90	11	5.2	
	36.0	626.50	11	5.2	
	39.0	626.80	11	5.2	
	40.0	626.20	11	5.2	
	43.0	626.40	11	5.2	
	44.0	626.20	11	5.2	
	47.0	626.00	11	5.2	
	48.0	626.30	11	5.2	
	51.0	626.20	11	5.3	
	52.0	626.10	11	5.3	
	56.0	625.90	11	5.3	
	60.0	625.90	11	5.3	
	64.0	626.20	11	5.3	
	67.0	626.10	11	5.3	
	68.0	625.90	11	5.3	
	72.0	625.70	11	5.2	
	75.0	626.10	11	5.2	
	76.0	625.60	11	5.2	
	79.0	625.80	11	5.2	
	80.0	625.60	1	5.1	
	83.0	625.60	1	5.1	
	84.0	625.60	1	1.1	

Table B-2.6 (cont.) Cross section elevations, substrate and cover data at site 132.6L.

Location Within Site	Hor	Bed	Sub	Cov	Comments
	Dist (ft)	Elev (ft)			
Cross Section 8	88.0	625.90	1	1.1	
Station 9+79	91.0	626.60	1	1.1	
(cont.)	92.0	626.20	1	1.1	
	95.0	626.60	1	1.1	
	96.0	627.00	1	1.1	
	98.0	627.40	1	1.1	
	99.0	626.80	1	1.1	RWE
	100.0	627.00	1	1.1	
	102.0	627.10	1	1.1	
	103.0	627.20	1	1.1	
	105.7	627.50	1	1.1	
	128.0	630.00	3	1.1	
	155.0	629.80	3	4.1	
	168.0	631.40	3	4.1	
	178.0	632.20	3	4.1	RB Headpin
Cross Section 9	0.0	631.10	1	2.5	LB Headpin
Station 11+31	4.0	628.60	1	2.5	
	6.0	628.40	1	2.5	
	9.0	627.70	1	2.3	LWE
	12.0	627.50	1	2.1	
	14.0	627.30	1	2.1	
	16.0	626.70	1	7.1	
	19.0	626.10	11	7.1	
	25.0	626.20	11	7.1	
	28.0	626.60	11	7.1	
	32.0	626.80	11	7.1	
	34.0	627.70	1	5.2	RWE
	36.0	628.40	1	5.2	
	40.0	629.70	1	5.2	
	55.0	629.60	1	5.2	
	84.0	629.00	1	5.2	
	88.5	628.90	1	5.2	
	90.8	628.40	1	5.2	
	92.0	628.20	1	5.2	
	94.0	628.00	8	5.2	LWE
	96.0	627.90	8	5.2	
	98.0	627.70	8	5.2	
	100.0	627.70	8	5.2	
	103.0	627.60	8	5.2	
	108.0	627.50	8	5.2	

Table B-2.6 (cont.) Cross section elevations, substrate and cover data at site 132.6L.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 9	112.0	627.60	8	5.2	
Station 11+31	116.0	627.70	8	5.2	
(cont.)	120.0	627.70	8	5.3	
	124.0	627.70	8	5.3	
	127.0	628.00	8	5.3	RWE
	130.0	628.20	8	5.3	
	132.0	628.20	8	5.3	LWE
	134.0	627.90	8	5.3	
	136.0	627.60	8	5.3	
	140.0	627.20	8	5.3	
	142.0	627.20	8	5.3	
	144.0	627.30	8	5.3	
	148.0	627.60	8	4.2	
	152.0	627.50	8	4.2	
	156.0	627.70	8	4.2	
	158.5	627.60	8	5.2	RWE
	164.0	627.60	8	5.2	
	168.0	627.60	8	5.2	
	170.6	628.10	8	5.2	
	176.0	628.10	8	5.2	
	180.0	628.00	8	5.2	
	183.0	627.80	5	8.3	
	184.0	628.20	5	8.3	
	186.0	628.40	5	8.3	
	193.0	629.30	5	8.3	
	210.5	631.00	5	8.3	
	219.0	631.60	5	8.3	RB Headpin

Date of survey: Sept. 7, 1984.

Reference elevation: R&M Alcap 131.1S1 RB 1982.

Table B-2.7

Cross section elevations, substrate and
cover data at site 136.0L.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 1	0.0	681.70	1	8.3	LB Headpin
Station 0+00	1.0	681.00	12	8.3	
	9.0	675.90	12	6.2	
	11.0	674.50	12	6.2	LWE
	14.0	674.20	12	7.1	
	16.0	674.20	12	7.1	
	18.0	674.30	12	7.1	
	19.5	674.60	12	7.1	RWE
	23.0	674.60	12	7.1	
	25.0	674.50	2	7.1	LWE
	26.0	674.40	2	7.1	
	28.0	673.90	1	7.1	
	30.0	674.00	1	7.2	
	32.0	674.10	1	7.2	
	34.0	674.00	1	7.2	
	36.0	673.60	1	7.2	
	38.0	673.40	1	7.2	
	40.0	673.30	1	7.2	
	42.0	673.10	1	7.2	
	44.0	673.30	10	7.2	
	46.0	673.60	10	7.2	
	48.0	673.80	10	7.2	
	50.0	673.90	10	7.2	
	52.0	673.90	10	7.2	
	54.0	674.30	10	7.2	
	56.0	674.20	12	7.2	
	58.0	673.60	12	7.2	
	60.0	673.10	12	7.2	
	62.0	672.50	12	7.2	
	64.0	672.50	6	7.2	
	66.0	672.70	6	7.2	
	68.0	673.10	6	7.2	
	70.0	673.40	6	7.2	
	72.0	673.20	1	7.2	
	74.0	673.20	1	7.2	
	76.0	674.00	1	7.2	
	78.7	674.60	1	8.2	RWE
	80.0	674.00	8	8.2	
	80.9	675.10	8	8.2	
	82.0	675.60	8	8.2	
	82.8	675.80	8	8.2	

Table B-2.7 (cont.) Cross section elevations, substrate and cover data at site 136.0L.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 1	88.0	677.90	1	8.2	Bottom of bank
Station 0+00	91.5	682.50	1	8.4	Top of bank
(cont.)	93.5	683.00	1	8.4	RB Headpin
Cross Section 2	0.0	682.84	1	8.5	LB Headpin
Station 0+88	3.0	681.00	1	9.4	Top of bank
	4.0	677.40	1	9.4	
	17.0	676.10	12	4.1	
	20.0	676.00	12	4.2	
	22.0	675.80	12	4.2	
	24.0	675.60	12	4.2	
	26.0	675.40	12	4.2	
	28.0	674.80	12	4.2	
	30.0	675.10	12	4.2	
	32.0	674.90	12	4.2	
	34.0	674.77	12	4.2	LWE
	36.0	674.50	12	7.2	
	38.0	674.10	12	7.2	
	40.0	673.80	12	7.2	
	42.0	673.80	12	7.2	
	44.0	673.00	12	7.2	
	46.0	672.70	12	7.2	
	48.0	672.60	10	7.2	
	50.0	673.00	10	7.2	
	52.0	673.20	10	7.2	
	54.0	673.30	10	7.2	
	56.0	673.50	10	7.2	
	58.0	673.90	10	7.2	
	60.0	673.90	10	7.2	
	62.0	674.80	10	7.2	
	64.0	674.80	1	8.2	RWE
	73.0	681.00	1	8.4	
	76.0	683.30	1	8.4	
	78.5	684.91	1	8.4	RB Headpin
Cross Section 3	0.0	680.63	1	5.3	LB Headpin
Station 1+95	3.0	678.50	10	4.2	
	9.0	675.80	10	4.2	
	10.0	675.60	10	4.2	
	12.0	674.90	12	4.2	
	14.0	674.50	12	4.2	

Table B-2.7 (cont.) Cross section elevations, substrate and cover data at site 136.0L.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 3	16.0	674.10	12	7.2	
Station 1+95	18.0	673.70	8	7.2	
(cont.)	20.0	673.70	8	7.2	
	22.0	673.80	8	7.2	
	24.0	673.70	8	7.2	
	26.0	673.70	8	7.2	
	28.0	673.80	8	7.2	
	30.0	673.90	8	7.2	
	32.0	673.90	6	7.2	
	34.0	674.00	6	7.2	
	36.0	674.30	6	7.2	
	38.0	674.30	6	7.2	
	40.0	674.10	6	7.2	
	42.0	674.10	6	7.2	
	44.0	674.00	1	7.2	
	46.0	675.20	1	7.2	
	47.5	675.30	1	7.2	RWE
	55.0	678.50	1	7.2	
	59.0	681.00	1	8.5	
	61.0	682.80	1	8.5	Top of bank
	63.0	683.86	1	8.5	RB Headpin
Cross Section 4	0.0	683.16	1	8.4	LB Headpin
Station 2+91	2.5	680.30	1	7.4	
	7.5	677.50	12	6.3	Bottom of bank
	10.0	676.10	12	6.3	
	12.0	675.50	12	6.3	
	12.5	675.59	12	6.3	LWE
	14.0	675.60	12	6.3	
	16.0	675.00	12	4.1	
	18.0	674.70	12	4.1	
	20.0	674.60	10	4.1	
	22.0	674.40	10	4.1	
	24.0	674.00	10	4.1	
	26.0	674.10	10	4.1	
	28.0	674.00	10	4.1	
	30.0	674.00	10	4.1	
	32.0	674.10	10	4.1	
	34.0	674.30	10	4.1	
	36.0	674.40	10	4.1	
	38.0	674.50	10	4.1	

Table B-2.7 (cont.) Cross section elevations, substrate and cover data at site 136.0L.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 4	40.0	674.60	10	4.1	
Station 2+91	42.0	674.80	8	4.1	
(cont.)	44.0	674.90	8	4.1	
	46.0	675.00	8	4.1	
	48.0	674.90	8	4.1	
	50.0	674.90	8	4.1	
	52.0	675.00	8	4.1	
	54.0	675.10	8	4.1	
	56.0	675.30	8	4.1	
	58.0	675.30	8	4.1	
	60.0	675.60	8	4.1	
	62.0	675.70	6	4.1	
	64.0	675.80	6	7.2	
	66.0	675.90	6	7.2	
	68.0	676.00	6	7.2	
	68.5	676.10	1	7.2	
	72.3	676.60	1	7.2	
	82.5	679.60	1	8.4	Bottom of bank
	84.5	683.16	1	8.4	Top of bank
	87.5	684.41	1	8.4	RB Headpin
Cross Section 5	0.0	681.10	2	8.4	LB Headpin
Station 4+23	2.5	678.50	2	8.4	
	13.7	677.10	6	6.1	
	14.0	676.60	6	6.1	
	16.0	676.60	6	6.1	
	17.0	676.35	6	6.1	LWE
	18.0	676.30	6	6.1	
	20.0	676.20	6	6.1	
	22.0	676.30	6	6.1	RWE
	24.0	676.30	6	6.1	
	26.0	676.30	6	6.1	
	28.0	676.30	6	6.1	LWE
	30.5	676.30	10	6.1	
	32.0	676.10	10	6.1	
	34.0	675.80	10	6.1	
	36.0	675.60	13	8.2	
	38.0	675.40	13	8.2	
	40.0	675.30	13	8.2	
	42.0	675.30	13	8.2	
	44.0	674.90	13	8.2	
	46.0	674.90	13	8.2	

Table B-2.7 (cont.) Cross section elevations, substrate and cover data at site 136.0L.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 5	48.0	674.70	13	8.2	
Station 4+23	50.0	674.40	13	8.2	
(cont.)	52.0	674.20	13	8.2	
	54.0	673.70	13	8.2	
	56.0	673.70	12	8.2	
	58.0	674.30	12	8.2	
	60.0	674.30	12	8.2	
	62.0	673.90	12	8.2	
	64.0	673.70	12	8.2	
	66.0	673.90	12	8.2	
	68.0	673.90	12	8.2	
	70.0	673.90	12	8.2	
	72.0	673.90	12	8.2	
	74.0	674.10	12	8.2	
	76.0	674.80	1	8.2	
	78.0	675.90	1	8.2	
	79.0	677.50	1	8.2	
	79.8	677.70	1	8.2	
	80.5	677.80	1	8.4	
	83.0	680.82	1	8.4	RWE
	89.0	685.40	1	8.4	
	91.0	686.10	1	8.4	RB Headpin
Cross Section 6	0.0	683.23	1	8.5	LB Headpin
Station 5+82	8.0	681.60	1	9.5	Top of bank
	8.5	678.50	10	9.5	
	10.0	677.50	10	4.2	
	11.0	677.00	10	4.2	
	11.5	677.00	10	4.2	
	12.0	676.80	10	4.2	
	14.0	676.80	10	4.2	
	16.0	676.60	11	4.2	LWE
	18.0	676.20	11	4.2	
	20.0	676.00	11	4.2	
	22.0	675.80	11	4.2	
	24.0	675.90	11	4.2	
	26.0	675.20	11	4.2	
	28.0	675.20	10	4.2	
	30.0	675.10	10	4.2	
	32.0	674.90	10	4.2	
	34.0	674.90	10	4.2	

Table B-2.7 (cont.) Cross section elevations, substrate and cover data at site 136.0L.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 6	36.0	674.90	10	4.2	
Station 5+82	38.0	675.10	10	4.2	
(cont.)	40.0	675.10	10	4.2	
	42.0	675.20	10	4.2	
	44.0	675.10	10	4.2	
	46.0	674.90	10	4.2	
	48.0	675.00	10	4.2	
	50.0	674.80	10	4.2	
	52.0	674.80	10	4.2	
	54.0	674.80	10	4.2	
	56.0	675.20	10	4.1	
	58.0	675.50	10	4.1	
	60.0	676.00	10	4.1	
	62.0	676.70	6	4.1	RWE
	63.3	677.00	6	4.1	
	65.0	677.20	6	4.1	
	67.0	677.50	6	4.1	
	68.0	677.50	6	4.1	
	76.0	678.10	1	7.3	Bottom of bank
	79.0	681.00	1	9.5	Top of bank
	81.0	681.70	1	9.5	RB Headpin

Date of survey: Sept. 9, 1984.

Reference elevation: R&M Alcap 136.5Q3 LB 1982.

Table B-2.8

Cross section elevations, substrate and
cover data at site 147.1L.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 1	0.0	820.50	1	8.5	LB Headpin
Station 0+00	8.5	818.60	1	8.5	
	17.0	816.00	1	8.2	
	38.5	812.50	9	5.2	LWE
	51.0	811.80	9	5.2	
	61.0	809.30	9	5.2	
	70.0	809.20	9	5.2	
	100.0	808.80	9	5.2	
	140.0	808.90	9	5.2	
	177.0	810.00	9	5.2	
	187.0	810.10	9	5.2	
	196.0	810.70	9	5.2	
	213.0	811.70	9	5.2	
	223.0	812.20	9	5.2	RWE
	250.0	814.30	1	5.2	
	292.0	816.40	1	5.2	
	340.0	816.40	1	5.2	
	415.0	818.20	1	8.3	RB Headpin
Cross Section 2	0.0	821.50	1	8.5	LB Headpin
Station 3+62	8.0	817.40	1	8.5	
	27.0	813.70	12	6.3	LWE
	35.0	813.10	10	5.2	
	43.0	812.50	10	5.2	
	60.0	811.90	10	5.2	
	70.0	810.90	10	5.2	
	110.0	810.30	10	5.2	
	170.0	810.50	10	5.2	
	200.0	812.00	10	5.2	
	208.0	812.40	10	5.2	
	216.0	811.90	10	5.2	
	223.0	813.50	10	5.2	RWE
	277.0	814.90	12	6.2	
	326.0	816.40	12	6.2	
	346.0	818.00	12	8.1	
	362.0	819.20	1	8.3	RB Headpin
Cross Section 3	0.0	822.40	1	8.4	LB Headpin
Station 7+17	1.5	820.50	1	8.4	
	7.0	818.60	1	8.4	
	27.0	814.90	12	6.3	LWE

Table B-2.8 (cont.) Cross section elevations, substrate and cover data at site 147.1L.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 3	39.0	813.20	10	5.2	
Station 7+17	48.0	812.10	10	5.2	
(cont.)	57.0	812.00	10	5.2	
	70.0	811.50	10	5.2	
	110.0	810.70	10	5.2	
	160.0	811.80	10	5.2	
	202.0	812.10	10	5.2	
	209.0	812.40	10	5.2	
	214.0	813.00	10	5.2	
	238.0	813.50	10	5.2	
	241.0	813.80	10	5.2	
	249.0	814.30	10	5.2	
	259.0	814.70	10	5.2	RWE
	295.0	817.60	9	5.2	
	308.5	818.90	9	5.2	
	309.0	819.80	1	8.2	RB Headpin
Cross Section 4	0.0	830.00	1	8.5	LB Headpin
Station 10+00	11.0	820.70	9	5.3	
	18.0	818.00	9	5.3	
	32.5	815.30	9	6.2	LWE
	40.0	813.40	9	6.2	
	60.0	811.90	9	6.2	
	80.0	811.30	9	6.2	
	100.0	810.80	9	6.2	
	120.0	810.90	9	6.2	
	140.0	811.50	9	6.2	
	180.0	811.60	9	6.2	
	200.0	811.90	9	6.2	
	220.0	812.60	9	6.2	
	230.0	812.90	9	6.2	
	238.0	813.50	9	6.2	
	245.0	815.20	9	6.2	RWE
	266.0	818.50	12	6.2	
	282.0	820.80	1	8.5	RB Headpin
Cross Section 5	0.0	822.40	9	5.4	LB Headpin
Station 13+35	6.0	819.40	9	5.4	
	22.5	815.60	9	6.3	LWE
	30.5	814.10	9	6.3	
	39.0	813.10	9	6.3	

Table B-2.8 (cont.) Cross section elevations, substrate and cover data at site 147.1L.

Location Within Site	Hor Dist (ft)	Bed Elev (ft)	Sub	Cov	Comments
Cross Section 5	48.0	812.80	9	6.3	
Station 13+35	56.0	812.30	9	6.3	
(cont.)	100.0	811.80	9	6.3	
	150.0	811.40	9	6.3	
	165.0	811.80	9	6.3	
	189.0	812.80	9	6.3	
	198.0	813.90	9	6.3	
	201.0	814.70	12	6.3	
	206.0	815.50	12	6.3	RWE
	245.0	819.60	1	8.2	
	261.0	821.90	1	8.5	Beside headpin
	261.0	822.87	1	8.5	RB Headpin
Cross Section 6	0.0	820.90	12	6.3	LB Headpin
Station 17+76	4.0	817.20	12	6.3	
	8.0	816.13	12	6.3	LWE
	12.0	814.70	12	6.3	
	16.0	814.00	12	6.3	
	24.0	813.50	12	6.3	
	27.0	813.30	12	6.3	
	60.0	812.10	12	6.3	
	110.0	812.00	12	6.3	
	140.0	812.70	12	6.3	
	155.0	813.50	12	6.3	
	160.0	814.30	12	6.3	
	165.0	815.30	12	6.3	
	172.0	816.30	12	6.3	RWE
	201.0	817.70	12	6.3	
	255.0	820.20	12	6.2	
	281.0	821.30	12	6.4	
	311.0	822.20	12	6.3	RB Headpin

Date of survey: Sept. 17, 1984.

Reference elevation: R&M LRM-60 LB 1980.

Table B-3.1

IFG-4 Calibration velocities (ft/sec) at site 101.2R.

Location Within Site	Hor Dist (ft)	Velocities	
		at 279 cfs	Velocities at 25 cfs
Cross Section 1	0.0	0.00	0.00
Station 0+')	2.0	0.00	0.00
	8.0	0.00	0.00
	16.6	0.00	0.00
	18.0	0.60	0.00
	20.0	1.05	0.00
	22.0	2.20	0.00
	24.0	2.00	0.00
	26.0	2.30	0.10
	28.0	2.30	0.40
	30.0	2.40	0.60
	32.0	2.38	0.50
	34.0	2.35	0.55
	36.0	2.50	0.70
	38.0	2.70	0.70
	40.0	2.85	0.50
	42.0	3.00	0.55
	43.0	3.25	0.60
	44.0	3.30	0.65
	46.0	3.50	0.60
	48.0	3.40	0.70
	50.0	3.35	0.80
	52.0	3.40	0.70
	54.0	3.50	0.60
	55.0	3.35	0.65
	56.0	3.10	0.70
	58.0	3.05	0.70
	60.0	2.85	0.70
	62.0	2.80	0.75
	64.0	2.32	0.65
	65.0	2.08	0.60
	66.0	2.10	0.55
	68.0	2.20	0.50
	70.0	1.60	0.35
	72.0	1.45	0.25
	73.0	1.37	0.20
	74.0	1.30	0.10
	76.0	1.35	0.00
	78.0	1.20	0.00
	80.0	1.20	0.00
	82.0	1.25	0.00

Table B-3.1 (cont.) IFG-4 Calibration velocities (ft/sec) at site 101.2R.

Location Within Site	Hor Dist (ft)	Velocities at 279 cfs	Velocities at 25 cfs
Cross Section 1	84.0	1.15	0.00
Station 0+00	86.0	1.00	0.00
(cont.)	88.0	0.70	0.00
	90.0	0.50	0.00
	92.0	0.25	0.00
	94.0	0.00	0.00
	96.0	0.00	0.00
	98.0	0.00	0.00
	124.0	0.00	0.00
	148.0	0.00	0.00
	218.0	0.00	0.00
	249.5	0.00	0.00
	272.0	0.00	0.00
	274.0	0.05	0.00
	276.0	0.05	0.00
	278.0	0.05	0.00
	282.0	0.05	0.00
	285.0	0.10	0.00
	286.0	1.10	0.00
	290.0	0.10	0.00
	293.0	0.10	0.00
	294.0	0.05	0.00
	298.0	0.05	0.00
	302.0	0.05	0.00
	306.0	0.05	0.00
	308.0	0.03	0.00
	310.0	0.03	0.00
	314.0	0.03	0.00
	318.0	0.03	0.00
	322.0	0.00	0.00
	323.0	0.00	0.00
	334.0	0.00	0.00
	350.0	0.00	0.00
Cross Section 3	0.0	0.00	0.00
Station 3+74	5.0	0.00	0.00
	14.0	0.03	0.00
	16.0	0.03	0.00
	20.0	0.03	0.00
	24.0	0.03	0.00
	28.0	0.03	0.00

Table B-3.1 (cont.) IFG-4 Calibration velocities (ft/sec) at site 101.2R.

Location Within Site	Hor Dist (ft)	Velocities at 279 cfs	Velocities at 25 cfs
Cross Section 3	32.0	0.03	0.00
Station 3+74	36.0	0.03	0.00
(cont.)	40.0	0.05	0.00
	44.0	0.05	0.00
	46.0	0.05	0.00
	48.0	0.05	0.00
	49.0	0.05	0.00
	50.0	0.00	0.00
	54.0	0.00	0.00
	67.0	0.00	0.00
	77.0	0.00	0.00
	87.5	0.00	0.00
	90.0	0.60	0.00
	92.0	0.90	0.00
	96.0	1.00	0.00
	100.0	1.00	0.00
	104.0	1.00	0.00
	108.0	1.80	0.00
	114.0	1.75	0.00
	116.0	2.05	0.00
	118.0	2.00	0.20
	120.0	2.00	0.25
	122.0	2.20	0.54
	124.0	2.40	0.59
	126.0	2.35	0.59
	128.0	2.35	0.74
	130.0	2.35	0.54
	132.0	2.30	0.59
	134.0	2.30	0.64
	136.0	2.30	0.69
	136.5	2.30	0.69
	138.0	2.30	0.69
	140.0	2.30	0.49
	142.0	2.25	0.69
	144.0	2.25	0.85
	146.0	2.25	0.70
	148.0	2.20	0.60
	150.0	2.25	0.60
	152.0	2.25	0.65
	154.0	2.25	0.60

Table B-3.1 (cont.) IFG-4 Calibration velocities (ft/sec) at site 101.2R.

Location Within Site	Hor Dist (ft)	Velocities at 279 cfs	Velocities at 25 cfs
Cross Section 3	156.0	2.30	0.60
Station 3+74	158.0	1.88	0.55
(cont.)	160.0	1.90	0.50
	162.0	2.00	0.50
	164.0	2.30	0.45
	166.0	2.20	0.45
	168.0	2.25	0.50
	170.0	2.30	0.35
	172.0	2.40	0.30
	174.0	2.20	0.30
	176.0	2.00	0.20
	178.0	2.05	0.20
	180.0	2.10	0.15
	182.0	1.90	0.10
	184.0	1.70	0.10
	186.0	1.65	0.00
	188.0	1.60	0.00
	189.5	1.55	0.00
	192.0	1.50	0.00
	196.0	1.50	0.00
	200.0	0.95	0.00
	204.0	0.65	0.00
	208.0	0.55	0.00
	212.0	0.45	0.00
	216.0	0.10	0.00
	220.0	0.10	0.00
	224.0	0.00	0.00
	227.0	0.00	0.00
	322.0	0.00	0.00
	339.0	0.00	0.00
	340.0	0.20	0.00
	344.0	0.20	0.00
	347.5	0.15	0.00
	352.0	0.10	0.00
	356.0	0.00	0.00
	376.5	0.00	0.00
	381.0	0.00	0.00
	381.5	0.00	0.00

Table B-3.1 (cont.) IFG-4 Calibration velocities (ft/sec) at site 101.2R.

Location Within Site	Hor Dist (ft)	Velocities at 279 cfs	Velocities at 25 cfs
Cross Section 4	0.0	0.00	0.00
Station 5+64	3.0	0.00	0.00
	7.0	0.00	0.00
	23.0	0.00	0.00
	62.0	0.00	0.00
	111.0	0.00	0.00
	123.0	0.00	0.00
	147.0	0.00	0.00
	151.0	0.30	0.00
	155.0	1.05	0.00
	159.0	1.10	0.00
	163.0	1.90	0.00
	164.0	2.00	0.00
	166.0	2.10	0.20
	168.0	2.10	0.15
	170.0	1.80	0.25
	172.0	1.85	0.35
	174.0	1.90	0.35
	176.0	1.95	0.50
	178.0	2.00	0.40
	180.0	2.20	0.67
	182.0	2.10	0.50
	184.0	2.10	0.60
	186.0	2.10	0.70
	188.0	2.00	0.70
	190.0	2.00	0.60
	192.0	1.97	0.70
	194.0	1.90	0.77
	196.0	1.87	0.75
	198.0	1.85	0.85
	200.0	1.88	0.67
	202.0	2.00	0.90
	204.0	2.05	0.90
	206.0	2.10	0.80
	208.0	2.05	0.70
	210.0	2.00	0.65
	212.0	2.00	0.60
	214.0	2.05	0.70
	216.0	1.90	0.60
	218.0	1.80	0.47
	220.0	1.50	0.40

Table B-3.1 (cont.) IFG-4 Calibration velocities (ft/sec) at site 101.2R.

Location Within Site	Hor Dist (ft)	Velocities at 279 cfs	Velocities at 25 cfs
Cross Section 4	222.0	1.40	0.40
Station 5+64	224.0	1.50	0.15
(cont.)	226.0	1.61	0.12
	228.0	1.63	0.20
	230.0	1.55	0.20
	232.0	1.55	0.20
	234.0	1.55	0.00
	236.0	1.22	0.00
	238.0	1.15	0.00
	240.0	1.00	0.00
	243.0	1.10	0.00
	247.0	0.80	0.00
	251.0	0.60	0.00
	255.0	0.20	0.00
	259.0	0.20	0.00
	263.0	0.00	0.00
	266.2	0.00	0.00
	331.0	0.00	0.00
	362.0	0.00	0.00
	369.0	0.00	0.00
	383.0	0.00	0.00
	387.0	0.20	0.00
	389.0	0.00	0.00
	391.0	0.00	0.00
	393.0	0.00	0.00
	394.0	0.00	0.00
	408.0	0.00	0.00
	413.0	0.00	0.00
	416.0	0.00	0.00
	419.0	0.00	0.00
Cross Section 6	0.0	0.00	0.00
Station 8+37	29.0	0.00	0.00
	42.0	0.00	0.00
	62.0	0.00	0.00
	66.0	0.75	0.00
	70.0	1.20	0.00
	74.0	0.95	0.00
	78.0	1.25	0.00
	80.0	1.23	0.00
	82.0	1.20	0.00

Table B-3.1 (cont.) IFG-4 Calibration velocities (ft/sec) at site 101.2R.

Location Within Site	Hor Dist (ft)	Velocities at 279 cfs	Velocities at 25 cfs
Cross Section 6	84.0	1.20	0.00
Station 8+37	86.0	1.20	0.00
(cont.)	88.0	1.40	0.20
	90.0	1.50	0.20
	92.0	1.60	0.30
	94.0	1.55	0.35
	96.0	1.55	0.30
	98.0	1.55	0.35
	100.0	1.47	0.35
	102.0	1.40	0.40
	104.0	1.47	0.40
	106.0	1.45	0.40
	108.0	1.50	0.50
	110.0	1.55	0.45
	112.0	1.65	0.55
	114.0	1.80	0.55
	116.0	1.70	0.50
	118.0	1.60	0.50
	120.0	1.75	0.55
	122.0	1.90	0.65
	124.0	1.67	0.65
	126.0	1.45	0.70
	128.0	1.70	0.62
	129.0	1.80	0.64
	130.0	1.95	0.65
	132.0	1.93	0.67
	134.0	1.90	0.60
	136.0	2.00	0.60
	138.0	2.05	0.65
	140.0	2.00	0.65
	142.0	1.95	0.65
	144.0	1.90	0.60
	146.0	1.85	0.60
	148.0	1.90	0.52
	150.0	2.05	0.55
	152.0	1.70	0.55
	154.0	1.40	0.60
	155.0	1.50	0.49
	156.0	1.55	0.37
	158.0	1.60	0.37

Table B-3.1 (cont.) IFG-4 Calibration velocities (ft/sec) at site 101.2R.

Location Within Site	Hor Dist (ft)	Velocities at 279 cfs	Velocities at 25 cfs
Cross Section 6	160.0	1.45	0.36
Station 8+37	162.0	1.30	0.35
(cont.)	164.0	1.50	0.40
	166.0	1.70	0.48
	168.0	1.50	0.30
	170.0	1.35	0.35
	172.0	1.45	0.20
	173.5	1.55	0.10
	176.0	1.50	0.10
	178.0	1.40	0.00
	180.0	1.43	0.00
	182.0	1.45	0.00
	186.0	1.25	0.00
	190.0	1.15	0.00
	194.0	1.00	0.00
	198.0	0.70	0.00
	202.0	0.42	0.00
	206.0	0.10	0.00
	209.0	0.00	0.00
	211.5	0.00	0.00
	248.5	0.00	0.00
	250.0	0.00	0.00
	252.0	0.00	0.00
	254.0	0.00	0.00
	256.0	0.00	0.00
	258.0	0.25	0.00
	260.0	0.15	0.00
	262.0	0.00	0.00
	266.0	0.00	0.00
	272.0	0.00	0.00
	276.0	0.00	0.00
	278.0	0.00	0.00
Cross Section 7	0.0	0.00	0.00
Station 10+23	43.0	0.00	0.00
	79.0	0.00	0.00
	80.0	0.00	0.00
	82.0	0.00	0.00
	84.0	0.25	0.00
	86.0	0.40	0.00
	90.0	0.65	0.00

Table B-3.1 (cont.) IFG-4 Calibration velocities (ft/sec) at site 101.2R.

Location Within Site	Hor Dist (ft)	Velocities at 279 cfs	Velocities at 25 cfs
Cross Section 7	92.0	0.70	0.00
Station 10+23	94.0	0.75	0.00
(cont.)	96.0	0.75	0.10
	98.0	0.75	0.10
	100.0	0.77	0.10
	102.0	0.8^	0.12
	104.0	0.75	0.12
	106.0	0.73	0.15
	108.0	0.75	0.15
	110.0	0.83	0.12
	112.0	0.70	0.15
	114.0	0.75	0.18
	115.0	0.66	0.11
	116.0	0.67	0.05
	118.0	0.68	0.05
	120.0	0.79	0.10
	122.0	0.84	0.08
	124.0	0.87	0.10
	126.0	0.90	0.10
	128.0	0.86	0.10
	130.0	0.84	0.15
	132.0	0.80	0.10
	134.0	0.83	0.10
	136.0	0.96	0.15
	140.0	1.03	0.20
	141.0	1.06	0.18
	142.0	1.10	0.16
	144.0	1.08	0.15
	148.0	1.08	0.12
	151.0	1.08	0.15
	152.0	1.02	0.18
	156.0	1.00	0.15
	158.0	0.98	0.13
	160.0	0.94	0.10
	164.0	0.93	0.12
	166.0	0.92	0.10
	168.0	0.86	0.10
	176.0	0.80	0.10
	180.0	0.80	0.10
	182.0	0.80	0.10

Table B-3.1 (cont.) IFG-4 Calibration velocities (ft/sec) at site 10¹.2R.

Location Within Site	Hor Dist (ft)	Velocities at 279 cfs	Velocities at 25 cfs
Cross Section 7	184.0	0.80	0.10
Station 10+23	188.0	0.70	0.10
(cont.)	190.0	0.85	0.10
	192.0	0.80	0.10
	194.0	0.70	0.10
	196.0	0.72	0.00
	198.0	0.65	0.00
	200.0	0.55	0.00
	202.0	0.50	0.00
	203.0	0.58	0.00
	204.0	0.56	0.00
	206.0	0.55	0.00
	208.0	0.53	0.00
	210.0	0.50	0.00
	214.0	0.30	0.00
	218.0	0.05	0.00
	222.0	0.05	0.00
	224.0	0.00	0.00
	256.5	0.00	0.00
	262.0	0.00	0.00
	264.0	0.00	0.00
Cross Section 8	0.0	0.00	0.00
Station 12+79	7.0	0.00	0.00
	27.0	0.00	0.00
	34.0	0.00	0.00
	40.0	0.00	0.00
	42.0	0.00	0.00
	44.0	0.35	0.00
	48.0	0.45	0.00
	52.0	0.65	0.00
	54.0	0.70	0.00
	56.0	0.80	0.10
	60.0	0.65	0.10
	62.0	0.66	0.10
	64.0	0.70	0.10
	66.0	0.70	0.10
	68.0	0.80	0.10
	70.0	0.83	0.10
	72.0	0.85	0.10
	73.4	0.85	0.15

Table B-3.1 (cont.) IFG-4 Calibration velocities (ft/sec) at site 101.2R.

Location Within Site	Hor Dist (ft)	Velocities at 279 cfs	Velocities at 25 cfs
Cross Section 8	74.0	0.83	0.15
Station 12+79	76.0	0.80	0.15
(cont.)	78.0	0.83	0.15
	80.0	0.85	0.15
	82.0	0.80	0.12
	84.0	0.75	0.14
	86.0	0.70	0.15
	94.0	0.75	0.10
	96.0	0.80	0.10
	100.0	0.75	0.10
	104.0	0.75	0.10
	108.0	0.80	0.15
	112.0	0.80	0.15
	116.0	0.75	0.15
	118.0	0.80	0.15
	120.0	0.85	0.15
	121.5	0.92	0.15
	124.0	0.97	0.10
	128.0	0.92	0.10
	132.0	1.08	0.20
	136.0	1.03	0.25
	140.0	1.08	0.28
	144.0	0.92	0.28
	145.0	0.90	0.20
	148.0	0.88	0.23
	152.0	0.90	0.25
	164.0	0.95	0.35
	168.0	0.95	0.30
	172.0	1.00	0.22
	176.0	0.75	0.10
	178.0	0.60	0.10
	179.0	0.60	0.10
	180.0	0.50	0.10
	182.0	0.40	0.10
	184.0	0.30	0.10
	188.0	0.15	0.00
	192.0	0.50	0.00
	196.0	0.00	0.00
	213.5	0.00	0.00
	221.5	0.00	0.00
	224.0	0.00	0.00

Table B-3.1 (cont.) IFG-4 Calibration velocities (ft/sec) at site 101.2R.

Location Within Site	Hor Dist (ft)	Velocities at 219 cfs	Velocities at 25 cfs
Cross Section 9	0.0	0.00	0.00
Station 14+62	27.5	0.00	0.00
	36.5	0.00	0.00
	40.0	0.00	0.00
	44.0	0.25	0.00
	48.0	0.26	0.00
	52.0	0.52	0.00
	56.0	0.40	0.00
	60.0	1.28	0.00
	64.0	1.00	0.00
	68.0	1.60	0.00
	72.0	1.74	0.00
	80.0	1.83	0.00
	82.0	1.70	0.00
	84.0	1.60	0.00
	88.0	1.55	0.00
	92.0	1.75	0.40
	94.0	1.85	0.00
	96.0	2.02	0.50
	100.0	2.22	0.40
	104.0	2.43	0.63
	108.0	2.37	0.62
	112.0	2.35	0.84
	116.0	2.40	0.57
	119.5	2.45	0.62
	120.0	2.48	0.68
	124.0	2.46	0.69
	127.5	2.44	0.65
	128.0	2.43	0.59
	132.0	2.55	0.69
	136.0	2.78	0.62
	140.0	2.75	0.81
	142.0	2.73	0.71
	144.0	2.72	0.65
	148.0	2.70	0.62
	152.0	2.13	0.58
	156.0	2.12	0.44
	158.0	2.11	0.39
	160.0	2.11	0.39
	162.0	1.95	0.39
	166.0	1.90	0.25

Table B-3.1 (cont.) IFG-4 Calibration velocities (ft/sec) at site 101.2R.

Location Within Site	Hor Dist (ft)	Velocities	
		at 279 cfs	at 25 cfs
Cross Section 9	168.0	1.88	0.25
Station 14+62	170.0	1.75	0.25
(cont.)	174.0	1.76	0.25
	176.0	1.78	0.30
	184.0	1.40	0.20
	186.0	0.90	0.10
	188.0	0.45	0.00
	190.0	0.40	0.00
	192.4	0.00	0.00
	197.0	0.00	0.00
	212.0	0.00	0.00
	215.0	0.00	0.00
	216.5	0.00	0.00

Table B-3.2

IFG-4 Calibration velocities (ft/sec) at
site 131.⁷ L.

Location Within Site	Hor Dist (ft)	Velocities at 240 cfs	Velocities at 150 cfs	Velocities at 55 cfs	Velocities at 18 cfs
Cross Section 1	0.0	0.00	0.00	0.00	0.00
Station 0+00	1.0	0.00	0.00	0.00	0.00
	8.0	0.00	0.00	0.00	0.00
	26.0	0.00	0.00	0.00	0.00
	29.0	0.00	0.00	0.00	0.00
	32.0	0.00	0.00	0.00	0.00
	36.0	0.20	0.15	0.10	0.05
	40.0	0.40	0.30	0.15	0.10
	44.0	0.50	0.40	0.20	0.09
	48.0	0.60	0.50	0.30	0.15
	52.0	0.65	0.50	0.30	0.15
	56.0	0.75	0.55	0.30	0.10
	60.0	0.75	0.60	0.40	0.20
	64.0	0.75	0.60	0.40	0.20
	68.0	0.70	0.68	0.40	0.15
	72.0	0.70	0.65	0.40	0.15
	76.0	0.70	0.62	0.40	0.20
	80.0	0.70	0.60	0.35	0.20
	84.0	0.70	0.50	0.30	0.20
	88.0	0.60	0.50	0.20	0.10
	92.0	0.70	0.45	0.20	0.10
	96.0	0.70	0.50	0.17	0.05
	100.0	0.65	0.40	0.15	0.06
	104.0	0.47	0.38	0.20	0.10
	108.0	0.50	0.40	0.17	0.10
	112.0	0.47	0.35	0.14	0.05
	116.0	0.50	0.37	0.13	0.05
	120.0	0.63	0.37	0.10	0.05
	124.0	0.63	0.37	0.10	0.05
	128.0	0.63	0.37	0.10	0.05
	132.0	0.35	0.30	0.12	0.02
	136.0	0.40	0.30	0.10	0.02
	140.0	0.40	0.28	0.10	0.02
	144.0	0.50	0.30	0.10	0.02
	148.0	0.50	0.30	0.11	0.02
	152.0	0.40	0.32	0.10	0.02
	156.0	0.50	0.35	0.10	0.02
	160.0	0.55	0.40	0.10	0.02
	164.0	0.55	0.50	0.07	0.02
	168.0	0.50	0.40	0.10	0.02
	172.0	0.60	0.35	0.09	0.02

Table B-3.2 (cont.) IFG-4 Calibration velocities (ft/sec) at site 131.7L.

Location Within Site	Hor Dist (ft)	Velocities at 240 cfs	Velocities at 150 cfs	Velocities at 55 cfs	Velocities at 18 cfs
Cross Section 1	176.0	0.65	0.35	0.13	0.02
Station 0+00	180.0	0.50	0.35	0.15	0.02
(cont.)	184.0	0.45	0.35	0.15	0.02
	188.0	0.55	0.35	0.15	0.00
	192.0	0.50	0.45	0.15	0.00
	196.0	0.50	0.45	0.15	0.00
	200.0	0.50	0.45	0.15	0.00
	204.0	0.60	0.50	0.15	0.00
	208.0	0.65	0.55	0.15	0.00
	212.0	0.62	0.55	0.15	0.00
	216.0	0.57	0.50	0.15	0.00
	220.0	0.60	0.50	0.15	0.00
	224.0	0.50	0.40	0.15	0.00
	228.0	0.40	0.35	0.00	0.00
	232.0	0.30	0.20	0.00	0.00
	234.0	0.00	0.00	0.00	0.00
	236.0	0.00	0.00	0.00	0.00
	237.0	0.00	0.00	0.00	0.00
	251.0	0.00	0.00	0.00	0.00
	258.0	0.00	0.00	0.00	0.00
	263.0	0.00	0.00	0.00	0.00
Cross Section 2	0.0	0.00	0.00	0.00	0.00
Station 2+45	1.0	0.00	0.00	0.00	0.00
	2.0	0.00	0.00	0.00	0.00
	14.0	0.00	0.00	0.00	0.00
	18.0	0.20	0.15	0.00	0.00
	22.0	0.25	0.15	0.00	0.00
	26.0	0.34	0.18	0.05	0.00
	30.0	0.40	0.25	0.05	0.00
	34.0	0.35	0.16	0.04	0.00
	38.0	0.35	0.16	0.04	0.00
	42.0	0.40	0.17	0.05	0.00
	46.0	0.45	0.17	0.05	0.00
	50.0	0.40	0.20	0.10	0.00
	54.0	0.50	0.25	0.15	0.00
	58.0	0.30	0.15	0.06	0.00
	62.0	0.50	0.34	0.19	0.12
	66.0	0.85	0.55	0.30	0.15
	70.0	1.00	0.70	0.33	0.12
	73.0	1.65	1.44	0.45	0.20

Table B-3.2 (cont.) IFG-4 Calibration velocities (ft/sec) at site 131.7L.

Location Within Site	Hor Dist (ft)	Velocities at 240 cfs	Velocities at 150 cfs	Velocities at 55 cfs	Velocities at 18 cfs
Cross Section 2	78.0	1.70	1.60	0.50	0.10
Station 2+45	81.0	1.95	1.70	0.50	0.20
(cont.)	86.0	2.15	1.96	0.65	0.30
	90.0	2.25	2.00	0.75	0.40
	94.0	2.20	2.00	1.20	0.35
	98.0	2.10	1.85	1.20	0.54
	102.0	2.15	1.61	1.24	0.58
	106.0	2.00	1.76	1.27	0.63
	110.0	2.10	1.79	1.29	0.90
	114.0	2.05	1.80	1.16	0.65
	118.0	2.10	1.80	1.02	0.45
	122.0	2.35	1.60	1.00	0.60
	126.0	2.15	1.50	0.90	0.58
	130.0	2.25	1.50	1.00	0.60
	134.0	2.20	1.28	0.90	0.48
	138.0	1.64	1.22	0.75	0.41
	142.0	1.65	1.35	0.87	0.35
	147.0	1.55	1.40	0.85	0.33
	150.0	1.70	1.44	0.80	0.32
	153.0	1.75	1.50	0.80	0.40
	158.0	1.75	1.60	0.38	0.15
	161.0	1.80	1.63	0.38	0.15
	166.0	1.65	0.64	0.24	0.00
	169.0	1.75	0.63	0.24	0.00
	174.0	1.40	0.90	0.20	0.00
	177.0	1.20	0.80	0.20	0.00
	182.0	1.05	0.75	0.20	0.00
	186.0	1.25	0.82	0.21	0.00
	190.0	1.30	1.00	0.21	0.00
	194.0	1.10	0.87	0.28	0.00
	198.0	1.20	0.84	0.48	0.00
	202.0	1.15	0.83	0.20	0.00
	206.0	1.05	0.74	0.00	0.00
	210.0	1.00	0.68	0.00	0.00
	214.0	0.90	0.68	0.00	0.00
	218.0	0.65	0.39	0.00	0.00
	222.0	0.40	0.15	0.00	0.00
	227.0	0.10	0.00	0.00	0.00
	231.0	0.00	0.00	0.00	0.00

Table B-3.2 (cont.) IFG-4 Calibration velocities (ft/sec) at site 131.7L.

Location Within Site	Hor Dist (ft)	Velocities at 240 cfs	Velocities at 150 cfs	Velocities at 55 cfs	Velocities at 18 cfs
Cross Section 2	235.0	0.00	0.00	0.00	0.00
Station 2+45	239.0	0.00	0.00	0.00	0.00
(cont.)	256.0	0.00	0.00	0.00	0.00
	301.0	0.00	0.00	0.00	0.00
Cross Section 3	0.0	0.00	0.00	0.00	0.00
Station 6+45	2.0	0.00	0.00	0.00	0.00
	15.0	0.00	0.00	0.00	0.00
	24.0	0.00	0.00	0.00	0.00
	26.0	0.00	0.00	0.00	0.00
	28.0	0.00	0.00	0.00	0.00
	30.0	0.00	0.00	0.00	0.00
	32.0	0.00	0.00	0.00	0.00
	34.0	0.00	0.00	0.00	0.00
	36.0	0.10	0.00	0.00	0.00
	38.0	0.20	0.10	0.02	0.00
	40.0	0.20	0.10	0.02	0.00
	44.0	0.10	0.09	0.05	0.00
	48.0	0.23	0.15	0.05	0.00
	52.0	0.20	0.15	0.05	0.00
	56.0	0.20	0.15	0.05	0.00
	60.0	0.20	0.15	0.10	0.05
	64.0	0.25	0.20	0.10	0.05
	68.0	0.27	0.25	0.15	0.10
	72.0	0.30	0.20	0.10	0.05
	76.0	0.35	0.25	0.15	0.05
	80.0	0.35	0.25	0.15	0.05
	84.0	0.45	0.32	0.14	0.05
	88.0	0.45	0.32	0.20	0.10
	92.0	0.55	0.39	0.22	0.10
	96.0	0.65	0.50	0.26	0.15
	100.0	0.55	0.45	0.25	0.10
	104.0	0.70	0.50	0.35	0.15
	108.0	0.80	0.55	0.40	0.15
	112.0	0.80	0.65	0.40	0.10
	116.0	1.00	0.85	0.40	0.20
	120.0	1.00	0.75	0.40	0.20
	124.0	0.85	0.75	0.30	0.09
	128.0	0.90	0.75	0.35	0.15
	132.0	0.90	0.85	0.30	0.15
	136.0	1.00	0.90	0.35	0.15

Table B-3.2 (cont.) IFG-4 Calibration velocities (ft/sec) at site 131.7L.

Location Within Site	Hor Dist (ft)	Velocities at 240 cfs	Velocities at 150 cfs	Velocities at 55 cfs	Velocities at 18 cfs
Cross Section 3	140.0	1.00	0.85	0.40	0.15
Station 6+45	144.0	0.85	0.70	0.40	0.17
(cont.)	148.0	0.75	0.65	0.35	0.15
	152.0	0.77	0.68	0.38	0.10
	156.0	0.85	0.72	0.35	0.10
	160.0	0.80	0.70	0.35	0.10
	164.0	0.78	0.70	0.35	0.08
	168.0	0.80	0.75	0.32	0.08
	172.0	0.65	0.60	0.30	0.07
	176.0	0.65	0.50	0.25	0.07
	180.0	0.60	0.50	0.10	0.00
	184.0	0.65	0.50	0.15	0.00
	188.0	0.65	0.40	0.10	0.00
	192.0	0.55	0.35	0.10	0.00
	196.0	0.50	0.30	0.07	0.00
	198.0	0.45	0.25	0.00	0.00
	200.0	0.50	0.25	0.00	0.00
	202.0	0.3	0.15	0.00	0.00
	206.0	0.30	0.12	0.00	0.00
	208.0	0.25	0.10	0.00	0.00
	210.0	0.20	0.10	0.00	0.00
	212.0	0.20	0.00	0.00	0.00
	214.0	0.20	0.00	0.00	0.00
	216.0	0.00	0.00	0.00	0.00
	218.0	0.00	0.00	0.00	0.00
	260.0	0.00	0.00	0.00	0.00
	266.0	0.00	0.00	0.00	0.00
	273.0	0.00	0.00	0.00	0.00
Cross Section 4	0.0	0.00	0.00	0.00	0.00
Station 9+45	1.0	0.00	0.00	0.00	0.00
	7.0	0.00	0.00	0.00	0.00
	25.0	0.00	0.00	0.00	0.00
	27.0	0.05	0.00	0.00	0.00
	28.0	0.10	0.05	0.00	0.00
	30.0	0.30	0.25	0.20	0.00
	32.0	0.55	0.35	0.25	0.10
	34.0	0.65	0.45	0.25	0.10
	36.0	0.75	0.50	0.25	0.10
	38.0	0.72	0.50	0.35	0.15
	41.0	0.81	0.55	0.45	0.25

Table B-3.2 (cont.) IFG-4 Calibration velocities (ft/sec) at site 131.7L.

Location Within Site	Hor Dist (ft)	Velocities at 240 cfs	Velocities at 150 cfs	Velocities at 55 cfs	Velocities at 18 cfs
Cross Section 4	43.0	0.80	0.60	0.50	0.30
Station 9+45	45.0	1.10	0.90	0.59	0.25
(cont.)	48.0	1.30	1.25	0.72	0.30
	52.0	1.30	1.25	0.70	0.35
	54.0	1.30	1.25	0.60	0.35
	55.0	1.40	1.25	0.65	0.38
	56.0	1.42	1.25	0.68	0.30
	57.0	1.40	1.20	0.68	0.30
	58.0	1.34	1.28	0.58	0.25
	60.0	1.50	0.90	0.40	0.20
	64.0	1.40	0.90	0.43	0.20
	68.0	1.30	1.00	0.40	0.10
	72.0	1.20	0.80	0.29	0.10
	76.0	1.15	0.60	0.14	0.08
	80.0	0.55	0.35	0.10	0.05
	84.0	0.35	0.23	0.10	0.05
	88.0	0.20	0.13	0.08	0.04
	92.0	0.30	0.19	0.10	0.05
	96.0	0.60	0.29	0.13	0.05
	100.0	0.65	0.30	0.10	0.03
	104.0	1.00	0.40	0.10	0.05
	108.0	1.00	0.50	0.10	0.05
	112.0	1.10	0.70	0.18	0.00
	116.0	1.10	0.60	0.15	0.00
	120.0	0.95	0.60	0.15	0.00
	124.0	1.00	0.73	0.20	0.00
	126.0	1.00	0.73	0.20	0.00
	130.0	0.90	0.65	0.20	0.00
	134.0	0.80	0.50	0.20	0.00
	138.0	0.60	0.35	0.00	0.00
	140.0	0.45	0.25	0.00	0.00
	144.0	0.40	0.20	0.00	0.00
	148.0	0.30	0.00	0.00	0.00
	152.0	0.15	0.00	0.00	0.00
	157.0	0.05	0.00	0.00	0.00
	163.0	0.00	0.00	0.00	0.00
	167.0	0.00	0.00	0.00	0.00
	171.0	0.00	0.00	0.00	0.00
	175.0	0.00	0.00	0.00	0.00
	179.0	0.00	0.00	0.00	0.00

Table B-3.2 (cont.) IFG-4 Calibration velocities (ft/sec) at site 131.7L.

Location Within Site	Dist (ft)	Hor Velocities			
		at 240 cfs	at 150 cfs	at 55 cfs	at 18 cfs
Cross Section 4	216.0	0.00	0.00	0.00	0.00
Station 9+45	231.0	0.00	0.00	0.00	0.00
(cont.)	283.0	0.00	0.00	0.00	0.00
	303.0	0.00	0.00	0.00	0.00
Cross Section 5	0.0	0.00	0.00	0.00	0.00
Station 11+90	4.0	0.00	0.00	0.00	0.00
	7.0	0.00	0.00	0.00	0.00
	9.0	0.00	0.00	0.00	0.00
	12.0	0.25	0.20	0.15	0.00
	14.0	0.25	0.20	0.15	0.00
	18.0	0.25	0.20	0.15	0.09
	22.0	0.30	0.20	0.15	0.09
	26.0	1.05	1.00	0.42	0.20
	30.0	1.20	1.07	0.43	0.30
	34.0	1.35	1.15	0.60	0.20
	38.0	1.40	1.25	0.50	0.20
	42.0	1.65	1.15	0.65	0.25
	46.0	1.55	1.25	0.60	0.30
	50.0	1.75	1.40	0.60	0.30
	54.0	1.85	1.60	0.60	0.30
	58.0	1.20	0.88	0.45	0.25
	62.0	1.65	1.00	0.65	0.30
	66.0	1.40	0.95	0.60	0.20
	70.0	1.45	0.80	0.20	0.10
	74.0	1.35	0.75	0.15	0.10
	78.0	1.10	0.40	0.00	0.00
	82.0	0.90	0.45	0.10	0.00
	86.0	0.90	0.45	0.00	0.00
	90.0	0.93	0.50	0.00	0.00
	94.0	0.95	0.50	0.00	0.00
	98.0	0.95	0.50	0.00	0.00
	102.0	0.85	0.40	0.00	0.00
	106.0	0.60	0.30	0.00	0.00
	110.0	0.65	0.35	0.00	0.00
	114.0	0.48	0.30	0.00	0.00
	118.0	0.50	0.30	0.00	0.00
	122.0	0.45	0.20	0.00	0.00
	126.0	0.45	0.20	0.00	0.00
	130.0	0.50	0.00	0.00	0.00
	134.0	0.60	0.00	0.00	0.00

Table B-3.2 (cont.) IFG-4 Calibration velocities (ft/sec) at site 131.7L.

Location Within Site	Hor Dist (ft)	Velocities at 240 cfs	Velocities at 150 cfs	Velocities at 55 cfs	Velocities at 18 cfs
Cross Section 5	138.0	0.40	0.00	0.00	0.00
Station 11+90	142.0	0.30	0.00	0.00	0.00
(cont.)	146.0	0.00	0.00	0.00	0.00
	150.0	0.00	0.00	0.00	0.00
	154.0	0.00	0.00	0.00	0.00
	156.0	0.00	0.00	0.00	0.00
	276.0	0.00	0.00	0.00	0.00
	380.0	0.00	0.00	0.00	0.00
	391.0	0.00	0.00	0.00	0.00
Cross Section 6	0.0	0.00	0.00	0.00	0.00
Station 16+30	1.0	0.00	0.00	0.00	0.00
	11.0	0.00	0.00	0.00	0.00
	14.0	0.65	0.50	0.00	0.00
	17.0	1.20	1.00	0.45	0.00
	20.0	1.60	1.30	0.53	0.25
	22.0	1.90	1.60	0.70	0.40
	26.0	2.05	1.90	1.05	0.65
	30.0	2.00	1.60	0.90	0.60
	34.0	1.90	1.73	1.00	0.60
	37.0	1.95	1.67	1.20	0.60
	42.0	1.75	1.50	1.13	0.40
	46.0	1.70	1.49	0.92	0.53
	50.0	1.70	1.37	0.65	0.29
	54.0	1.50	1.32	0.50	0.30
	58.0	1.50	1.26	0.60	0.32
	62.0	1.35	0.93	0.59	0.28
	66.0	1.13	0.70	0.48	0.28
	70.0	1.12	0.84	0.48	0.26
	74.0	1.15	0.86	0.52	0.30
	78.0	1.00	0.86	0.48	0.25
	82.0	0.95	0.66	0.30	0.12
	86.0	1.05	0.68	0.33	0.00
	90.0	0.94	0.68	0.36	0.00
	92.0	1.20	0.65	0.00	0.00
	96.0	1.20	0.65	0.00	0.00
	98.0	1.10	0.55	0.00	0.00
	104.0	0.95	0.45	0.00	0.00
	106.0	0.90	0.37	0.00	0.00
	110.0	0.75	0.30	0.00	0.00
	114.0	0.70	0.30	0.00	0.00

Table B-3.2 (cont.) IFG-4 Calibration velocities (ft/sec) at site 131.7L.

Location Within Site	Hor Dist (ft)	Velocities at 240 cfs	Velocities at 150 cfs	Velocities at 55 cfs	Velocities at 18 cfs
Cross Section 6	117.0	0.55	0.25	0.00	0.00
Station 16+30	122.0	0.50	0.20	0.00	0.00
(cont.)	126.0	0.30	0.13	0.00	0.00
	130.0	0.30	0.12	0.00	0.00
	138.0	0.06	0.02	0.00	0.00
	146.0	0.06	0.02	0.00	0.00
	151.0	0.05	0.03	0.00	0.00
	154.0	0.05	0.03	0.00	0.00
	162.0	0.05	0.00	0.00	0.00
	166.0	0.05	0.00	0.00	0.00
	170.0	0.25	0.00	0.00	0.00
	174.0	0.70	0.36	0.00	0.00
	178.0	1.30	0.80	0.00	0.00
	182.0	1.30	0.75	0.00	0.00
	188.0	1.10	0.70	0.00	0.00
	192.0	0.90	0.60	0.00	0.00
	196.0	0.80	0.50	0.00	0.00
	200.0	0.70	0.48	0.00	0.00
	204.0	0.40	0.35	0.00	0.00
	208.0	0.29	0.20	0.00	0.00
	212.0	0.24	0.20	0.00	0.00
	216.0	0.30	0.20	0.00	0.00
	220.0	0.30	0.23	0.00	0.00
	224.0	0.30	0.15	0.00	0.00
	228.0	0.50	0.39	0.00	0.00
	232.0	0.45	0.30	0.00	0.00
	236.0	0.29	0.20	0.00	0.00
	240.0	0.19	0.00	0.00	0.00
	244.0	0.00	0.00	0.00	0.00
	246.0	0.00	0.00	0.00	0.00
	248.0	0.00	0.00	0.00	0.00
	252.0	0.00	0.00	0.00	0.00
	256.0	0.00	0.00	0.00	0.00
	260.0	0.00	0.00	0.00	0.00
	264.0	0.00	0.00	0.00	0.00
	268.0	0.00	0.00	0.00	0.00
	272.0	0.00	0.00	0.00	0.00
	276.0	0.00	0.00	0.00	0.00

Table B-3.2 (cont.) IFG-4 Calibration velocities (ft/sec) at site 131.7L.

Location Within Site	Hor Dist (ft)	Velocities at 240 cfs	Velocities at 150 cfs	Velocities at 55 cfs	Velocities at 18 cfs
Cross Section 6	280.0	0.00	0.00	0.00	0.00
Station 16+30	284.0	0.00	0.00	0.00	0.00
(cont.)	342.0	0.00	0.00	0.00	0.00
	358.0	0.00	0.00	0.00	0.00
Cross Section 7	0.0	0.00	0.00	0.00	0.00
Station 19+05	2.0	0.00	0.00	0.00	0.00
	8.0	0.00	0.00	0.00	0.00
	10.0	0.00	0.00	0.00	0.00
	14.0	0.07	0.05	0.03	0.00
	18.0	0.07	0.05	0.03	0.00
	20.0	0.07	0.05	0.03	0.00
	24.0	0.07	0.05	0.03	0.00
	28.0	0.07	0.05	0.03	0.00
	32.0	0.07	0.05	0.03	0.00
	36.0	0.07	0.05	0.03	0.00
	40.0	0.07	0.05	0.03	0.00
	44.0	0.07	0.05	0.03	0.00
	48.0	0.07	0.05	0.03	0.00
	51.0	0.07	0.05	0.00	0.00
	54.0	0.00	0.00	0.00	0.00
	71.0	0.00	0.00	0.00	0.00
	84.0	0.00	0.00	0.00	0.00
	88.0	0.40	0.22	0.05	0.00
	92.0	0.90	0.70	0.20	0.00
	96.0	1.30	0.92	0.55	0.20
	100.0	1.50	1.03	0.70	0.14
	104.0	1.60	1.13	0.30	0.10
	108.0	1.50	0.65	0.10	0.00
	112.0	1.55	0.35	0.10	0.00
	116.0	1.40	1.00	0.52	0.25
	120.0	1.60	0.74	0.30	0.00
	124.0	1.20	0.65	0.20	0.08
	128.0	1.50	0.50	0.15	0.00
	132.0	1.60	1.00	0.55	0.10
	136.0	1.85	1.65	1.14	0.75
	140.0	2.00	1.65	1.14	0.75
	144.0	2.00	1.65	1.13	0.70
	148.0	2.00	1.65	1.07	0.70
	152.0	2.20	2.00	1.00	0.70
	156.0	2.30	2.00	1.22	0.72

Table B-3.2 (cont.) IFG-4 Calibration velocities (ft/sec) at site 131.7L.

Location Within Site	Hor Dist (ft)	Velocities at 240 cfs	Velocities at 150 cfs	Velocities at 55 cfs	Velocities at 18 cfs
Cross Section 7	160.0	2.30	1.98	1.27	0.69
Station 19+05	164.0	2.30	1.63	1.10	0.59
(cont.)	168.0	2.00	1.56	1.30	0.79
	172.0	1.80	1.56	1.17	0.79
	176.0	1.70	1.56	1.20	0.80
	178.0	1.90	1.70	1.18	0.50
	182.0	2.30	1.90	1.16	0.54
	186.0	2.20	2.00	1.15	0.59
	190.0	1.90	1.50	0.90	0.40
	194.0	1.70	1.05	0.67	0.30
	198.0	1.70	1.00	0.57	0.10
	202.0	1.80	1.20	0.10	0.10
	208.0	1.70	1.41	0.36	0.10
	212.0	1.50	0.95	0.39	0.10
	216.0	1.40	1.20	0.40	0.35
	220.0	1.40	1.30	0.50	0.21
	224.0	1.55	1.42	0.50	0.15
	228.0	1.60	1.45	0.45	0.20
	232.0	1.60	1.34	0.40	0.18
	236.0	1.74	1.30	0.55	0.00
	240.0	1.45	1.10	0.55	0.00
	244.0	1.16	0.95	0.35	0.00
	248.0	1.25	0.90	0.25	0.00
	254.0	1.25	0.85	0.10	0.00
	258.0	1.25	0.72	0.24	0.00
	262.0	1.35	0.65	0.35	0.00
	266.0	1.35	0.60	0.42	0.10
	270.0	1.28	0.65	0.35	0.10
	274.0	1.35	0.94	0.25	0.10
	278.0	1.06	0.95	0.20	0.10
	282.0	1.06	0.79	0.10	0.10
	285.0	0.80	0.60	0.26	0.05
	288.0	0.80	0.50	0.20	0.05
	290.0	0.80	0.40	0.10	0.00
	294.0	0.45	0.25	0.00	0.00
	298.0	0.45	0.20	0.00	0.00
	302.0	0.30	0.10	0.00	0.00
	305.0	0.35	0.10	0.00	0.00
	311.0	0.35	0.10	0.00	0.00
	315.0	0.65	0.25	0.00	0.00
	319.0	0.65	0.20	0.00	0.00
	323.0	0.45	0.25	0.00	0.00
	327.0	0.45	0.25	0.00	0.00
	331.0	0.30	0.15	0.00	0.00
	335.0	0.20	0.12	0.00	0.00

Table B-3.2 (cont.) IFG-4 Calibration velocities (ft/sec) at site 131.7L.

Location Within Site	Hor Dist (ft)	Velocities at 240 cfs	Velocities at 150 cfs	Velocities at 55 cfs	Velocities at 18 cfs
Cross Section 7	339.0	0.30	0.10	0.00	0.00
Station 19+05	343.0	0.30	0.10	0.00	0.00
(cont.)	347.0	0.10	0.00	0.00	0.00
	351.0	0.01	0.00	0.00	0.00
	355.0	0.00	0.00	0.00	0.00
	359.0	0.00	0.00	0.00	0.00
	362.0	0.00	0.00	0.00	0.00
	367.0	0.00	0.00	0.00	0.00
	414.0	0.00	0.00	0.00	0.00
	432.0	0.00	0.00	0.00	0.00

Table B-3.3

IFG-4 Calibration velocities (ft/sec) at
site 132.6L.

Location Within Site	Hor Dist (ft)	Velocities at 141 cfs	Velocities at 27 cfs
Cross Section 1	0.0	0.00	0.00
Station 0+00	8.7	0.00	0.00
	9.0	0.00	0.00
	9.3	0.00	0.00
	9.5	0.00	0.00
	10.0	0.60	0.00
	12.0	0.50	0.00
	14.0	1.50	0.00
	16.0	2.10	0.00
	18.0	2.20	0.00
	20.0	2.20	0.00
	21.0	2.20	0.95
	24.0	2.00	1.15
	28.0	2.80	1.30
	29.0	2.20	1.60
	31.0	1.95	1.20
	32.0	1.80	1.30
	33.0	1.90	1.50
	36.0	2.20	1.32
	39.0	2.20	1.10
	40.0	2.20	1.20
	43.0	1.95	1.10
	44.0	1.60	1.10
	47.0	1.50	0.90
	48.0	1.40	0.50
	51.0	1.30	0.25
	52.0	1.50	0.30
	55.0	1.50	0.65
	56.0	1.60	0.90
	59.0	1.70	1.50
	60.0	1.70	1.30
	63.0	1.70	1.45
	64.0	1.50	1.20
	67.0	1.80	0.90
	68.0	2.00	1.10
	70.0	2.20	1.30
	72.0	1.90	1.20
	74.0	1.80	0.90
	76.0	1.50	0.50
	77.8	1.20	0.00
	78.0	0.90	0.00

Table B-3.3 (cont.) IFG-4 Calibration velocities (ft/sec) at site 132.6L.

Location Within Site	Hor Dist (ft)	Velocities at 141 cfs	Velocities at 27 cfs
Cross Section 1	80.0	0.00	0.00
Station 0+00	83.0	0.00	0.00
(cont.)	98.0	0.00	0.00
	109.0	0.00	0.00
Cross Section 2	0.0	0.00	0.00
Station 1+24	4.0	0.00	0.00
	18.5	0.00	0.00
	31.5	0.00	0.00
	32.0	0.00	0.00
	34.0	0.00	0.00
	36.0	0.00	0.00
	37.0	0.00	0.00
	38.0	0.00	0.00
	40.0	0.60	0.20
	42.0	0.90	0.10
	44.0	1.20	0.10
	46.0	1.75	0.32
	48.0	2.30	0.60
	50.0	2.50	0.47
	52.0	2.70	0.95
	54.0	3.00	1.15
	56.0	3.30	1.20
	58.0	3.35	1.37
	60.0	3.40	1.30
	62.0	3.30	1.25
	64.0	3.20	1.30
	66.0	3.20	1.05
	68.0	3.20	0.90
	70.0	2.85	0.80
	72.0	2.50	0.80
	74.0	1.70	0.50
	76.0	0.90	0.45
	78.0	1.00	0.00
	80.0	0.56	0.00
	82.0	1.36	0.00
	84.0	0.21	0.00
	86.0	0.00	0.00
	88.0	0.00	0.00
	90.0	0.35	0.00
	92.0	0.68	0.00

Table B-3.3 (cont.) IFG-4 Calibration velocities (ft/sec) at site 132.6L.

Location Within Site	Hor Dist (ft)	Velocities at 141 cfs	Velocities at 27 cfs
Cross Section 2	96.0	0.40	0.00
Station 1+24	100.0	0.20	0.00
(cont.)	104.0	0.00	0.00
	111.5	0.00	0.00
	139.0	0.00	0.00
	161.0	0.00	0.00
Cross Section 3	0.0	0.00	0.00
Station 2+46	8.5	0.00	0.00
	23.0	0.00	0.00
	23.5	0.00	0.00
	24.0	0.85	0.00
	26.0	2.20	0.00
	28.0	2.30	0.00
	30.0	2.80	0.64
	32.0	2.80	0.65
	34.0	2.80	0.60
	36.0	2.80	0.70
	38.0	3.10	1.50
	40.0	3.20	2.22
	42.0	3.30	3.00
	44.0	3.40	2.00
	46.0	3.50	1.55
	48.0	3.30	1.35
	50.0	2.20	0.50
	52.0	2.00	0.40
	54.0	1.80	0.00
	58.0	1.60	0.00
	62.0	0.40	0.00
	66.0	0.40	0.00
	70.0	0.10	0.00
	74.0	0.07	0.00
	78.0	0.85	0.00
	80.0	0.90	0.00
	82.0	0.70	0.00
	84.0	0.80	0.00
	86.0	0.50	0.00
	88.0	0.25	0.00
	90.0	0.00	0.00

Table B-3.3 (cont.) IFG-4 Calibration velocities (ft/sec) at site 132.6L.

Location Within Site	Hor Dist (ft)	Velocities at 141 cfs	Velocities at 27 cfs
Cross Section 3	90.3	0.00	0.00
Station 2+46	95.0	0.00	0.00
(cont.)	104.4	0.00	0.00
	139.5	0.00	0.00
Cross Section 4	0.0	0.00	0.00
Station 3+90	17.6	0.00	0.00
	18.0	1.20	0.00
	20.0	1.40	0.00
	22.0	1.80	0.00
	24.0	2.00	0.00
	30.0	1.60	0.00
	32.0	1.70	0.00
	34.0	1.80	0.00
	36.0	1.80	0.00
	38.0	1.90	0.50
	40.0	2.00	0.40
	42.0	1.90	0.40
	44.0	2.00	0.40
	46.0	2.10	0.40
	48.0	2.20	1.00
	50.0	2.30	1.60
	51.0	2.40	1.60
	53.0	2.40	1.70
	55.0	2.60	1.75
	57.0	2.40	1.60
	59.0	2.30	1.60
	61.0	2.00	1.45
	62.0	2.00	1.15
	64.0	1.90	0.90
	66.0	1.80	0.75
	68.0	1.60	0.35
	70.8	1.50	0.70
	72.0	1.50	0.00
	74.0	1.60	0.00
	76.0	1.70	0.00
	78.0	1.90	0.00
	80.0	1.60	0.00
	84.0	1.40	0.00
	86.0	0.90	0.00
	88.0	0.90	0.00

Table B-3.3 (cont.) IFG-4 Calibration velocities (ft/sec) at site 132.6L.

Location Within Site	Hor Dist (ft)	Velocities at 141 cfs	Velocities at 27 cfs
Cross Section 4	90.0	0.90	0.00
Station 3+90	92.0	0.90	0.00
(cont.)	94.0	0.90	0.00
	96.0	0.75	0.00
	98.0	0.60	0.00
	102.0	0.56	0.00
	106.0	0.48	0.00
	110.0	0.56	0.00
	114.0	0.30	0.00
	118.0	0.25	0.00
	122.0	0.00	0.00
	124.0	0.00	0.00
	126.0	0.00	0.00
	128.0	0.00	0.00
	130.0	0.00	0.00
	132.0	0.00	0.00
	152.0	0.00	0.00
	162.5	0.00	0.00
	182.0	0.00	0.00
	199.0	0.00	0.00
Cross Section 5	0.0	0.00	0.00
Station 5+11	40.0	0.00	0.00
	43.5	0.05	0.00
	44.0	0.20	0.00
	46.0	0.80	0.20
	48.0	1.10	0.35
	50.0	1.00	0.40
	52.0	1.10	0.35
	54.0	1.20	0.45
	56.0	1.30	0.45
	58.0	1.30	0.35
	60.0	1.20	0.40
	62.0	1.20	0.40
	66.0	1.20	0.50
	68.0	1.20	0.50
	70.0	1.10	0.55
	74.0	1.00	0.40
	78.0	0.90	0.40
	80.0	0.80	0.45
	82.0	0.90	0.50

Table B-3.3 (cont.) IFG-4 Calibration velocities (ft/sec) at site 132.6L.

Location Within Site	Hor Dist (ft)	Velocities at 141 cfs	Velocities at 27 cfs
Cross Section 5	86.0	1.00	0.45
Station 5+11	90.0	0.90	0.37
(cont.)	92.0	0.80	0.40
	94.0	1.00	0.55
	98.0	1.20	0.45
	102.0	1.15	0.37
	104.0	1.10	0.36
	106.0	1.00	0.35
	110.0	0.90	0.35
	114.0	1.00	0.30
	116.0	1.20	0.40
	118.0	1.00	0.35
	122.0	0.90	0.15
	124.0	0.95	0.10
	126.0	0.95	0.00
	128.0	1.00	0.00
	130.0	0.90	0.00
	134.0	0.80	0.00
	136.0	0.60	0.00
	138.0	0.60	0.00
	140.0	0.50	0.00
	142.0	0.50	0.00
	144.0	0.40	0.00
	146.0	0.60	0.00
	148.0	0.50	0.00
	150.0	0.40	0.00
	152.0	0.30	0.00
	154.0	0.30	0.00
	156.0	0.00	0.00
	162.5	0.00	0.00
	182.0	0.00	0.00
	210.0	0.00	0.00
Cross Section 6	0.0	0.00	0.00
Station 6+94	25.0	0.00	0.00
	29.0	0.00	0.00
	30.0	0.00	0.00
	32.0	0.35	0.00
	34.0	0.50	0.15
	36.0	0.70	0.15
	38.0	0.90	0.15

Table B-3.3 (cont.) IFG-4 Calibration velocities (ft/sec) at site 132.6L.

Location Within Site	Hor Dist (ft)	Velocities at 141 cfs	Velocities at 27 cfs
Cross Section 6	42.0	0.90	0.10
Station 6+94	44.0	0.90	0.20
(cont.)	46.0	0.90	0.25
	50.0	0.80	0.30
	54.0	0.85	0.30
	56.0	1.00	0.30
	58.0	1.00	0.30
	62.0	0.93	0.30
	66.0	1.00	0.30
	68.0	0.90	0.31
	70.0	0.90	0.32
	72.5	0.90	0.29
	74.0	0.90	0.30
	76.0	0.90	0.30
	78.0	0.90	0.30
	80.0	0.85	0.30
	82.0	0.90	0.27
	84.0	0.90	0.30
	86.0	0.90	0.30
	88.0	0.90	0.30
	90.0	0.90	0.30
	92.0	0.90	0.30
	94.0	0.90	0.20
	96.0	0.90	0.20
	98.0	0.80	0.20
	100.0	0.80	0.15
	102.0	0.80	0.15
	104.0	0.80	0.00
	106.0	0.60	0.00
	108.0	0.50	0.00
	110.0	0.40	1.00
	112.0	0.40	0.00
	114.0	0.30	0.00
	116.0	0.30	0.00
	118.0	0.10	0.00
	120.0	0.00	0.00
	122.0	0.00	0.00
	124.0	0.00	0.00
	139.0	0.00	0.00
	160.0	0.00	0.00
	181.5	0.00	0.00

Table B-3.3 (cont.) IFG-4 Calibration velocities (ft/sec) at site 132.6L.

Location Within Site	Hor Dist (ft)	Velocities at 141 cfs	Velocities at 27 cfs
Cross Section 7	0.0	0.00	0.00
Station 8+52	18.2	0.00	0.00
	20.0	0.00	0.00
	22.0	0.00	0.00
	22.6	0.00	0.00
	23.5	0.00	0.00
	24.0	0.40	0.00
	26.0	0.20	0.00
	28.0	0.30	0.00
	30.0	0.70	0.00
	32.0	0.60	0.00
	34.0	0.60	0.15
	36.0	0.60	0.15
	40.0	0.65	0.15
	44.0	0.70	0.25
	48.0	0.85	0.30
	52.0	0.80	0.25
	56.0	1.10	0.35
	58.0	0.90	0.40
	60.0	1.10	0.30
	62.0	1.10	0.35
	64.0	1.00	0.35
	66.0	1.00	0.30
	68.0	1.00	0.30
	70.0	1.00	0.40
	72.0	1.00	0.25
	74.0	1.00	0.30
	76.0	1.00	0.20
	78.0	0.85	0.20
	80.0	0.90	0.10
	82.0	0.65	0.10
	84.0	0.60	0.10
	86.0	0.60	0.00
	88.0	0.60	0.00
	90.0	0.50	0.00
	92.0	0.50	0.00
	94.0	0.50	0.00
	96.0	0.50	0.00
	98.0	0.35	0.00
	100.0	0.30	0.00
	102.0	0.20	0.00

Table B-3.3 (cont.) IFG-4 Calibration velocities (ft/sec) at site 132.6L.

Location Within Site	Hor Dist (ft)	Velocities at 141 cfs	Velocities at 27 cfs
Cross Section 7	104.0	0.10	0.00
Station 8+52	106.0	0.10	0.00
(cont.)	108.0	0.00	0.00
	116.0	0.00	0.00
	121.5	0.00	0.00
	131.5	0.00	0.00
	145.0	0.00	0.00
	168.5	0.00	0.00
Cross Section 8	0.0	0.00	0.00
Station 9+79	18.0	0.00	0.00
	20.0	0.00	0.00
	21.0	0.00	0.00
	22.0	0.10	0.00
	24.0	0.20	0.01
	26.0	0.30	0.01
	28.0	0.40	0.05
	31.0	0.50	0.10
	32.0	0.50	0.10
	33.0	0.60	0.10
	36.0	0.70	0.10
	39.0	0.60	0.10
	40.0	0.60	0.10
	43.0	0.60	0.20
	44.0	0.60	0.20
	47.0	0.60	0.20
	48.0	0.50	0.15
	51.0	0.60	0.20
	52.0	0.65	0.25
	56.0	0.70	0.25
	60.0	0.85	0.25
	64.0	0.90	0.20
	67.0	0.90	0.20
	68.0	0.90	0.20
	72.0	1.20	0.25
	75.0	1.30	0.35
	76.0	1.40	0.35
	79.0	1.40	0.30
	80.0	1.30	0.30
	83.0	1.30	0.40
	84.0	1.30	0.50

Table B-3.3 (cont.) IFG-4 Calibration velocities (ft/sec) at site 132.6L.

Location Within Site	Hor Dist (ft)	Velocities	
		at 141 cfs	at 27 cfs
Cross Section 8	88.0	1.20	0.60
Station 9+79	91.0	1.00	0.60
(cont.)	92.0	0.80	0.50
	95.0	0.80	0.50
	96.0	0.60	0.30
	98.0	0.60	0.30
	99.0	0.50	0.25
	100.0	0.40	0.20
	102.0	0.30	0.15
	103.0	0.20	0.10
	105.7	0.10	0.00
	128.0	0.00	0.00
	155.0	0.00	0.00
	168.0	0.00	0.00
	178.0	0.00	0.00
Cross Section 9	0.0	0.00	0.00
Station 11+31	4.0	0.00	0.00
	6.0	0.00	0.00
	9.0	0.27	0.07
	12.0	0.54	0.07
	14.0	0.48	0.07
	16.0	0.45	0.12
	19.0	0.35	0.10
	25.0	0.20	0.05
	28.0	0.00	0.00
	32.0	0.00	0.00
	34.0	0.00	0.00
	36.0	0.00	0.00
	40.0	0.00	0.00
	55.0	0.00	0.00
	84.0	0.00	0.00
	88.5	0.00	0.00
	90.8	0.00	0.00
	92.0	0.39	0.00
	94.0	1.20	0.00
	96.0	1.80	0.00
	98.0	1.60	0.25
	100.0	2.55	0.35
	103.0	2.40	0.80
	108.0	1.80	0.77

Table B-3.3 (cont.) IFG-4 Calibration velocities (ft/sec) at site 132.6L.

Location Within Site	Hor Dist (ft)	Velocities at 141 cfs	Velocities at 27 cfs
Cross Section 9	112.0	1.60	0.77
Station 11+31	116.0	1.10	0.56
(cont.)	120.0	1.00	0.54
	124.0	1.00	0.55
	127.0	1.70	0.35
	130.0	1.20	0.00
	132.0	2.30	0.00
	134.0	2.50	0.40
	136.0	2.50	0.55
	140.0	3.00	1.20
	142.0	2.70	1.20
	144.0	3.90	1.20
	148.0	3.20	1.20
	152.0	3.70	1.20
	156.0	2.45	0.80
	158.5	2.00	0.40
	164.0	0.96	0.30
	168.0	1.50	0.00
	170.6	1.00	0.00
	176.0	1.10	0.00
	180.0	1.05	0.00
	183.0	0.32	0.00
	184.0	0.00	0.00
	186.0	0.00	0.00
	193.0	0.00	0.00
	210.5	0.00	0.00
	219.0	0.00	0.00

Table B-3.4

IFG-4 Calibration velocities (ft/sec) at
site 136.0L.

Location Within Site	Hor Dist (ft)	Velocities at 265 cfs	Velocities at 153 cfs	Velocities at 81 cfs
Cross Section 1	0.0	0.00	0.00	0.00
Station 0+00	1.0	0.00	0.00	0.00
	9.0	0.00	0.00	0.00
	11.0	0.07	0.03	0.01
	14.0	0.07	0.03	0.01
	16.0	0.07	0.03	0.01
	18.0	0.10	0.05	0.01
	19.5	0.10	0.05	0.02
	23.0	0.10	0.05	0.02
	25.0	0.10	0.05	0.02
	26.0	0.40	0.25	0.10
	28.0	0.60	0.45	0.30
	30.0	0.65	0.55	0.45
	32.0	0.73	0.62	0.45
	34.0	0.86	0.78	0.50
	36.0	0.95	0.75	0.50
	38.0	1.38	0.97	0.60
	40.0	1.54	1.20	0.92
	42.0	1.71	1.54	1.04
	44.0	1.95	1.73	1.04
	46.0	2.40	2.26	1.37
	48.0	2.39	2.26	1.75
	50.0	2.76	2.00	1.60
	52.0	3.80	2.57	2.00
	54.0	4.28	3.29	2.00
	56.0	4.42	3.29	2.20
	58.0	4.56	3.30	2.30
	60.0	4.18	3.42	2.60
	62.0	3.80	3.50	2.60
	64.0	3.20	2.90	2.65
	66.0	2.38	1.85	1.50
	68.0	1.81	1.30	1.00
	70.0	1.40	1.15	0.95
	72.0	1.50	1.00	0.75
	74.0	1.10	0.95	0.60
	76.0	1.20	0.87	0.50
	78.7	1.20	0.73	0.00
	80.0	0.70	0.00	0.00
	80.9	0.00	0.00	0.00
	82.0	0.00	0.00	0.00

Table B-3.4

IFG-4 Calibration velocities (ft/sec) at
site 136.0L.

Location Within Site	Hor Dist (ft)	Velocities at 265 cfs	Velocities at 153 cfs	Velocities at 81 cfs
Cross Section 1	82.8	0.00	0.00	0.00
Station 0+00	88.0	0.00	0.00	0.00
(cont.)	91.5	0.00	0.00	0.00
	93.5	0.00	0.00	0.00
Cross Section 2	0.0	0.00	0.00	0.00
Station 0+88	3.0	0.00	0.00	0.00
	4.0	0.00	0.00	0.00
	17.0	0.00	0.00	0.00
	20.0	0.00	0.00	0.00
	22.0	1.00	0.00	0.00
	24.0	1.00	0.00	0.00
	26.0	1.80	0.00	0.00
	28.0	1.90	0.00	0.00
	30.0	2.00	1.10	0.00
	32.0	2.20	1.50	0.00
	34.0	2.30	1.80	0.80
	36.0	3.00	2.70	1.35
	38.0	3.20	2.80	2.20
	40.0	3.55	3.20	2.50
	42.0	4.00	3.50	2.50
	44.0	4.30	3.50	2.45
	46.0	4.30	3.50	2.40
	48.0	4.45	3.80	2.65
	50.0	4.30	3.50	2.65
	52.0	4.20	3.95	3.50
	54.0	4.10	3.50	3.10
	56.0	3.60	3.30	3.00
	58.0	3.00	2.50	1.75
	60.0	1.80	0.95	0.58
	62.0	0.80	0.50	0.20
	64.0	0.40	0.00	0.00
	73.0	0.00	0.00	0.00
	76.0	0.00	0.00	0.00
Cross Section 3	0.0	0.00	0.00	0.00
Station 1+95	3.0	0.00	0.00	0.00
	9.0	0.00	0.00	0.00
	10.0	0.30	0.10	0.00
	12.0	0.60	0.25	0.00
	14.0	1.80	1.10	0.40

Table B-3.4 (cont.) IFG-4 Calibration velocities (ft/sec) at site 136.0L.

Location Within Site	Hor Dist (ft)	Velocities at 265 cfs	Velocities at 153 cfs	Velocities at 81 cfs
Cross Section 3	16.0	3.05	1.95	1.05
Station 1+95	18.0	3.90	2.50	1.60
(cont.)	20.0	3.59	2.80	1.87
	22.0	3.60	2.80	2.12
	24.0	3.74	2.80	2.12
	26.0	4.30	3.00	2.12
	28.0	4.00	3.10	2.10
	30.0	4.07	3.00	2.02
	32.0	4.03	2.40	1.85
	34.0	4.00	2.80	1.82
	36.0	3.80	2.80	1.70
	38.0	3.60	3.00	1.85
	40.0	3.25	2.50	1.87
	42.0	2.90	2.60	1.83
	44.0	2.00	1.85	1.70
	46.0	0.80	0.30	0.15
	47.5	0.10	0.00	0.00
	55.0	0.00	0.00	0.00
	59.0	0.00	0.00	0.00
	61.0	0.00	0.00	0.00
	63.0	0.00	0.00	0.00
Cross Section 4	0.0	0.00	0.00	0.00
Station 2+91	2.5	0.00	0.00	0.00
	7.5	0.00	0.00	0.00
	10.0	0.50	0.00	0.00
	12.0	1.00	0.50	0.00
	12.5	1.00	0.50	0.00
	14.0	1.70	0.90	0.00
	16.0	1.98	1.70	1.00
	18.0	2.20	2.00	1.00
	20.0	2.60	2.35	2.20
	22.0	2.67	2.40	2.15
	24.0	2.70	2.40	2.19
	26.0	2.70	2.40	2.09
	28.0	2.60	2.40	1.92
	30.0	2.70	2.50	2.14
	32.0	2.90	2.70	2.16
	34.0	3.10	2.85	2.20
	36.0	3.20	3.00	2.25
	38.0	2.90	2.70	2.14

Table B-3.4 (cont.) IFG-4 Calibration velocities (ft/sec) at site 136.0L.

Location Within Site	Hor Dist (ft)	Velocities at 265 cfs	Velocities at 153 cfs	Velocities at 81 cfs
Cross Section 4	40.0	3.20	3.00	2.25
Station 2+91	42.0	3.50	3.00	2.20
(cont.)	44.0	3.20	2.90	2.38
	46.0	3.00	2.80	2.20
	48.0	2.95	2.72	2.47
	50.0	3.00	2.72	2.38
	52.0	3.10	2.84	2.00
	54.0	3.20	2.90	1.70
	56.0	3.17	2.70	1.65
	58.0	3.14	2.07	1.60
	60.0	1.70	0.90	0.50
	62.0	1.54	0.00	0.00
	64.0	1.45	0.00	0.00
	66.0	1.37	0.00	0.00
	68.0	1.40	0.00	0.00
	68.5	0.00	0.00	0.00
	72.3	0.00	0.00	0.00
	82.5	0.00	0.00	0.00
	84.5	0.00	0.00	0.00
	87.5	0.00	0.00	0.00
Cross Section 5	0.0	0.00	0.00	0.00
Station 4+23	2.5	0.00	0.00	0.00
	13.7	0.00	0.00	0.00
	14.0	0.00	0.00	0.00
	16.0	0.10	0.00	0.00
	18.0	0.35	0.15	0.10
	20.0	0.50	0.20	0.10
	22.0	0.75	0.25	0.10
	24.0	1.00	0.40	0.15
	26.0	1.20	0.60	0.30
	28.0	1.30	0.95	0.30
	30.5	1.40	1.10	0.30
	32.0	1.60	1.30	0.40
	34.0	2.40	1.45	0.80
	36.0	2.25	1.65	1.05
	38.0	2.10	1.65	1.00
	40.0	2.20	1.65	0.82
	42.0	2.30	1.70	1.10
	44.0	2.25	1.65	0.97
	46.0	2.20	1.40	0.95
	48.0	2.45	1.90	1.35

Table B-3.4 (cont.) IFG-4 Calibration velocities (ft/sec) at site 136.0L.

Location Within Site	Hor Dist (ft)	Velocities at 265 cfs	Velocities at 153 cfs	Velocities at 81 cfs
Cross Section 5	50.0	2.70	1.75	1.00
Station 4+23	52.0	2.40	1.80	1.37
(cont.)	54.0	2.05	1.70	1.05
	56.0	2.10	1.70	1.03
	58.0	2.15	1.55	0.95
	60.0	2.17	1.65	0.75
	62.0	2.18	1.75	1.10
	64.0	2.40	1.50	0.90
	66.0	2.75	1.50	1.10
	68.0	2.38	1.70	0.95
	70.0	2.00	1.48	1.05
	72.0	1.70	1.30	1.00
	74.0	1.40	1.05	0.40
	76.0	1.00	0.50	0.25
	78.0	0.90	0.40	0.18
	79.0	0.00	0.00	0.00
	79.8	0.00	0.00	0.00
	80.5	0.00	0.00	0.00
	83.0	0.00	0.00	0.00
	89.0	0.00	0.00	0.00
	91.0	0.00	0.00	0.00
Cross Section 6	0.0	0.00	0.00	0.00
Station 5+82	8.0	0.00	0.00	0.00
	8.5	0.00	0.00	0.00
	10.0	0.00	0.00	0.00
	11.0	0.00	0.00	0.00
	11.5	0.00	0.00	0.00
	12.0	0.00	0.00	0.00
	14.0	1.00	0.63	0.00
	16.0	1.65	1.20	0.00
	18.0	1.85	1.30	0.60
	20.0	2.58	1.90	1.30
	22.0	3.10	2.00	1.62
	24.0	3.25	2.20	1.75
	26.0	3.33	2.50	1.90
	28.0	3.36	2.50	1.80
	30.0	3.35	2.40	1.90
	32.0	3.33	2.70	1.97
	34.0	3.32	2.60	2.00
	36.0	3.31	2.50	1.85

Table B-3.4 (cont.) IFG-4 Calibration velocities (ft/sec) at site 136.0L.

Location Within Site	Hor Dist (ft)	Velocities at 265 cfs	Velocities at 153 cfs	Velocities at 81 cfs
Cross Section 6	38.0	2.95	2.60	2.25
Station 5+82	40.0	2.78	2.20	1.95
(cont.)	42.0	2.69	2.40	1.70
	44.0	2.65	2.30	1.60
	46.0	2.40	1.90	1.25
	48.0	2.40	2.05	1.10
	50.0	2.30	2.00	1.10
	52.0	2.05	1.40	0.90
	54.0	2.04	1.00	0.60
	56.0	1.90	1.20	0.55
	58.0	1.32	0.80	0.35
	60.0	0.98	0.00	0.00
	62.0	0.32	0.00	0.00
	63.3	0.00	0.00	0.00
	65.0	0.00	0.00	0.00
	67.0	0.00	0.00	0.00
	68.0	0.00	0.00	0.00
	76.0	0.00	0.00	0.00
	79.0	0.00	0.00	0.00
	81.0	0.00	0.00	0.00

Table B-4.1. Comparison between observed and predicted water surface elevations, discharges, and velocities for site 101.2R hydraulic model.

Streambed Station (ft)	Water Surface Elevation		Discharge		Velocity Adjustment Factor
	Observed (ft)	Predicted (ft)	Observed (cfs)	Predicted (cfs)	
Calibration Flow 279 cfs					
0+00	361.08	361.08	272.6	272.4	1.00
3+74	362.60	362.60	270.5	270.2	1.01
5+64	362.98	362.98	272.5	272.2	.99
8+37	363.20	363.20	258.0	257.7	.99
10+23	363.50	363.50	267.5	267.2	.97
12+79	363.50	363.50	243.8	243.6	1.00
14+62	364.01	364.01	270.5	270.2	1.01
Calibration Flow 25 cfs					
0+00	360.07	360.07	25.1	25.1	.99
3+74	361.83	361.83	26.7	26.7	.98
5+64	361.85	361.85	28.9	28.9	.99
8+37	362.36	362.36	26.5	26.5	.96
10+23	362.95	362.45	21.9	21.9	.92
12+79	362.45	362.45	28.4	28.4	1.00
14+62	363.34	363.34	23.5	23.5	.96

Table B-4.2. Comparison between observed and predicted water surface elevations, discharges, and velocities for site 131.7L hydraulic model.

Streambed Station (ft)	Water Surface Elevation		Discharge		Velocity Adjustment Factor
	Observed (ft)	Predicted (ft)	Observed (cfs)	Predicted (cfs)	
Calibration Flow 240 cfs					
0+00	617.03	617.01	230.8	240.0	.98
2+45	617.07	617.05	253.3	239.5	.98
6+45	617.61	617.56	221.8	230.6	.97
9+45	617.63	617.56	227.5	219.1	.99
11+90	618.17	618.12	242.5	235.8	.98
16+30	619.52	619.50	250.8	247.1	.98
19+05	620.71	620.69	259.7	257.3	.99
Calibration Flow 150 cfs					
0+00	616.78	616.81	156.7	150.9	1.01
2+45	616.91	616.92	160.2	153.7	1.02
6+45	617.32	617.35	156.0	151.6	1.01
9+45	617.28	617.33	137.4	142.0	1.03
11+90	617.77	617.82	144.2	147.9	1.03
16+30	619.23	619.25	152.5	155.3	1.02
19+05	620.55	620.59	151.9	162.0	1.02
Calibration Flow 55 cfs					
0+00	616.42	616.41	57.3	56.1	1.00
2+45	616.69	616.69	58.4	56.6	1.04
6+45	616.92	616.97	61.9	58.8	1.03
9+45	616.86	616.92	51.0	53.4	1.03
11+90	617.24	617.26	49.8	52.3	1.04
16+30	618.73	618.74	54.5	54.5	1.01
19+05	620.41	620.39	62.0	57.1	1.01
Calibration Flow 18 cfs					
0+00	616.03	616.04	17.9	18.6	.92
2+45	616.49	616.49	18.6	19.5	.96
6+45	616.67	616.65	20.2	21.5	.99
9+45	616.62	616.59	19.2	18.8	.94
11+90	616.83	616.82	17.5	17.3	.94
16+30	618.30	618.30	17.6	17.9	1.00
19+05	620.20	620.20	17.9	18.8	.96

Table B-4.3. Comparison between observed and predicted water surface elevations, discharges, and velocities for site 132.6L hydraulic model.

Streambed Station (ft)	Water Surface Elevation		Discharge		Velocity Adjustment Factor
	Observed (ft)	Predicted (ft)	Observed (cfs)	Predicted (cfs)	
Calibration Flow 141 cfs					
0+00	626.05	626.05	127.2	127.4	1.00
1+24	626.28	626.28	142.0	142.3	.99
2+46	627.29	627.29	145.9	146.2	1.01
3+90	627.95	627.95	145.2	145.5	1.02
5+11	628.10	628.10	140.2	140.5	.97
6+94	628.16	628.16	142.4	142.7	.96
8+52	628.17	628.17	142.2	142.4	.95
9+79	628.19	628.19	132.3	132.6	.98
11+31	628.43	628.43	142.7	142.9	1.00
Calibration Flow 27 cfs					
0+00	625.33	625.33	23.1	23.1	1.00
1+24	625.65	625.65	27.2	27.2	1.00
2+46	626.28	626.28	26.5	26.5	.99
3+90	627.23	627.23	25.1	25.1	.98
5+11	627.41	627.41	26.4	26.4	.97
6+94	627.43	627.43	28.0	28.0	.96
8+52	627.43	627.43	29.2	29.2	.87
9+79	627.52	627.52	27.6	27.6	.99
11+31	628.09	628.09	26.5	26.5	.92

Table B-4.4. Comparison between observed and predicted water surface elevations, discharges, and velocities for site 136.0L hydraulic model.

Streambed Station (ft)	Water Surface Elevation		Discharge		Velocity Adjustment Factor
	Observed (ft)	Predicted (ft)	Observed (cfs)	Predicted (cfs)	
Calibration Flow 265 cfs					
0+00	675.81	675.78	266.4	266.4	1.00
0+80	675.97	675.94	268.1	267.3	.99
1+95	676.39	676.37	274.3	272.4	.99
2+91	676.65	676.61	273.0	270.3	1.00
4+23	677.10	677.10	263.0	266.9	.99
5+82	677.53	677.49	268.4	264.4	.99
Calibration Flow 153 cfs					
0+00	675.14	675.18	151.8	151.0	.99
0+88	675.31	675.35	158.5	158.8	1.00
1+95	675.77	675.80	148.7	150.1	1.00
2+91	676.00	676.07	157.2	160.1	1.00
4+23	676.72	676.72	156.9	152.1	1.01
5+82	676.97	677.04	151.4	156.2	.99
Calibration Flow 81 cfs					
0+00	674.64	674.62	78.2	78.3	1.00
0+88	674.82	674.80	87.1	86.9	1.00
1+95	675.31	675.30	75.8	75.3	1.00
2+91	675.61	675.58	88.3	87.3	1.01
4+23	676.33	676.33	78.3	79.3	1.00
5+82	676.64	676.61	86.6	84.9	.99

Table B-5. Statistics evaluating predictive ability of IFG-4 hydraulic models.

		<u>N</u>	<u>\bar{O}</u>	<u>P</u>	<u>Std O</u>	<u>Std P</u>	<u>a</u>	<u>b</u>	TOTAL RMSE	SYSTEM RMSE	UNSYST RMSE	<u>d</u>
Site 101.2R	: DEF	715	1.1704	1.1599	0.6114	0.6071	0.0023	0.9891	0.0957	0.0100	0.0943	0.9962
	VEL	715	0.8910	0.9086	0.6363	0.6012	0.0532	0.9600	0.1269	0.0361	0.1212	0.9934
Site 131.7L	: DEF	900	1.0175	1.0102	0.6251	0.6130	0.0155	0.9776	0.1262	0.0173	0.1245	0.9935
	VEL	900	0.5370	0.5454	0.2917	0.2864	0.0186	0.9809	0.0770	0.0100	0.0755	0.9948
Site 132.6L	: DEF	629	1.0732	1.0663	0.5619	0.5547	0.0157	0.9789	0.1284	0.0171	0.1273	0.9925
	VEL	629	0.8495	0.8882	0.6349	0.5711	0.0988	0.9291	0.1659	0.0683	0.1511	0.9884
Site 136.0L	: DEF	474	1.5189	1.5127	0.6589	0.6408	0.0478	0.9644	0.1701	0.0283	0.1673	0.9887
	VEL	474	1.7559	1.7711	1.2827	1.2037	0.0878	0.9586	0.1647	0.0490	0.1572	0.9945

N = number of observations.

O, P = mean of observed and predicted values.

Std O, Std P = standard deviation of observed and predicted values.

a, b = y-intercept and slope of least squares regression between O and P.

RMSE = root mean square error, total, systematic and unsystematic.

d = index of agreement.

* see Willmott (1981) for discussion and use of these statistics.

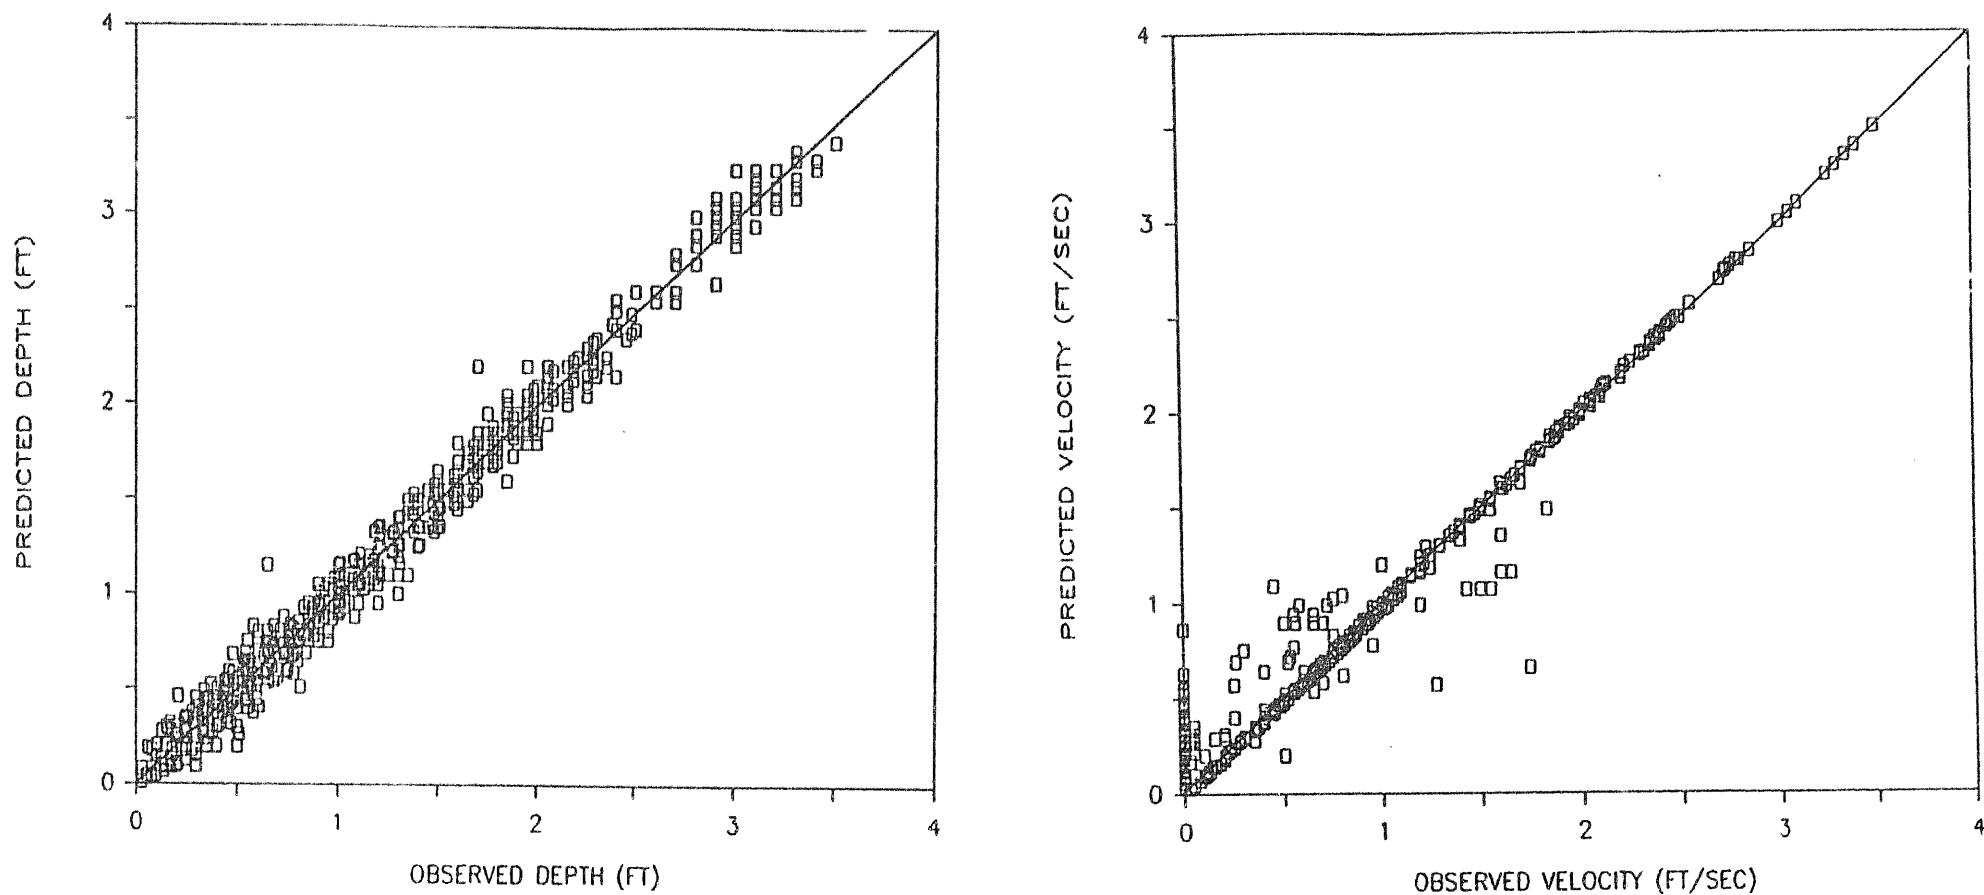


Figure B-2.1 Scatterplots of observed and predicted depths and velocities from the calibrated IFG-4 hydraulic model at 101.2R.

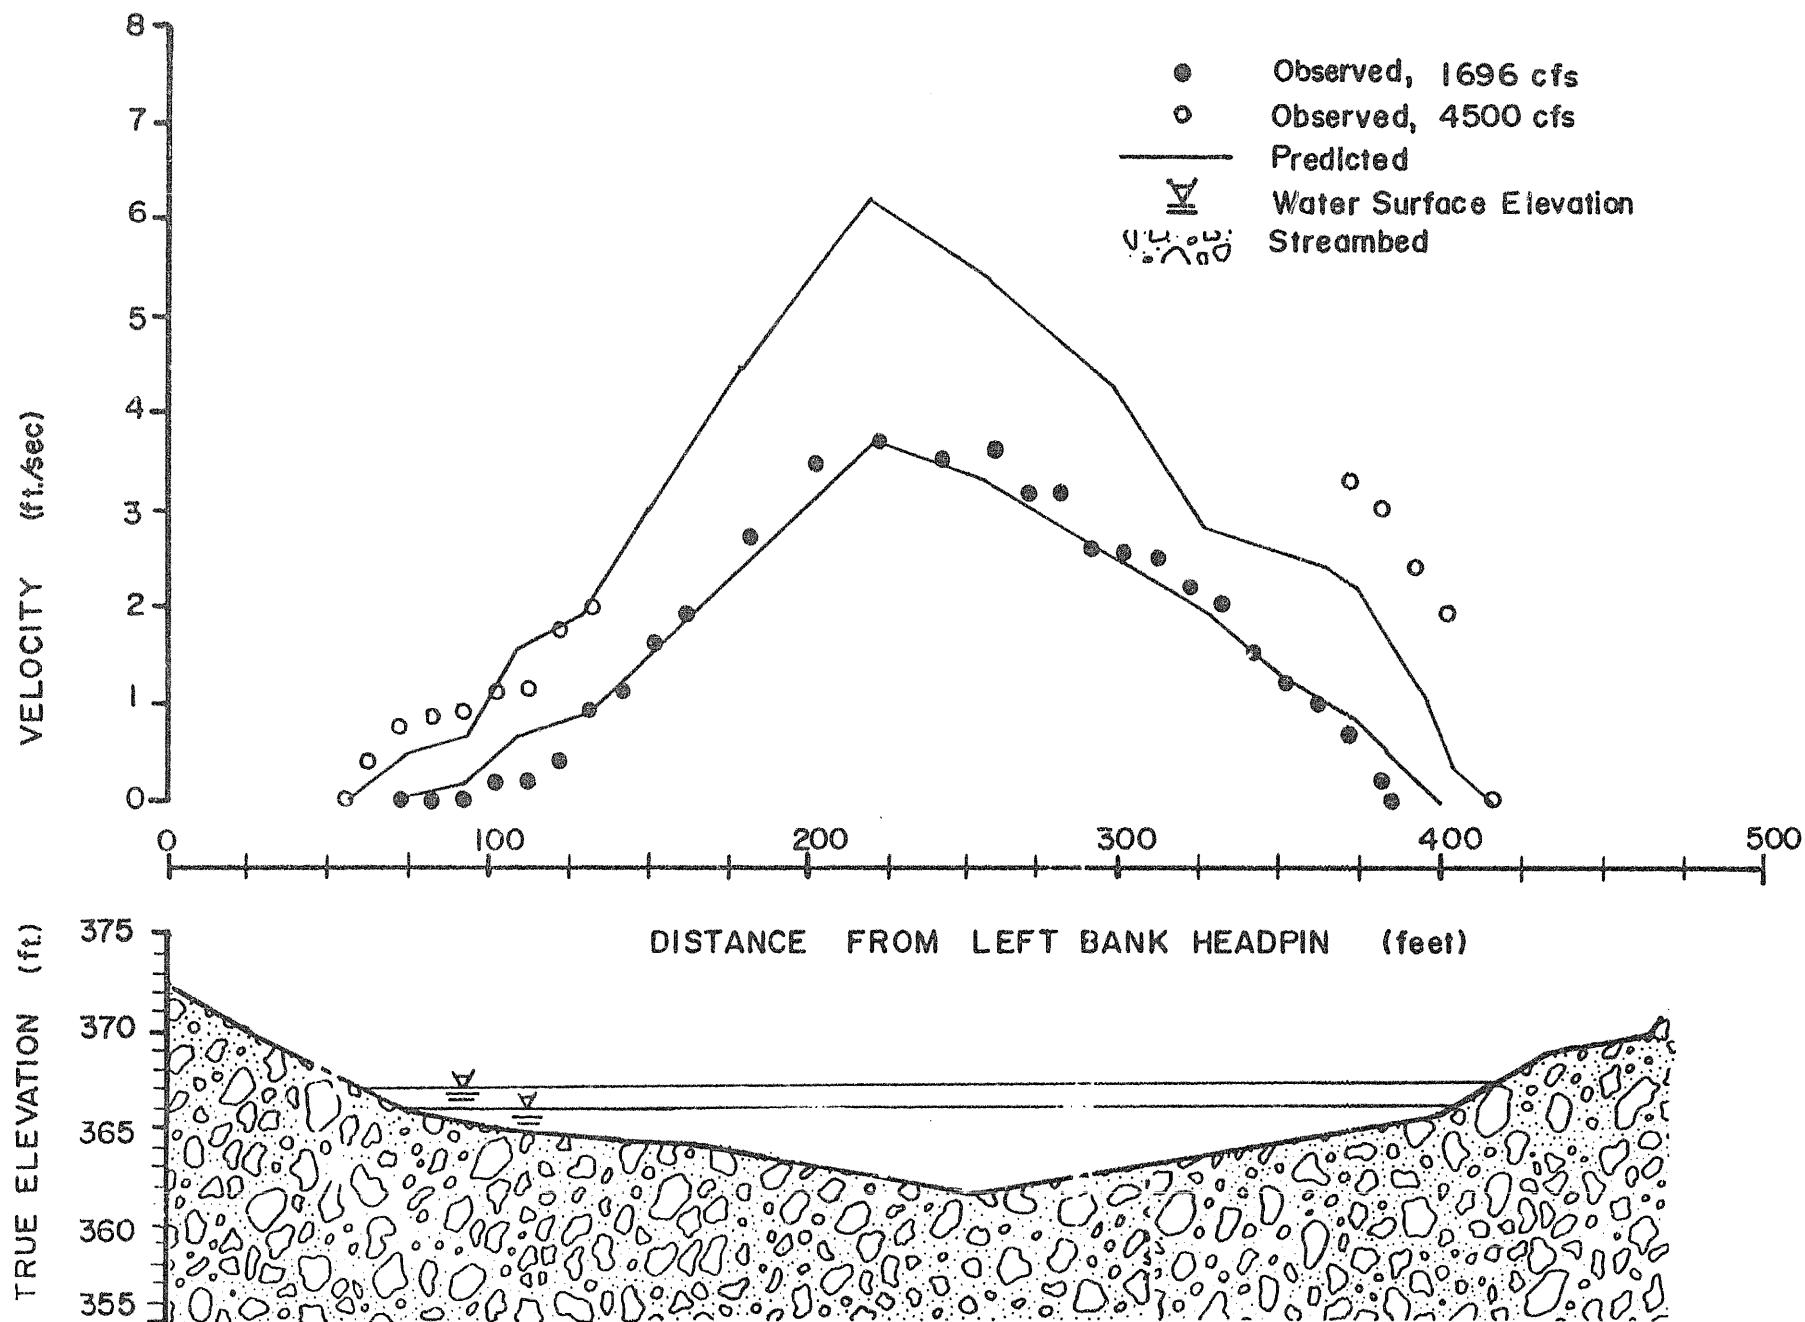


Figure B-2.2 Comparison of observed velocities and velocities predicted by low flow IFG-2 model at site 101.5L, cross section 5.

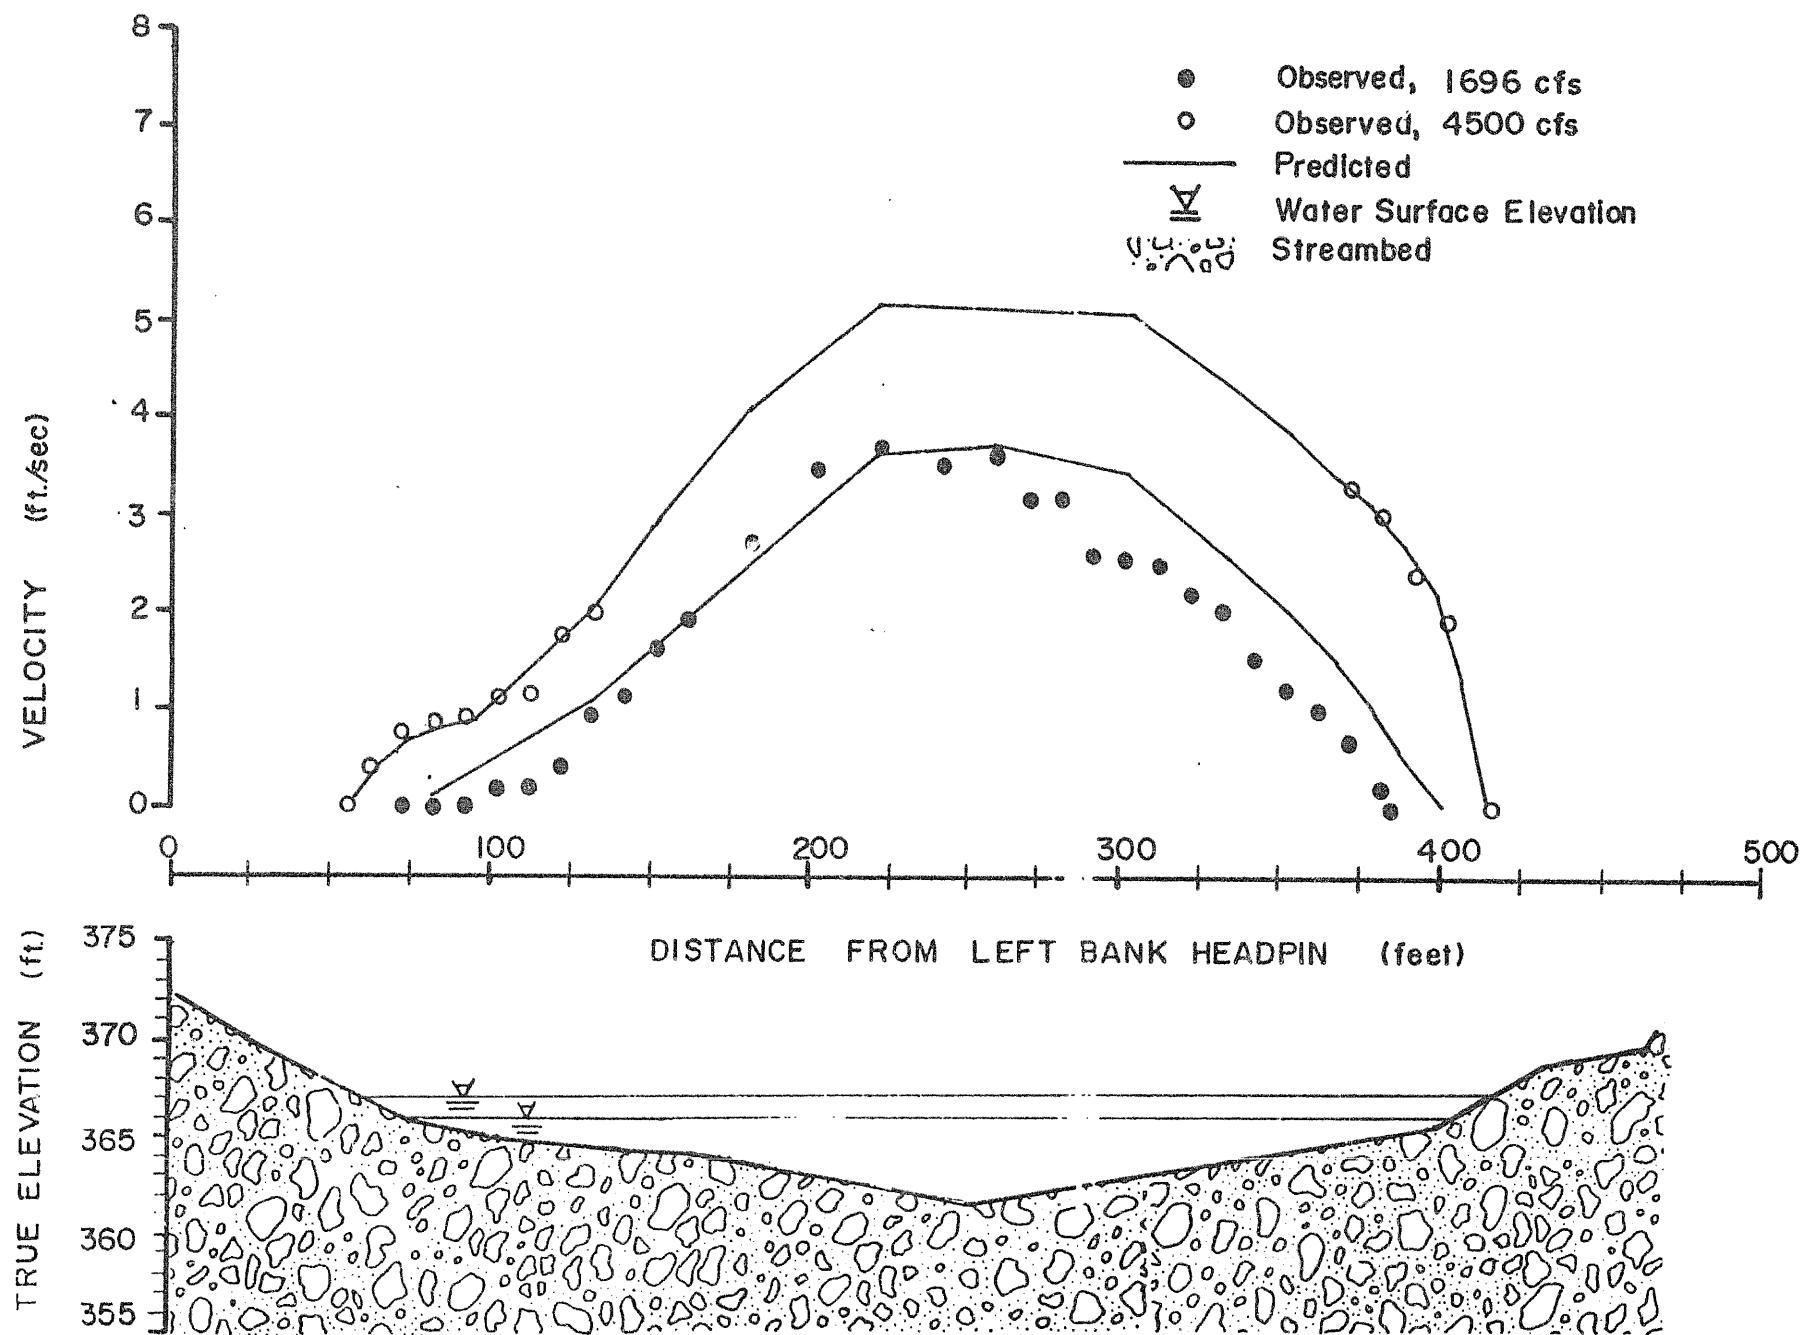


Figure B-2.3 Comparison of observed velocities and velocities predicted by high flow IFG-2 model at site 101.5L, cross section 5.

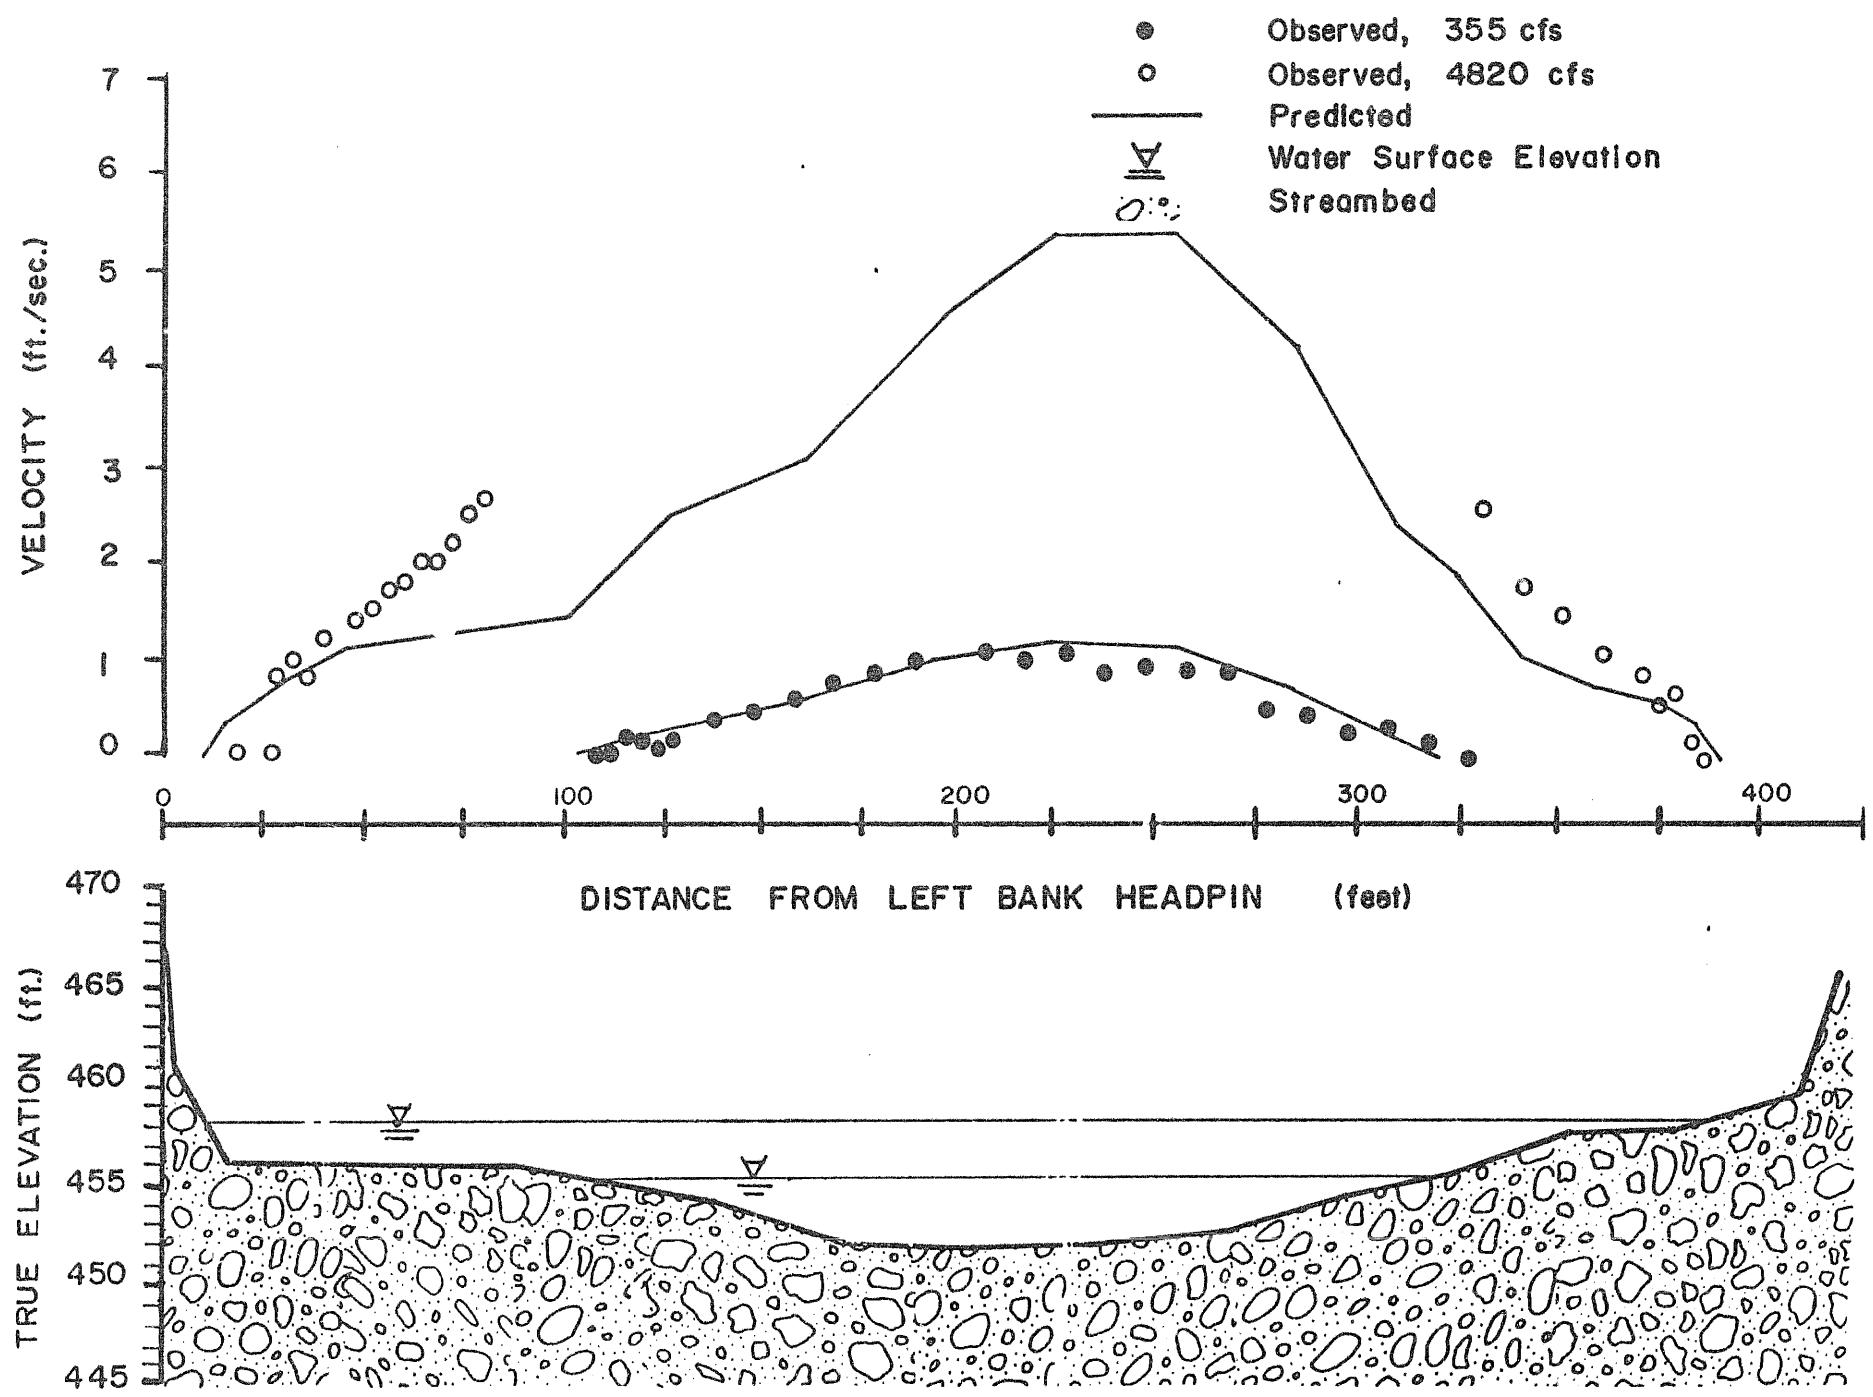


Figure B-2.4 Comparison of observed velocities and velocities predicted by low flow IFG-2 model at site 112.6L, cross section 7.

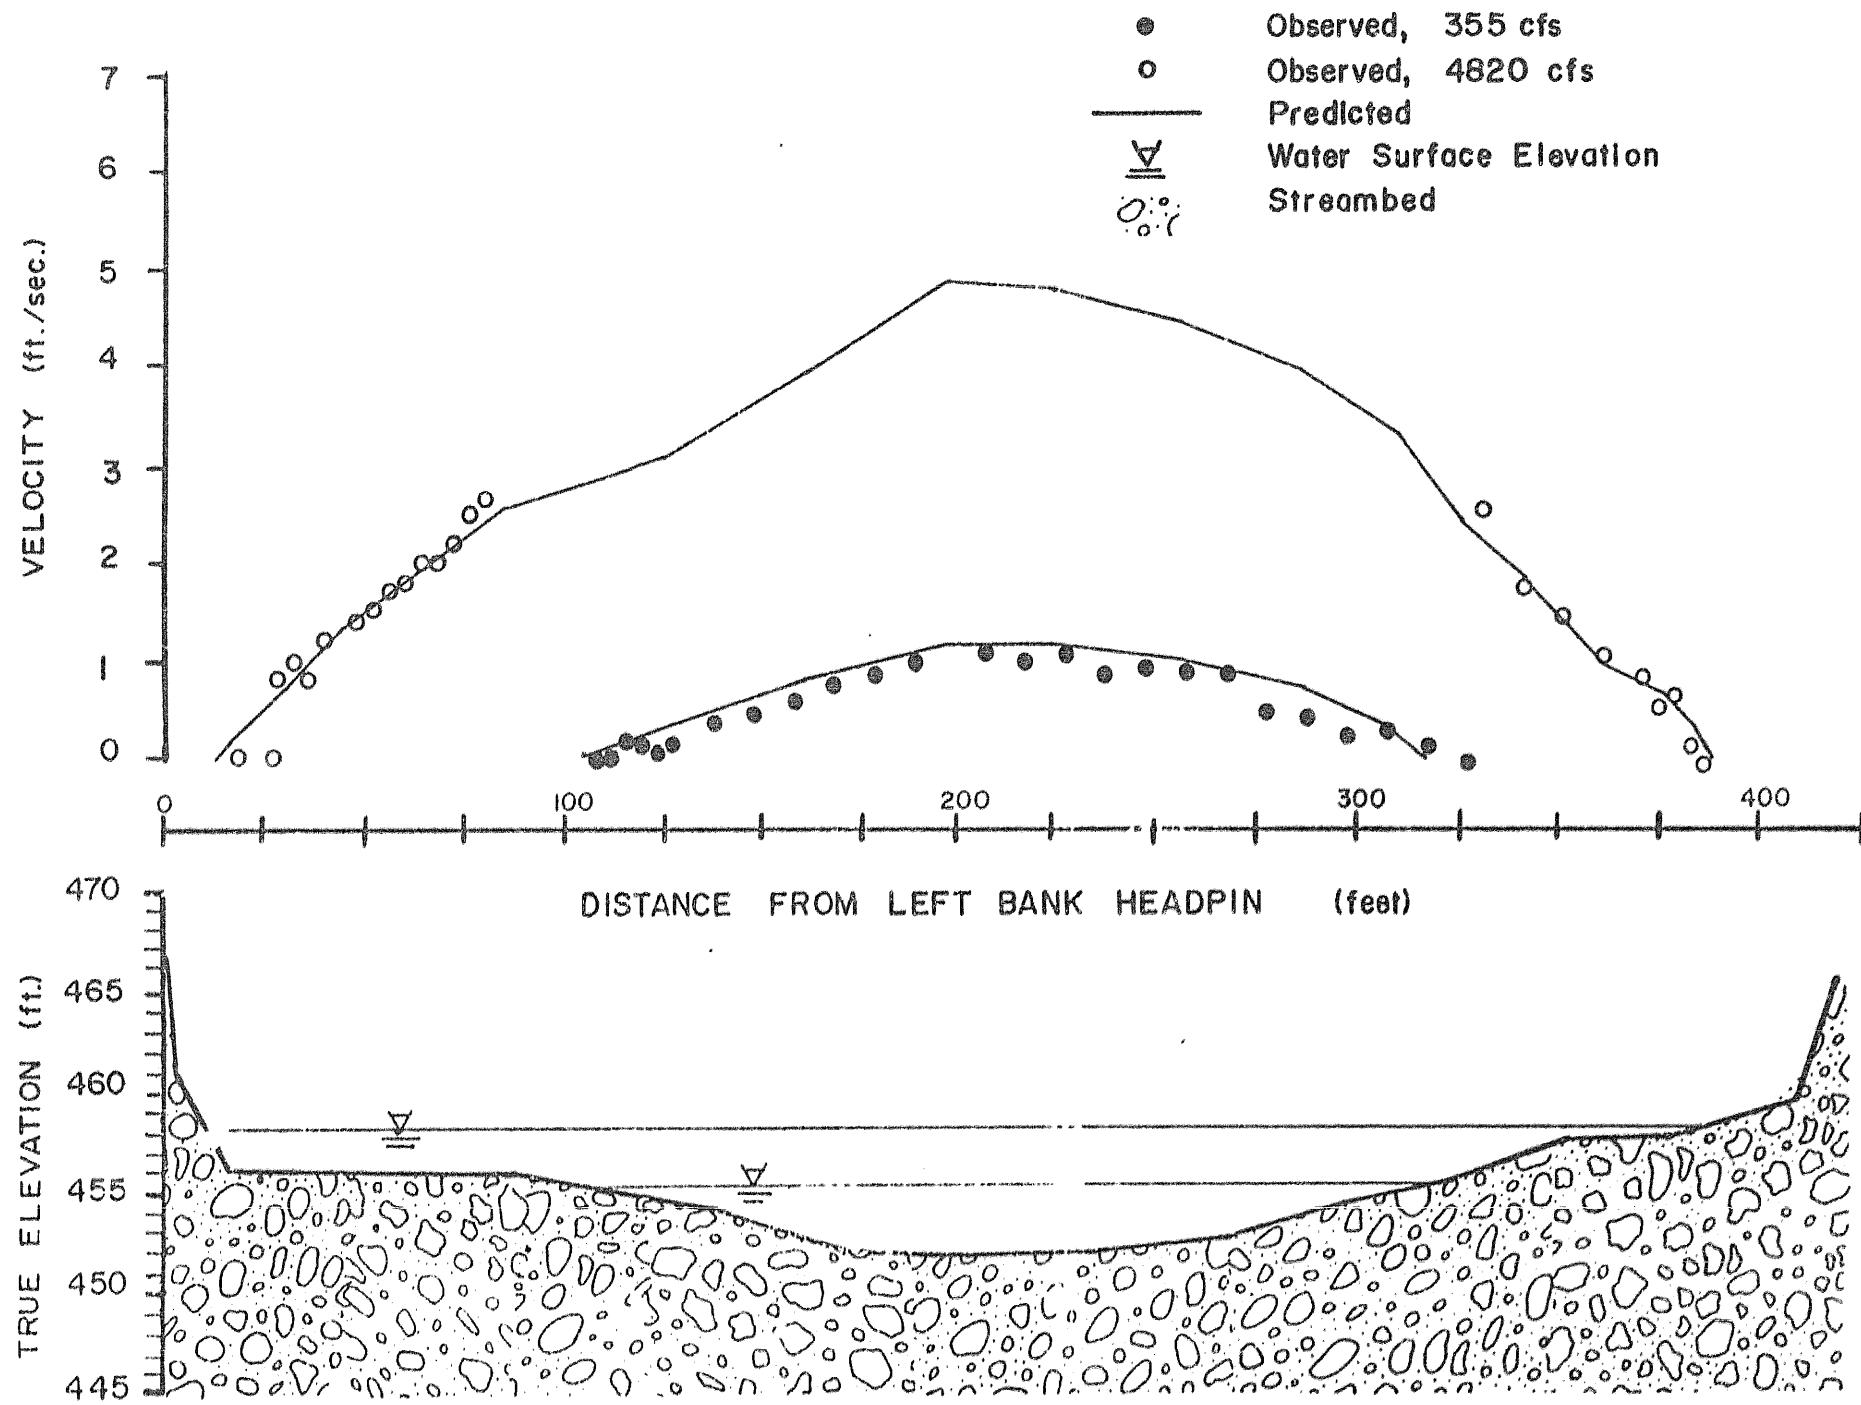


Figure B-2.5 Comparison of observed velocities and velocities predicted by high flow IFG-2 model at site 112.6L, cross section 7.

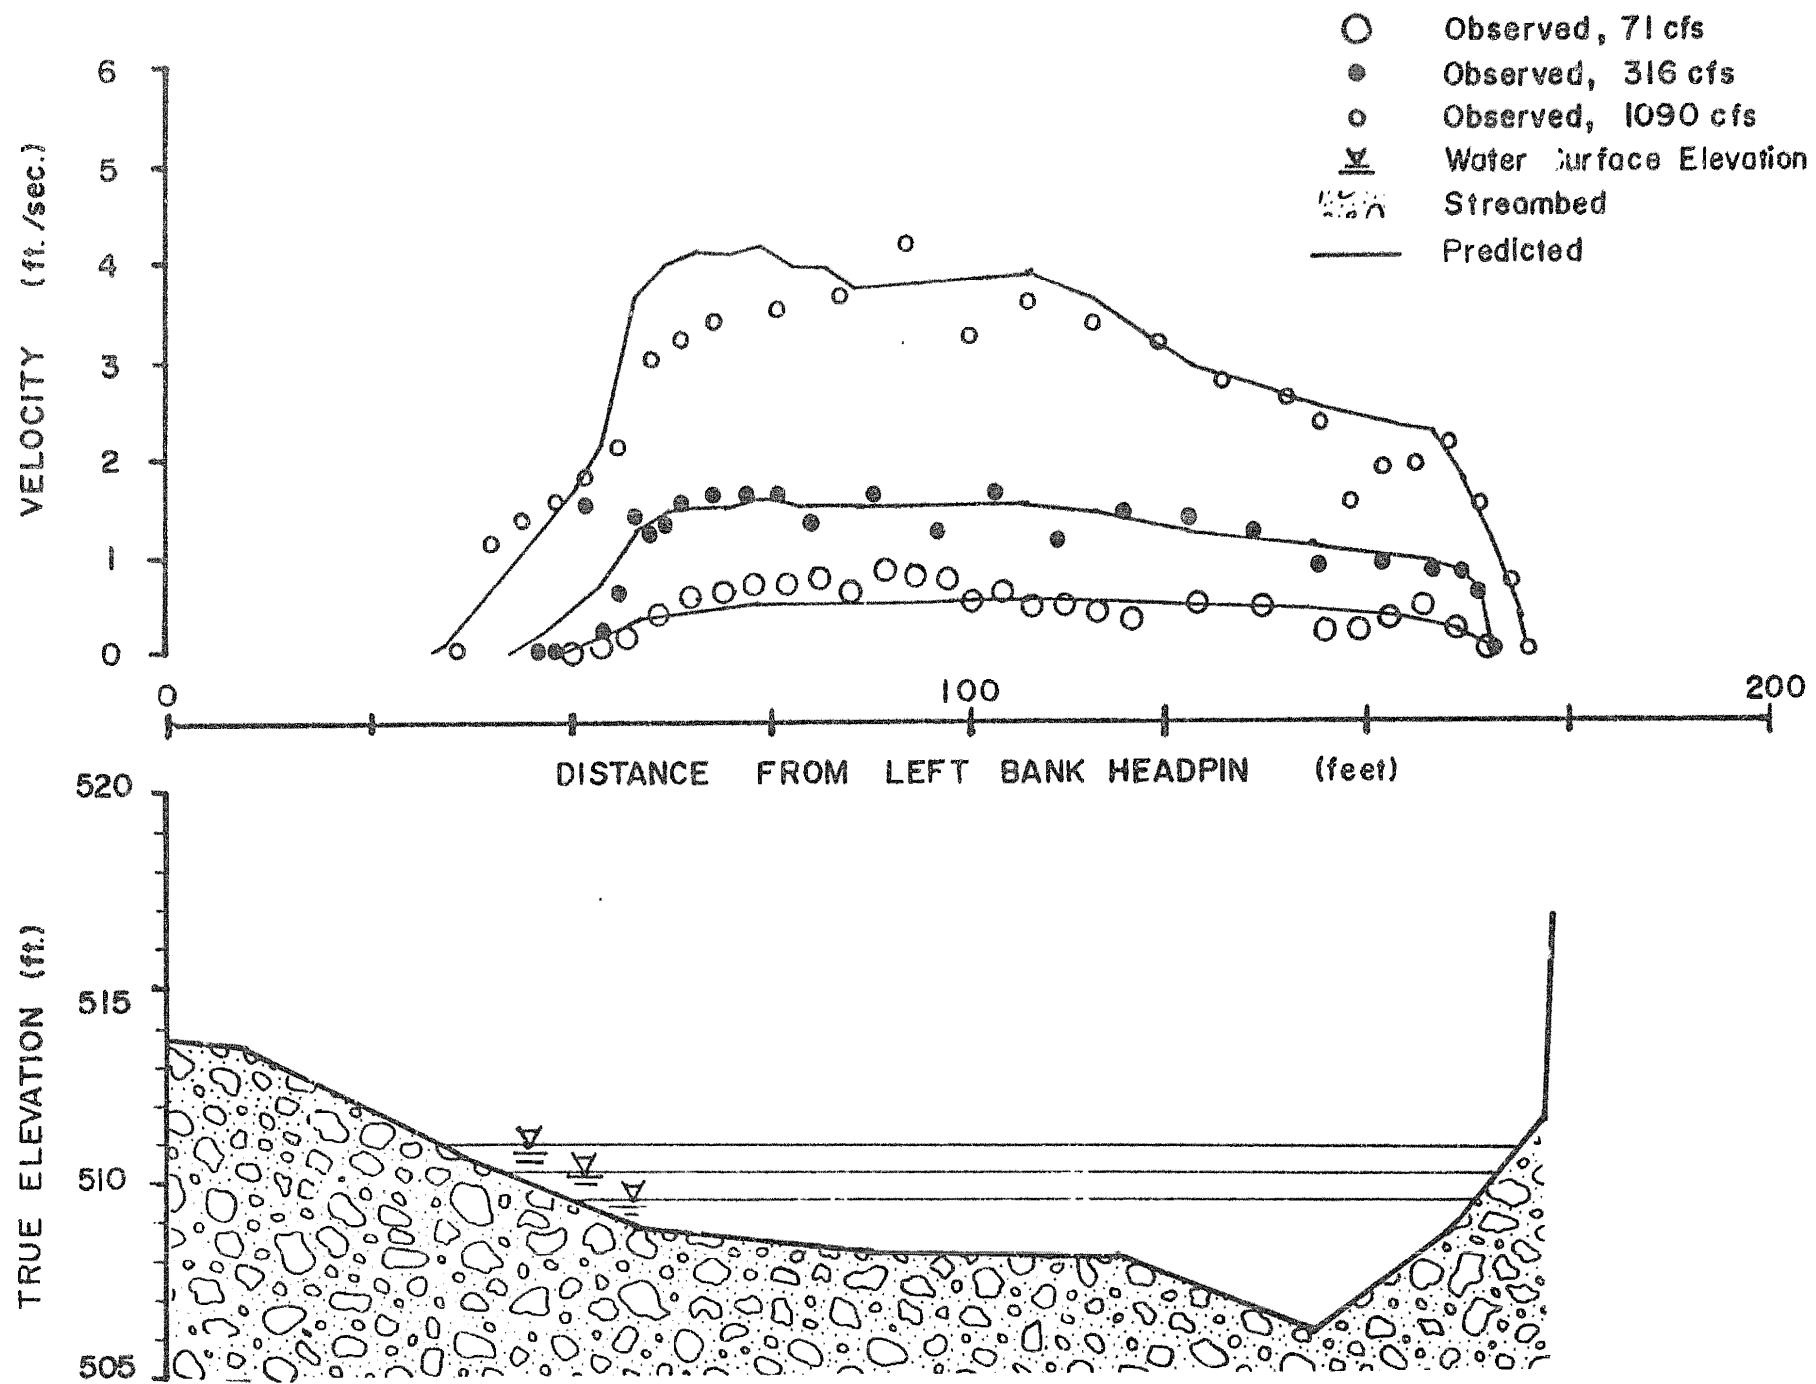


Figure B-2.6 Comparison of observed velocities and velocities predicted by IFG-2 model at site 119.2R, cross section 3.

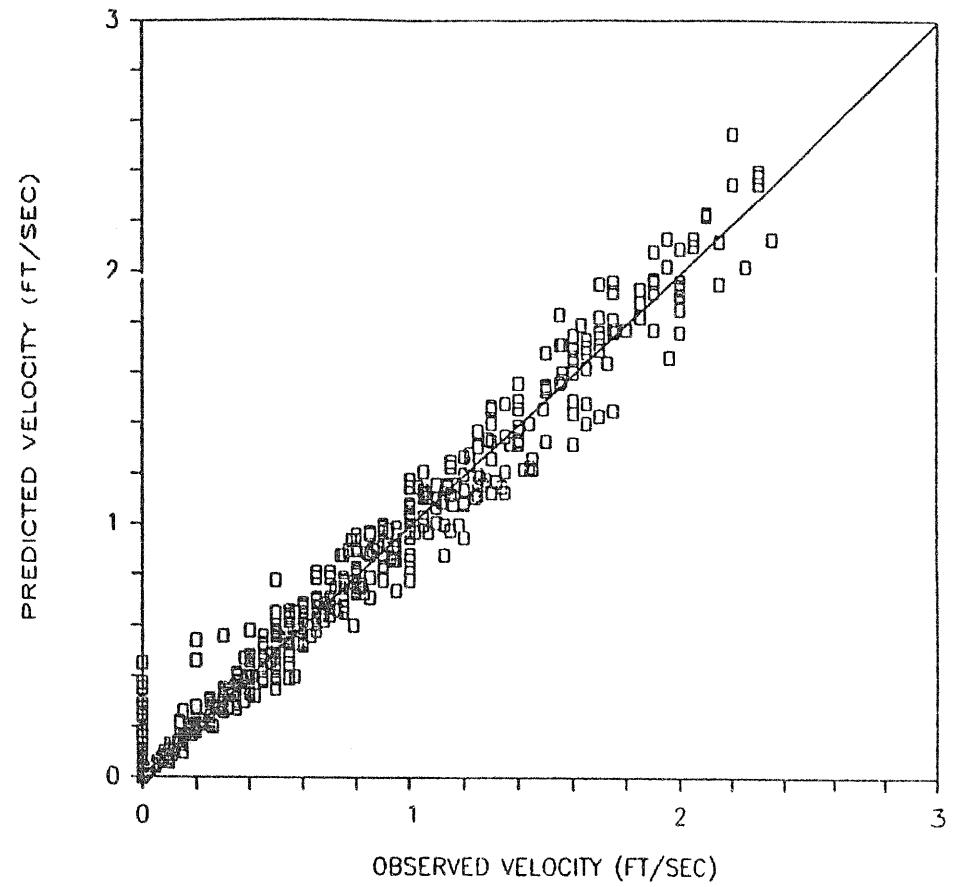
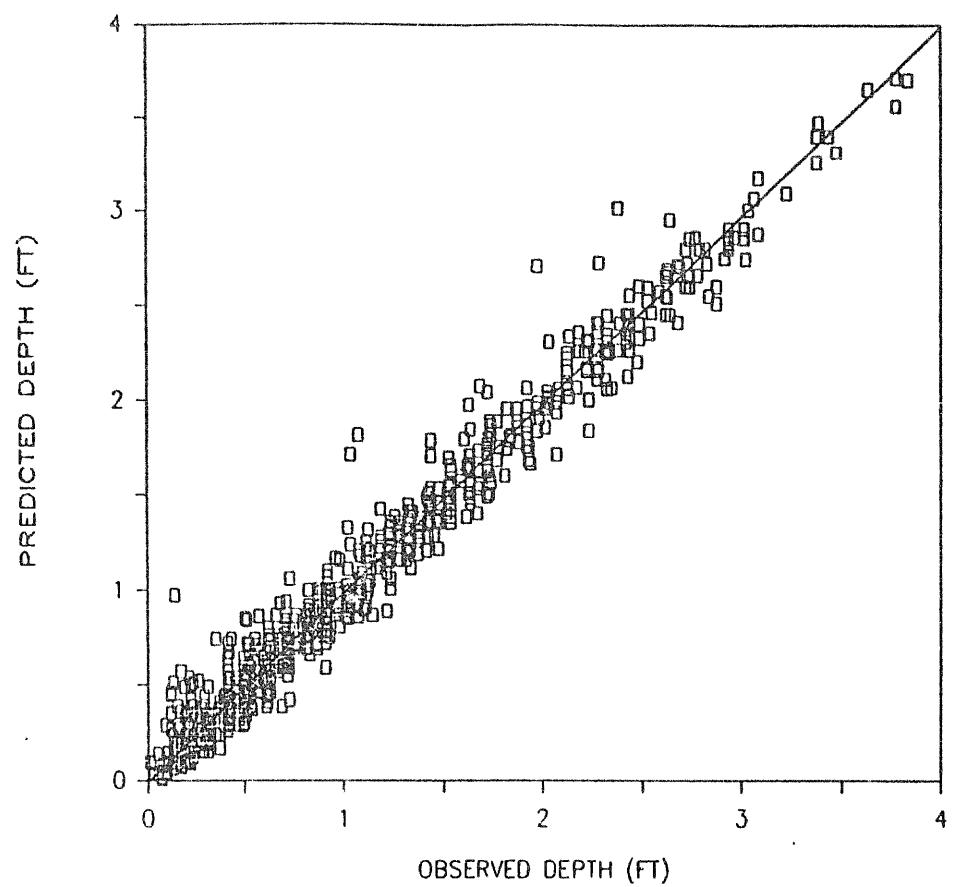


Figure B-2.7 Scatterplots of observed and predicted depths and velocities from the calibrated IFG-4 hydraulic model at 131.7L. The diagonal line in each plot represents a one-to-one relationship.



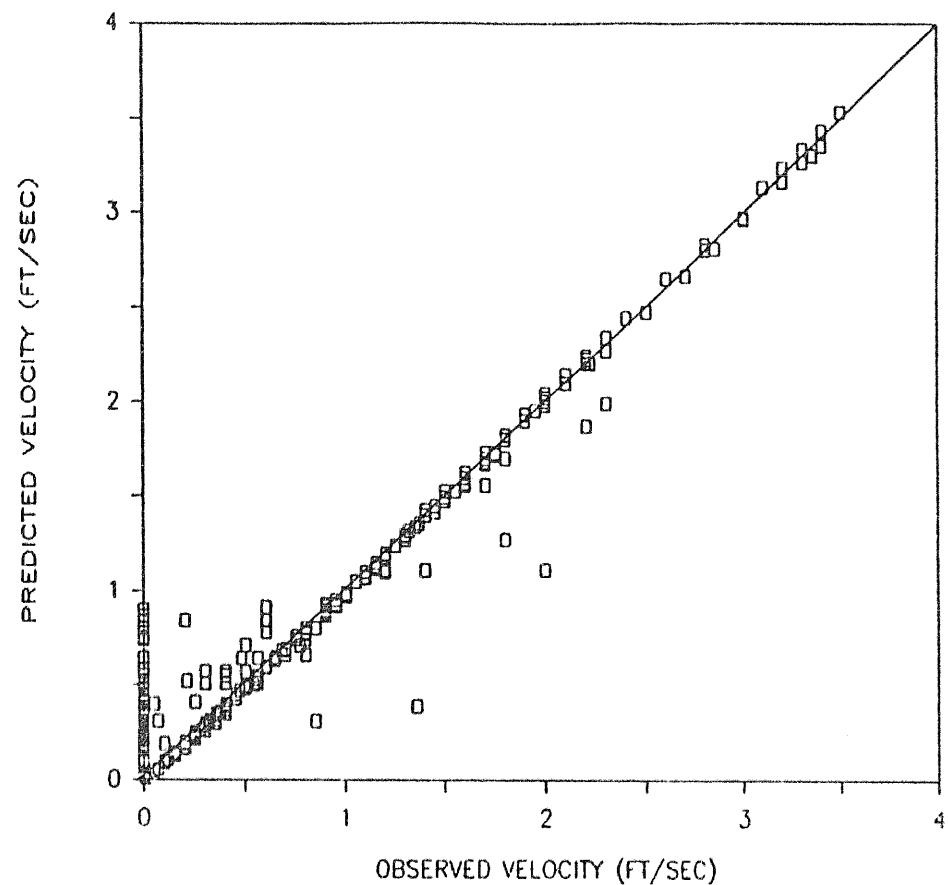



Figure B-2.8 Scatterplots of observed and predicted depths and velocities from the calibrated IFG-4 hydraulic model at 132.6L. The diagonal line in each plot represents a one-to-one relationship.

PREDICTED DEPTH (FT)

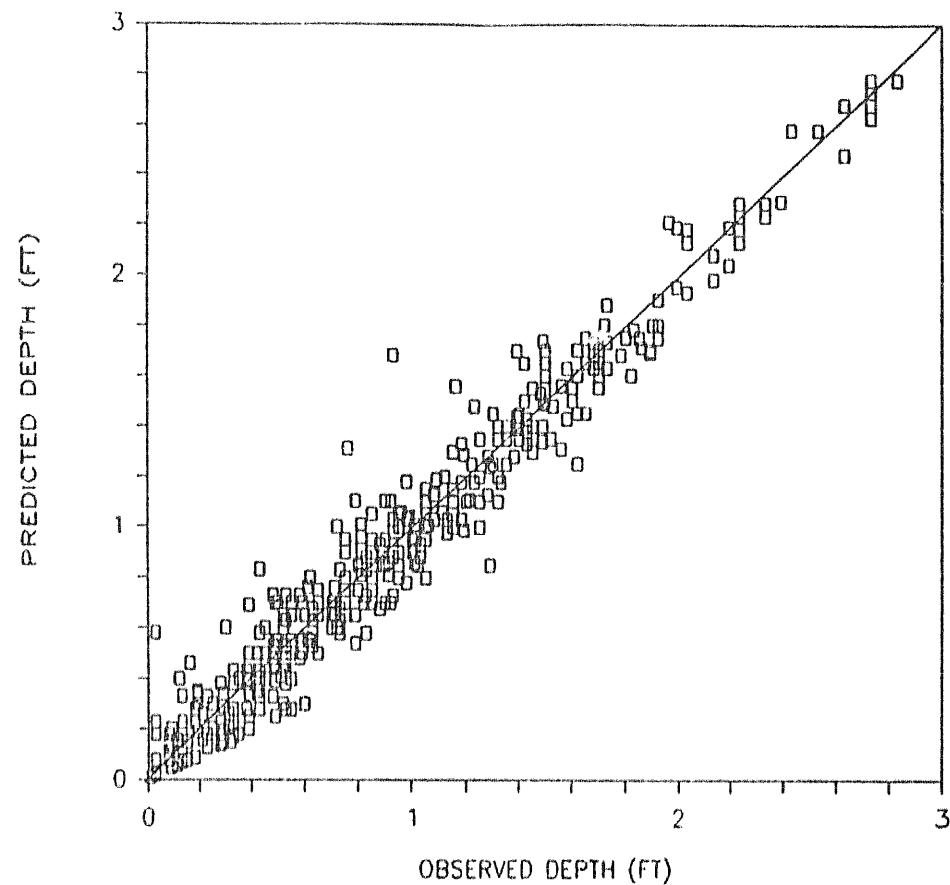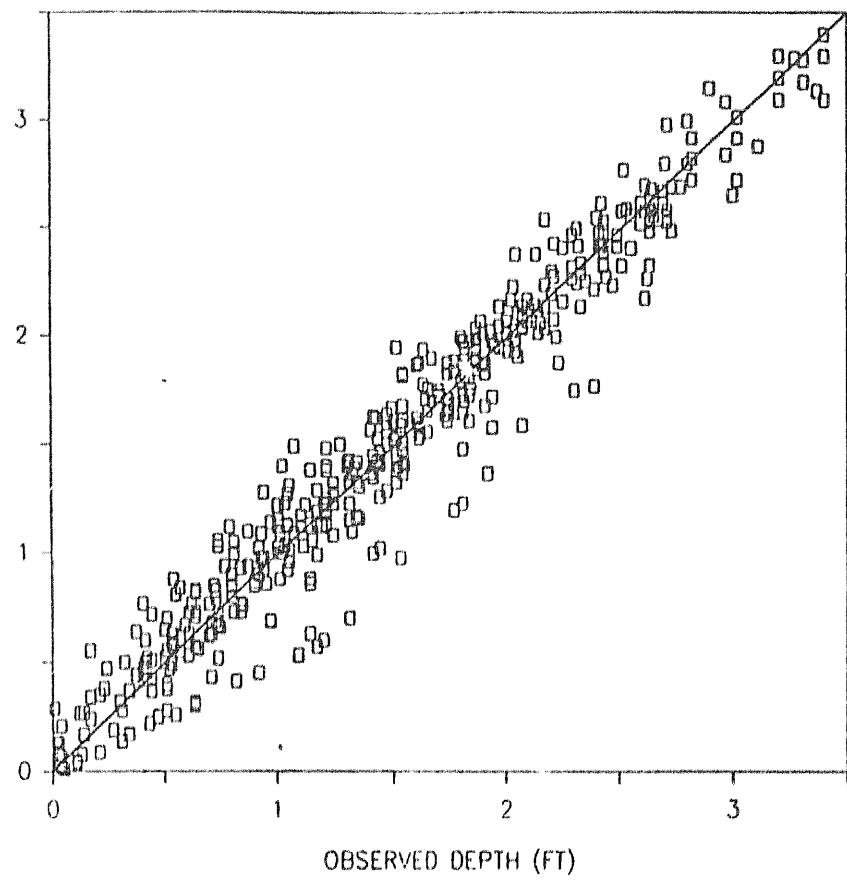

OBSERVED DEPTH (FT)

PREDICTED VELOCITY (FT/SEC)

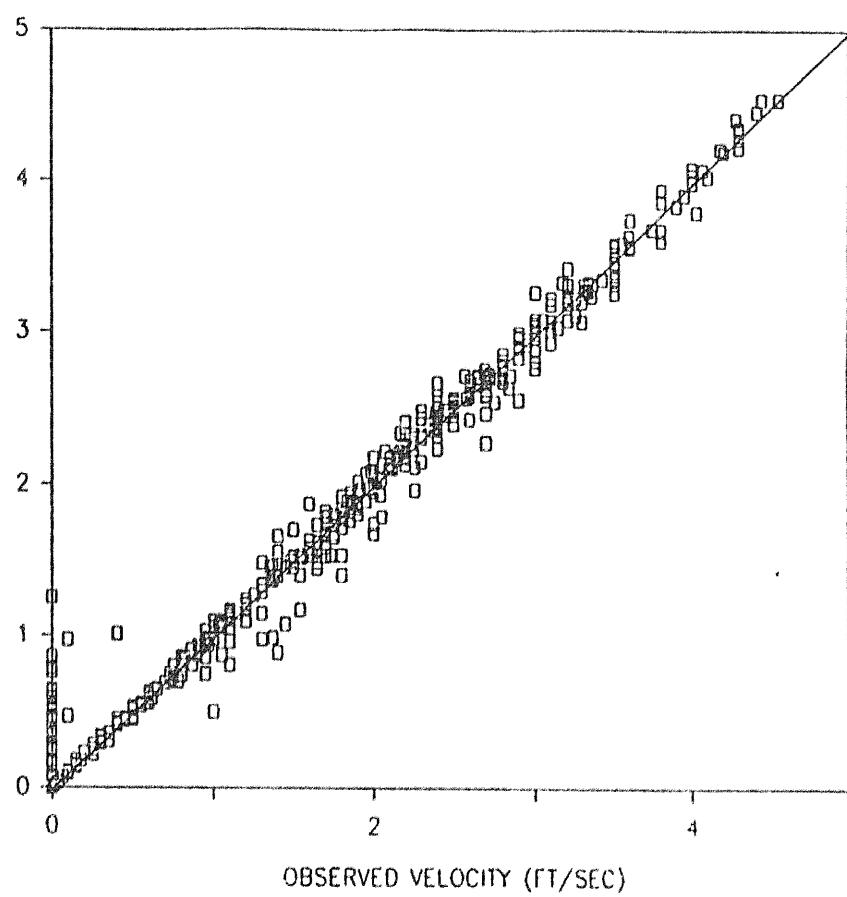

OBSERVED VELOCITY (FT/SEC)

Figure B-2.9 Scatterplots of observed and predicted depths and velocities from the calibrated IFG-4 hydraulic model at 136.0L. The diagonal line in each plot represents a one-to-one relationship.

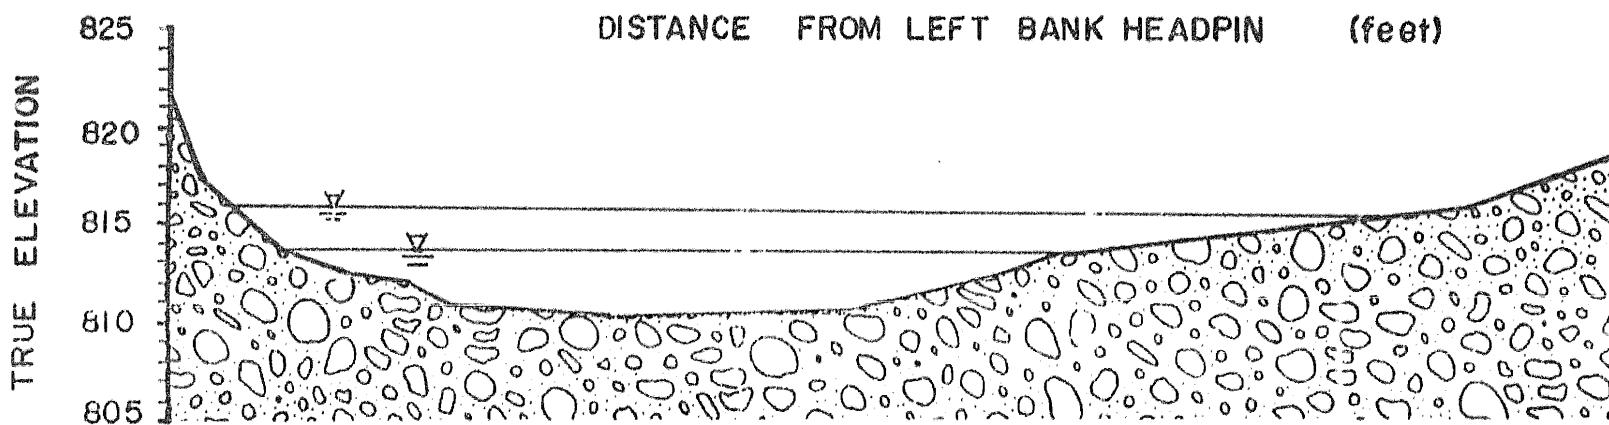
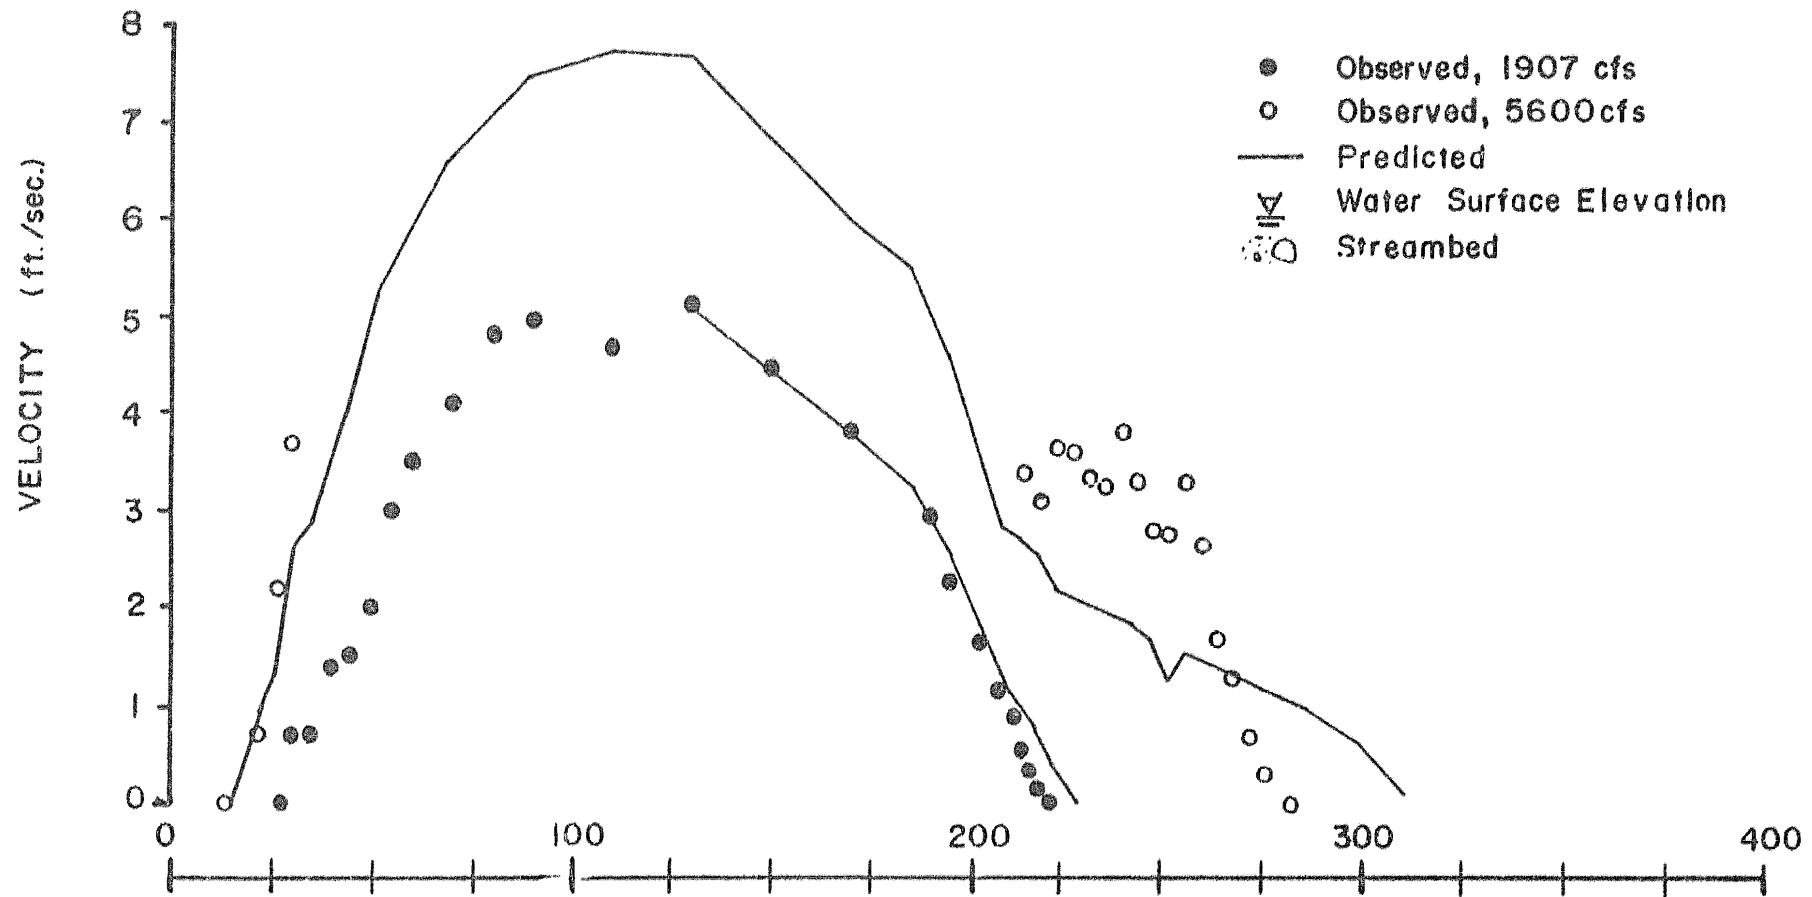


Figure B-2.10 Comparison of observed velocities and velocities predicted by high flow IFG-2 model at site 147.1L, cross section 2.

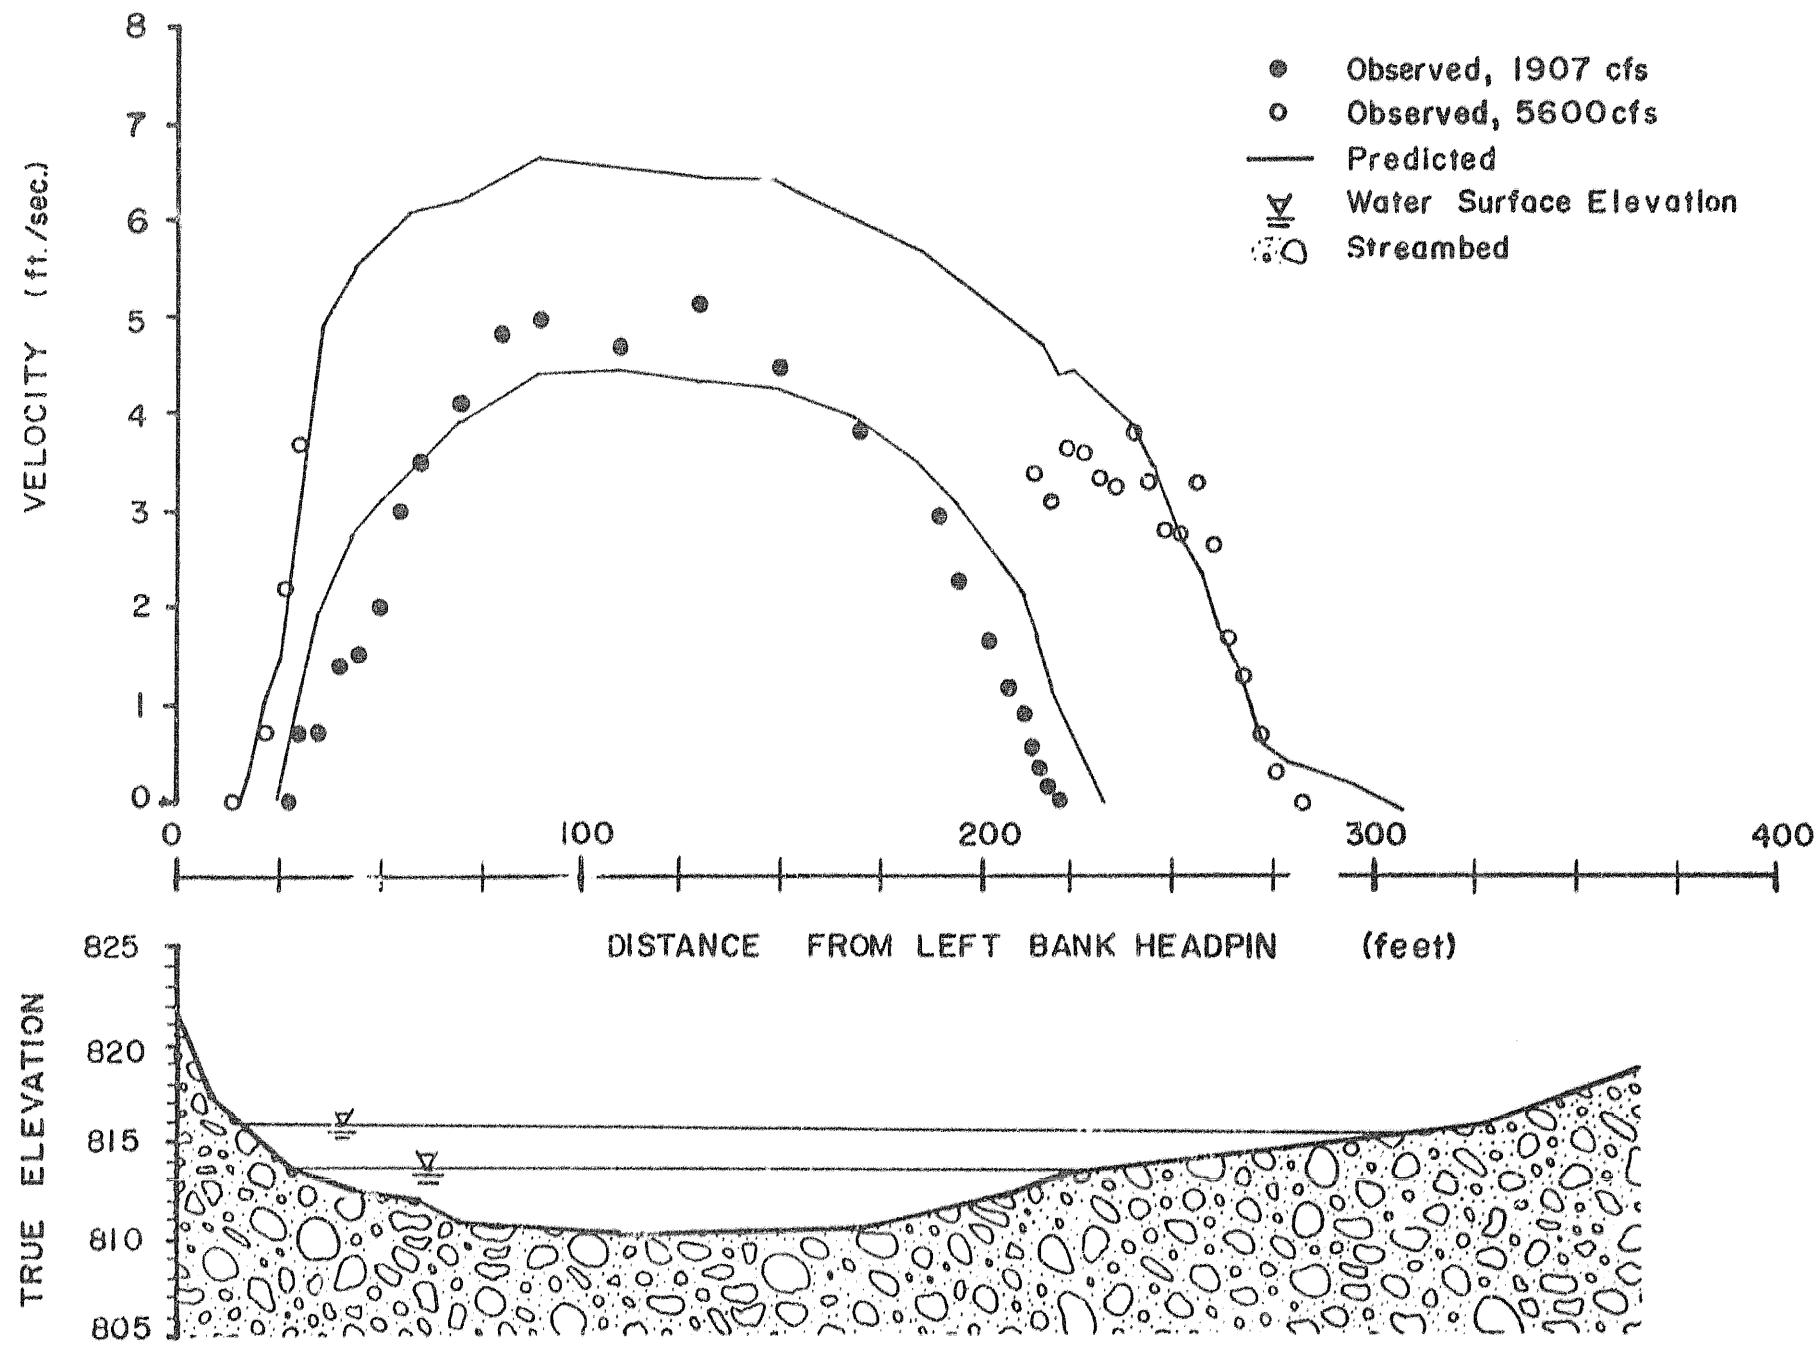


Figure B-2.11 Comparison of observed velocities and velocities predicted by high flow IFG-2 model at site 147.1L, cross section 2.

Table B-6.1. Mainstem discharge, site flow and water surface elevation (WSEL), wetted (gross) surface area and juvenile chinook weighted usable area (WUA) forecast for Site 101.1R. Rating curves are not available for the unbreached condition (<9,200 cfs); mainstem discharge versus site flow rating curve is inapplicable above 22,000 cfs. Low and high turbidity conditions are assumed for discharges below and above 9,200 cfs.

MAINSTEM DISCHARGE (cfs)	SITE FLOW (cfs)	SITE WSEL (ft)	GROSS SURFACE AREA (sq. ft. / 1000 linear ft.)	JUVENILE CHINOOK WUA
5000	-	-	31588	1 0 4
6000	-	-	39026	2 0 4
7000	-	-	46463	1 1471 2
8000	-	-	58631	2 5570 2
9000	-	-	70798	2 11210 2
10000	8	362.19	83712	26261
11000	16	362.40	90471	29533
12000	32	362.60	99200	26931
13000	59	362.81	111981	24498
14000	104	363.01	127928	22709
15000	177	363.22	140939	20795
16000	290	363.42	152865	18577
17000	463	363.62	158443	3 17791 5
18000	720	363.82	164242	3 17042 5
19000	1092	364.03	170271	3 16328 5
20000	1622	364.23	176541	3 15646 5
21000	2363	364.43	183062	3 14996 5
22000	3383	364.63	187100	3 14376 5
23000	-	364.83	188468	3 13783 5
24000	-	365.03	189847	3 13218 5
25000	-	365.22	191237	3 12678 5
26000	-	365.42	192637	3 12162 5
27000	-	365.62	197317	1 11670 5
28000	-	365.82	198766	3 11199 5
29000	-	366.02	200227	3 10749 5
30000	-	366.21	201699	3 10320 5
31000	-	366.41	203182	3 9909 5
32000	-	366.61	204678	3 9516 5
33000	-	366.80	206186	3 9141 5
34000	-	367.00	207705	3 3781 5
35000	-	367.19	209237	3 8452 5

1 Surface area based on aerial photography measurements

2 Interpolated value

3 Surface area at time t calculated as surface area at time t-1 raised to 1.003.

4 Site ponded

5 WUA at time t calculated as WUA at time t-1 raised to 0.998.

Table B-6.2. Mainstem discharge, site flow and water surface elevation (WSEL), wetted (gross) surface area nad juvenile chinook weighted usable area (WUA) forecast for Site 101.5L. High turbidity habitat suitability criteria were used for all discharges. The low and high flow IFG-2 models were used to forecast hydraulic conditions below and above 8,500 cfs, respectively.

MAINSTEM DISCHARGE (cfs)	SITE FLOW (cfs)	SITE WSEL (ft)	GROSS SURFACE AREA (sq. ft. / 1000 linear ft.)	JUVENILE CHINOOK WUA
5000	1466	361.40	280658	10944
6000	1570	361.47	284270	11895
7000	1664	361.54	290918	12764
8000	1784	361.62	300690	12870
9000	2056	361.80	308659	16262
10000	2333	361.97	314499	15600
11000	2616	362.15	320018	14928
12000	2905	362.32	325201	13222
13000	3198	362.49	331026	13783
14000	3496	362.66	337097	14000
15000	3798	362.82	342076	13521
16000	4105	362.99	345779	13030
17000	4415	363.15	351556	12000
18000	4729	363.32	357494	12323
19000	5047	363.48	362829	13110
20000	5368	363.64	368698	13338
21000	5692	363.80	372888	15676
22000	6019	363.96	377822	16513
23000	6349	364.12	383558	17116
24000	6683	364.27	387323	17335
25000	7019	364.43	392111	17920
26000	7357	364.59	397762	20112
27000	7699	364.74	402730	20922
28000	8043	364.90	407211	21382
29000	8389	365.05	410691	21240
30000	8738	365.21	413092	20348
31000	9090	365.36	415338	19664
32000	9443	365.51	417868	19455
33000	9799	365.66	420008	18859
34000	10156	365.81	421598	18207
35000	10516	365.96	423318	17731

Table B-6.3. Mainstem discharge, site flow and water surface elevation (WSEL), wetted (gross) surface area and juvenile chinook weighted usable area (WUA) modeled for Site 112.6L. High turbidity habitat suitability criteria were used for all discharges. The low and high flow IFG-2 models were used to forecast hydraulic conditions below and above 10,500 and 11,000 cfs, respectively. Surface area and WUA values within the range of overlap are averages of output from both IFG-2/HABTAT models.

MAINSTEM DISCHARGE (cfs)	SITE FLOW (cfs)	SITE WSEL (ft)	GROSS SURFACE AREA (sq. ft. / 1000 linear ft.)	JUVENILE CHINOOK WUA
5000	96	449.93	241007	76512
6000	181	450.29	280371	72545
7000	310	450.61	318562	69149 1
8000	493	450.91	340249	63242
9000	742	451.18	357920	51672
10000	1069	451.43	375250	40909
11000	1488	451.67	387719	28522
12000	1808	451.90	402981	22284
13000	2141	452.12	412202	20101
14000	2504	452.32	427124	19212
15000	2896	452.52	442689	22461
16000	3318	452.71	453276	24175
17000	3771	452.89	462377	24900
18000	4255	453.06	467125	22166
19000	4769	453.23	471074	19233
20000	5314	453.39	474600	16707
21000	5891	453.55	477784	14799
22000	6498	453.71	481584	13045
23000	7137	453.86	484249	11943
24000	7808	454.00	486796	10814
25000	8510	454.14	489256	10066
26000	9244	454.28	491644	9368
27000	10011	454.42	493951	8684
28000	10809	454.55	496166	8028
29000	11640	454.68	498304	7396
30000	12503	454.81	500362	6855
31000	13399	454.93	502333	6419
32000	14327	455.05	503909	5990
33000	15288	455.17	505493	5576
34000	16282	455.29	508227	5530
35000	17309	455.40	510083	5075

1 Interpolated value

Table B-6.4. Mainstem discharge, site flow and water surface elevation (WSEL), wetted (gross) surface area and juvenile chinook weighted usable area (WUA) forecast for Site 119.2R. Low and high turbidity conditions were assumed for discharges below and above 10,000 cfs. Rating curves were inapplicable in the 5-10,000 and 25-35,000 cfs discharge range.

MAINSTEM DISCHARGE (cfs)	SITE FLOW (cfs)	SITE WSEL (ft)	GROSS SURFACE AREA (sq. ft. / 1000 linear ft.)	JUVENILE CHINOOK WUA
5000	-	-	56282	1 10468 4
6000	-	-	56282	1 10468 4
7000	-	-	56282	1 10468 4
8000	-	-	62946	2 14239 2
9000	-	-	76275	2 23389 2
10000	15	508.83	88953	34430
11000	25	509.03	93316	36815
12000	40	509.23	105765	38833
13000	61	509.42	108515	38365
14000	90	509.61	111092	33527
15000	130	509.79	114256	28625
16000	184	509.96	117710	23436
17000	254	510.13	122129	19443
18000	344	510.29	127617	17479
19000	459	510.45	130593	14588
20000	603	510.61	132479	11345
21000	782	510.76	137254	9960
22000	1001	510.91	142216	3 8759 5
23000	1268	511.06	147374	3 7717 5
24000	1591	511.20	152734	3 6811 5
25000	-	-	157364	3 6292 5
26000	-	-	161177	3 6076 5
27000	-	-	165091	3 5868 5
28000	-	-	169108	3 5668 5
29000	-	-	173231	3 5475 5
30000	-	-	177463	3 5290 5
31000	-	-	181807	3 5112 5
32000	-	-	186267	3 4941 5
33000	-	-	190845	3 4776 5
34000	-	-	195545	3 4617 5
35000	-	-	200371	3 4464 5

- 1 Constant surface area based on aerial photography measurements
- 2 Interpolated value
- 3 Surface area at time t calculated as surface area at time t-1 raised to 1.001
- 4 WUA assumed equal to 18.6 percent of surface area
- 5 WUA at time t calculated as surface area at time t-1 raised to 0.993 (22-25,000 cfs) or 0.998 (25-35,000 cfs)

Table B-6.5. Mainstem discharge, site flow and water surface elevation (WSEL), wetted (gross) surface area and juvenile chinook weighted usable area (WUA) forecast for Site 131.7L. High turbidity habitat suitability criteria were used for all discharges.

MAINSTEM DISCHARGE (cfs)	SITE FLOW (cfs)	SITE WSEL (ft)	GROSS SURFACE AREA (sq. ft. / 1000 linear ft.)	JUVENILE CHINOOK WUA
5000	7	616.24	109615	30214
6000	13	616.40	123973	36623
7000	21	616.56	132671	41588
8000	33	616.71	137546	45776
9000	49	616.86	141445	46487
10000	69	617.00	151533	46977 1
11000	95	617.13	176337	47466 1
12000	127	617.26	189058	47956
13000	166	617.39	199945	47491
14000	213	617.52	212707	45734
15000	268	617.64	218480	44188
16000	333	617.76	221802	41630
17000	407	617.88	225003	39721
18000	493	617.99	228212	37451
19000	590	618.11	231356	35713
20000	701	618.22	234829	34628
21000	825	618.33	238209	33964
22000	963	618.44	241542	33771
23000	1117	618.54	244858	32056 2
24000	1288	618.65	248153	31863 2
25000	1476	618.75	251413	31670 2
26000	1683	618.86	254655	31477 2
27000	1909	618.96	257640	31285 2
28000	2155	619.06	260818	31092 2
29000	2423	619.16	263973	30899 2
30000	2714	619.26	267116	30706 2
31000	3028	619.36	270237	30514 2
32000	3367	619.45	273345	30321 2
33000	3731	619.55	276433	30128 2
34000	4122	619.64	279509	29935 2
35000	4541	619.74	282572	29743 2

1 Interpolated value

2 WUA at time t calculated as WUA at time t-1 raised to 0.995

Table B-6.6. Mainstem discharge, site flow and water surface elevation (WSEL), wetted (gross) surface area and juvenile chinook weighted usable area (WUA) forecast for Site 132.6L. Low and high turbidity conditions are assumed for discharges below and above 10,500 cfs. Rating curves are inapplicable below 10,500 cfs.

MAINSTEM DISCHARGE (cfs)	SITE FLOW (cfs)	SITE WSEL (ft)	GROSS SURFACE AREA (sq. ft. / 1000 linear ft.)	JUVENILE CHINOOK WUA
5000	-	-	0	0
6000	-	-	14976	2
7000	-	-	29951	1
8000	-	-	39165	2
9000	-	-	48378	2
10000	-	-	57592	1
10500	10	625.83	57592	16528
11000	12	625.90	59274	16791
12000	17	626.04	63544	17214
13000	24	626.18	67533	17695
14000	32	626.30	72391	18219
15000	41	626.42	74895	18207
16000	53	626.53	78605	17264
17000	67	626.64	80215	16508
18000	84	626.74	82569	14932
19000	103	626.84	87157	13221
20000	126	626.94	91843	12328
21000	152	627.03	93754	12464
22000	182	627.12	98212	11201
23000	217	627.21	100202	10602
24000	256	627.29	102175	10896
25000	300	627.37	104025	10314
26000	349	627.45	107262	9848
27000	405	627.52	109398	9982
28000	466	627.60	111596	10300
29000	534	627.67	115114	10209
30000	610	627.74	121236	10028
31000	693	627.81	125569	3 9845 5
32000	784	627.88	130071	3 9665 5
33000	884	627.94	134748	3 9490 5
34000	992	628.01	139608	3 9317 5
35000	1111	628.07	144659	3 9149 5

1 Surface area based on aerial photography measurements

2 Interpolated value

3 Surface area at time t calculated as surface area at time t-1 raised to 1.003

4 WUA assumed equal to low turbidity WUA forecast just prior to breaching

5 WUA at time t calculated as surface area at time t-1 raised to 0.998

Table B-6.7. Mainstem discharge, site flow and water surface elevation (WSEL), wetted (gross) surface area and juvenile chinook weighted usable area (WUA) forecast for Site 136.0L. High turbidity habitat suitability criteria were used for all discharges.

MAINSTEM DISCHARGE (cfs)	SITE FLOW (cfs)	SITE WSEL (ft)	GROSS SURFACE AREA (sq. ft. / 1000 linear ft.)	JUVENILE CHINOOK WUA
5000	12	613.90	28854	7662
6000	19	614.21	31895	7450
7000	28	614.50	35668	6985
8000	39	614.77	37446	6114
9000	53	615.02	39268	5886 1
10000	69	615.25	41025	5592 1
11000	88	615.47	46746	5364 1
12000	110	615.68	49043	5398
13000	136	615.87	51636	5431
14000	165	616.07	52775	5193
15000	197	616.25	53875	4274
16000	233	616.42	54996	4135
17000	272	616.59	56226	3792
18000	315	616.76	57824	3350
19000	362	616.92	59070	3366
20000	414	617.07	60332	3892
21000	469	617.22	61611	3945
22000	529	617.37	62780	3936
23000	593	617.51	63930	3866
24000	662	617.65	65004	3862
25000	735	617.78	65973	3838
26000	814	617.91	66662	3683
27000	897	618.04	67341	3748
28000	985	618.17	68019	3803
29000	1079	618.30	68673	3807
30000	1177	618.42	69292	3817
31000	1281	618.54	69854	3918
32000	1390	618.65	70302	3908
33000	1505	618.77	70753	3894
34000	1626	618.88	71183	3894
35000	1752	618.99	72227	3769

1 Interpolated values

Table B-6.8. Mainstem discharge, site flow and water surface elevation (WSEL), wetted (gross) surface area and juvenile chinook weighted usable area (WUA) forecast for Site 147.1L. The low and high flow IFG-2 models were used to forecast hydraulic conditions below and above 21,000 cfs.

MAINSTEM DISCHARGE (cfs)	SITE FLOW (cfs)	SITE WSEL (ft)	GROSS SURFACE AREA (sq. ft. / 1000 linear ft.)	JUVENILE CHINOOK WUA
5000	1066	811.56	181538	5341
6000	1326	811.80	186579	5028
7000	1594	812.03	191465	4661
8000	1870	812.26	197141	4691
9000	2154	812.48	202683	5318
10000	2443	812.67	207274	5256
11000	2738	812.90	211652	5313
12000	3039	813.11	215714	5033
13000	3344	813.31	219556	5441
14000	3655	813.51	223252	6165
15000	3969	813.70	226416	6250
16000	4288	813.89	229353	6465
17000	4611	814.08	232410	6118
18000	4937	814.27	235319	6789
19000	5267	814.46	238268	7267
20000	5601	814.64	241216	7105
21000	5600	814.82	246363	6991
22000	6278	815.00	249457	7814
23000	6621	815.18	252493	8269
24000	6967	815.35	256136	9353
25000	7315	815.53	259098	9376
26000	7667	815.70	261926	9340
27000	8021	815.87	264711	9358
28000	8378	816.04	267970	9321
29000	8738	816.21	270159	8709
30000	9099	816.38	272314	8781
31000	9464	816.54	275056	10139
32000	9830	816.71	277122	9629
33000	10199	816.87	279054	8959
34000	10570	817.03	280941	8462
35000	10943	817.20	283400	8302