# INSTREAM FLOW RELATIONSHIPS REPORT
# TECHNICAL REPORT NO. 2
# PHYSICAL PROCESSES

MAY 1985

R&M CONSULTANTS, INC.
ENGINEERS GEOLOGISTS PLANNERS SURVEYORS

R24/3 1

MAY 29 1985

ALASKA POWER AUTHORITY
SUSITNA HYDROELECTRIC PROJECT
Federal Energy Regulatory Commission
Project Number 7114

# INSTREAM FLOW RELATIONSHIPS REPORT
# TECHNICAL REPORT NO. 2
# PHYSICAL PROCESSES

MAY 1985

DRAFT REPORT

Prepared By:

R&M CONSULANTS, INC.
WOODWARD-CLYDE CONSULTANTS, INC.
and
HARZA-EBASCO SUSITNA JOINT VENTURE

# TABLE OF CONTENTS


| Section/Title | | Page |
|---|---|---|
| List of Tables | | ii |
| List of Figures | | v |
| Acknowledgments | | ix |
| Preface | | x |
| 1. | INTRODUCTION | |
| | 1.1 Purpose | 1-1 |
| | 1.2 Organization | 1-3 |
| | 1.3 Impacts at Other Projects | 1-3 |
| | 1.4 Data Sources | 1-7 |
| 2. | RESERVOIR SEDIMENTATION | |
| | 2.1 Factors Affecting Reservior Sedimentation | 2-1 |
| | 2.2 Reservoir Sedimentation | 2-4 |
| 3. | CHANNEL STABILITY | |
| | 3.1 Introduction | 3-1 |
| | 3.2 Factors Affecting Channel Stability | 3-3 |
| | 3.3 General Analytical Approach | 3-6 |
| | 3.4 Analysis of Natural Conditions | 3-10 |
| | 3.5 With-Project Conditions | 3-11 |
| 4. | SLOUGH HYDROLOGY | |
| | 4.1 Introduction | 4-1 |
| | 4.2 Factors Affecting Upwelling | 4-1 |
| | 4.3 Local Surface Runoff | 4-5 |
| | 4.4 Field Studies | 4-5 |
| | 4.5 With-Project Changes | 4-16 |
| 5. | SUMMARY | 5-1 |
| 6. | REFERENCES | 6-1 |

# LIST OF TABLES


| Number/Title | | Page |
|---|---|---|
| 1.1 | Streamflow and sediment data, Susitna River basin. | 1-9 |
| 1.2 | Mean flows and floods, Susitna River basin. | 1-10 |
| 1.3 | Size distribution of bedload and bed material, 1982 data. | 1-11 |
| 2.1 | Comparison of trap efficiencies estimated by Brune's curves, Churchill's curve, and sedimentation model. | 2-9 |
| 2.2 | Reservoir trap efficiency by Brune's curves. | 2-10 |
| 2.3 | Reservoir trap efficiency by Churchill's curves. | 2-11 |
| 2.4 | Particle size distribution of suspended sediment. | 2-12 |
| 3.1 | Characteristics of study sites on Middle Susitna River. | 3-16 |
| 3.2 | Hydraulic parameters for mainstem sites. | 3-17 |
| 3.3 | Hydraulic parameters for side channels and sloughs. | 3-18 |
| 3 4 | Representative bed material size distribution for selected sloughs, side channel and mainstem sites. | 3-20 |
| 3.5 | Transportable bed material sizes in selected sloughs, side channels and mainstem sites. | 3-21 |
| 3.6 | Potential degradation at selected sloughs, side channels and mainstem sites. | 3-22 |

LIST OF TABLES (Continued)


| Number/Title | | Page |
|---|---|---|
| 3.7 | Natural and with-project average weekly flows of Susitna River at Gold Creek (1950-1983). | 3-23 |
| 3.8 | Maximum natural and with-project weekly flows of Susitna River at Gold Creek. | 3-24 |
| 3.9 | Susitna tributary stability analysis, summary of semi-quantitative assessment. | 3-25 |
| 4.1 | Linear regresssion equations for slough discharge vs. mainstem discharge (1982-83). | 4-19 |
| 4.2 | Regression equations for slough discharge vs. mainstem discharge (1984). | 4-20 |
| 4.3 | Linear regression equations for slough discharge vs. mainstem stage (1982-83). | 4-21 |
| 4.4 | Linear regression equations for the mainstem component of groundwater upwelling to sloughs as a function of mainstem stage (1984). | 4-22 |
| 4.5 | Storm runoff analyses, Slough 9 tributary. | 4-23 |
| 4.6 | 1984 monthly water balances, Sloughs 8A and 11. | 4-24 |
| 4.7 | 1984 monthly water balance, Slough 9, Tributary 9B. | 4-25 |
| 4.8 | Precipitation coefficients for transfer of recorded data. | 4-26 |

LIST OF TABLES (Continued)


| Number/Title | | Page |
|---|---|---|
| 4.9 | Falling head test results, Slough 9 - boreholes. | 4-27 |
| 4.10 | Estimated daily runoff, Slough 8A, high rainfall pattern. | 4-28 |
| 4.11 | Estimated daily runoff, Slough 8A, moderate rainfall pattern. | 4-29 |
| 4.12 | Estimated daily runoff, Slough 8A, low rainfall pattern. | 4-30 |
| 4.13 | Estimated daily runoff, Slough 9, moderate rainfall pattern. | 4-31 |
| 4.14 | Estimated daily runoff, Slough 9, low rainfall pattern. | 4-32 |

# LIST OF FIGURES


| Number/Title | | Page |
|---|---|---|
| 1.1 | Susitna River Streamgage Locations. | 1-12 |
| 1.2 | Typical River Bed Material. | 1-13 |
| 2.1 | Iso-turbidity vs. time, Eklutna Lake at Station 9, 1984. | 2-13 |
| 2.2 | Suspended sediment rating curve, Susitna River near Cantwell (Vee Canyon). | 2-14 |
| 2.3 | Annual flow duration curves, Susitna River near Cantwell (Vee Canyon). | 2-15 |
| 2.4 | Suspended sediment rating curve, Susitna River at Gold Creek. | 2-16 |
| 2.5 | Seasonal flow duration curves, Susitna River at Gold Creek. | 2-17 |
| 4.1 | Approximate locations of slough study sites and data collection points - stage recorders and seepage meters. | 4-33 |
| 4.2 | Slough 8A upwelling/seepage, 1982. | 4-34 |
| 4.3 | Slough 8A ice-free areas, winter 1982-83. | 4-35 |
| 4.4 | Slough 9 upwelling/seepage, 1982. | 4-36 |
| 4.5 | Slough 9 ice-free areas, winter 1982-83. | 4-37 |
| 4.6 | Slough 11 upwelling/seepage, 1982. | 4-38 |
| 4.7 | Slough 11 ice-free areas, winter 1982-83. | 4-39 |

LIST OF FIGURES (Continued)


| Number/Title | | Page |
|---|---|---|
| 4.8 | Slough 21 upwelling/seepage, 1982. | 4-40 |
| 4.9 | Slough 21 ice-free areas, winter 1982-83. | 4-41 |
| 4.10 | Groundwater contours, Susitna River at Slough 8A ($Q_{GC}$ = 24,000 cfs). | 4-42 |
| 4.11 | Groundwater contours, Susitna River at Slough 8A ($Q_{GC}$ = 8,300 cfs). | 4-43 |
| 4.12 | Groundwater contours, Susitna River at Slough 8A (ice-covered mainstem). | 4-44 |
| 4.13 | Groundwater contours, Susitna River at Slough 9 ($Q_{GC}$ = 25,000 cfs). | 4-45 |
| 4.14 | Groundwater contours, Susitna River at Slough 9 ($Q_{GC}$ = 8,480 cfs). | 4-46 |
| 4.15 | Groundwater contours, Susitna River at Slough 9 (ice-covered mainstem). | 4-47 |
| 4.16 | Slough 8A water temperatures, 1982. | 4-48 |
| 4.17 | Slough 8A water temperatures, 1983. | 4-49 |
| 4.18 | Mean daily surface and intragravel water temperatures recorded at Lower Slough 8A - Site 3 (RM 125.6) and Upper Slough 8A - Site 3 (RM 126.6) during 1983-84 winter season. | 4-50 |

LIST OF FIGURES (Continued)


| Number/Title | | Page |
|---|---|---|
| 4.19 | Slough 9 water temperatures, 1983. | 4-51 |
| 4.20 | Mean daily surface and intragravel water temperatures recorded at Slough 9 - Site 3 (RM 128.6) during the 1983-84 winter season. | 4-52 |
| 4.21 | Slough 9 water temperatures, 1983. | 4-53 |
| 4.22 | Slough 11 water temperatures, 1983. | 4-54 |
| 4.23 | Upper Slough 21 water temperatures, 1983. | 4-55 |
| 4.24 | Lower Slough 21 water temperatures, 1983. | 4-56 |
| 4.25 | Seepage rate vs. mainstem discharge, seepage meter 8-1. | 4-57 |
| 4.26 | Seepage rate vs. mainstem discharge, seepage meter 8-2. | 4-58 |
| 4.27 | Seepage rate vs. mainstem discharge, seepage meter 9-1. | 4-59 |
| 4.28 | Seepage rate vs. mainstem discharge, seepage meter 9-2. | 4-60 |
| 4.29 | Seepage rate vs. mainstem discharge, seepage meter 9-3. | 4-61 |
| 4.30 | Seepage rate vs. msinstem discharge, seepage meter 11-1. | 4-62 |

LIST OF FIGURES (Continued)


| Number/Title | | Page |
|---|---|---|
| 4.31 | Seepage rate vs. mainstem discharge, seepage meter 11-2. | 4-63 |
| 4.32 | Seepage rate vs. mainstem discharge, seepage meter 21-1. | 4-64 |
| 4.33 | Seepage rate vs. mainstem discharge, seepage meter 21-2. | 4-65 |
| 4.34 | Response of mainstem and Slough 8A discharges to September 1983 storm. | 4-66 |
| 4.35 | Response of mainstem and Slough 9 discharges to September 1983 storm. | 4-67 |
| 4.36 | Response of mainstem and Slough 11 discharges to September 1983 storm. | 4-68 |

## ACKNOWLEDGMENTS

This report was prepared by Jeff Coffin and Stephen Bredthauer of R&M Consultants and Howard Teas of Woodward-Clyde Consultants, under the direction of Wayne Dyok of Harza-Ebasco Susitna Joint Venture. Guidance and review were also provided by Woody Trihey of E. Woody Trihey and Associates.

# PREFACE

This report represents a volume of the Instream Flow Relationships Study technical report series prepared for the Susitna Hydroelectric Project. The primary purpose of the Instream Flow Relationships Report and its associated technical report series is to present technical information and data to facilitate the settlement process. These reports are specifically intended to identify the relative importance of interactions among the primary physical and biological components of aquatic habitat. The presentation is primarily limited to the Middle Susitna River, the reach from the mouth of Devil Canyon downstream to the confluence with the Chulitna River. This section of the river is also referred to herein as "the middle reach". It encompasses river miles (RM) 151 to 99, the downstream section of river in which the aquatic habitat will be most affected by construction and operation of the Susitna Hydroelectric Project. Discussion is also presented for sedimentation that would occur in the Watana and Devil Canyon Reservoirs. The two reservoirs constitute the impoundment zone and extend from RM 151 to RM 230.

The Instream Flow Relationships Report and its associated technical report series are not intended to be an impact assessment. However, these reports present a variety of natural and with-project relationships that provide a quantitative basis to compare alternative streamflow regimes, conduct impact analyses, and prepare mitigation plans.

The technical report series is based on the data and findings presented in a variety of baseline data reports. The Instream Flow Relationships Report and its associated technical report series provide the methodology and appropriate technical information for use by those deciding how best to operate the proposed Susitna Hydroelectric Project for the benefit of both power production and downstream fish resources. The technical report series is described below.

Technical Report No 1. Fish Resources and Habitats in the Middle Susitna River. This report consolidates information on the fish resources and habitats in the Talkeetna-to-Devil Canyon reach of the Susitna basin available through June 1984 that is currently dispersed throughout numerous reports.

Technical Report No 2. Physical Processes Report. This report describes naturally occurring physical processes within the Talkeetna-to-Devil Canyon river reach pertinent to evaluating project effects on riverine fish habitat.

Technical Report No 3. Water Quality/Limnology Report. This report consolidates existing information on water quality in the Susitna basin and provides technical discussions of the potential for with-project bioaccumulation of mercury, influences on nitrogen gas supersaturation, changes in downstream nutrients and changes in turbidity and suspended sediments. This report is based principally on data and information that are available through June 1984.

Technical Report No 4. Instream Temperature Report. This report consists of three principal components: (1) reservoir and instream temperature modelling; (2) selection of temperature criteria for Susitna River fish stocks by species and life stage; and (3) evaluation of the influences of with-project stream temperatures on existing fish habitats and natural ice processes.

Technical Report No 5. Aquatic Habitat Report. This report describes the availability of various types of aquatic habitat in the Talkeetna-to-Devil Canyon river [illegible] as a function of mainstem discharge.

Technical Report No. 6, Ice Processes Report. This report describes the naturally-occurring ice processes in the middle river, anticipated changes in those processes due to project construction and operation, and

discusses effects of naturally occurring and with-project ice conditions on fish habitat.

# 1.0 INTRODUCTION

## 1.1 Purpose

This report was designed to bring together the available information on sedimentation, stream channel stability and slough hydrology that has been collected in the Middle Reach of the Susitna River. The Middle Reach encompasses the river from Talkeetna, at river mile (RM) 99, to the outlet of Devil Canyon at RM 151. This is the section of the river that will be most affected by the construction and operation of the Susitna Hydroelectric Project. Also included in this report is discussion of reservoir sedimentation within Watana and Devil Canyon Reservoirs, which extend from RM 230 to RM 151.

The river downstream of the damsites is of particular concern, and will be dealt with in the greatest detail. There is concern that detrimental effects on fish resources in the Middle Reach may be caused by the changes in mainstem flow that will occur with the project. With-project flows will be much more stable than at present. With-project summer flows will be lower than under natural conditions, while with-project winter flows will be higher. The regulated flows will also have a lower mean annual flood than under natural conditions.

The suspended sediment regime will be altered by construction of the project due to trapping of all bedload and most suspended sediment load in the reservoirs. This reduction in sediment load may alter the physical features of the river. However, reduced summer flows will limit the size and volume of streambed materials that can be moved by the river. The reduced level of the mean annual flood in the mainstem will cause some downstream tributaries to degrade their bed levels, while others will remain perched above the mainstem.

The alteration of river flow is likely to affect groundwater upwelling. Lower summer flows will tend to reduce the upwelling component from the

mainstem. Winter flows will be greater than under natural conditions, but changes in the ice regime will also alter the mainstem stages, altering the winter groundwater upwelling.

Five species of Pacific salmon use the middle river for reproduction and rearing of young. All five species use the Middle Reach for access to spawning areas. Coho and pink salmon generally use clear water tributary streams for spawning. The primary project impact on these species would be from effects on access into the spawning streams. Changes in or at tributary mouths and reduced water surface levels are discussed in this context.

The fish resource of greatest concern in the Middle Reach are chinook and chum salmon (APA 1984a). Chinook salmon spawn in clear water tributaries. However, mainstem side channel, and slough habitats, along with the tributaries themselves, are required year-round for juvenile rearing. Chum salmon primarily use the tributaries for reproduction and some rearing, but they also use the mainstem, side channel and side slough habitats (ADF&G 1984a). Changes in flow, depth, substrate size distribution and groundwater upwelling caused by project operation may have a serious effect on these species. These effects could come from changes to less acceptable substrate size for spawning or rearing, or to decrease in groundwater upwelling, leading to problems with access to spawning sites and egg dessication and freezing.

Sockeye salmon would likely be affected in a similar manner to chum. The lower numbers of sockeye salmon and the similarity in spawning habitat requirements allow concerns for chum salmon to cover this species as well.

Rearing of juveniles, especially of chinook, may also be affected. Sufficient rearing habitat must be maintained. Changes in mainstem morphology and upwelling in sloughs may affect the areas.

## 1.2 Organization

Following a brief review of environmental effects downstream of other large hydropower projects in the Introduction, the next three sections of the report each review pertinent Susitna Hydroelectric Project studies to date on specific types of physical watershed processes. They discuss the effects of those processes on the aquatic habitat in the Susitna River. Section 2 addresses sedimentation processes in the reservoir, Section 3 deals with stability of channels in the Middle Reach downstream of the project, and Section 4 discusses groundwater upwelling and local surface runoff as related to aquatic habitat in sloughs downstream of the project. Section 5 presents a summary of the three types of processes and ranks them in importance as concerns in the Middle Susitna River. References are listed in Section 6.

## 1.3 Impacts at Other Projects

Construction of dams at Watana and Devil Canyon would affect the terrestrial and aquatic habitat downstream of Devil Canyon, with possible effects on fish, riparian vegetation, and wildlife. The effects on the physical processes of sedimentation (reservoir and stream channel) and groundwater upwellings are the focus of this report. The following descriptions of environmental impacts downstream of similar projects introduce the subject of downstream effects of dams on these processes.

Kellerhals and Gill (1973), Petts (1977), Taylor (1978) and Baxter and Glaude (1980) have summarized channel response to flow regulation. Operation of reservoirs significantly alters the flow regime. There is often an increase in the diurnal variation of flow due to the variation in the amount of water passing the turbines in order to follow the load demand. Annual peak discharges are reduced not only due to storage, which allows no overflow over the spillway, but also due to the surcharge storage provided by the rise in water level above the spillway crest. Routing through a reservoir with no available storage may reduce some flood peaks

by over 50% (Moore, 1969), depending on the characteristics of the spillway, reservoir, and flood hydrograph. The magnitude of the mean annual flood of the Colorado River below Hoover Dam has been reduced by 60% (Dolan, Howard, and Gallenson, 1974). The total volume of flow may be reduced due to the increase in time during which seepage and evaporation losses may occur. Base flow tends to be increased due to seepage and to minimum releases to the channel below the dam.

Reservoirs with a large storage capacity may trap and store over 95% of the sediment load transported by the river (Leopold, Wolman, and Miller, 1964). Although reservoir shape, reservoir operation, and sediment characteristics have some influence (Gottschalk, 1964), the actual percentage depends primarily on the storage capacity-inflow ratio (Brune, 1953).

The effect of dams on the sediment load must be considered but in relation to changes in river sediment transport capacity, flow regime, channel morphometry, and tributary inflow. Tributaries which transport large quantities of sediment into a regulated stream with reduced capacity to flush away sediments may stimulate mainstem aggradation, an increase in bed slope of the tributary, and trenching of the deposit to form a channel that is in quasi-equilibrium with the flow regime (King, 1961; Kellerhals, Church and Davies, 1977). A reduced water-surface elevation in the mainstem also produces an increased hydraulic gradient at the tributary mouth. The increased gradient results in increased velocities, bank instability, possible major changes in the geomorphic character of the tributary stream, and increased local scour (Simons and Senturk, 1976).

All of the bedload entering a reservoir is deposited in the reservoir. This reduction in sediment supply is usually greater than the reduction in sediment-transport capacity. This deficit in sediment transport generally results in erosion downstream of the dam, except where an armor layer or an outcrop of bedrock occurs (Petts, 1977). Degradation will occur where the regulated flow has sufficient tractive force to initiate sediment

movement in the channel (Gottschalk, 1964). Once the channel bed has been stabilized, either by armoring or by the exposure of bedrock, then the banks, which usually consist of finer material than the bed, begin to fail and the channel will widen. Where armoring or bedrock occur across the width of the channel, a simple adjustment will occur where streamflow is accommodated in the existing channel.

The sediment load plays an important role in the process of meander migration across alluvial plains by forming point bars from bed load deposition on the inside bank. These point bars are then aggraded to floodplain levels due to the deposition of suspended sediment in the emerging vegetation during peak flows. The reduction in sediment load may disrupt this process, with at least local ecological changes. Widening of channels at meander bends and lateral instability may also be expected (Kellerhals and Gill, 1973).

Maximum degradation normally occurs in the tailwater of the dam, but may extend downstream. Rates of degradation up to 15 cm per year have been observed both in the United States (Leopold, Wolman, and Miller, 1964) and in Europe (Shulits, 1934), but in sand-bed rivers. Channel adjustment to bed degradation and the associated reduction in slope was observed for nearly 250 km below Elephant Butte Dam (Stabler, 1925), also involving silt and sand size bed material. When an armored condition occurs where the river is unable to recharge itself to capacity, the river may pick up additional material downstream, as was observed on the Colorado River below Hoover Dam (Stanley, 1951). The Susitna River, however, is a gravel-bed river and more resistant to bed degradation.

The channel properties of gravel-bed rivers such as the mainstem of the Peace River in Alberta appear to be controlled by floods with a recurrence interval of 1.5 to 2 years (Bray, 1972). Regulation reduces these flows, effectively reducing the size of the gravel-bed river without immediately changing the channel, but certain channel properties will adjust to the channel regime over a longer period of time. On the Peace River, the

entrenched layer of the channel, the proximity of bedrock, and the resistant bed material preclude significant changes in width and depth relationships or in the slope (except near tributary junctions), but deep scour holes at bends will fill to some degree, and gravel bars exposed above the new high water mark will have emerging vegetation (Kellerhals and Gill, 1973).

Vegetation encroachment on the higher elevations of the gravel bars downstream of a dam can be expected due to the reduced summer streamflows and the lower flood peaks, and in time could encroach on present high water channels (Tutt, 1979; Kellerhals, Church and Davies, 1977). The effect of the additional vegetation would be to increase the channel roughness, thus decreasing the channel water conveyance. The channel size and capacity could gradually decrease due to vegetation encroachment, deposition of suspended load in the newly vegetated areas, accumulation of material from the valley walls and deposition of sediment brought in by the tributaries. During periods of high flow, higher river stages could be expected.

The W.A.C. Bennett Dam on the Peace River had a dramatic unplanned impact on the Peace-Athabasca Delta (Baxter and Glaude, 1980). The delta is a series of marshes interspersed with lakes and ponds of various sizes. Before the dam was built, the delta was maintained in this state due to almost annual flooding, which prevented vegetation typical of drier ground from being able to establish itself. The hydrological situation itself was complex. The Peace River, passing to the north of the delta, contributed little to the actual flooding, but its flood waters blocked the exit of the Athabasca River, which entered from the south and caused the actual flooding. After construction of Bennett Dam, the delta started drying up, with dry-ground vegetation establishing itself. The effect of the dam was initially obscured due to lower than normal precipitation for some years previously, but it was eventually concluded that the dam was at least a contributing factor, as flood levels on the Peace River were

lowered, resulting in the Peace River no longer blocking the exit of the Athabasca River.

## 1.4 Data Sources

### 1.4.1 Streamflow

Streamflow records are available from the U.S. Geological Survey (U.S.G.S.) for various stations on the river and its tributaries. The periods of available records are shown in Table 1.1. The stream gaging locations are shown in Figure 1.1. The mean annual and seasonal flows and floods of selected recurrence intervals are shown in Table 1.2.

### 1.4.2 Suspended Sediment

Suspended sediment data are available from the USGS at ten sampling stations and are also shown in Table 1.1.

The mean annual suspended loads are about 5,710,000, 7,300,000 and 14,000,000 tons respectively for the Susitna River near Cantwell, at Gold Creek and at Sunshine, 7,400,000 tons for the Chulitna River near Talkeetna and 1,600,000 tons for the Talkeetna River near Talkeetna.

The suspended sediment concentration for the Susitna River upstream from the confluence with the Chulitna River ranges from essentially zero milligram per liter (mg/l) in winter to nearly 1,000 mg/l during summer floods. The Chulitna River, with 27 percent of its basin covered by glaciers, has recorded suspended concentrations up to 4,690 mg/l.

### 1.4.3 Bedload and Bed Material

Limited bed load discharge data are available from the U.S.G.S. as are also shown in Table 1.1. Typical size distributions of the bedload are shown in Table 1.3.

A total of 48 bed material samples were collected from the mainstem and side channels of the Susitna Rive between the mouth of Devil Canyon (RM 150) and the confluence between the Susitna and Chulitna Rivers (RM 98.6). These samples were used to determine the size distributions by sieve analysis. Bed material size distribution had also been estimated in an earlier study (R&M Consultants, Inc. 1982b) by grid sampling techniques. Figures 1.2a and 1.2b show some examples of typical bed material. Average size distributions are shown in Table 1.3.

### 1.4.4 River Cross Sections

Cross sections of the Susitna River have been surveyed at 106 locations between RM 84.0 near Talkeetna and RM 150.2, about 1.3 miles upstream from the confluence with Portage Creek (R&M, 1981a; 1982c, 1984a) Cross sections at 23 locations also are available between RM 162.1 at Devil Creek and RM 186.8 at Deadman Creek (R&M, 1981a), all 23 of which are in the impoundment zone.

Table 1.1 - Streamflow and Sediment Data, Susitna River Basin

| Gaging Station | USGS Gage No. | Drainage Area, $mi^2$ ($km^2$) | Streamflow Period of Record | Suspended Sediment: Number of Samples | Suspended Sediment: Period of Record | Bedload: Number of Samples | Bedload: Period of Record |
|---|---|---|---|---|---|---|---|
| Susitna River near Cantwell | 15291500 | 4,140 (10,720) | 5/61-9/72 5/80-Pres. | 43 | 62-72,82 | -- | -- |
| at Gold Creek | 15292000 | 6,160 (15,950) | 8/49-Pres. | 375 | 49,51-58,62 67-68,74-83 | 3 | 7/81-9/81 |
| near Talkeetna | 15292100 | - | - | 27 | 6/82-10/83 | 29 | 6/82-2/84 |
| right channel below Chulitna R. near Talkeetna | 15292439 | | - | 5 | 5/83-10/83 | 7 | 5/83-2/84 |
| left channel below Chulitna R. near Talkeetna | 15292440 | | - | 5 | 5/83-10/83 | 7 | 5/83-2/84 |
| at Sunshine | 15292780 | 11,100 (28,750) | 5/81-Pres. | 53 | 71,77,81-84 | 34 | 7/81-2/84 |
| at Susitna | 15294350 | 19,400 (50,250) | 10/74-Pres. | 44 | 75-83 | -- | -- |
| Chulitna River near Talkeetna | 15292400 | 2,570 (6,656) | 2/58-9/72, 5/80-Pres. | 53 | 58-59,67-72, 80-83 | 18 | 7/81-9/82 |
| below canyon near Talkeetna | 15292410 | | - | 13 | 83 | 15 | 3/83-2/84 |
| Talkeetna River near Talkeetna | 15292700 | 2,006 (5,196) | 10/74-Pres. | 133 | 66-83 | 33 | 7/81-2/84 |

SOURCE: Table reproduced from Wang, Bredthauer, and Marchegiani (1985)

Table 1.2 - Mean Flows and Floods
Susitna River Basin

| Gaging Station | Periods of records used in analysis | Mean Flows, cfs ($m^3$/sec) Summer[1] | Winter[2] | Annual | Max. Floods, cfs ($m^3$/sec) 2-year | 10-year | 50-year |
|---|---|---|---|---|---|---|---|
| Susitna River near Cantwell | 1962-72 81-83 | 11,900 (337) | 1,000 (28) | 6,400 (181) | 32,000 (906) | 54,000 (1530) | 65,000 (1840) |
| at Gold Creek | 1950-83 | 17,800 (504) | 1,600 (45) | 9,720 (275) | 48,000 (1,360) | 73,700 (2,090) | 97,700 (2,770) |
| at Sunshine | 1982-83 | 45,600 (1,290) | 4,500 (127) | 25,100 (710) | 142,000 (4,020) | 182,000 (5,150) | 212,000 (6,000) |
| Chulitna River near Talkeetna | 1959-72 81-83 | 16,200 (459) | 1,400 (40) | 8,800 (249) | 42,000 (1,190) | 62,000 (1,760) | 87,000 (2,460) |
| Talkeetna River near Talkeetna | 1965-83 | 7,300 (207) | 700 (20) | 4,000 (113) | 27,500 (780) | 49,000 (1390) | 61,000 (1730) |

1/ May through October

2/ November through April


SOURCE: Wang, Bredthauer, and Marchegiani (1985)

Table 1.3 - Size Distribution of Bedload and Bed Material, 1982 Data

| Gage | Size Distribution of Particles % Bedload | | | Bed Material | | |
|---|---|---|---|---|---|---|
| | Sand | Gravel | Cobble | Sand | Gravel | Cobble |
| Susitna River near Talkeetna | 78 | 16 | 6 | 0 | 30 | 70 |
| Chulitna River near Talkeetna | 41 | 58 | 1 | 26 | 64 | 10 |
| Talkeetna River near Talkeetna | 75 | 23 | 2 | 5 | 52 | 43 |
| Susitna River at Sunshine | 56 | 42 | 2 | 5 | 66 | 29 |

Source: Knott and Lipscomb (1983)
Harza-Ebasco Susitna Joint Venture (1984)

(Table reproduced from: Wang, Bredthauer, and Marchegiani (1985))

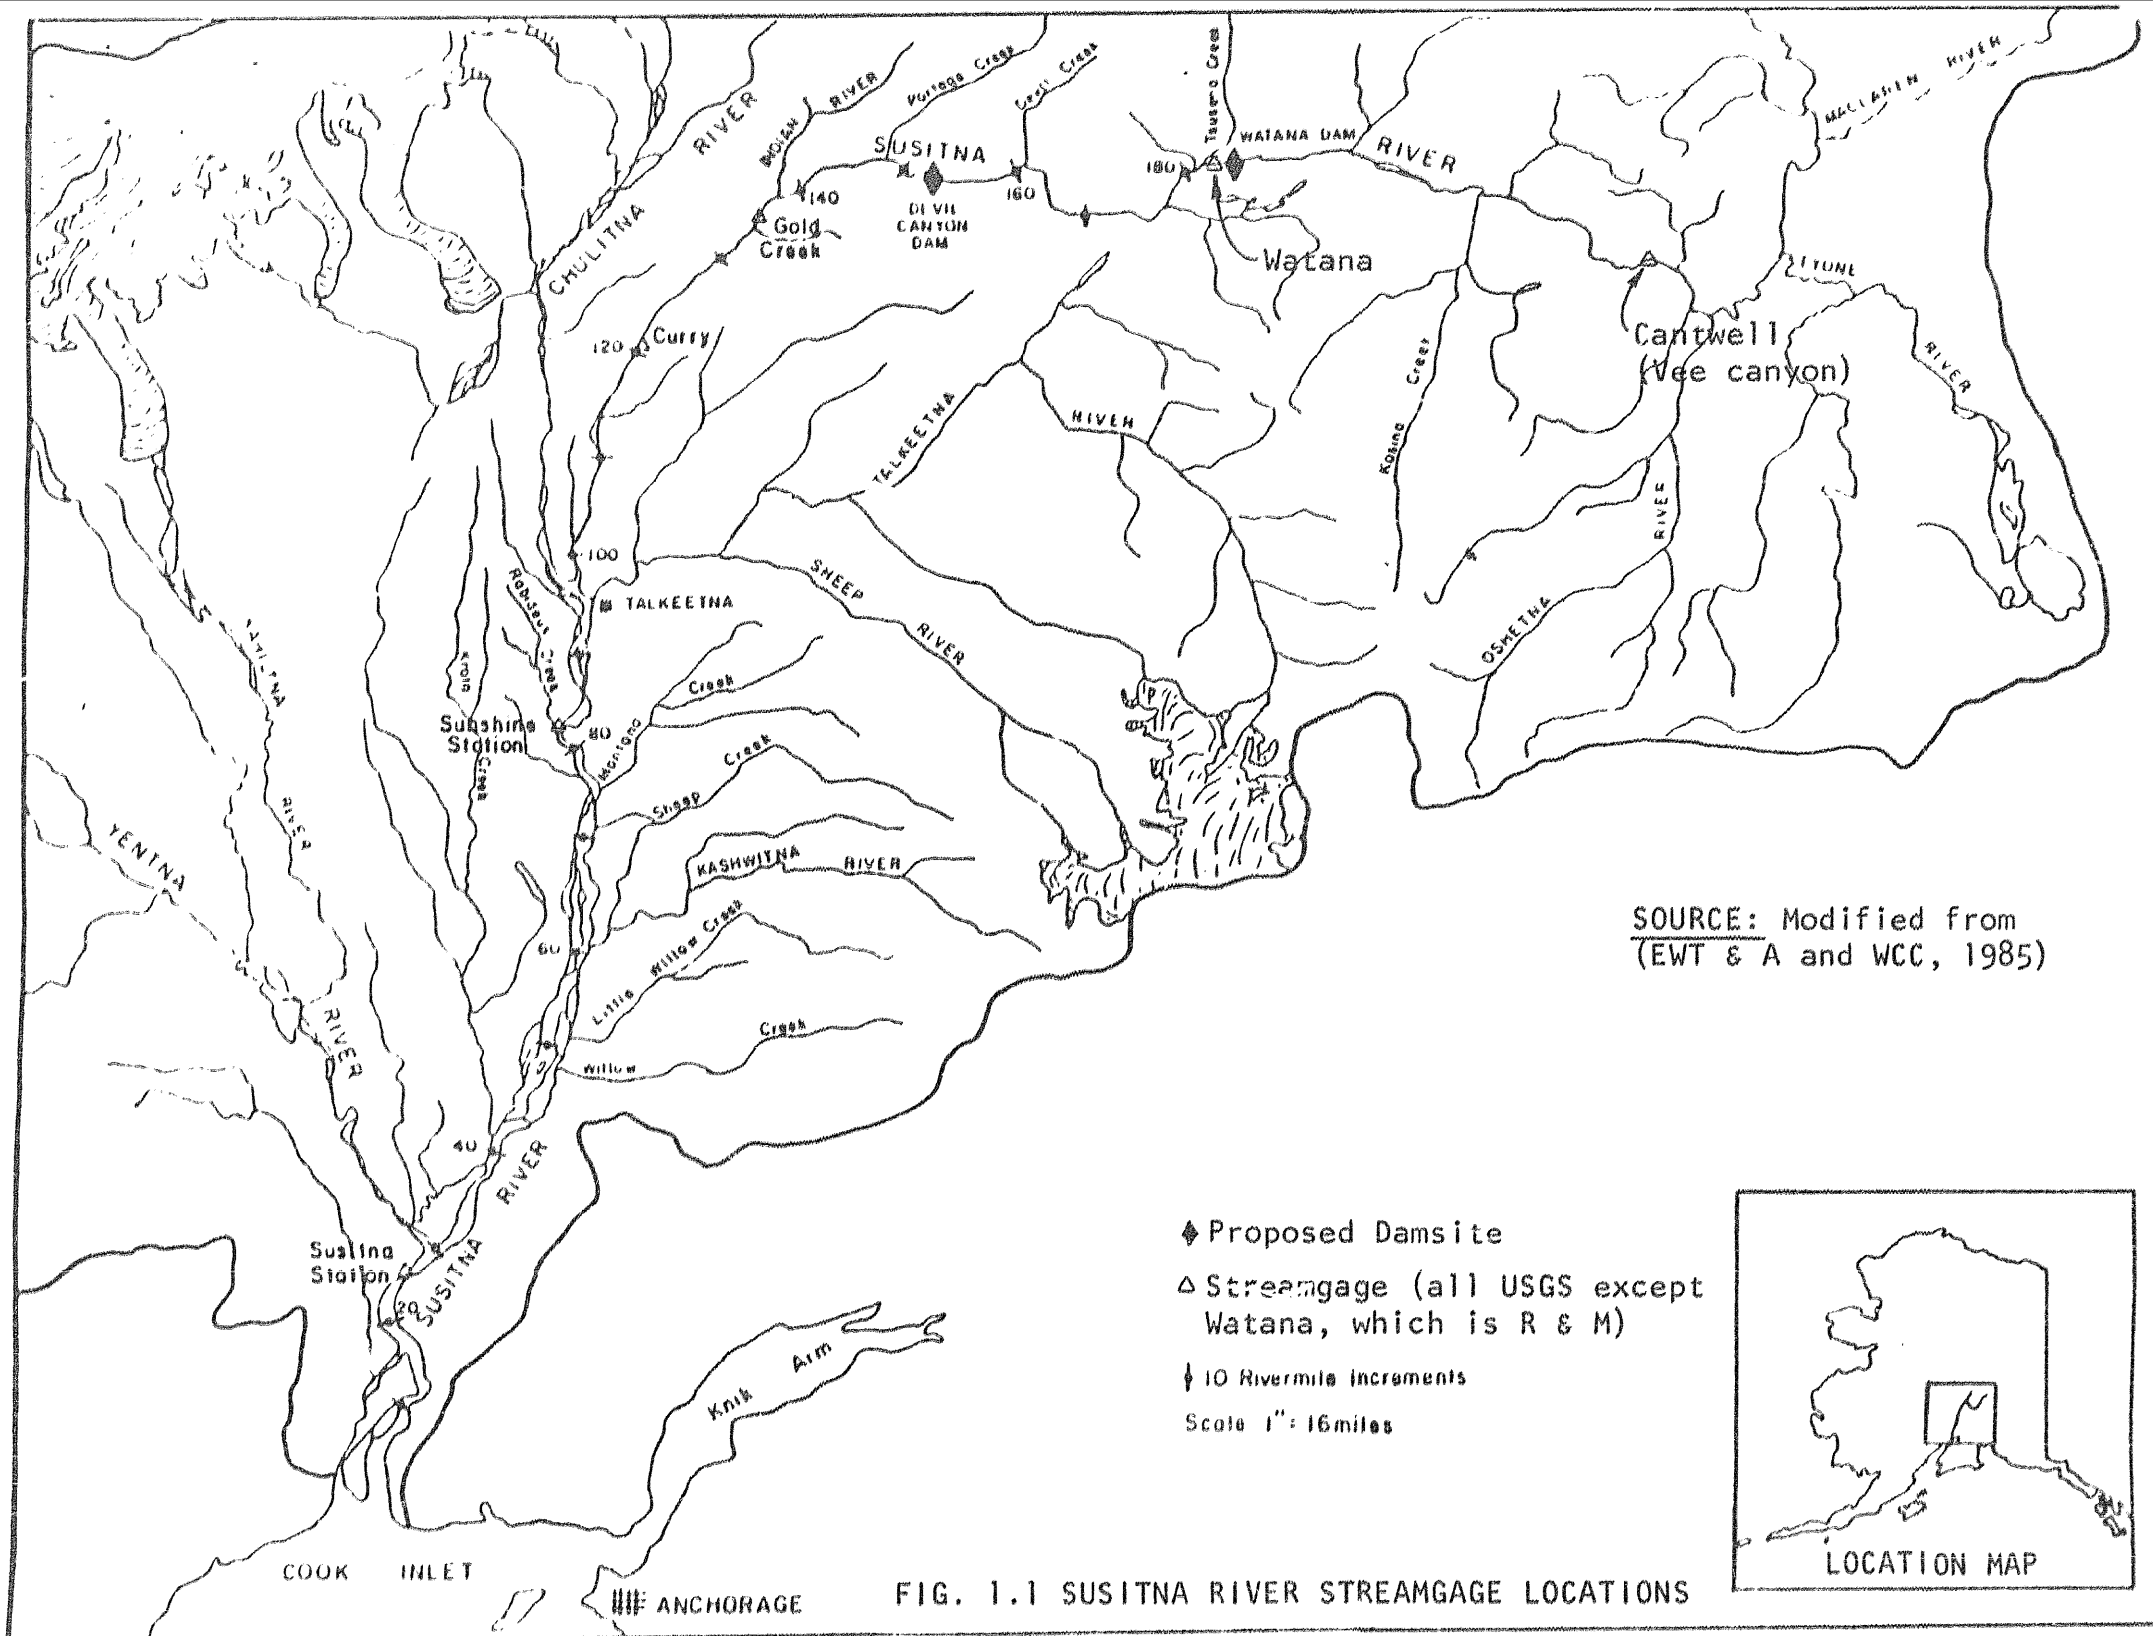



SOURCE: Modified from (EWT & A and WCC, 1985)

FIG. 1.1 SUSITNA RIVER STREAMGAGE LOCATIONS



(a) On a gravel bar near the Confluence of the Susitna and Chulitna Rivers

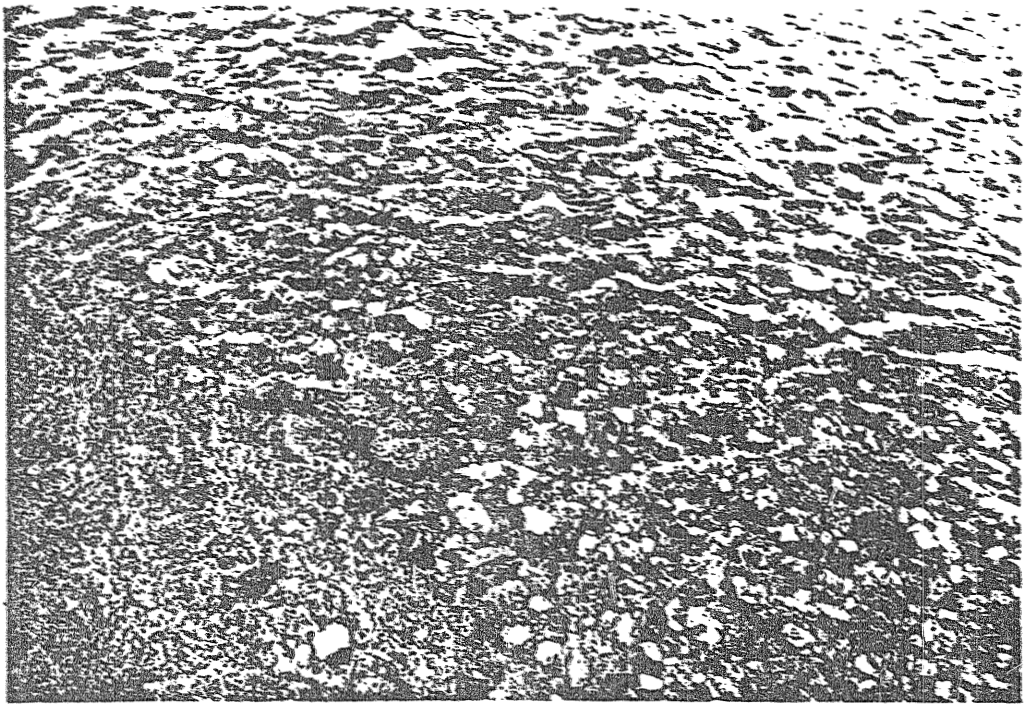

(b) The Susitna River near Talkeetna River bed under 1 ft. (0.3m) of water

Fig. 1.2 - Typical River Bed Material

SOURCE: Wang, Bredthauer, and Marchegiani (1985)

# 2.0 RESERVOIR SEDIMENTATION

## 2.1 Factors Affecting Reservoir Sedimentation

The effect of the project on sediment transport in the Susitna River is of concern as it relates to aquatic habitat. This section briefly describes the processes of reservoir sedimentation and details the factors which affect trap efficiency. Trap efficiency is the percentage of incoming sediment which is retained in the reservoir. Section 3 discusses downstream project effects on channel stability, which are derived from changes to the flow and sediment regimes of the river. Changes to the sediment regime result from trapping all the bedload sediment and a large proportion of the suspended sediment which enters the reservoir, thus substantially reducing the sediment supply downstream. Sediment effects on water quality are addressed in Report Number 3, the Water Quality/Limnology Report.

Trap efficiency of a reservoir depends on fall velocity of the sediment particles and on residence time of the sediment within the reservoir. Fall velocity is determined by a number of factors, including particle size and shape, particle density, sediment chemical composition, water temperature, water viscosity and sediment concentration (R&M 1982d; PN&D and Hutchison 1982; Jokela, Bredthauer and Coffin 1983). The chemical composition may cause electrochemical interactions which lead to particle aggregation or dispersion. Small particles may aggregate into clusters which have settling properties similar to larger particles and fall more rapidly (R&M 1982d). A review of data from glacial lakes (R&M 1982d) indicated that particle sizes of 2 microns (0.002 mm) and less would pass through the reservoir.

Another report (PN&D and Hutchison, 1982) concluded that particles smaller than 3 to 4 microns would likely remain in suspension, and that wind mixing would be significant in retaining particles of diameter 12-micron and less in suspension above the 50-foot depth. Strong

windstorms would cause re-entrainment of sediment, resulting in short-term increases in suspended sediment at the reservoir edges.

Data collected at Eklutna Lake (R&M 1982a, 1985b), approximately 100 miles south of the Watana damsite, indicate that the mean particle size of sediment carried through the lake is 3 to 4 microns equivalent diameter, with larger particles being deposited most rapidly and forming a delta.

Residence time of sediment within the reservoir is determined by the capacity-inflow ratio, by the reservoir geometry (plan shape and depth), and by size and location of reservoir outlets. Capacity-inflow ratio is the major factor, but it may be modified by "short-circuiting" of sediment-laden inflow to the outlet if little mixing occurs. Shallow, open lakes are more conducive to formation of internal currents (due to winds) than are deep, confined lakes. These internal currents slow down the settling processes, especially for fine, slowly-falling particles. Deep reservoirs with large surface areas are almost continuously subjected to mixing processes generated by climatic influences (wind and surface energy transfer) and by inflowing and outflowing currents. This mixing creates a substantial amount of turbulence which tends to keep the fine sediments in suspension (PN&D and Hutchison 1982). Location and size of reservoir outlets also affects trap efficiency, with bottom outlets more effective in removing the higher sediment concentrations near the bottom (R&M 1982d).

Short-circuiting of inflow may occur if hydraulic conditions in the reservoir are such that the inflow plume travels to the dam outlet and is discharged with little interaction having taken place with the ambient water. The plume may travel through the reservoir as overflow, underflow or interflow, depending on whether it follows a top, bottom, or middle layer in the reservoir depth. The flow depth is determined by the relative densities of the stream water and the lake water, the equilibrium depth being that where densities of the two are the same. Density is primarily a function of temperature and suspended-sediment concentration and to some extent of dissolved-solids concentration. Frequency, duration, and

intensity of underflows and interflows have also been attributed to lake bathymetry, especially near the stream mouth (R&M 1982d). Illustrations of the variation of turbidity (and thus of suspended sediment concentration) versus depth and time are shown for Eklutna Lake for 1984 in Figure 2.1.

Another process which can affect sediment levels in a reservoir is slope failure and deposition from the surrounding banks. Soil stability is reduced by the reservoir raising the ground water table, especially when it also acts to thaw permafrost that had been binding the soil. The primary types of slope failure and subsequent erosion that are expected in the Watana Reservoir are shallow rotational slides and other shallow slides, mainly skin and bimodal flows (Acres American 1982). Devil Canyon Reservoir slopes are expected to be stable after impounding due to shallow overburden materials and stable bedrock.

Rotational slides are landslides with well-defined, curved shear surfaces, concave upward in cross-section. Skin flows are detachments of a thin veneer of vegetation and mineral soil, with subsequent movement over a planar, inclined surface. In the reservoir impoundment area, this usually indicates thawing of fine-grained overburden over permafrost. Bimodal flows along the reservoir shore are slides that consist of steep headwalls containing ice or ice-rich sediment. The ice-rich sediment retreats retrogressively through melting to form a debris flow which slides down the face of the headwall to its base (Acres American 1982).

The Alaska Power Authority (1983) made quantitative estimates of the increases in suspended sediments expected from skin slides, bimodal flows, and shallow rotational slides in the two reservoirs, including where they were likely to occur. A "worst case" scenario was assumed, in which $2 \times 10^8$ cubic meters of unconsolidated materials would slide into the reservoirs. It was assumed that all particles less than or equal to 10 microns would become suspended in the water. This resulted in an estimate of 35 percent (by dry weight) of the material being suspended.

Seventy-five percent of this suspended material was assumed to be trapped in the reservoir. This reduced to an estimated maximum yield of 33 million metric tons of suspended particulates which could pass through the reservoirs and on downstream. Most of this activity would probably occur during the first five years of reservoir operation.

## 2.2 Reservoir Sedimentation

### 2.2.1 General Approach

Suspended sediment loads at the Watana and Devil Canyon dam sites were estimated by interpolating the loads at the Cantwell (Vee Canyon) and Gold Creek gages on the Susitna River. Sediment trap efficiencies of the reservoirs were estimated by the Brune and Churchill curves (Harza-Ebasco, 1984c). Sediment deposits in Devil Canyon Reservoir were estimated for with- and without-Watana Reservoir conditions.

Bedloads were estimated as percentages of suspended sediment loads using available data at the Gold Creek, Talkeetna, and Sunshine gages on the Susitna River. All bedloads were assumed to be trapped by the reservoirs. Bedloads at Devil Canyon Reservoir were computed for with- and without-Watana Reservoir conditions.

### 2.2.2 Sediment Load

Sediment discharges at the Cantwell (Vee Canyon) and Gold Creek gages were computed by the sediment rating flow duration curves method. Suspended sediment discharges and the corresponding water discharges for the Cantwell (Vee Canyon) gage are shown in Figure 2.2. The data for the Cantwell (Vee Canyon) gage were grouped into three groups, each corresponding to the period from June to October, November to April, and May. Only one sample was available for the

November-April period and two sampies for the May period. These data were insufficient to develop separate curves. Therefore, one sediment rating curve was fitted visually to all data points. Using this suspended sediment rating curve and the flow-duration curve for Vee Canyon on Figure 2.3, the mean annual suspended sediment discharge at the Cantwell (Vee Canyon) gage was computed to be about 5,660,000 tons/year.

Suspended sediment discharges and the corresponding water discharges for the Gold Creek gage are shown on Figure 2.4. The data for the Gold Creek gage, collected in the period from 1949 to 1982, were divided into three groups corresponding to June-October, November-April, and May periods. The points for the June-October and May periods indicated separate trend lines and were fitted with two curves. Limited data points were available for the low-flow period of November-April. These points appeared to be fitting the lower part of the May curve. Therefore, the May curve was used for the November-April period. The daily flow duration curves for the Gold Creek gage for the June-October and November-May periods were derived using the 1950-1982 flow data and are shown on Figure 2.5. The mean annual suspended sediment discharge at the Gold Creek gage was computed to be about 7,260,000 tons/year.

### 2.2.3 Reservoir Sediment Inflow

Suspended-sediment inflows to Watana and Devil Canyon Reservoir were computed by transposing sediment discharges at the Cantwell (Vee Canyon) and Gold Creek gages, whose locations bracket the two reservoirs. Sediment discharges at the two gages were assumed to follow the following exponential relationship (Vanoni; 1975):

$$\frac{q_{s2}}{q_{s1}} = \left(\frac{A_2}{A_1}\right)^n$$

in which:

$q_{s1}$ = sediment discharge per unit drainage area (unit sediment discharge) at point 1

$q_{s2}$ = unit sediment discharge at point 2

$A_1$ = drainage area for point 1

$A_2$ = drainage area for point 2

n = exponent

Using the unit sediment discharges at the Cantwell (Vee Canyon) and Gold Creek gages, exponent "n" in the above equation was computed to be -0.376. Thus, suspended-sediment discharge at the Watana damsite was computed to be 6,530,000 tons/year for the drainage area of 5,180 square miles. Assuming no Watana Reservoir, the suspended-sediment discharge at the Devil Canyon was computed to be 7,030,000 tons/year using a drainage area of 5,810 square miles.

Bedload discharge was estimated to be three percent of suspended-sediment discharge, based on the following analysis. Bedload and suspended sediment discharges for the Susitna River near Talkeetna were estimated to be 43,400 and 2,610,000 tons/year, respectively, as presented later in this report. Thus, the bedload discharge is about 1.6 percent of suspended sediment discharge. For the Sunshine gage, this percentage is about 3.2 based on the bedload and suspended sediment discharges of 423,000 and 13,330,000 tons/year, respectively. A value of 3 percent was used in the analysis.

### 2.2.4 Sediment Trap Efficiency

Sediment trap efficiencies of Watana and Devil Canyon Reservoirs were estimated by the Brune's and Churchill's curves (U.S. Bureau of Reclamation, 1977). The trap efficiency of Watana was also estimated by PN&D and Hutchison (1982) using a sedimentation model. Similar modeling is not available for Devil Canyon Reservoir.

A comparison of the trap efficiencies of Watana and Devil Canyon Reservoirs estimated by the three methods is shown in Table 2.1. The Watana trap efficiency ranges from 96 to 100 percent based on Brune's curves. The trap efficiency is about 100 percent based on the Churchill's curves for local silt. The trap efficiency computed by a reservoir sedimentation model, DEPOSITS, ranges from 78 to 96 percent depending on reservoir mixing and dead storage volume.

The trap efficiency of Devil Canyon Reservoir ranges from 86 to 98 percent based on the Brune's curves. The trap efficiency estimated with the Churchill's curves is 95 percent for local silt and 88 percent for fine silt, the latter case being for sediment discharged from an upstream reservoir. Tables 2.2 and 2.3 show the estimation of the trap efficiencies by Brune's curves and Churchill's curves.

### 2.2.5 Sediment Deposition

Based on the estimated trap efficiencies shown in Table 2.1, Watana Reservoir was assumed conservatively to trap all sediment inflow to the reservoir. The resulting sediment deposition over a 50- and 100-year period will be about 210,000 and 410,000 acre-feet. The gross reservoir volume is about 9,470,000 acre-feet at a normal maximum pool elevation of 2,185 feet, of which 5,730,000 acre-feet is the dead storage (APA, 1983a). The 100-year sediment deposit is only about 7 percent of the dead storage volume.

Without Watana Reservoir, the 50- and 100-year sediment deposits in Devil Canyon Reservoir would be about 226,000 and 442,000 acre-feet, respectively, also assuming a trap efficiency of 100 percent. The gross reservoir volume of Devil Canyon Reservoir is about 1,090,000 acre-feet at a normal maximum pool elevation of 1,455 feet, of which about 740,000 acre-feet is dead storage. The 100-year sediment deposit is about 60 percent of the dead storage volume.

With Watana Reservoir, the 50- and 100-year sediment deposits in Devil Canyon Reservoir would be abut 16,100 and 31,400 acre-feet, respectively, or about 2 and 4 percent, respectively, of the dead storage volume, assuming 100 percent trap efficiency for sediments from the intervening drainage area. Any fine suspended sediment passed through Watana Reservoir was assumed to also pass through Devil Canyon Reservoir.

The sediment volumes presented above were computed using the procedures of the U.S. Bureau of Reclamation (1977). Percentages of clay, silt, and sand of the incoming suspended sediment were estimated to be 20, 38 and 42, respectively, using sediment data for the Cantwell (Vee Canyon)and Gold Creek gages (Table 2.4). Using unit weights for clay, silt and sand of 26, 70 and 97 $lb/ft^3$, respectively, the unit weights of the sediment deposits after 50 and 100 years were estimated to be about 80 and 82 $lbs/ft^3$, respectively. The unit weight of bedload was estimated to be 120 $lb/ft^3$.

Table 2.1 COMPARISON OF TRAP EFFICIENCIES ESTIMATED BY BRUNE'S CURVES, CHURCHILL'S CURVE, AND SEDIMENTATION MODEL

| Method | Trap Efficiency, % | |
|---|---|---|
| | Watana | Devil Canyon |
| Brune's Curves | | |
| Coarse Sediment | 100 | 98 |
| Median Curve | 99 | 94 |
| Fine Sediment | 96 | 86 |
| Churchill's Curve | | |
| Local Silt | 100 | 95 |
| Fine Silt | - | 88 |
| DEPOSITS Model | | |
| Quiescent | 94 to 96* | - |
| Minimum Mixing | 86 to 93* | - |
| Maximum Mixing | 78 to 90* | - |

* Corresponding to dead storage volumes from 5,340,000 acre- feet to 900,000 acre-feet (reservoir capacity = 9,470,000 acre-feet at normal maximum pool).

SOURCE: Harza-Ebasco (1984c)

Table 2.2

RESERVOIR TRAP EFFICIENCY
BY BRUNE'S CURVES

| Reservoir | Storage Capacity af | Average Annual Inflow af | Capacity ÷ Inflow | Trap Efficiency Max. | Median | Min. |
|---|---|---|---|---|---|---|
| Watana | 9,470,000[1] | 5,780,000[3] | 1.64 | 100 | 99 | 96 |
| Devil Canyon | 1,090,000[2] | 6,580,000[4] | 0.17 | 98 | 94 | 86 |

---

1/ At normal maximum pool elevaton 2185 feet above mean sea level. From License Application, Exhibit E, Chapter 2, page E-2-55 (11).

2/ At normal maximum pool elevation 1455 feet above mean sea level. From License Application, Exhibit E, Chapter 2, page E-2-55 (11).

3/ Converted from average annual flow of 7990 cfs at Watana, as shown in License Application, Exhibit E, Chapter 2, Table E.2.4 (11).

4/ Converted from average annual flow of 9080 cfs, as shown in License Application, Exhibit E, Chapter 2, Table E.2.4 (11).

SOURCE: Harza-Ebasco (1984c)

Table 2.3

RESERVOIR TRAP EFFICIENCY
BY CHURCHILL'S CURVES

| (1) Reservoir | (2) Storage Capacity [1] | (3) Average Inflow [2] | (4) Retention Period [3] | (5) Reservoir Length [4] | (6) Average Cross-Sectional Area [5] | (7) Mean Velocity [6] | (8) Retention Period ÷ Velocity | (9) % of Silt Passing | (10) Trap Efficiency |
|---|---|---|---|---|---|---|---|---|---|
| | $ft^3$ | cfs | sec | ft | $ft^2$ | ft/sec | $sec^2/ft$ | | % |
| Watana | $4.13 \times 10^{11}$ | 7990 | $5.17 \times 10^{7}$ | $2.75 \times 10^{5}$ | $1.50 \times 10^{6}$ | $0.53 \times 10^{-2}$ | $9.70 \times 10^{9}$ | < 0.1 | 100 |
| Devil Canyon (local silt) | $0.48 \times 10^{11}$ | 9080 | $0.52 \times 10^{7}$ | $1.69 \times 10^{5}$ | $0.28 \times 10^{6}$ | $3.23 \times 10^{-2}$ | $0.16 \times 10^{9}$ | 5 | 95 |
| Devil Canyon (fine silt) | | | | | | | | 12 | 88 |

1/ At normal maximum pool elevation 2185 ft for Watana and 1455 ft for Devil Canyon. From License Application, Exhibit E, Chapter 2, page E-2-55.
2/ From License Application, Exhibit E, Chapter 2, Table E.2.4.
3/ Col. (2) ÷ Col. (3).
4/ Converted from 52 reservoir miles for Watana and 32 reservoir miles for Devil Canyon.
5/ Col. (2) ÷ Col. (5).
6/ Col. (3) ÷ Col. (6).

SOURCE: Harza-Ebasco (1984c)

Table 2.4

PARTICLE SIZE DISTRIBUTION OF SUSPENDED SEDIMENT

| Stream Gaging Station | No. of Sample [1] | Particle Size (mm) Percent Finer Than [2] .002 | .004 | .008 | .016 | .031 | .062 | .125 | .250 | .500 | 1.000 |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Susitna River nr. Denali | 34 | 12 | 16 | 23 | 31 | 41 | 53 | 64 | 81 | 96 | 100 |
| Susitna River nr. Cantwell | 27 | 12 | 18 | 25 | 33 | 43 | 54 | 67 | 86 | 97 | 100 |
| Susitna River at Gold Creek | 24 | 15 | 19 | 27 | 35 | 47 | 61 | 75 | 86 | 98 | 100 |
| Susitna River nr. Talkeetna | 13 | 29 | 35 | | 53 | | 72 | 79 | 90 | 100 | |
| Chulitna River nr. Talkeetna | 36 | 21 | 31 | 37 | 46 | 55 | 62 | 72 | 85 | 99 | 100 |
| Talkeetna River nr. Talkeetna | 16 | 9 | 16 | 22 | 31 | 41 | 53 | 65 | 85 | 99 | 100 |
| Susitna River at Sunshine | 17 | 22 | 33 | 43 | 53 | 62 | 67 | 79 | 90 | 100 | |
| Susitna River at Susitna Station | 9 | 16 | 23 | 33 | 43 | 52 | 60 | 82 | 94 | 100 | |

1/ Samples for which full range of size distributions were analyzed.

2/ The percentages given are the median values from a range of oberved percentages for various sizes.

SOURCE: Harza-Ebasco (1984d)

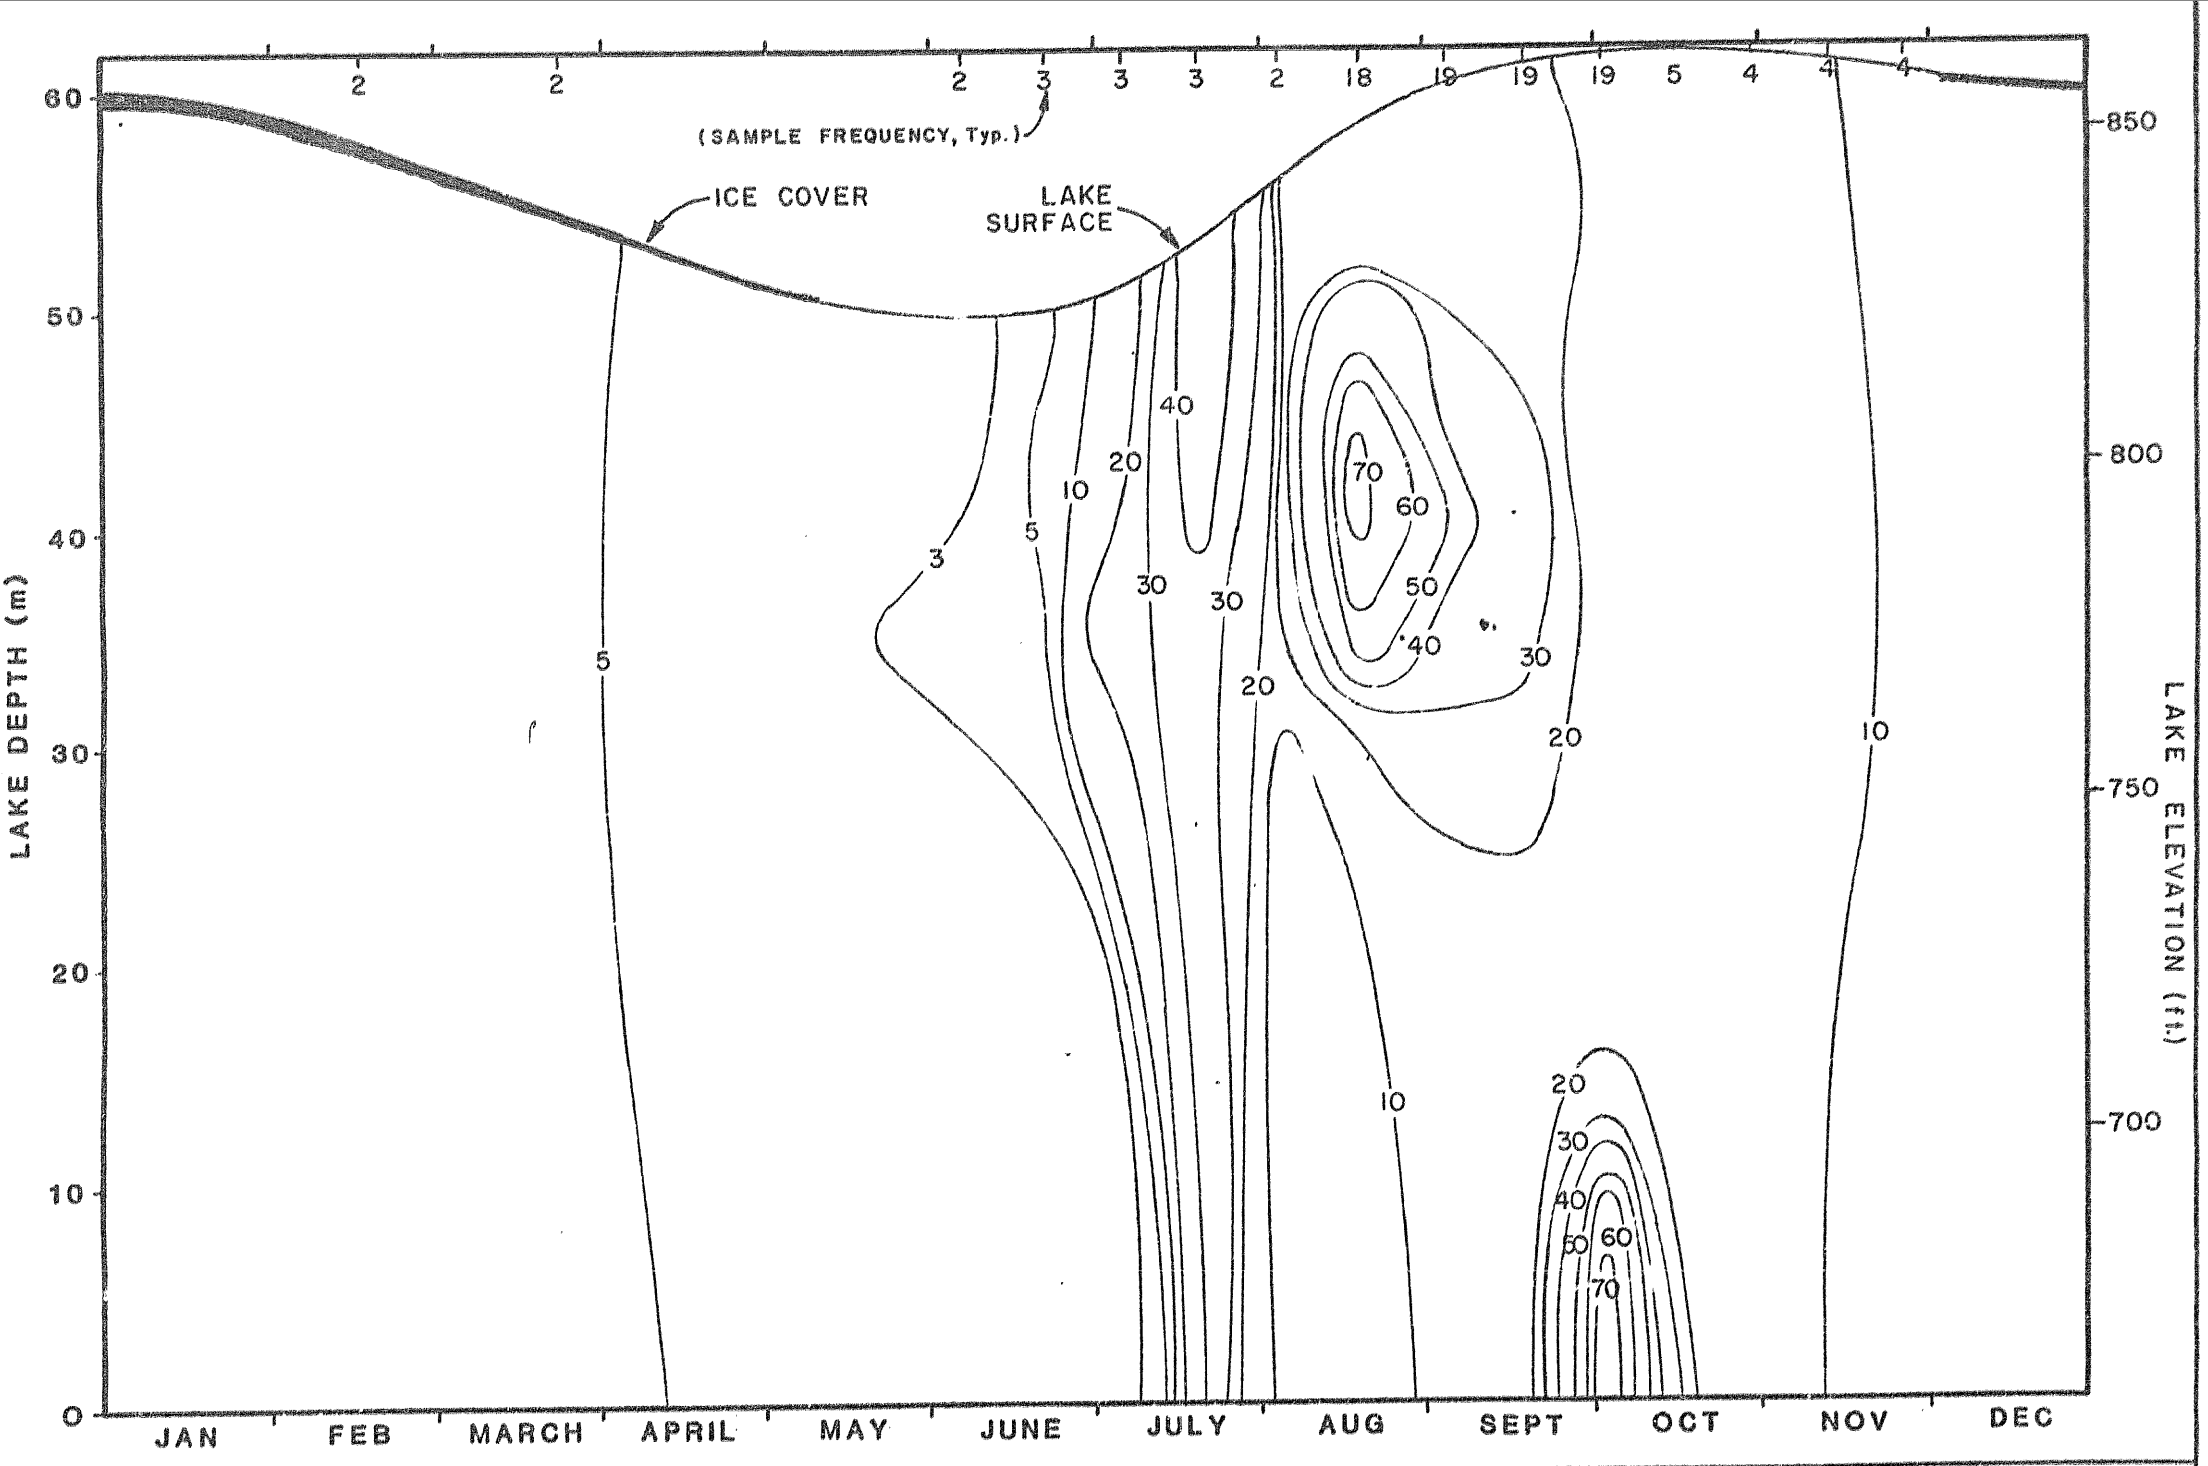



FIG. 2.1 **ISO-TURBIDITY vs. TIME**
**EKLUTNA LAKE at STATION 9**
**1984**

SOURCE: Figure reproduced from (R & M 1985b)

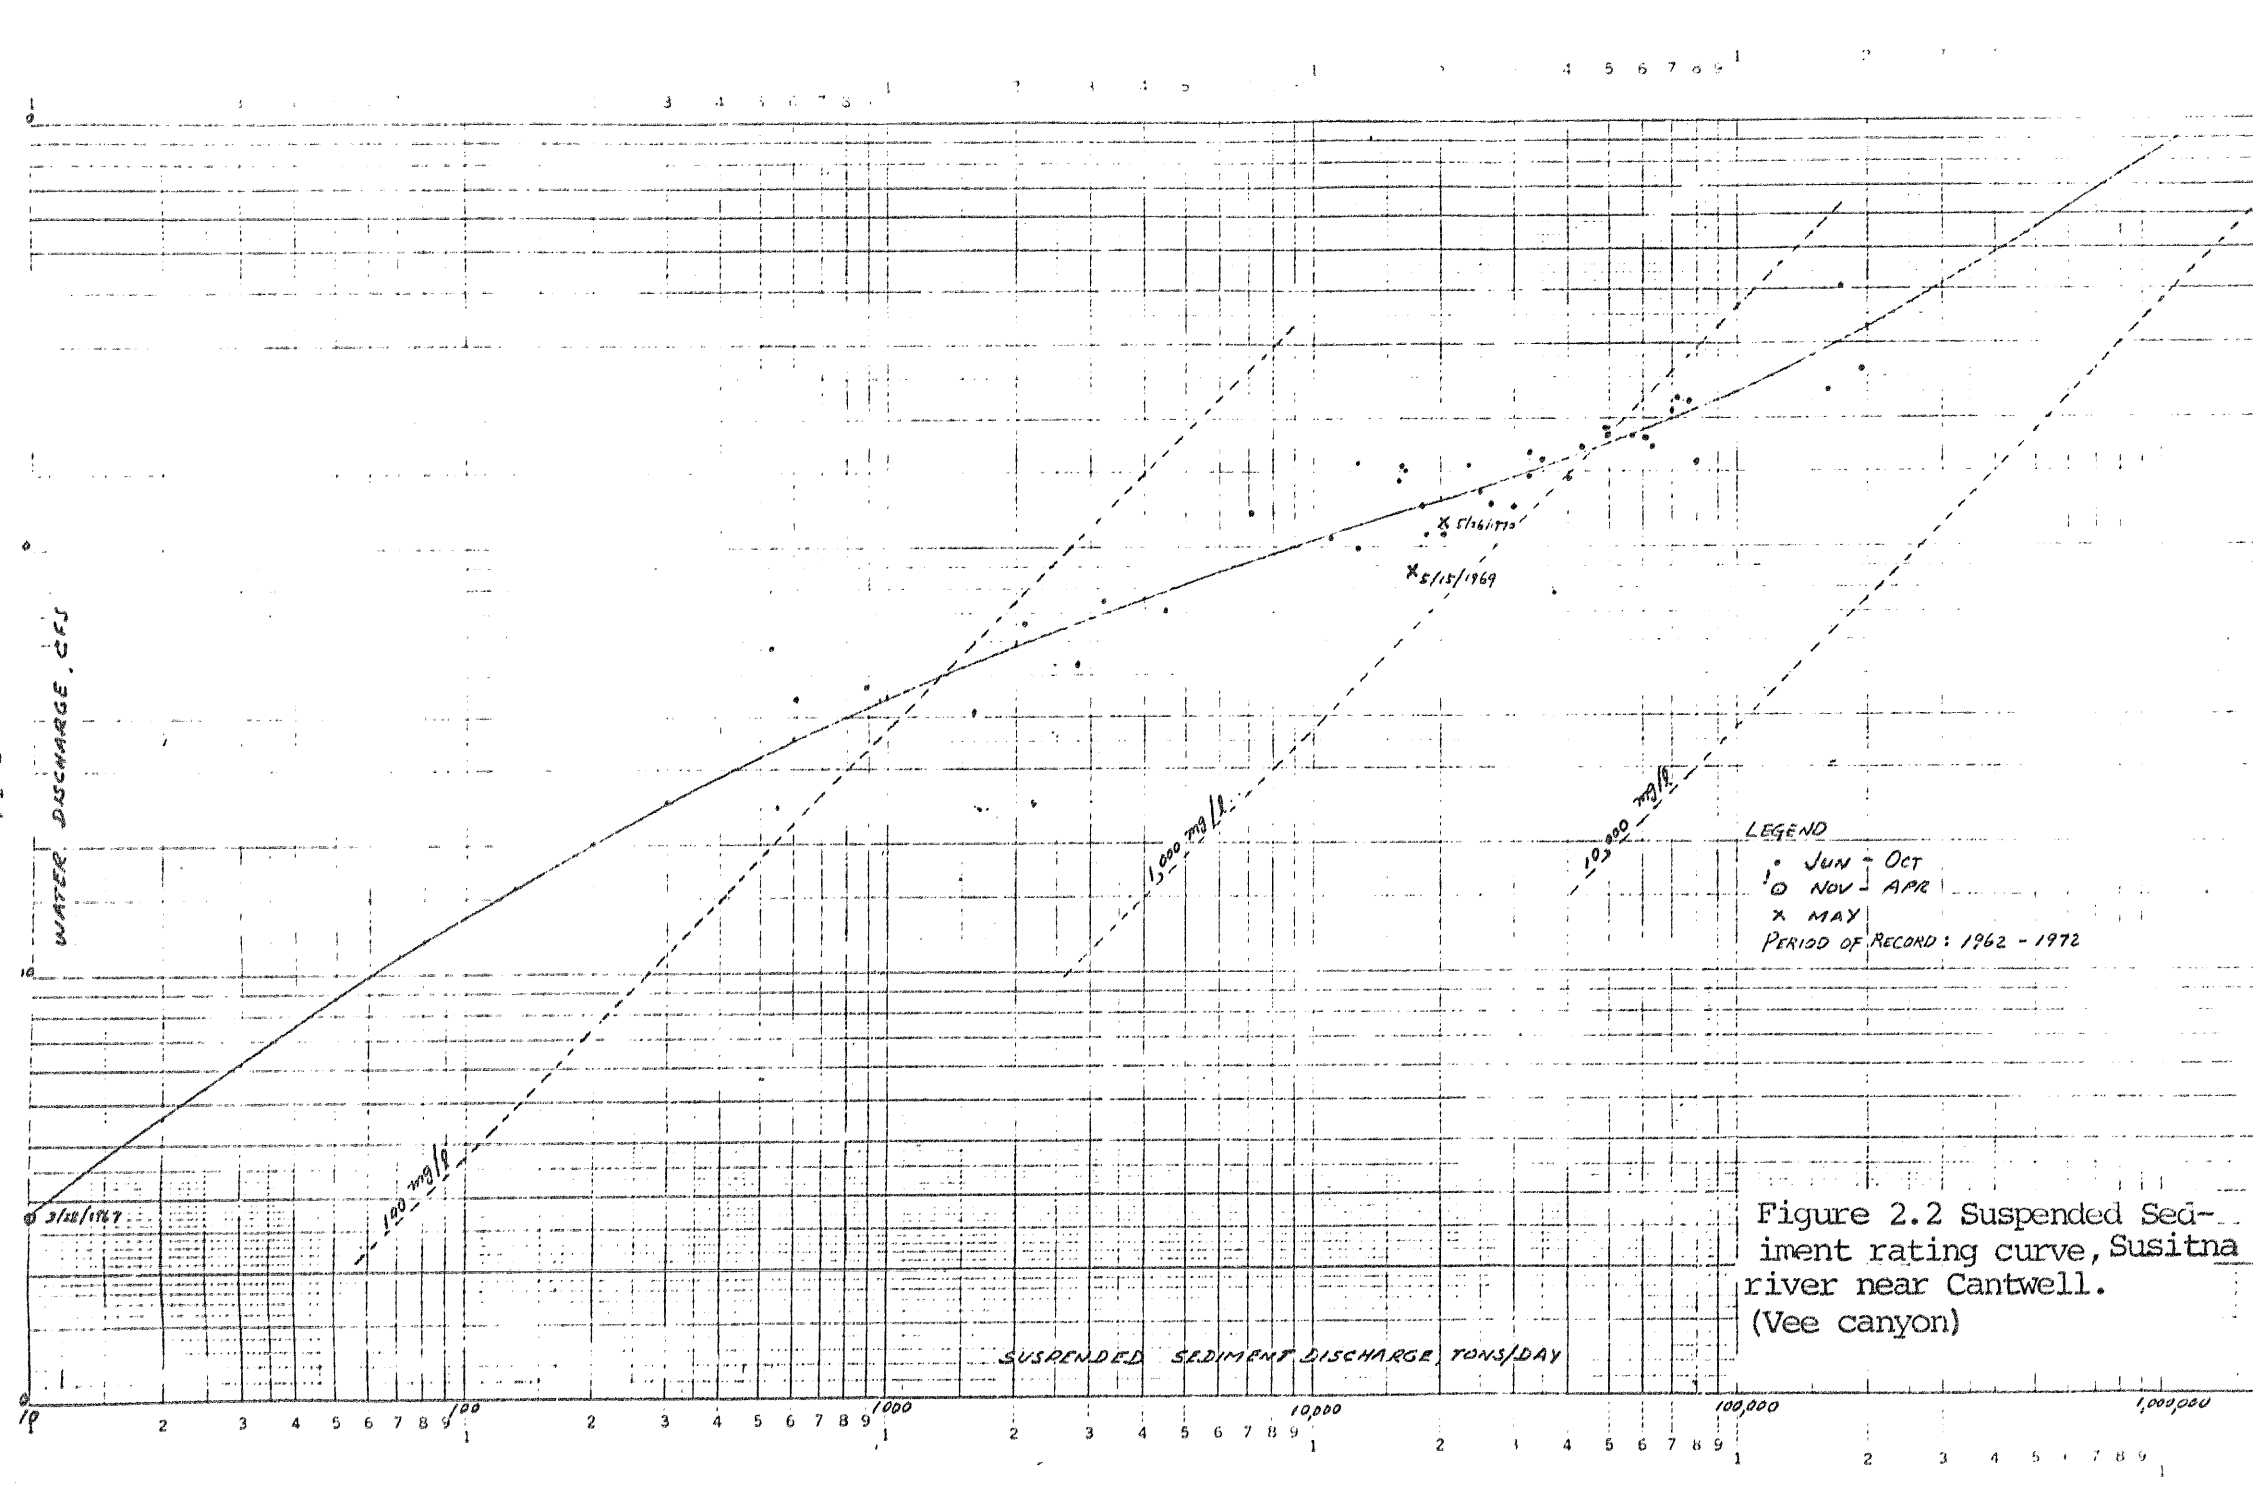



Figure 2.2 Suspended Sediment rating curve, Susitna river near Cantwell. (Vee canyon)

SOURCE: Harza-Ebasco (1984c)

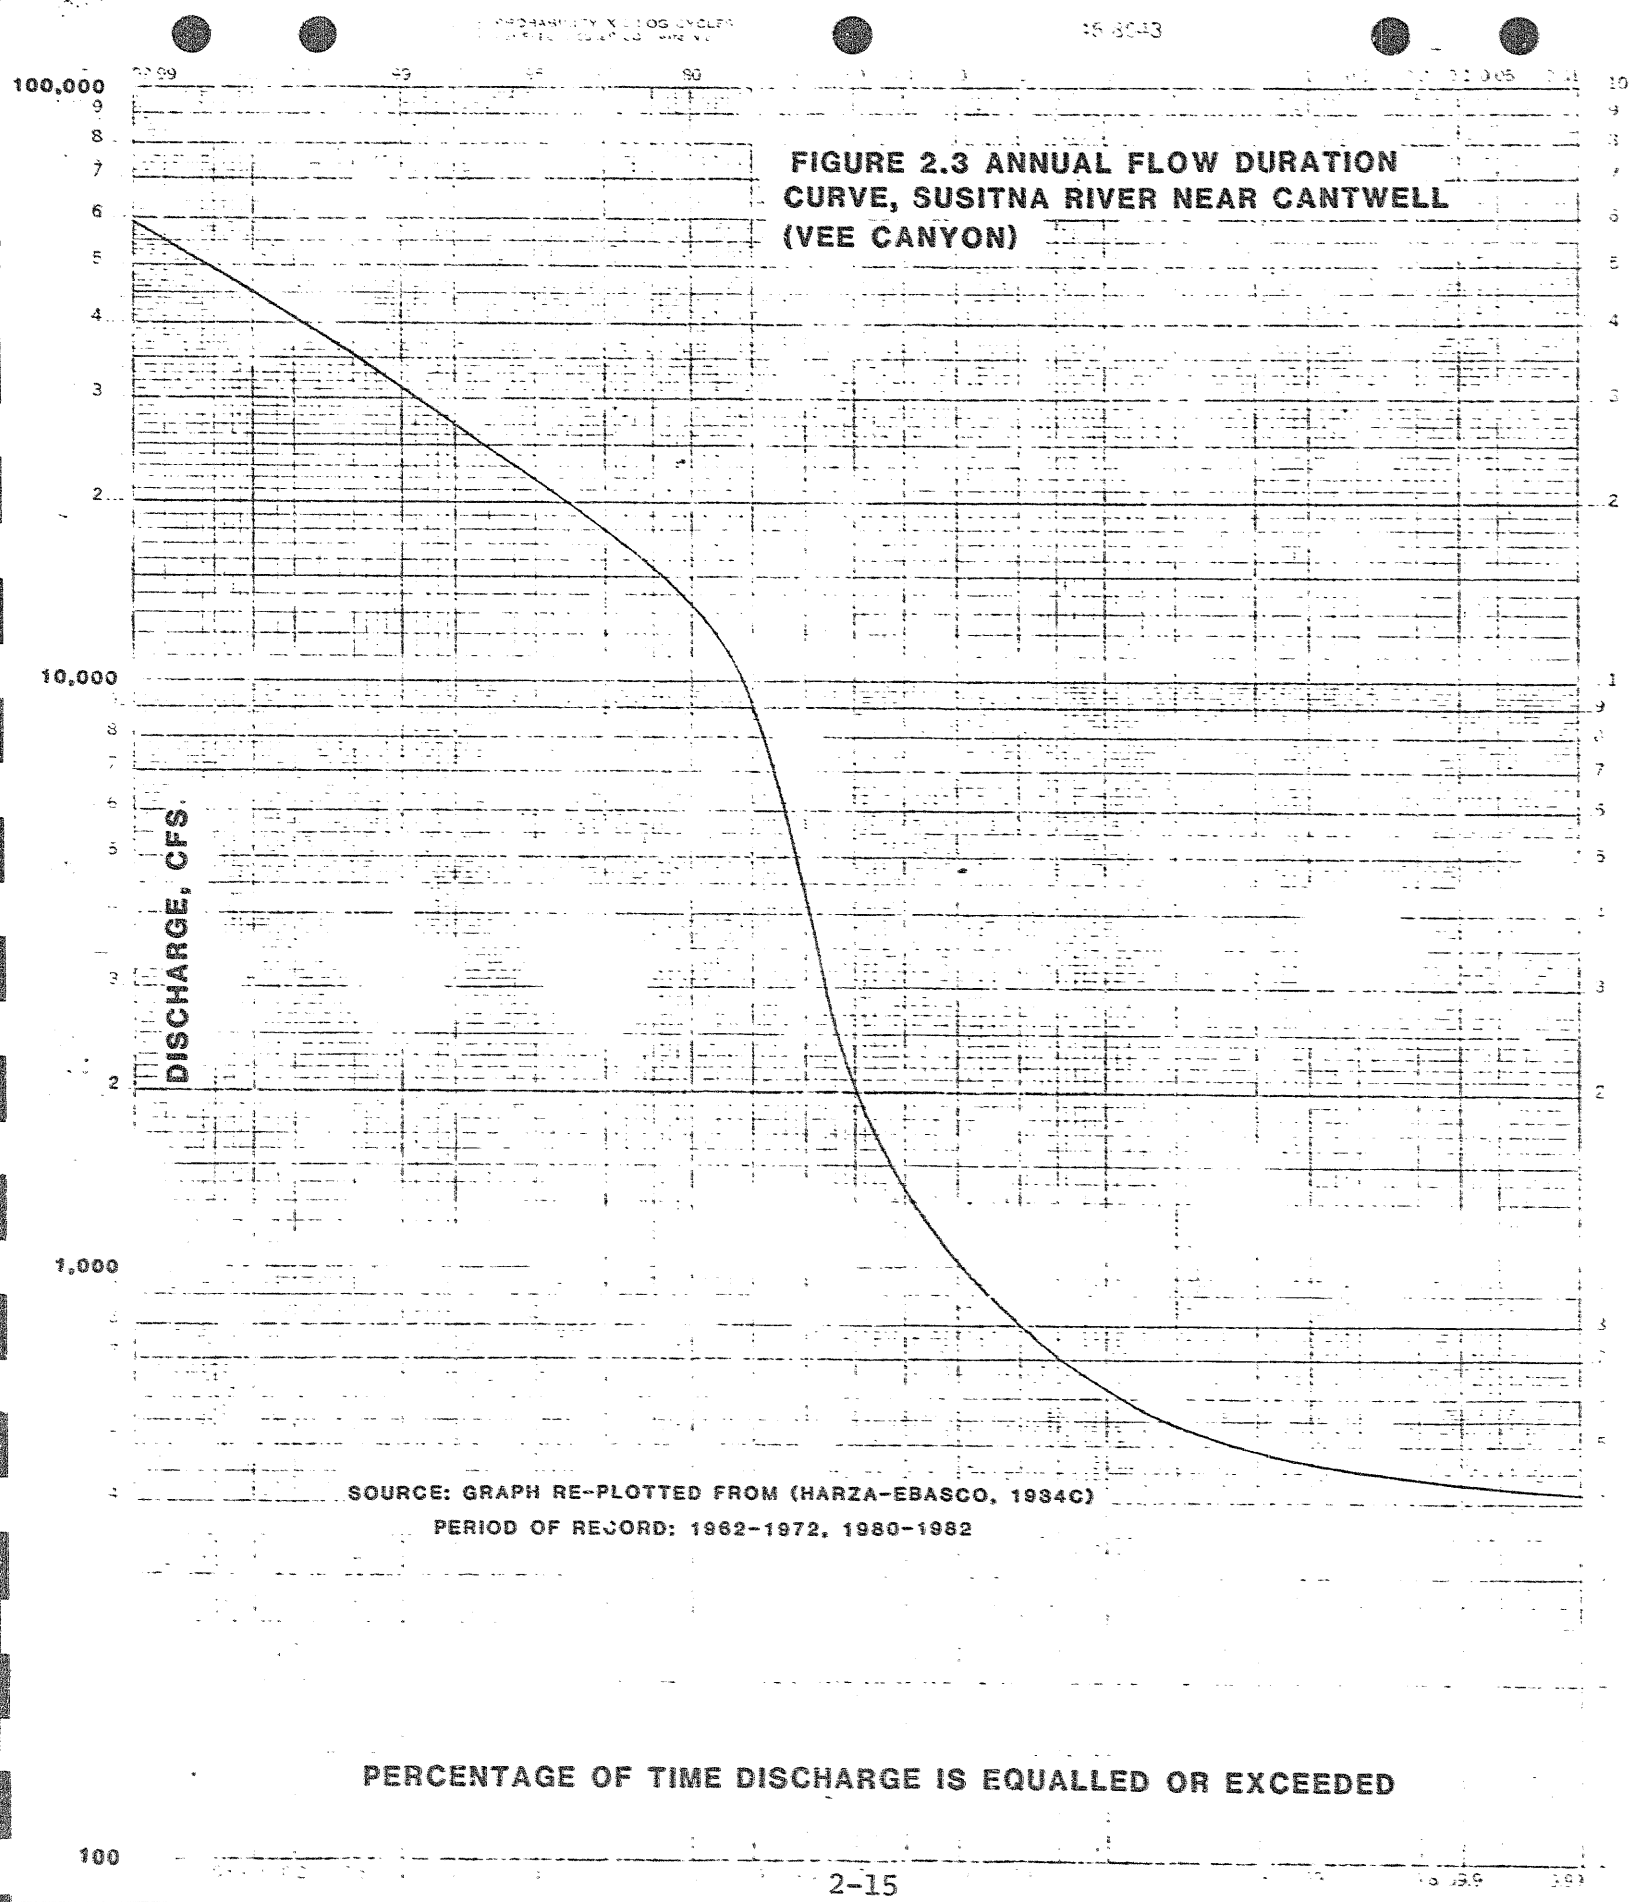
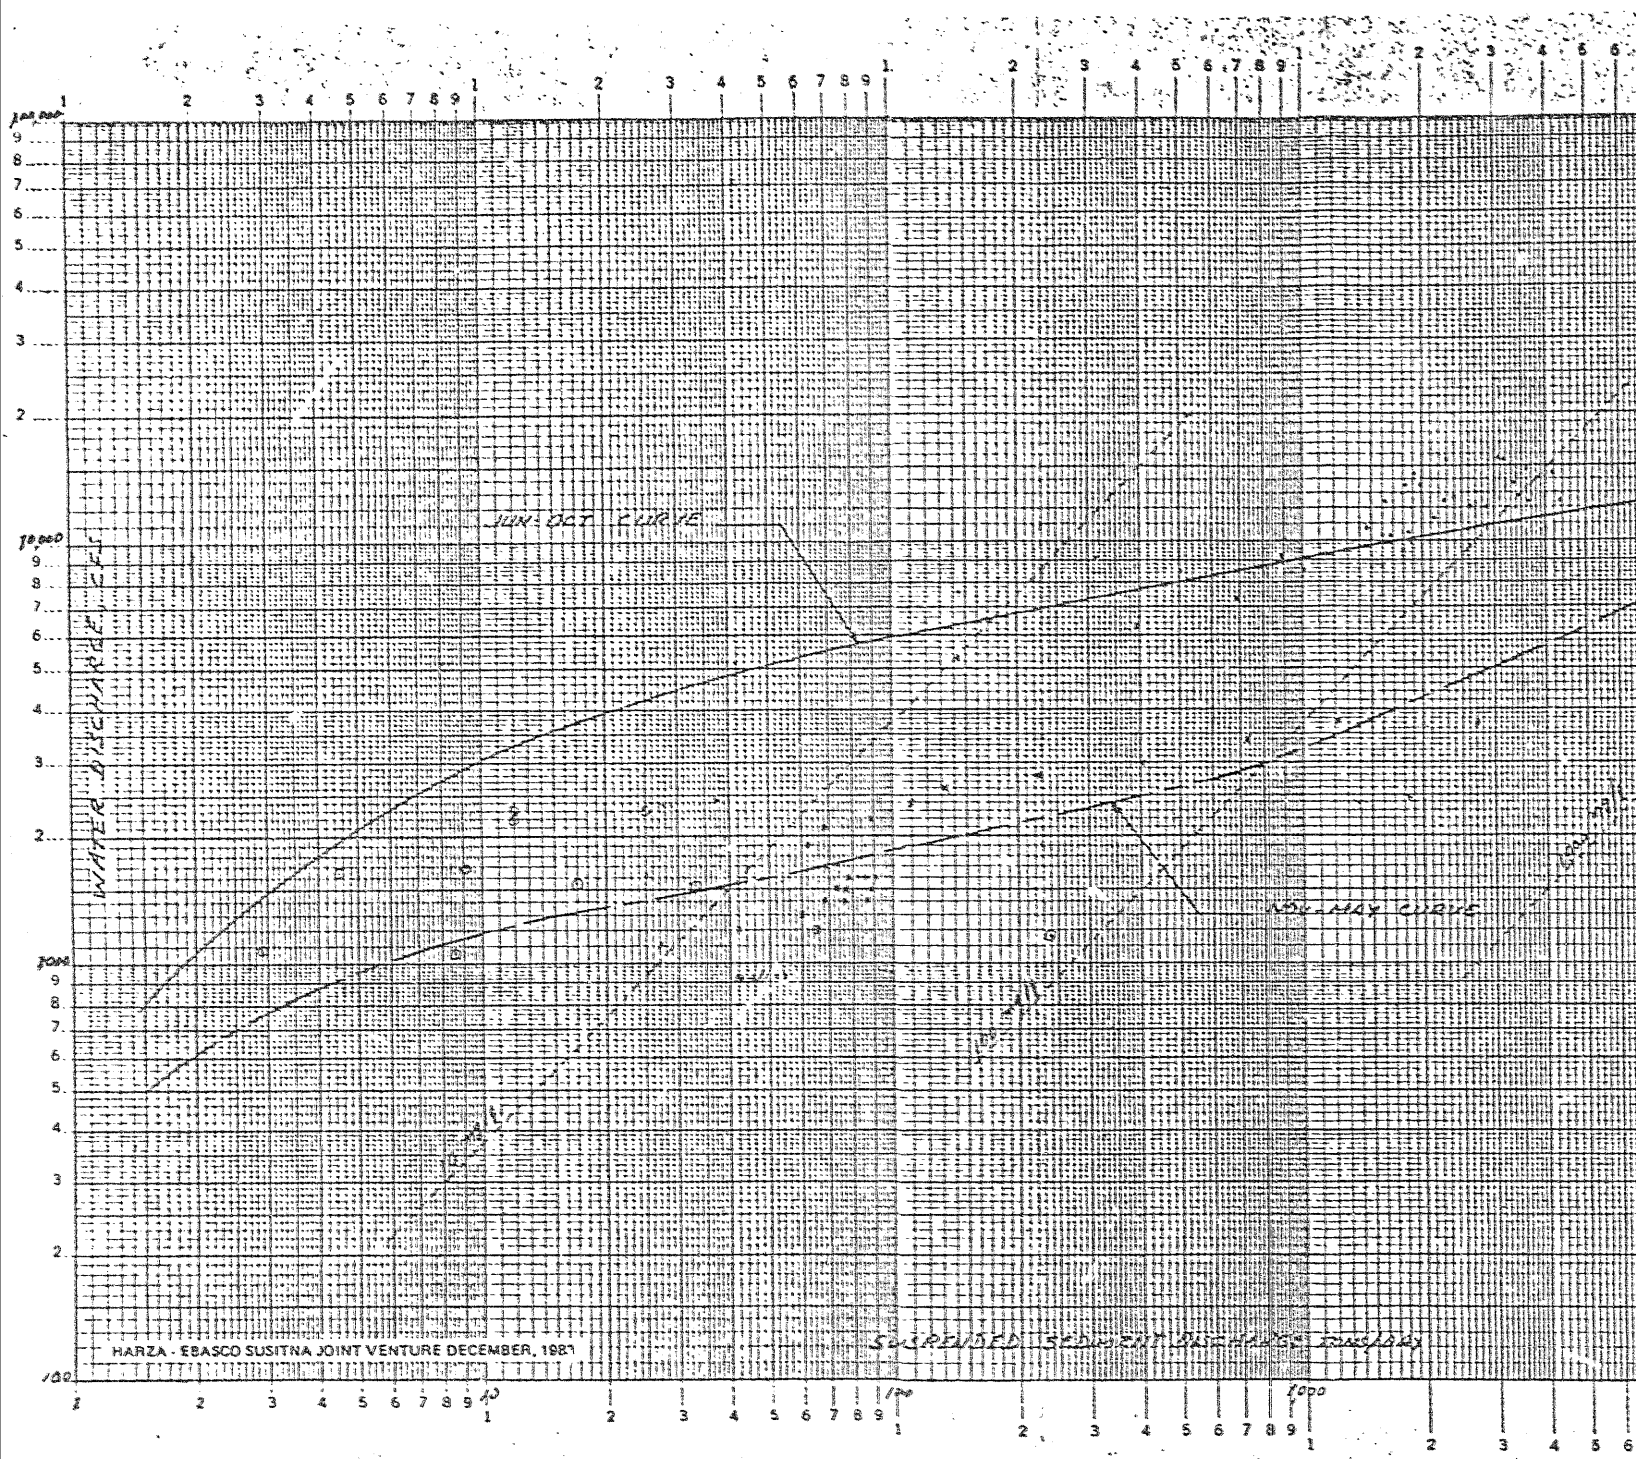



**FIGURE 2.3 ANNUAL FLOW DURATION CURVE, SUSITNA RIVER NEAR CANTWELL (VEE CANYON)**

SOURCE: GRAPH RE-PLOTTED FROM (HARZA-EBASCO, 1984C)

PERIOD OF RECORD: 1962-1972, 1980-1982


WATER DISCHARGE, CFS
JUN-OCT CURVE
NOV-MAY CURVE
SUSPENDED SEDIMENT DISCHARGE, TONS/DAY
HARZA - EBASCO SUSITNA JOINT VENTURE DECEMBER, 1987


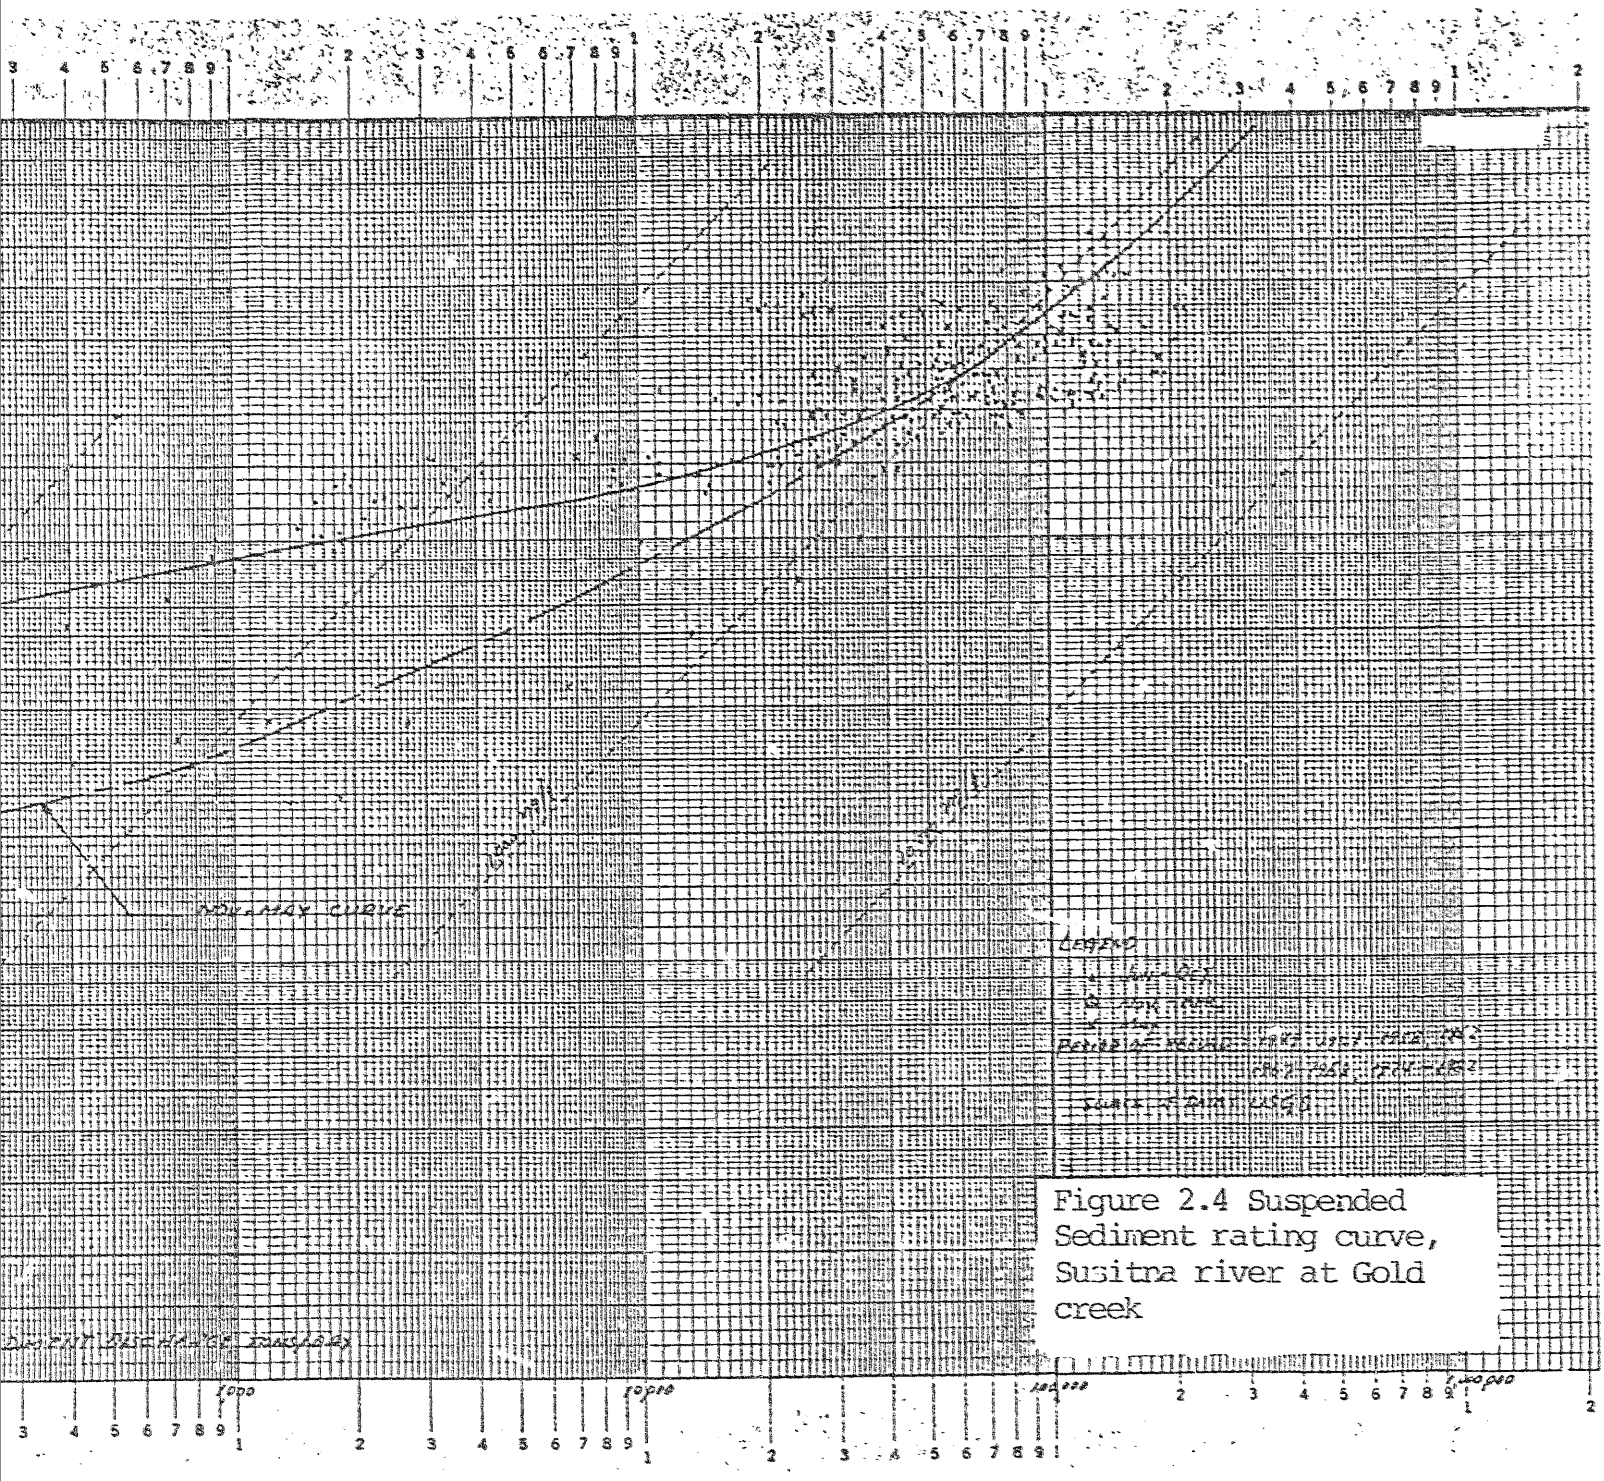


Figure 2.4 Suspended Sediment rating curve, Susitna river at Gold creek

SOURCE: Harza-Ebasco (1984c)

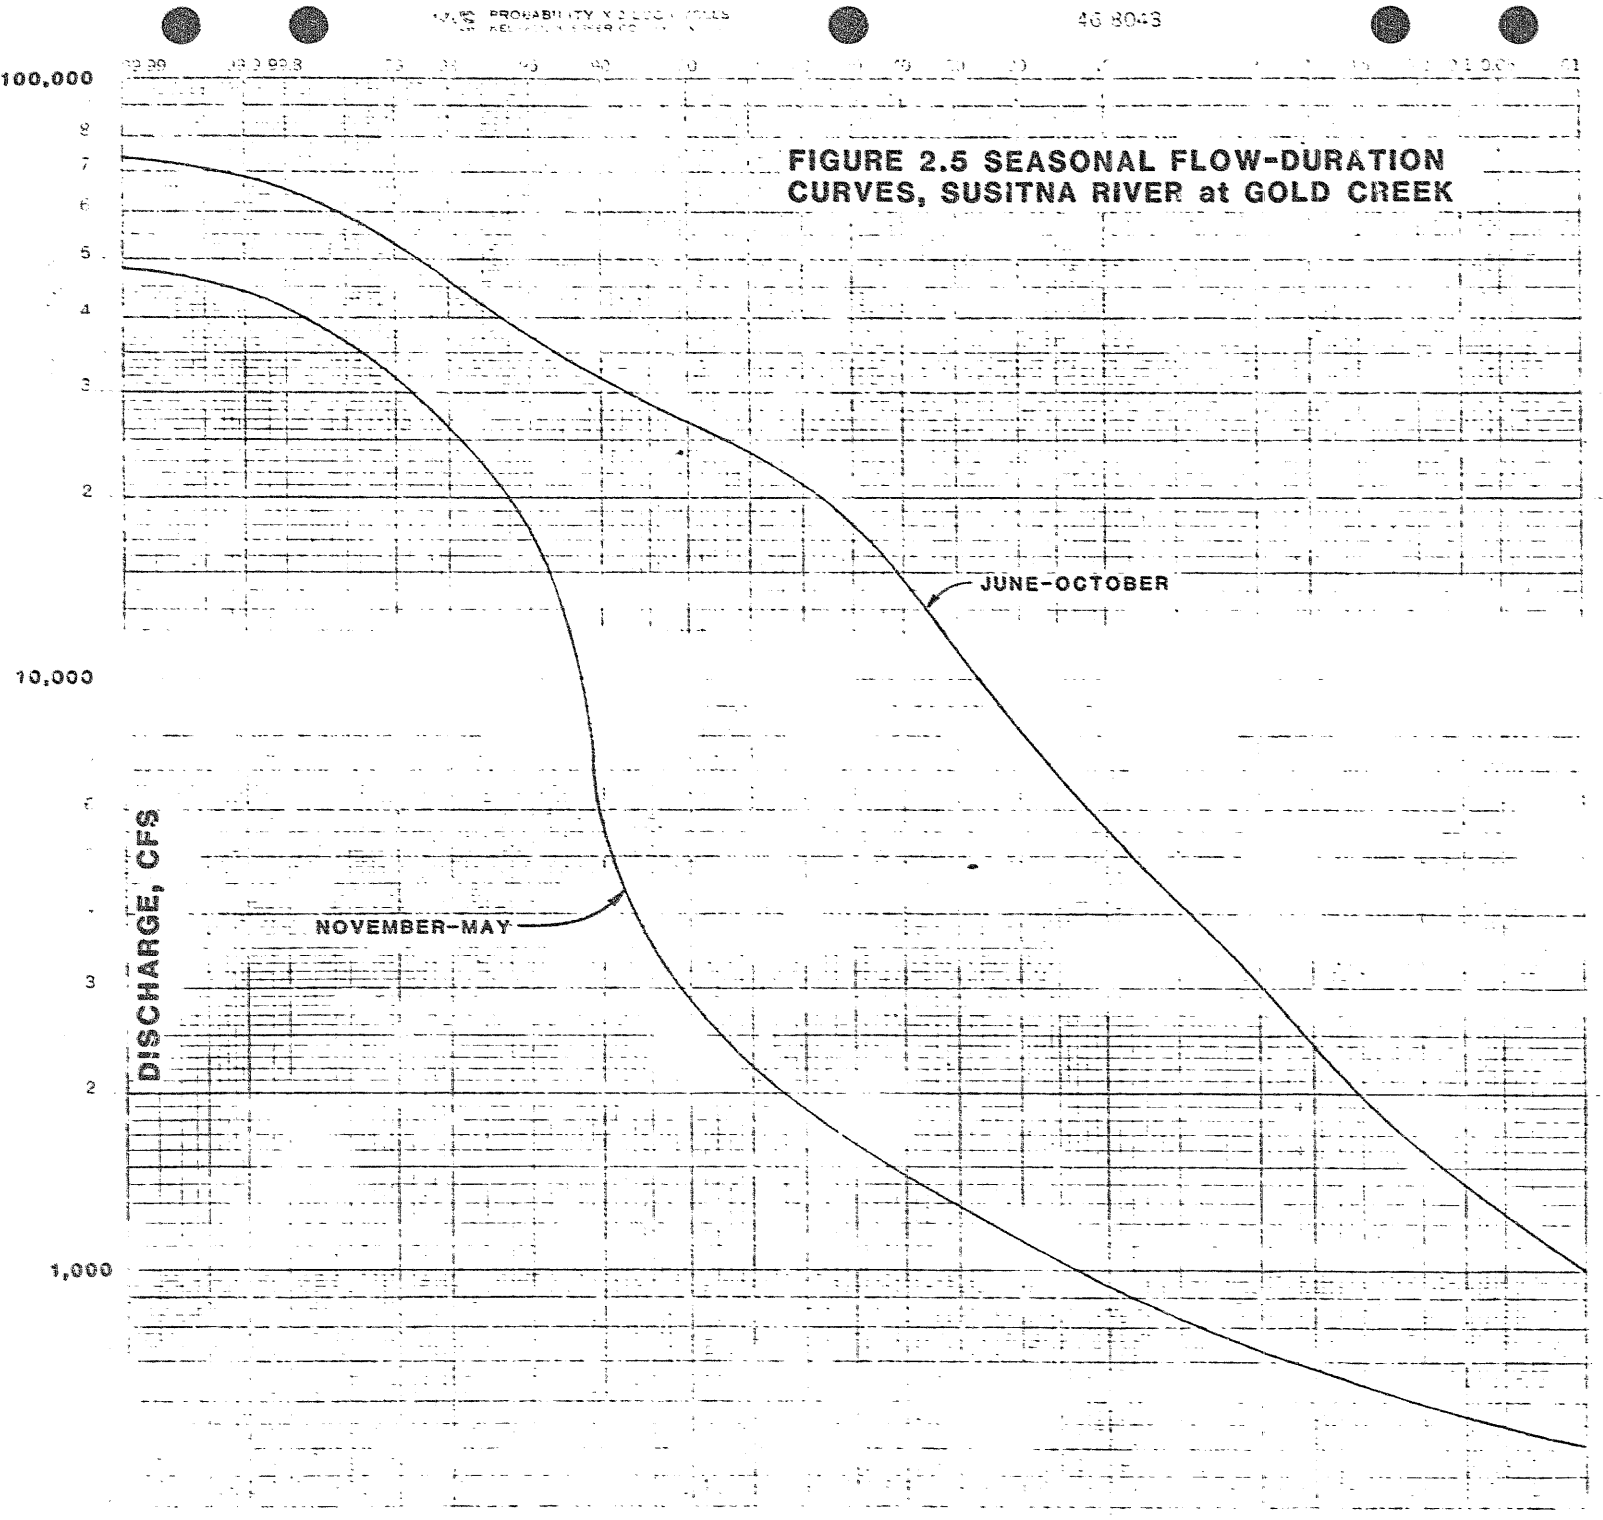


SOURCE: GRAPHS RE-PLOTTED FROM HARZA-EBASCO (1984c)

PERIOD OF RECORD: 1950-1982

# 3.0 CHANNEL STABILITY

## 3.1 Introduction

The Susitna River between Devil Canyon and the confluence of the Susitna and Chulitna Rivers has a single-channel or a split-channel configuration. A number of barren gravel bars or moderately-to-heavily vegetated islands exist in the river. The mid-channel gravel bars appear to be mobile during moderate to high floods (R&M, 1982e). A number of tributaries, including Portage Creek, Indian River, 4th of July Creek, and Lane Creek, join the main river in this reach. Almost every tributary has built an alluvial fan into the river valley. Due to relatively steep gradients of some of these tributaries, the deposited material is somewhat coarser than that normally carried by the Susitna River.

Vegetated islands generally separate the main channel from side channels and sloughs. These sloughs and side channels exist on one bank of the river at locations where the main river channel is confined towards the opposite bank. The flows enter into these sloughs and side channels, depending upon the elevations of the berms at their heads relative to the mainstem river stages (Table 3.1). Coarser bed materials are generally found at the heads of sloughs and side channels, as the flow entering these sloughs and side channels is from the upper layer of the flow in the main channel and does not carry coarse material. This relatively sediment-free flow picks up finer bed material at the heads, thereby leaving coarser material.

Evaluation of morphological changes between 1949 1951 and 1977-1980 (AEIDC, 1984) indicates that some sloughs have come into existence since 1949-51, some have changed character and/or type significantly, and others have not yet changed enough to be noticeable. Many sloughs have evolved from side channels to side sloughs or from side sloughs to upland sloughs (definitions of slough types and other habitat types may be found in (EWT&A and WCC, 1985)). Thus, they are now higher in elevation

relative to the water surface in the mainstem at a given discharge. The perching of the sloughs and increased exposure of gravel bars above the water surface are indicative of river degradation over the 35-year period. However, the photographs presented in the report also show significant increase in the number and/or size of barren gravel bars, which indicates that depositions also have occurred. Therefore, both aggradation and degradation can be expected to occur in the Susitna River under natural conditions, depending upon the flows and sediment loads.

Under with-project conditions, the flow regime of the Susitna River will be modified, and the reservoirs will trap most sediment except the smaller particle sizes of fine silt and clay size material. The river will strive to adjust itself to a new equilibrium. The main channel will have the tendency to be more confined with a narrower channel. This may cause the main channel to recede from the heads of some sloughs and side channels.

Of major concern are potential aggradation or degradation in the sloughs and side channels at their entrances, and at sites in the main channel. Also of concern are intrusion of fine sediment into the gravel bed and its subsequent entrapment. In case of fine sediment deposition on the gravel bed, appropriate measures may be necessary to flush out the sediments so that the bed can be kept clean.

Another concern is the potential change in hydraulic conditions at the mouths of tributaries due to lower mainstem water levels. Of special interest are Indian River and Portage Creek, which receive the majority of the escapement of chinook and chum salmon entering tributaries upstream of the Chulitna River confluence. Potential perching of these and other tributaries above the mainstem, the decrease or elimination of the backwater area at the mouth, and increased velocities could restrict fish access to spawning areas (Trihey, 1983). Conversely, excessive degradation at some tributaries could potentially cause maintenance problems at stream crossings of the Alaska Railroad (R&M, 1982f).

This segment of the report discusses the analyses of sedimentation processes conducted by Harza-Ebasco (1985), R&M (1982e,f) and Trihey (1983) in order to evaluate stream channel stability under natural and with-project conditions for study sites in the mainstem, in selected sloughs and side channels, and in significant tributaries. For these analyses, a stable channel means that its shape, slope and bed material size distribution do not change significantly with time. Thus, these physical parameters are relatively constant, although there may actually be exchange of soil particles in the bed from time to time. Major items discussed in this section are:

1. Evaluation of sedimentation processes under natural conditions;
2. Evaluation of potential degradation or aggradation under with-project conditions;
3. Determination of discharge rates at which the mainstem flows are likely to overtop the entrances of the sloughs and side channels under natural and with-project conditions;
4. Estimation of discharge rates for the sloughs and side channels at which their beds will be unstable, and also estimation of the rates required to flush out fine sediment deposits; and
5. Estimation of changes in tributary mouth conditions at significant tributaries.

## 3.2 Factors Affecting Channel Stability

To provide some background for analyzing the specific problems under study, a brief description of sediment transport in a river is given below.

Sediment particles are transported by the flow as bedload and suspended load. The bedload consists of wash load and bed-material load. In large rivers, the amount of bedload generally varies between about 3 and 25 percent of the suspended load. Although the amount of bedload is generally small compared to the suspended load, it is important because it shapes the bed and affects the channel stability.

The amount of material transported or deposited in a stream under a given set of conditions depends upon the interaction between variables representing the characteristics of the sediment being transported and the capacity of the stream to transport the sediment. A list of these variables is given below (Simons, Li and Associates, 1982).

Sediment Characteristics:

Quality: Size, settling velocity, specific gravity, shape, resistance to wear, state of dispersion and cohesiveness.

Quantity: Geology and topography of watershed; magnitude, intensity, duration, distribution and season of rainfall; soil condition; vegetal cover; cultivation and grazing; surface erosion; and bank cutting.

Capacity of Stream:

Geometric shape: Depth, width, form and alignment.

Hydraulic Properties: Slope, roughness, hydraulic radius, discharge, velocity, velocity distribution, turbulence, tractive force, fluid properties and uniformity of discharge.

The above variables are not independent, and in some cases the effect of a variable is not definitely known. However, the responses of channel pattern and longitudinal gradient to variation of the variables have been studied by various investigators, including Lane (1955), Leopold and Maddock (1953), Schumm (1971) and Santos-Cayudo and Simons (1972). The studies by these investigators support the following general relationships (Simons and Senturk, 1977):

(i) depth of flow is directly proportional to the cube root of water discharge;

(ii) channel width is directly proportional to sediment discharge and to the square root of water discharge;

(iii) channel shape expressed as width to depth ratio is directly related to sediment discharge;

(iv) channel slope is inversely proportional to water discharge and directly proportional to both sediment discharge and grain size;

(v) sinuosity is directly proportional to valley slope and inversely proportional to sediment discharge; and

(vi) transport of bed material is directly related to streampower (defined as product of bed shear and cross-sectional average velocity), and to concentration of fine material, and inversely related to bed material sizes.

Because of the complexity of interaction between various variables, the river response to natural or man-made changes is generally studied by (i) qualitative analysis, involving morphological concepts; (ii) quantitative analysis involving application of morphological concepts and various empirical or experimental relationships; and (iii) quantitative analysis using mathematical models. The insight to the problems obtained through the qualitative approach provides understanding of the methods required to quantify the changes in the system. Mathematical modeling can help to study many factors simultaneously. Recent work by Simons and Li (1978) and others indicate that physical process computer modeling provides a reliable methodology for analyzing the impacts and developing solutions to complex problems of aggradation, degradation and river response to engineering activities.

For river channels of non-cohesive sediment, qualitative predictions of river response have been made using Lane's relationship (Lane, 1955):

$$QS \sim G_s d_s$$

in which

Q = stream discharge
S = longitudinal slope of stream channel
$G_s$ = bed material discharge
$d_s$ = particle size of bed material, generally represented by $d_{50}$ (median diameter)

The use of the above relationship to predict potential responses of the Susitna River under natural and with-project conditions is discussed in Section 3.5.1.

Prediction of quantitative changes in a river system requires geomorphic and hydraulic data or information which are generally not readily available. Considerable effort, time and money are required to collect such information. The data of primary needs include hydrological and topographic maps and charts, large scale aerial and other photos of the river and surrounding terrain, existing river conditions (roughness coefficient, aggradation, degradation, local scour near structures), discharge and stage data (under natural and with-project conditions), existing channel geometry (main channel, side channels, islands), sediment data (suspended load and bed-load, size distribution of bank and bed material and suspended sediment), and size and operation of anticipated reservoir(s) on the river system.

Because the available data did not permit meaningful mathematical modeling using computer techniques, the morphological concepts and empirical relationships were used to predict potential aggradation or degradation at the study sites.

## 3.3 General Analytical Approach

Harza-Ebasco (1985) evaluated the sedimentation processes of degradation and aggradation under natural and with-project conditions in the Susitna

River at the study sites (Table 3.1), using the approaches discussed below.

### 3.3.1 Degradation

Generally, river bed degradation occurs downstream of newly constructed diversion and storage structures. The rate of degradation is rapid at the beginning, but is checked by either the development of a stable channel slope or by the formation of an armor layer if sufficient coarse sediment particles are available in the bed. The important variables affecting the degradation process are:

1. Characteristics of the flow released from the reservoir,

2. Sediment concentration of the flow released from the reservoir,

3. Characteristics of the bed material,

4. Irregularities in the river bed,

5. Geometric and hydraulic characteristics of the river channel; and

6. Existence and location of controls in the downstream channel.

The assumptions used in the analysis of degradation include:

1. Bedload is completely trapped by the reservoir, but suspended sediment particles of .004 mm and less in diameter will remain in suspension and pass through the reservoir (PN&D, 1982). The sediment passing through the reservoir would be about 18 percent of the sediment inflow (Harza-Ebasco, 1984d);

2. Irregularities in the river and channel configurations remain unchanged;

3. Sediment supply due to bank erosion is negligible;

4. Sediment eroded from the river bed is carried downstream as bedload;

5. Sediment injections by tributaries are carried downstream without significant deposition;

6. Size distribution of bed material is constant throughout the depth at each study site; and

7. Sufficient coarse material exists in the river bed to form an armoring layer which prevents further degradation.

The size of transportable bed material was estimated using (i) the competent bottom velocity concept of Mavis and Laushey (1948) and U.S. Bureau of Reclamation (1977); (ii) the tractive force versus transportable size relationship derived by Lane (1953); (iii) the Meyer-Peter, Muller formula (U.S. Bureau of Reclamation, 1977); (iv) the Schoklitsch formula (U.S. Bureau of Reclamation, 1977); and (v) Shields criteria (Simons, and Li and Associates, 1982).

The depth of degradation or the depth from original streambed to top of the armoring layer was computed by the following relationship given in (U.S. Bureau of Reclamation, 1977):

$$Y_d = Y_a \left(\frac{1}{\Delta p} - 1\right)$$

in which:

$Y_d$ = depth of degradation, feet

$Y_a$ = thickness of armoring layer, assumed as 3 times transportable size or 0.5 feet, whichever is smaller

$\Delta p$ = decimal percentage of material larger than the size

The transportable size for a given discharge was the average of the five sizes estimated by using the five methods mentioned above.

### 3.3.2 Aggradation

Potential aggradation at the entrances of sloughs and side channels was estimated by comparing the transportable size for the flow in the mainstem before diversion into the slough or side channel and the transportable size for the remaining flow in the main channel after diversion into side channel or slough. If the two sizes were significantly different, it was concluded that some of the bedload being transported would be deposited near the entrance.

### 3.3.3 Stability of Tributary Mouths

The regulation of floods by reservoir operation results in a decrease in stage during mean annual floods of from 3.2 to 7.6 feet at the mouths of tributaries between Devil Canyon and the Chulitna River confluence. Similarly, the decrease in average summer flows results in average reductions in water levels of 1-4 feet. Material transported to the tributaries' mouths will no longer be readily transported downstream (although such transport is assumed in the degradation analysis). Consequently, alluvial fans will increase in size at the mouth of affected tributaries. Also, the reduced summer water levels may result in headcutting and scour at the tributaries.

Field data were collected at nineteen tributaries. A qualitative analysis was conducted to determine if the above problems were likely to occur. A semi-quantitative analysis (R&M, 1982f) was done on six creeks, and considered channel slope, the sediment discharge rate, the bed material size distribution and the decrease in stage expected at the tributary mouth. Due to their importance to chinook and chum

salmon spawning, Indian River and Portage Creek were analyzed in more detail for changes in hydraulic conditions due to project operation, including bed changes and average velocities (Trihey, 1983).

## 3.4 Analysis of Natural Conditions

The basic data used in this study were taken from various reports prepared for Alaska Power Authority by the Alaska Department of Fish and Game, Susitna Hydro Aquatic Studies Team (ADF&G); R&M Consultants, Inc. (R&M); and Harza-Ebasco Susitna Joint Venture (H-E). Discharge and sediment data also were taken from the publications of the U.S. Geolcgical Survey, Water Resources Division (USGS) in co-operation with the Alaska Power Authority (Knott and Lipscomb, 1983, 1985).

Hydraulic parameters such as stage-discharge relationships, channel widths, average channel depths, measured velocities and bed slopes of selected side channels and sloughs, were taken from various reports of R&M (R&M, 1982 b, c, f, g) and ADF&G (ADF&G, 1983b, 1984b). The hydraulic parameters for the main channel reaches were derived from the data given in (Harza-Ebasco, 1984b). Some unpublished data were obtained from USGS, R&M and ADF&G through correspondence. The site characteristics and hydraulic parameters for study sites in the mainstem, side channels and sloughs are shown in Tables 3.1, 3.2 and 3.3.

The Manning's roughness coefficients for various main channel reaches, side channels and sloughs (Table 3.1) were estimated based on field reconnaissances made in 1983 and 1984 and on the analysis presented by Harza-Ebasco (1984b).

The representative bed material size distribution for each site was derived from the analysis of the bed material samples collected by Harza-Ebasco. In the mainstem of the Susitna River, the surface material is generally coarser than the sub-surface material. The bed material samples collected

in the sloughs and side channels, however, did not show any distinct difference between the surface and sub-surface materials. The surface and sub-surface samples at a given site were combined to determine the size distribution. The adopted size distributions are given in Table 3.4. These are considered only indicative of the bed material at the specific sites because many additional samples would be required to determine a representative size distribution for the whole length of the study reach.

The sizes of transportable bed material corresponding to a selected range of discharges (Table 3.5) were estimated as the average of the five sizes computed using the methods of competent bottom velocity; tractive force; Meyer-Peter, Muller formula; Schoklitsch formula; and Shields criteria. A comparison of median bed material size and the transportable size at each site indicated that under natural conditions, most of the selected sites are subject to temporary scour and/or deposition, depending upon the magnitude and characteristics of the sediment load and high flows caused by floods or breaching of ice jams.

About 56 percent of the suspended sediment load carried by the river under natural conditions is finer than 0.5 millimeter (medium to fine sand, silt and clay). This fine sediment has been observed to deposit in side channels and sloughs. However, many of these deposits are re-suspended and removed during high flows, probably because of disturbances of the surface bed material layer.

## 3.5 With-Project Conditions

### 3.5.1 River Morphology

The construction of the Susitna Hydroelectric Project will change the streamflow pattern and sediment regime. The essentially sediment-free flows from the reservoirs will have the tendency to pick up bed material and cause degradation. The modified discharges downstream from the dams, however, will have reduced competence to transport

sediment, especially that brought by the tributaries. These two factors tend to compensate each other, resulting in the overall effects discussed below.

The Lane relationship discussed in Section 3.2 is based on an equilibrium concept, that is, if any change occurs in one or two parameters of the water and sediment discharge relationships, the river will strive to compensate the other parameters so that a new equilibrium is attained. In the case of the Susitna River, both water discharge and bed load discharge will be modified by the reservoirs. Therefore, adjustments will occur in the river channel and particle sizes of the bed material. A number of studies (Hey, et al 1982) have indicated that the new median diameter under with-project conditions may correspond to the $D_{90}$ or $D_{95}$ of the original bed material.

The potential morphological changes of the Susitna River also were addressed qualitatively by R&M (1982e). It was argued that the Susitna River between Devil Canyon and the confluence of the Susitna and Chulitna Rivers would tend to become more defined with a narrower channel. The main channel river pattern will strive for a tighter, better defined meander pattern within the existing banks. A trend of channel width reduction by encroachment of vegetation and sediment deposition near the banks would be expected.

### 3.5.2 Channel Stability

Potential degradation at the selected sites was estimated for various discharges using the discussed procedure. The potential degradation at each site estimated from these relationships is listed in Table 3.6. These estimates are based on the assumptions that there would not be a significant supply of coarse sediments by the tributaries and that there would not be redeposition of bed material eroded from the upstream channel.

Table 3.7 shows average weekly flows at Gold Creek for four project operation scenarios and for natural conditions (Harza-Ebasco, 1985). These data indicate about 50 percent reduction in flows during the May through September period and about 3 to 4 times increase in flows during the October through April period. Table 3.8 shows annual maximum weekly flow at Gold Creek for natural and with-project conditions. Under with-project conditions, the maximum weekly flows occur under 2002 load conditions for almost every year. Using the average of these annual maximum weekly flows as the dominant discharge (about 30,000 cfs), the potential degradation at the main channel sites would be in the range of about 1.0 to 1.5 feet. In the sloughs and side channels, the degradation would be about 0 to 0.5 feet. These estimates, however, are based on the assumptions that there will not be significant injection of bedload by the tributaries and that there would not be redeposition of sediment eroded from the upstream channel. In actual situations, there will be sediments carried down by the tributaries, of which some will be deposited in the main river. Redeposition of some sediment eroded from the upstream channel will also occur. Therefore, actual degradation at the main channel sites would be less than that estimated.

Table 3.3 shows that bifurcation of flow at the heads of the sloughs and side channels will not significantly reduce the discharge rates in the main channel. Therefore, the competence of flow to transport bed material will not be affected due to bifurcation of flow and little aggradation should be expected in the main channel near the entrances to the sloughs and side channels.

It is not possible to accurately estimate the actual degradation since there are many unquantifiable parameters. These include bed material transport from tributaries and bank erosion, the degree of armoring by the present bed, and the actual streamflows and floods which will occur for the first few years of Devil Canyon operation. However,

based on many samples of bed material and visual inspection, it is believed that on the average, degradation in the main channel will not exceed approximately one foot. The amount of this degradation may be greatest near the Devil Canyon Dam face, decreasing with distance downstream.

When the system energy demand increases (as in 2010), and less flow is discharged in July and August, the armoring layer developed earlier will be stable, more so than under natural conditions. However, infrequent high flood events will not be controlled to as great an extent as will smaller floods, and will still have the ability to remove the armor layer and cause bed degradation. Reservoir operation studies indicate that floods up to the 50-year event will be controlled for project energy demands in 2002. Control of infrequent flood events will be improved as energy demand increases, and the potential for bed degradation will therefore be reduced.

Because of degradation in the mainstem, discharges higher than those under natural conditions would be required to overtop the berms at the heads of the sloughs and side channels. Assuming that the river bed at the entrances would be lowered by about one foot due to degradation, the with-project discharges that would overtop the sloughs and side channels were estimated to be between 4,000 and 12,000 cfs higher than those under natural conditions, with an average increase of approximately 8,000 cfs.

### 3.5.3 Intrusion of Fine Sediments

As previously discussed, the reservoir will trap all sediment except for particles sizes of .004 mm and less, which constitute about 18 percent of the suspended load. The velocities at the study sites (Tables 3.2 and 3.3) would be sufficiently high to carry these fine particles in suspension, and the substrate would generally be cleaner. However, some coarse silt and fine sand might be picked up from the

river bed. These fine materials would have the tendency to settle out in pools and backwater areas. Therefore, some deposition of such silt and sand in the sloughs and side channels is possible, and it may be desirable to operate the project such that the sloughs and side channels are overtopped at least for a few days each year, unless other means such as "Gravel Gerties" are employed to flush out the fine sediment deposition.

### 3.5.4 Tributary Stability

The semi-quantitative assessment of the nineteen tributaries (R&M, 1982f) indicated that three creeks (Jack Long, Sherman and Deadhorse) are estimated to aggrade and to likely restrict access by fish. The tributaries at RM 127.3, RM 110.1, and Skull Creek are estimated to degrade and to possibly affect the railroad bridges. The other tributaries studied will either degrade or aggrade, but without effects on fish access or railroad. The assessment is summarized in Table 3.9.

The analysis of hydraulic conditions at Portage Creek and Indian River indicates that fish access has not been a problem and is unlikely to be a problem under with-project conditions (Trihey, 1983). These creeks will adjust their streambed gradients and will re-establish entrance conditions similar to those under natural conditions.

Table 3.1
CHARACTERISTICS OF STUDY SITES
ON MIDDLE SUSITNA RIVER[1/]

| | Approx. River Miles | Overall Slope of Study Reach | Overall Slope of Main River | Observed Overtopping Discharge[2/] | Estimated Bed Elev. at Head | Estimated Manning's Roughness |
|---|---|---|---|---|---|---|
| Main Channel Nr. River Cross Section 4 | 99.0 to 100.0 | .0017 | .0017 | NA[3/] | NA | .030 |
| Main Channel Between River Cross Sections 12 and 13 | 108.5 to 110.0 | .0012 | .0012 | NA | NA | .035 |
| Main Channel Upstream from Lane Creek | 113.6 to 114.2 | .0017 | .0017 | NA | NA | .035 |
| Mainstem 2 Side Channels at River Cross Section 18.2 | | .0030 | .0017 | 12,000 | 476.3 | .035 |
| NW Channel | 114.4 | .0020 | .0017 | 12,000 | 476.3 | .035 |
| NE Channel | 115.5 | .0024 | .0017 | 23,000 | 484.6 | .035 |
| Slough 8A (main channel) | | .0024 | .0017 | 26,000 | | .032 |
| NW Channel | 126.2 | .0024 | .0017 | 26,000 | | .032 |
| NE Channel | 126.7 | .0024 | .0017 | 33,000 | 576.5 | .032 |
| Slough 9 | 128.3 | .0026 | .0016 | 16,000 | 604.6 | .032 |
| Main Channel Upstream From the 4th of July Creek | 131.2 to 132.2 | .0015 | .0015 | NA | NA | .035 |
| Side Channel 10 | 134.2 | .0039 | .1017 | 19,000 | 656.6 | .035 |
| Lower Side Channel 11 | 135.0 | .0024 | .0020 | 5,000 | | .035 |
| Slough 11 | 135.4 | .0029 | .0020 | 42,000 | 684.6 | .032 |
| Upper Side Channel 11 | 136.2 | .0045 | .0020 | 13,000 | 684.3 | .035 |
| Main Channel Between Cross Sections 46 and 48 | 136.9 to 137.4 | .0017 | .0017 | NA | NA | .035 |
| Side Channel 21 | | .0030 | .0032 | | | |
| Downstream from A5 | 140.6 | | | 12,000 | | .030 |
| Upstream from A5 | 141.9 | | | 20,000 | | .030 |
| Slough 21 | | .0043 | .0023 | | | .030 |
| NW Channel | 142.2 | | | 23,000 | 753.8 | |
| NE Channel | 142.3 | | | 26,000 | 756.9 | |

1/ Data taken from various reports of H-E; ADF&G and R&M.
2/ Discharges at Gold Creek Station
3/ Not applicable.

SOURCE: Harza-Ebasco (1985)

Table 3.2

HYDRAULIC PARAMETERS FOR MAINSTEM SITES

| Location | Gold Creek Discharge (cfs) | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| | 3,000 | 5,000 | 7,000 | 9,700 | 13,400 | 17,000 | 23,400 | 34,500 | 52,000 |
| Near River Cross Section 4 | | | | | | | | | |
| Discharge, cfs | 3,090 | 5,150 | 7,210 | 9,990 | 13,800 | 17,500 | 24,100 | 35,500 | 53,600 |
| Width, ft | 650 | 750 | 860 | 1,010 | 1,200 | 1,380 | 1,640 | 2,060 | 2,680 |
| Depth, ft | 2.9 | 3.4 | 3.9 | 4.6 | 5.5 | 6.3 | 7.3 | 8.9 | 10.6 |
| Velocity, ft/sec | 2.7 | 3.4 | 3.8 | 4.4 | 4.4 | 4.3 | 4.2 | 4.6 | 4.9 |
| Between River Cross Sections 12 and 13 | | | | | | | | | |
| Discharge, cfs | 3,090 | 5,150 | 7,210 | 9,990 | 13,800 | 17,500 | 24,100 | 35,500 | 53,600 |
| Width, ft | 380 | 410 | 425 | 445 | 460 | 473 | 495 | 518 | 545 |
| Depth, ft | 5.6 | 6.6 | 7.6 | 8.0 | 9.2 | 9.9 | 11.2 | 13.1 | 16.0 |
| Velocity, ft/sec | 2.3 | 3.0 | 3.4 | 4.2 | 4.7 | 5.3 | 6.1 | 7.0 | 7.7 |
| Upstream from Lane Creek | | | | | | | | | |
| Discharge, cfs | 3,090 | 5,150 | 7,210 | 9,990 | 13,800 | 17,500 | 24,100 | 35,500 | 53,600 |
| Width, ft | 850 | 960 | 1,020 | 1,110 | 1,350 | 1,680 | 1,790 | 1,860 | 1,900 |
| Depth, ft | 5.9 | 6.8 | 7.4 | 8.2 | 8.5 | 9.3 | 10.0 | 11.0 | 12.9 |
| Velocity, ft/sec | 1.7 | 2.2 | 2.6 | 3.1 | 4.1 | 4.3 | 5.2 | 6.7 | 7.5 |
| Upstream from 4th of July Creek | | | | | | | | | |
| Discharge, cfs | 3,000 | 5,000 | 7,000 | 9,700 | 13,400 | 17,000 | 23,400 | 34,500 | 52,000 |
| Width, ft | 250 | 340 | 430 | 580 | 800 | 970 | 1,150 | 1,250 | 1,380 |
| Depth, ft | 6.3 | 7.2 | 7.7 | 8.3 | 9.0 | 9.3 | 10.1 | 10.6 | 11.6 |
| Velocity, ft/sec | 2.1 | 2.7 | 3.3 | 4.0 | 4.9 | 5.8 | 6.2 | 7.4 | 8.8 |
| Between River Cross Sections 46 and 48 | | | | | | | | | |
| Discharge, cfs | 3,000 | 5,000 | 7,000 | 9,700 | 13,400 | 17,000 | 23,400 | 34,500 | 52,000 |
| Width, ft | 305 | 385 | 465 | 545 | 600 | 650 | 710 | 800 | 920 |
| Depth, ft | 5.1 | 6.2 | 6.9 | 8.1 | 9.0 | 9.7 | 10.6 | 12.0 | 14.1 |
| Velocity, ft/sec | 3.6 | 4.1 | 4.6 | 4.9 | 5.7 | 6.4 | 6.8 | 8.2 | 9.4 |

SOURCE: Harza-Ebasco (1985)

Table 3.3

HYDRAULIC PARAMETERS FOR SIDE CHANNELS AND SLOUGHS

| Location | Gold Creek Discharge (cfs) | Slough/Side Channel Discharge | Slough/Side Channel Width (ft) | Slough/Side Channel Depth (ft) | Slough/Side Channel Velocity (ft/sec) |
|---|---|---|---|---|---|
| (1) | (2) | (3) | (4) | (5) | (6) |
| Mainstem 2 Side Channel | | | | | |
| Northwest Channel | 17,000 | 150 | 112 | 1.0 | 1.39 |
| | 23,400 | 940 | 117 | 1.9 | 2.78 |
| | 34,500 | 2,940 | 228 | 2.5 | 5.20 |
| | 52,000 | 6,700 | 264 | 2.9 | 8.75 |
| Northeast Channel | 34,500 | 650 | 111 | 3.4 | 1.71 |
| | 52,000 | 2,900 | 124 | 3.8 | 6.09 |
| Main Channel Below Confluence | 17,000 | 150 | 128 | 0.5 | 2.31 |
| | 23,400 | 940 | 250 | 1.4 | 3.78 |
| | 34,500 | 3,590 | 341 | 2.7 | 3.89 |
| | 52,000 | 9,600 | 366 | 4.4 | 6.00 |
| Slough 8A | | | | | |
| Northwest Channel | 30,000 | 19 | 45 | 0.7 | 0.62 |
| | 35,000 | 47 | 45 | 0.9 | 1.18 |
| | 40,000 | 98 | 45 | 1.0 | 2.21 |
| | 45,000 | 183 | 45 | 1.1 | 3.75 |
| | 52,000 | 383 | 46 | 1.3 | 6.58 |
| Northeast Channel | 30,000 | 17 | 70 | 1.0 | .42 |
| | 35,000 | 26 | 71 | 1.1 | .51 |
| | 40,000 | 37 | 73 | 1.2 | .59 |
| | 45,000 | 51 | 75 | 1.4 | .67 |
| | 52,000 | 74 | 78 | 1.6 | .77 |
| Main Channel Below Confluence | 30,000 | 36 | 62 | 0.8 | .72 |
| | 35,000 | 73 | 66 | 1.0 | 1.14 |
| | 40,000 | 135 | 70 | 1.1 | 1.74 |
| | 45,000 | 234 | 72 | 1.2 | 2.68 |
| | 52,000 | 457 | 78 | 1.5 | 3.96 |
| Slough 9 | 23,400 | 80 | 73 | 1.3 | 0.82 |
| | 34,500 | 580 | 151 | 2.2 | 2.34 |
| | 45,000 | 1,600 | 156 | 3.0 | 4.03 |
| | 52,000 | 2,650 | 160 | 3.2 | 5.30 |

Table 3.3 (con't)

HYDRAULIC PARAMETERS FOR SIDE CHANNELS AND SLOUGHS

| Location | Gold Creek Discharge (cfs) | Slough/Side Channel Discharge | Slough/Side Channel Width (ft) | Slough/Side Channel Depth (ft) | Slough/Side Channel Velocity (ft/sec) |
|---|---|---|---|---|---|
| (1) | (2) | (3) | (4) | (5) | (6) |
| Side Channel 10 | 21,000 | 30 | 38 | 0.8 | 1.00 |
| | 25,000 | 150 | 83 | 1.5 | 1.25 |
| | 30,000 | 430 | 102 | 2.1 | 2.05 |
| | 34,500 | 860 | 108 | 2.6 | 3.07 |
| | 45,000 | 2,800 | 119 | 3.7 | 6.36 |
| | 52,000 | 4,900 | 127 | 4.4 | 8.75 |
| Lower Side Channel 1 | 7,000 | 520 | 275 | 0.9 | 1.75 |
| | 9,700 | 862 | 280 | 1.3 | 2.27 |
| | 13,400 | 1,420 | 285 | 1.8 | 2.96 |
| | 17,000 | 2,053 | 290 | 2.3 | 3.60 |
| | 23,400 | 3,365 | 295 | 3.2 | 4.64 |
| | 34,500 | 6,133 | 300 | 4.8 | 6.46 |
| | 45,000 | 9,248 | 300 | 6.3 | 7.87 |
| | 52,000 | 11,565 | 300 | 7.5 | 8.90 |
| Upper Side Channel 11 | 17,000 | 38 | 101 | 0.5 | .75 |
| | 23,400 | 170 | 117 | 1.0 | 1.52 |
| | 34,500 | 1,060 | 146 | 2.2 | 3.30 |
| | 45,000 | 3,900 | 155 | 4.0 | 6.70 |
| | 52,000 | 7,800 | 170 | 5.2 | 8.80 |
| Slough 11 | 44,000 | 21 | 24 | 0.5 | 1.65 |
| | 46,000 | 33 | 30 | 0.6 | 1.80 |
| | 48,000 | 94 | 49 | 0.9 | 2.25 |
| | 50,000 | 176 | 64 | 1.1 | 2.60 |
| | 52,000 | 332 | 84 | 1.3 | 3.00 |
| Side Channel 21 | 12,000 | 67 | 77 | 1.0 | 0.87 |
| | 16,000 | 205 | 105 | 1.4 | 1.40 |
| | 20,000 | 420 | 130 | 1.7 | 1.90 |
| | 25,000 | 810 | 162 | 2.0 | 2.50 |
| | 30,000 | 1,350 | 189 | 2.3 | 3.10 |
| | 40,000 | 2,900 | 260 | 2.7 | 4.15 |
| | 52,000 | 5,600 | 298 | 3.3 | 5.70 |
| Slough 21 | 25,000 | 13 | 52 | 0.5 | 0.50 |
| | 30,000 | 39 | 72 | 0.9 | 0.60 |
| | 35,000 | 105 | 94 | 1.4 | 0.80 |
| | 40,000 | 235 | 98 | 2.0 | 1.20 |
| | 45,000 | 500 | 99 | 2.8 | 1.80 |
| | 50,000 | 970 | 99 | 3.9 | 2.52 |

SOURCE: Harza-Ebasco (1985)

# Table 3.4

REPRESENTATIVE BED MATERIAL SIZE DISTRIBUTION
FOR SELECTED SLOUGHS, SIDE CHANNEL AND MAINSTEM SITES

| | Particle Size, mm | | | | | | | | | | | Bed Material Sizes (mm) For Given Percentage | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | .062 | .125 | .250 | .500 | 1.00 | 2.00 | 4.00 | 8.00 | 16.0 | 32.0 | 64.0 | | | |
| | Percent Finer Than | | | | | | | | | | | | | |
| | | | | | | | | | | | | $D_{16}$ | $D_{50}$ | $D_{90}$ |
| Main Channel near | | | | | | | | | | | | | | |
| Cross Section 4[1] | 2 | 3 | 7 | 10 | 13 | 16 | 22 | 29 | 42 | 70 | 89 | 1.7 | 20 | 65 |
| Main Channel between Cross Sections 12 and 13[2] | 1 | 2 | 3 | 5 | 8 | 12 | 18 | 24 | 32 | 50 | 77 | 3.0 | 34 | 78 |
| Main Channel upstream from Lane Creek[3] | 2 | 3 | 5 | 7 | 9 | 10 | 14 | 21 | 32 | 48 | 77 | 5.0 | 35 | 84 |
| Mainstem 2 Side Channels at Cross Section 18.2[4] | 3 | 5 | 7 | 10 | 13 | 17 | 22 | 29 | 37 | 53 | 73 | 1.7 | 30 | 110 |
| Slough 8A[5] | 1 | 3 | 6 | 10 | 12 | 13 | 15 | 18 | 28 | 47 | 83 | 4.3 | 35 | 70 |
| Slough 9[6] | 1 | 2 | 7 | 15 | 18 | 20 | 23 | 30 | 41 | 63 | 93 | 0.5 | 22 | 58 |
| Main Channel upstream from 4th of July Creek[7] | 2 | 4 | 6 | 8 | 11 | 14 | 20 | 27 | 36 | 55 | 78 | 2.5 | 28 | 85 |
| Side Channel 10[8] | 1 | 3 | 6 | 12 | 17 | 20 | 25 | 34 | 44 | 62 | 82 | 0.8 | 20 | 80 |
| Lower Side Channel 11, downstream from Slough 11[9] | 1 | 2 | 5 | 7 | 10 | 14 | 19 | 30 | 41 | 58 | 84 | 2.6 | 25 | 72 |
| Slough 11[10] | 1 | 2 | 5 | 8 | 12 | 15 | 20 | 27 | 35 | 50 | 68 | 2.2 | 32 | 100 |
| Upperside Channel 11, upstream from Slough 11[10] | 1 | 2 | 5 | 8 | 12 | 15 | 20 | 27 | 35 | 50 | 68 | 2.2 | 32 | 100 |
| Main Channel between Cross Section 46 and 48[11] | 1 | 2 | 3 | 7 | 10 | 13 | 17 | 24 | 33 | 53 | 72 | 3.3 | 30 | 100 |
| Side Channel 21, downstream from Slough 21[12] | 0 | 0 | 1 | 4 | 6 | 8 | 12 | 17 | 23 | 40 | 62 | 7.5 | 46 | 96 |
| Slough 21[12] | 0 | 0 | 1 | 4 | 6 | 8 | 12 | 17 | 23 | 40 | 62 | 7.5 | 46 | 96 |

---

1/ Based on 6 samples taken at three locations near cross section 4.
2/ Based on 2 samples taken near river miles 109.3.
3/ Based on 2 samples taken in main channel upstream from Lane Creek.
4/ Based on 4 samples taken in the Mainstem 2 side channel, at four locations.
5/ Based on 6 samples taken near the slough in the main channel at RM 125.6.
6/ Based on 5 samples taken near the slough in the main channel at RM 128.7.
7/ Based on 3 samples taken in the main and side channels near 4th of July Creek.
8/ Based on 2 samples taken in Slough 10.
9/ Based on 2 samples taken in Side Channel 11, downstream from Slough 11.
10/ Based on one sample taken in Slough 11.
11/ Based on 2 samples taken between cross sections 46 and 48.
12/ Based on one sample taken near the upstream end of side channel.

SOURCE: Harza-Ebasco (1985)

# Table 3.5

TRANSPORTABLE BED MATERIAL SIZES IN SELECTED SLOUGHS, SIDE CHANNELS AND MAINSTEM SITES

| Location | Discharge at Gold Creek (cfs) | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | 5,000 | 7,000 | 10,000 | 15,000 | 20,000 | 25,000 | 30,000 | 35,000 | 40,000 | 45,000 | 55,000 |
| | Transportable Bed Material Size (mm) | | | | | | | | | | |
| Main Channel near Cross Section 4 | 18 | 21 | 24 | 29 | 33 | 36 | 38 | 41 | 43 | 44 | 48 |
| Main Channel between Cross Sections 12 & 13 | 21 | 25 | 28 | 37 | 44 | 48 | 53 | 57 | 60 | 65 | 76 |
| Main Channel upstream from Lane Creek | 25 | 28 | 32 | 37 | 44 | 48 | 52 | 56 | 60 | 64 | 72 |
| Mainstem 2 Side Channel at Cross Section 18.2 | | | | | | | | | | | |
| Main Channel | | | | 6 | 11 | 18 | 25 | 31 | 37 | 43 | 56 |
| North-east Fork | | | | 5 | 9 | 13 | 16 | 18 | 21 | 24 | 29 |
| North-west Fork | | | | 5 | 9 | 13 | 16 | 17 | 19 | 21 | 24 |
| Slough 8A | | | | | | | 4 | 6 | 8 | 9 | 12 |
| Slough 9 | | | | | | 9 | 13 | 17 | 20 | 24 | 31 |
| Main Channel upstream from 4th of July Creek | 27 | 31 | 35 | 40 | 45 | 50 | 54 | 57 | 61 | 64 | 71 |
| Side Channel 10 | | | | | 5 | 13 | 22 | 29 | 37 | 45 | 60 |
| Lower Side Channel 11 | | 5 | 9 | 16 | 22 | 28 | 34 | 39 | 45 | 50 | 61 |
| Slough 11 | | | | | | | | | | 5 | 17 |
| Upper Side Channel 11 | | | | | 7 | 13 | 20 | 30 | 44 | 57 | 84 |
| Main Channel between Cross Sections 46 and 48 | 30 | 35 | 41 | 49 | 56 | 62 | 68 | 73 | 79 | 84 | 94 |
| Side Channel 21 | | | 6 | 10 | 15 | 18 | 22 | 25 | 28 | 31 | 37 |
| Slough 21 | | | | | 3 | 5 | 9 | 14 | 21 | 30 | 58 |

SOURCE: Harza-Ebasco (1985)

# Table 3.6

POTENTIAL DEGRADATION AT SELECTED SLOUGHS,
SIDE CHANNELS AND MAINSTEM SITES

| Location | Discharge at Gold Creek (cfs) | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | 5,000 | 7,000 | 10,000 | 15,000 | 20,000 | 25,000 | 30,000 | 35,000 | 40,000 | 45,000 | 55,000 |
| | Estimated Degradation, ft | | | | | | | | | | |
| Main Channel near Cross Section 4 | 0.1 | 0.2 | 0.3 | 0.6 | 0.8 | 1.1 | 1.3 | 1.5 | 1.7 | 1.9 | 2.4 |
| Main Channel between Cross Sections 12 & 13 | 0.1 | 0.2 | 0.3 | 0.4 | 0.6 | 0.8 | 1.1 | 1.3 | 1.8 | 2.4 | 3.7 |
| Main Channel upstream from Lane Creek | 0.2 | 0.2 | 0.3 | 0.4 | 0.6 | 0.8 | 1.0 | 1.2 | 1.5 | 1.8 | 2.5 |
| Mainstem 2 Side Channel at Cross Section 18.2 | | | | | | | | | | | |
| Main Channel | 0 | 0 | 0 | 0 | 0 | 0.1 | 0.2 | 0.3 | 0.5 | 0.7 | 1.2 |
| North-east Fork | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0.1 | 0.1 | 0.2 | 0.2 |
| North-west Fork | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0.1 | 0.1 | 0.2 | 0.2 |
| Slough 8A | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Slough 9 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0.1 | 0.2 | 0.3 | 0.5 |
| Main Channel upstream from 4th of July Creek | 0.3 | 0.3 | 0.4 | 0.6 | 0.8 | 1.1 | 1.3 | 1.5 | 1.7 | 2.0 | 2.5 |
| Side Channel 10 | 0 | 0 | 0 | 0 | 0 | 0.1 | 0.2 | 0.4 | 0.6 | 1.0 | 2.0 |
| Lower Side Channel 11 | 0 | 0 | 0 | 0.1 | 0.2 | 0.3 | 0.5 | 0.7 | 1.0 | 1.3 | 2.1 |
| Slough 11 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0.1 |
| Upper Side Channel 11 | 0 | 0 | 0 | 0 | 0 | 0.1 | 0.2 | 0.3 | 0.6 | 0.9 | 1.8 |
| Main Channel between Cross Sections 46 and 48 | 0.3 | 0.4 | 0.6 | 0.9 | 1.2 | 1.4 | 1.7 | 1.9 | 2.1 | 2.4 | 2.8 |
| Side Channel 21 | 0 | 0 | 0 | 0 | 0 | 0 | 0.1 | 0.1 | 0.2 | 0.2 | 0.3 |
| Slough 21 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0.1 | 0.2 | 0.5 |

SOURCE: Harza-Ebasco (1985)

Table 3.7

NATURAL AND WITH-PROJECT AVERAGE WEEKLY FLOWS
OF SUSITNA RIVER AT GOLD CREEK
(1950-1983)

| Week[1] (1) | Natural Flow (2) | With-Project Flows[2] 1996 Load Conditions[3] (3) | 2001 Load Conditions[3] (4) | 2002 Load Conditions[4] (5) | 2020 Load Conditions (6) |
|---|---|---|---|---|---|
| 1 | 1607 | 9552 | 9695 | 7027 | 10[illegible]3 |
| 2 | 1554 | 9540 | 9679 | 6997 | 1[illegible] |
| 3 | 1512 | 9526 | 9655 | 6965 | [illegible]28 |
| 4 | 1494 | 9537 | 9666 | 6936 | 10[illegible] |
| 5 | 1427 | 9518 | 9639 | 6897 | 102[illegible] |
| 6 | 1354 | 9561 | 9789 | 6903 | 10262 |
| 7 | 1300 | 9603 | 9775 | 6851 | 10141 |
| 8 | 1258 | 9502 | 9669 | 6802 | 10082 |
| 9 | 1204 | 9357 | 9521 | 6709 | 9957 |
| 10 | 1152 | 8711 | 8971 | 6376 | 9448 |
| 11 | 1149 | 8338 | 8486 | 6167 | 9117 |
| 12 | 1157 | 7953 | 8093 | 5959 | 8781 |
| 13 | 1167 | 7715 | 7852 | 5840 | 8581 |
| 14 | 1216 | 7593 | 7682 | 5832 | 8500 |
| 15 | 1240 | 7260 | 7303 | 5670 | 8245 |
| 16 | 1408 | 7028 | 7028 | 5543 | 8000 |
| 17 | 1667 | 6765 | 6765 | 5534 | 7644 |
| 18 | 3654 | 6912 | 6875 | 5481 | 7532 |
| 19 | 7914 | 7449 | 7559 | 5910 | 7932 |
| 20 | 13466 | 8886 | 9001 | 6780 | 9067 |
| 21 | 18715 | 10440 | 10521 | 7434 | 9896 |
| 22 | 23556 | 11910 | 11953 | 8115 | 10782 |
| 23 | 27284 | 11367 | 11438 | 9014 | 10252 |
| 24 | 29369 | 11679 | 11741 | 8960 | 10452 |
| 25 | 27860 | 11415 | 11539 | 10227 | 10322 |
| 26 | 26313 | 10974 | 11142 | 11773 | 10112 |
| 27 | 23987 | 10006 | 10161 | 13951 | 9317 |
| 28 | 24491 | 10124 | 10254 | 16950 | 9383 |
| 29 | 24708 | 10153 | 10275 | 19797 | 9460 |
| 30 | 24031 | 10013 | 10204 | 20915 | 9355 |
| 31 | 25294 | 11002 | 11103 | 22285 | 9613 |
| 32 | 23320 | 10470 | 10629 | 21810 | 9415 |
| 33 | 22387 | 11770 | 11072 | 21224 | 10756 |
| 34 | 20411 | 12367 | 12177 | 20478 | 11875 |
| 35 | 18377 | 12280 | 11929 | 18366 | 11281 |
| 36 | 15621 | 12685 | 12088 | 15756 | 11772 |
| 37 | 14039 | 11783 | 11100 | 14030 | 10998 |
| 38 | 12871 | 11269 | 10790 | 12790 | 10211 |
| 39 | 10663 | 10304 | 10033 | 10750 | 9649 |
| 40 | 8102 | 8990 | 8726 | 8297 | 8812 |
| 41 | 6782 | 8384 | 8266 | 7258 | 8695 |
| 42 | 5348 | 8543 | 8374 | 6443 | 8557 |
| 43 | 4303 | 8636 | 8456 | 6531 | 8514 |
| 44 | 3332 | 8440 | 8345 | 6620 | 8461 |
| 45 | 2861 | 8792 | 8691 | 6824 | 8908 |
| 46 | 2562 | 9215 | 9165 | 7032 | 9554 |
| 47 | 2358 | 9727 | 9698 | 7255 | 10122 |
| 48 | 2204 | 10196 | 10195 | 7476 | 10603 |
| 49 | 1978 | 10892 | 11025 | 7775 | 11108 |
| 50 | 1886 | 11162 | 11312 | 7918 | 11474 |
| 51 | 1785 | 10796 | 10915 | 7675 | 11162 |
| 52 | 1739 | 10080 | 10142 | 7263 | 10590 |

1/ First week is the first week of month of January.
2/ Based on environmental constraints, E-6.
3/ Watana Operation.
4/ Watana - Devil Canyon operation.

SOURCE: Harza-Ebasco (1985)

Table 3.8

MAXIMUM NATURAL AND WITH-PROJECT WEEKLY
FLOWS OF SUSITNA RIVER AT GOLD CREEK

| Year | Natural Flow | 1996 Load Conditions | 2001 Load Conditions | 2002 Load Conditions | 2020 Load Conditions |
|---|---|---|---|---|---|
| 1950 | 26171 | 10092 | 11534 | 21157 | 10327 |
| 51 | 30057 | 15024 | 11374 | 30057 | 11856 |
| 52 | 38114 | 14216 | 14216 | 37243 | 12721 |
| 53 | 35114 | 14356 | 15779 | 25643 | 11771 |
| 54 | 31143 | 13975 | 13975 | 31143 | 12664 |
| 55 | 37243 | 22402 | 19671 | 35236 | 18572 |
| 56 | 43543 | 25394 | 22429 | 32000 | 26000 |
| 57 | 37443 | 20071 | 19275 | 25943 | 13414 |
| 58 | 38686 | 12426 | 12426 | 37485 | 11817 |
| 59 | 44171 | 28700 | 16498 | 41415 | 14829 |
| 60 | 32043 | 13342 | 13914 | 28943 | 12203 |
| 61 | 38714 | 15622 | 15622 | 26000 | 13787 |
| 62 | 58743 | 26057 | 26057 | 35557 | 23571 |
| 63 | 40257 | 19900 | 19543 | 38549 | 22106 |
| 64 | 75029 | 18410 | 18410 | 29834 | 14941 |
| 65 | 33643 | 21913 | 21913 | 28514 | 19812 |
| 66 | 47686 | 17098 | 17098 | 28014 | 14719 |
| 67 | 54871 | 41459 | 29071 | 41589 | 30600 |
| 68 | 37343 | 14439 | 15125 | 29429 | 12551 |
| 69 | 18114 | 9861 | 8000 | 8000 | 10228 |
| 70 | 26429 | 9211 | 9409 | 8126 | 10226 |
| 71 | 47186 | 22857 | 22857 | 37427 | 22857 |
| 72 | 44243 | 18029 | 19488 | 33149 | 18029 |
| 73 | 36443 | 11756 | 11756 | 23171 | 10293 |
| 74 | 31357 | 11846 | 11846 | 16614 | 10828 |
| 75 | 36400 | 19886 | 18629 | 29900 | 19886 |
| 76 | 29843 | 11965 | 11965 | 25844 | 11530 |
| 77 | 46300 | 15438 | 15438 | 25514 | 14420 |
| 78 | 22786 | 11800 | 11921 | 20214 | 11685 |
| 79 | 32457 | 12955 | 13558 | 32457 | 12927 |
| 80 | 33557 | 13106 | 13264 | 33557 | 13304 |
| 81 | 46729 | 37029 | 37029 | 39966 | 37029 |
| 82 | 29857 | 12141 | 12145 | 27500 | 11895 |
| 83 | 27343 | 12683 | 13481 | 26586 | 12875 |

SOURCE: Harza-Ebasco (1985)

TABLE 3.9

SUSITNA TRIBUTARY STABILITY ANALYSIS

SUMMARY OF SEMI-QUANTITATIVE ASSESSMENT

| No. | Name | $Q_2$[1] (cfs) | S[2] (ft/ft) | $D_{50}$[3] (mm) | $\Delta E$[4] (ft) | Reason for Concern | Response to Increased Slope at Mouth | Impacts Foreseen |
|---|---|---|---|---|---|---|---|---|
| 1 | Portage | 1680 | .0158 | 33 | 7.6 | fish | degrade | |
| 2 | Jack Long | 181 | .0276 | - | 6.1 | fish | perch | possible restriction of fish access |
| 3 | Indian | 786 | .0150 | 50 | 5.5 | fish | degrade | |
| 4 | Gold | 260 | .0194 | 36 | 5.2 | fish | degrade | |
| 5 | 132.0 | 17 | .1280 | - | 3.2 | RR | perch | |
| 6 | 4th of July | 187 | .0219 | 25 | 6.1 | fish | degrade | |
| 7 | Sherman | 72 | .0403 | 30 | 4.4 | RR, fish | perch | possible restriction of fish access |
| 8 | 128.5 | 14 | .0607 | - | 4.0 | RR | perch | |
| 9 | 127.3 | 28 | .0597 | - | 3.6 | RR | degrade | possible limited scour at RR bridge |
| 10 | Skull | 51 | .0159 | 20 | 4.2 | RR | degrade | possible limited scour at RR bridge |
| 11 | 123.9 | 67 | .0230 | - | 5.0 | fish | perch | |
| 12 | Deadhorse | 51 | .0344 | 19 | 4.4 | fish, RR | perch | possible restriction of fish access |
| 13 | 121.0 | 16 | .0483 | 20 | 4.4 | fish | degrade | |
| 14 | L. Portage | 23 | .0048 | 26 | 5.0 | RR | perch | |
| 15 | McKenzie | 21 | .0316 | 18 | 6.2 | fish | degrade | |
| 16 | Lane | 117 | .0214 | 13 | 5.0 | fish | degrade | |
| 17 | Gash | 4 | N/A | - | 5.2 | fish | degrade | |
| 18 | 110.1 | 21 | .0757 | - | 7.0 | RR | degrade | possible limited scour at RR bridge |
| 19 | Whiskers | 114 | .0011 | - | 3.5 | fish | perch (but backwater) | |

SOURCE: R & M (1982f)

1 Mean annual flood, from Table 4.4.
2 Average channel slope, from Table 4.1.
3 Median bed particle size, from Table 4.2.
4 Decrease in Susitna River stage at mouth, from Table 4.3.

# 4.0 SLOUGH HYDROLOGY

## 4.1 Introduction

Flow into side-channel and upland sloughs comes from overtopping of upstream berms by mainstem flow, from local surface tributaries, and from groundwater upwelling. Slough discharges and hydraulic conditions when the upstream berms are overtopped are dominated by mainstem flow. The relationship between mainstem flow and slough flow for overtopped conditions has been previously shown in Table 3.3. Under with-project conditions, the upstream berms will be overtopped much less frequently. Consequently, groundwater upwelling and local surface runoff will control slough hydrology. This section of the report describes these two aspects of slough hydrology.

During non-overtopped conditions, sufficient local runoff and upwelling are required to provide sufficient flow to allow access to spawning areas in the side sloughs for chum and sockeye salmon (ADF&G 1983a). Upwelling also provides water which both keeps incubating embryos from freezing and supplies them with oxygen. Much of this upwelling water is at 2° to 4°C throughout the winter. This warmer water keeps developing embryos alive during early incubation and maintains development at a level elevated above that which would occur in the mainstem at 0°C (Wangaard and Burger, 1983).

## 4.2 Factors Affecting Upwelling

### 4.2.1 Sources of Groundwater

Groundwater sources for the Middle Reach can be separated into mainstem and local upland sources. The origin of groundwater is surface flow. Sources controlled by the mainstem originate at an undefined point upstream. During the summer, upstream precipitation events and glacial melt supply the surface water, which percolates

Groundwater flow through an aquifer may be confined or unconfined, depending on the location. Unconfined aquifers are similar to underground lakes in porous materials. There is no restricting material at the top of the aquifer, so the groundwater levels are free to rise and fall. The top of the unconfined aquifer is the water table. Below the water table the aquifer is saturated, while above the water table it is only partially saturated. Much of the sand, gravel and cobble alluvium underlying the Susitna River's bed is an unconfined aquifer. This unconfined aquifer is bounded by bedrock on the sides and bottom. Groundwater flow through the system is downhill, running parallel to the valley walls and following the general course of the surface river, but at a much slower rate.

Conditions in unconfined aquifiers are such that changes in mainstem stage have a delayed and minimal effect on water table elevation. This is caused by the large volume of aquifer that must be filled to raise the water table by a given amount.

A confined aquifer is a layer of saturated, porous material located between two layers of much less permeable material. If these confining layers are essentially impermeable, they are called aquicludes. If the layers are permeable enough to transmit water vertically to or from the confined aquifer, but not permeable enough to laterally transport water as an aquifer, they are called aquitards. A confined aquifer bounded by one or two aquitards is called a leaky or semiconfined aquifer. Aquitards consisting of layers of fine silt often bound the highly permeable sand and gravel alluvium, creating piping zones where groundwater is easily transmitted. Along the Susitna River, such piping zones are believed to be sources of shallow lateral flow to the upwelling areas. These piping zones would be most likely to rapidly respond to changes in mainstem stage, because such changes would be transmitted into the aquifer as pressure effects rather than by filling or draining the pore space of the aquifer. A regional confined aquifer may be providing water to

into the groundwater. Much of the winter flow is maintained by water stored during the summer in the broad gravel floodplains below the glaciers at the headwaters of the basin. Alluvial fans at the bases of upstream slopes and tributaries add to the volume. This is considered to be the basic source of groundwater in the system (Acres American 1983).

The upland component of groundwater upwelling comes from precipitation falling on the slopes above the river. After reaching the earth's surface, precipitation and/or snowmelt move as surface runoff or go into soil storage or groundwater. Recent precipitation and snowmelt history determine the amounts of each which occur. Large precipitation events are usually required to contribute much water into the groundwater system. Upland sources are independent of mainstem discharge levels, since local events drive the system. These local events also are unpredictable. The effects of upland sources on upwelling are most pronounced for steeper, higher and closer valley walls.

### 4.2.2 Aquifer Conditions

An aquifer is generally considered to be a geological formation that is porous enough to hold significant quantities of water and also permeable enough to readily transmit it horizontally. The material of the floodplain aquifer in the Middle Reach typically consists of a thin layer of topsoil overlying 2 to 6 feet of sandy silt. Below this is a heterogeneous alluvium of silt, sand, gravel, cobbles, and boulders. Non-stationary streambed deposition is believed to be responsible for the heterogeneous pattern. The heterogeneous nature of the material results in variable hydraulic conductivities, both laterally and vertically (Acres American 1983). Depth through this material to bedrock is approximately 100 feet at the abutments to the Alaska Railroad bridge at Gold Creek (Prince 1964).

Groundwater flow through an aquifer may be confined or unconfined, depending on the location. Unconfined aquifers are similar to underground lakes in porous materials. There is no restricting material at the top of the aquifer, so the groundwater levels are free to rise and fall. The top of the unconfined aquifer is the water table. Below the water table the aquifer is saturated, while above the water table it is only partially saturated. Much of the sand, gravel and cobble alluvium underlying the Susitna River's bed is an unconfined aquifer. This unconfined aquifer is bounded by bedrock on the sides and bottom. Groundwater flow through the system is downhill, running parallel to the valley walls and following the general course of the surface river, but at a much slower rate.

Conditions in unconfined aquifiers are such that changes in mainstem stage have a delayed and minimal effect on water table elevation. This is caused by the large volume of aquifer that must be filled to raise the water table by a given amount.

A confined aquifer is a layer of saturated, porous material located between two layers of much less permeable material. If these confining layers are essentially impermeable, they are called aquicludes. If the layers are permeable enough to transmit water vertically to or from the confined aquifer, but not permeable enough to laterally transport water as an aquifer, they are called aquitards. A confined aquifer bounded by one or two aquitards is called a leaky or semiconfined aquifer. Aquitards consisting of layers of fine silt often bound the highly permeable sand and gravel alluvium, creating piping zones where groundwater is easily transmitted. Along the Susitna River, such piping zones are believed to be sources of shallow lateral flow to the upwelling areas. These piping zones would be most likely to rapidly respond to changes in mainstem stage, because such changes would be transmitted into the aquifer as pressure effects rather than by filling or draining the pore space of the aquifer. A regional confined aquifer may be providing water to

the sloughs and mainstem. However, the preponderance of near-surface bedrock along the valley walls and nearby mountains minimizes the likelihood of a confined regional aquifer being a significant water source, although some local springs and seeps may occur at faults in the bedrock. According to APA (1984b), neither regional flow from the valley walls into the alluvium nor downriver flow through the alluvium appears to be sufficient to provide all of the apparent groundwater upwelling to the side sloughs.

Ice processes have a dramatic effect on lateral flow during the winter. As an ice cover forms on the river, the effective water surface level (WSL) in the mainstem rises dramatically. Flow becomes confined by the ice at the water surface. Friction caused by movement against the stationary ice cover slows the velocity of the river water. Water level rises as the velocity drops. The ice cover also acts directly to increase the WSL by floating on the surface. The increased pressure supplied by the floating ice increases the effective WSL to near the top of the ice cover. In the Middle Reach, confined 2,000-cfs flow may have the same effective WSL as 20,000 cfs with no ice cover present. The result of this increase in stage is a much higher hydraulic head, increasing lateral flow from the mainstem into the groundwater system and, presumably, resulting in increased upwelling in the side channels and sloughs.

Groundwater temperatures are buffered from seasonal climatic variations by the heat storage in the aquifer. As groundwater moves through the system, it adds to or removes heat from the surrounding material. Heat transfer during groundwater movement can occur by both conduction and convention. The groundwater temperature approaches that of the surrounding material, and remains stable through the year. The net energy balance is such that groundwater temperature in the Middle Reach stabilizes at about 2-4°C, approximating the mean annual (time-weighted) mainstem temperature.

The temperature of the groundwater is a function of time. This becomes important when considering groundwater temperatures in areas of confined flow. The response of flow can be very rapid since changes are caused by pressure waves. Actual time of flow is much greater. Therefore, groundwater temperatures in these areas are similar to areas of unconfined flow. The distance through the alluvium that is travelled is much more important on the moderating effect on the groundwater.

## 4.3 Local Surface Runoff

Runoff from a drainage basin is influenced both by climatic factors and physiographic factors (Chow, 1964). Climatic factors include the forms and types of precipitation, interception, evaporation, and trarspiration, all of which exhibit seasonal variations. Physiographic factors are further classified into basin characteristics and channel characteristics. Basin characteristics include such factors as size, shape, and slope of drainage areas, permeability and capacity of groundwater formations, presence of lakes and wetlands in the basin, and land use. Channel characteristics are primarily related to the hydraulic properties of the channel which govern the movement of streamflows and determine channel storage capacity.

Many of the above factors are interdependent to a certain extent, and can be highly variable in nearby basins. The general basin characteristics of each of the study sloughs are described in the following section.

## 4.4 Field Studies

### 4.4.1 Study Sloughs

Four sloughs have been chosen for intensive sampling. These four, 8A, 9, 11 and 21, were chosen because they are the most important side sloughs for salmon spawning and incubation (ADF&G 1984c).

They also encompass a wide range of physical variables, allowing a better understanding of the general upwelling conditions in the Middle Reach. The relative locations of each of the study sloughs are shown in Figure 4.1.

Slough 8A, located at RM 125, is a side slough on the east side of the river. The two-mile long slough is relatively straight with two upstream channels connecting it to the mainstem (Figures 4.2, 4.3). Overtopping of the northwest channel at RM 126.2 occurs at about 26,000 cfs, while overtopping of the northeast channel at RM 126.7 occurs at 33,000 cfs. The substrate in the upper slough is primarily cobble and boulders, and in the lower slough is gravel and cobble. At present, several beaver dams, some of them armored with cobble are located along the slough. Surface water input is supplied by 6 to 8 streams coming down from steep slopes adjacent to the slough with shallow or exposed bedrock.

Slough 9 is a 1.2 mile-long S-shaped side slough on the east side of the river at RM 128 (Figures 4.4, 4.5). The upper slough has a fairly steep slope and cobble/boulder substrate. The lower slough has a low gradient and smaller substrate consisting of gravel/cobble. Overtopping discharge of the berm at the upper end of the slough is about 16,000 cfs. A major water source during non-overtopped conditions is slough 9B (Figure 4.4). This small slough drains a marshy area near the head of the slough. A small tributary (Tributary 9B) with a drainage area of about 1.5 square miles enters the slough further down.

Slough 11, at RM 135, is another side slough on the east bank of the river. This mile-long slough was formed in 1976 as an overflow channel when an ice jam blocked the river during breakup. The steeper upper slough has a cobble/boulder substrate while the lower slough is less steep and has a mostly gravel/cobble substrate. The slough overtops at approximately 42,000 cfs. There are no

tributaries into the slough. Non-overtopped flow in the slough comes from seepage and upwelling in the lower two-thirds of the slough (Figures 4.6, 4.7).

Slough 21 is located at RM 149, on the east side of the river, and is about one-half mile long. The upper one-half of the slough is divided into two channels, with overtopping flows of 23,000 and 26,000 cfs. There are no tributaries conveying surface runoff to this slough. Groundwater upwelling is very obvious, as large areas of strong upwelling and springs occur throughout the slough (Figures 4.8, 4.9). A large upland area may provide considerable input into the local groundwater.

### 4.4.2 Field Investigations

In order to explain the relationship between the mainstem and upwelling in the sloughs, several studies were conducted in the study sloughs described in the following section. Slough discharges were recorded in Sloughs 8A, 9, 11 and 21. Daily mainstem flow or stage measurements have been compared with slough flow using linear regression analysis, with slough flow as the dependent variable (Tables 4.1 and 4.2) (R&M 1982, 1985a; Acres American 1983; APA 1984b, Beaver, 1985). Analysis was complicated by frequent overtopping of the upstream berms in Sloughs 8A and 9 during much of the summer. Data collected in 1984 were particularly useful in investigating groundwater upwelling to the sloughs because a significant portion of the 1984 open-water data are for very low mainstem discharge rates, thus minimizing complicating effects such as surface runoff and overtopping of berms. Correlations between weekly average slough discharge and weekly average mainstem stage are given on Table 4.4. Correlation with mainstem stage, rather than mainstem discharge, makes it easier to estimate groundwater upwelling for various with-project scenarios, particularly winter conditions when ice staging effects have been simulated. Similarly, the use of weekly

rather than daily averages makes it easier to apply the results of with-project simulations, which are generally expressed as weekly average mainstem stage or discharge values.

Additional data were obtained by monitoring groundwater surface levels in shallow wells dug in the vicinities of sloughs 8A and 9 (R&M 1982g, APA 1984b). The data allow groundwater flow direction to be determined in the areas immediately around sloughs 8A and 9. Comparison of the plots for different dates and mainstem flows shows the temporal variability of flow patterns in the groundwater system (Figures 4.10-4.15).

Mainstem, groundwater, intragravel and slough water temperatures have been continuously recorded (ADF&G 1983a, b; 1984 b, c, d). These data show the range in variations for different locations (Figures 4.16 - 4.24).

Seepage meter data were obtained at upwelling sites in several sloughs (APA 1984b). The data serve as another indicator of flow rate through the groundwater system. Relationships between mainstem discharge and upwelling rates are illustrated in Figures 4.25-4.33.

In 1984, the water balance in the sloughs was investigated (R&M 1985a). Studies focused on quantifying the local upland input into sloughs 8A, 9 and 11. Continuous flow measurements of tributary flow into Slough 9 were made. Storm runoff analyses and monthly water balances are shown in Tables 4.5, 4.6 and 4.7. The spatial variability of precipitation along the Middle Susitna River was also investigated. Coefficients to adjust recorded rainfall for other locations along the Middle River are shown in Table 4.8.

### 4.4.3 Results

#### a. Slough 8A

Slough discharge at Slough 8A is moderately well correlated to mainstem discharge and stage (Tables 4.1 through 4.4). Local runoff from the adjacent steep, rocky hillslopes causes some disruption of the relationship. Linear regression equations have been developed from several data bases. In order to minimize the disrupting effects of overtopping flow and local runoff on the relationship, data from 1983 were separated into a subset where all data pairs were eliminated in which either flow at Gold Creek exceeded 30,000 cfs or flow in Slough 8A exceeded 3 cfs. Data from 1984 were subdivided in a similar manner, using flows at Gold Creek of 27,900 cfs and 12,500 cfs as the upper limits for the equation. These regression equations are shown in Table 4.1. The coefficient of determination ($R^2$) improves for the lower flow range. The low flow regression equation is for a period of relatively little local precipitation, so little local runoff would be expected.

Beaver (1985), using weekly flows, shows an improvement in the determination coefficient over the same data using daily averages, and also over low flow periods in 1983. Precipitation in 1984, especially after September 1, was generally lower than during the two previous years (R&M 1985a). The lower precipitation resulted in less local runoff in 1984, and resulted in the high $R^2$ values obtained for non-overtopped conditions.

Seepage data were collected at two sites near the head of Slough 8A in 1983. The seepage rates are plotted against mainstem discharge in Figures 4.25 and 4.26. Data from the site nearest the upstream berm, located in the channel, showed the higher correlation to mainstem discharge ($R^2$=0.62). The other site,

located in a small channel adjacent to a steep bank, had a relatively poor correlation ($R^2$=0.38).

Water surface elevation data collected in 1983 from wells and boreholes indicate the general downvalley movement of groundwater in the vegetated island separating Slough 8A from the mainstem. Data collected with an ice cover on the mainstem (Figure 4.12) show a definite trend of groundwater flow down valley and from the mainstem towards the side-channel. The trend was also evident during the open-water period (Figure 4.10). When streamflow is dropping, groundwater levels in the island may be higher than the water surface in either the slough or the mainstem (Figure 4.11).

Intra-gravel water temperature in the slough rose from -0.1°C during the winter (ADF&G 1983a) to 5.5°C in August (ADF&G 1984a) of 1983. During the same period mainstem surface water ranged from 0.2°C in May to 15.8°C in July (ADF&G 1984a) (Figures 4.16-4.18).

A monthly water balance study of Slough 8A conducted in 1984 (R&M, 1984a) determined that 62%-73% of available precipitation falling on the Slough 8A watershed ran off as surface water (Table 4.6). Higher percentages of runoff may occur with large storms, as the soil layer on the slopes above the river is relatively thin.

Analysis of local precipitation data for 27 September to 7 October 1983 (Bredthauer 1984) shows an immediate response in slough discharge to a major rainstorm (Figure 4.34). The event occurred after a fairly long dry period (over one month). It was an intense storm, with 1.12 inches of rain falling in Talkeetna on 29 September. This amount of precipitation apparently was sufficient to saturate the groundwater table and produce a rapid response.

The daily surface runoff pattern into Slough 8A was estimated for high, moderate, and low monthly precipitation (Tables 4.10, 4.11, 4.12). The recorded slough discharges for August 1984 (high precipitation), September 1983 (moderate precipitation), and September 1984 (low precipitation) were separated into surface runoff and groundwater flow. Groundwater flow was estimated using the regression equation for slough discharge and the average daily flows for the Susitna River at Gold Creek. The estimated groundwater flow was then subtracted from the recorded value. (When the groundwater flow estimate from the regression equation exceeded the recorded value, groundwater flow was reduced to the recorded value.) Surface runoff was assumed to be the difference between the recorded discharge and the estimated groundwater flow.

Although the estimates for surface runoff are not precise, Tables 4.10 through 4.12 do indicate that there are long periods when little surface runoff is contributed to Slough 8A, even in months when precipittation is well above average. In Table 4.10, a 13-day period of zero surface runoff is indicated, even though the monthly precipitation is exceeded only 20 percentof the time in August. Similar periods of zero surface runoff were indicated for the low rainfall month (September 1984). Surface runoff contributed an estimated 57%, 64%, and 15% for the high, moderate and low precipitation patterns illustrated in Tables 4.10 through 4.12.

The data in Table 4.10 also indicate that the runoff period extends for several days after a major precipitation event. Apparently, there is sufficient shallow subsurface flow on the valley slopes to maintain the flow for several days.

The sources of water to flow in Slough 8A are complex. When the upstream berm is overtopped, mainstem flow dominates the

discharge. When the berm is not overtopped, groundwater flow dominates the discharge during periods of low precipitation and during the winter. Good correlation exists between mainstem discharge and slough discharge for periods of low precipitation and little surface runoff. Local surface runoff may be high during periods of high precipitation, with subsurface flow maintaining the local flow for several days after a major precipitation event.

b. Slough 9

Due to the relatively low flow (16,000 cfs) required to overtop the upstream berm, hydraulic conditions in Slough 9 are dominated by mainstem flow for much of the summer. Upwelling occurs in the slough, contributing flow throughout the year. Upwelling sites can be observed during low flow conditions (Figure 4.4). Linear regression equations for data collected in 1983 and 1984 during periods of non-overtopping are shown in Tables 4.1 and 4.2. The slopes of the equations for both the 1983 and the 1984 data are very similar.

Tables 4.3 and 4.4 give the linear regression equations for the apparent mainstem related component of groundwater upwelling as a function of mainstem stage. Table 4.4 presents the relationship of slough flows to mainstem stage based on weekly rather than daily averages. This technique shows no real improvement in the relationship over the daily averages for slough 9 (a good relationship already).

Results of groundwater surface elevation measurements show movement from the side channel upstream of the slough toward the upper reach of Slough 9 between its head and Tributary 9B (APA 1984). A subdued response was often seen even at well 9-3, away from the slough on the upland side. An analysis of

lateral flow to the slough based on the Pinder curves showed slough flow to be much less than expected (APA 1984). Major variations in the results of falling head tests performed in 1984 (R&M 1985a) indicate semiconfined aquifer conditions (Table 4.9). Data from seepage meters in 1983 showed a higher correlation at the downstream end of the slough than in a marshy area near the head of the slough (APA 1984). The poor correlation in the marshy area is likely due to water seeping into the groundwater system from Tributary 9B.

Intragravel water temperatures were very stable throughout the study, at just over 3°C (Figures 4.19 and 4.20). Groundwater temperatures from boreholes 9-1A and 9-5 show a limited rise from 2°C in April to 4°C in September of 1983 (Figure 4.21) (APA 1984). Temperature data from borehole 9-3 show no variation related to the mainstem. There appears to be a strong inverse relationship between variations in temperature of the groundwater and distance from the mainstem. Figures 4.19 and 4.21 also show mainstem temperature for comparative purposes.

Tributary 9B was gaged at 2 locations in 1984: (1) at the base of the slope and (2) above its confluence with Slough 9. The intervening area between these 2 gages is an alluvial fan with meadows and beaver ponds. A significant portion of the water measured at the base of the slope infiltrates into the ground before reaching the slough. The data indicate that the amount of infiltration loss is controlled by the water table level, which in turn is controlled by the stage in the mainstem (R&M, 1985a). Runoff percentages for the 2 sites for the months of August - October 1984 are shown in Table 4.7. Runoff analyses for two precipitation events in 1984 are shown in Table 4.5.

Figure 4.3.5 shows the response of Slough 9 to a high precipitation event during a period in 1983 when the upstream berm was not overtopped. Slough 9 is dominated by overtopping under natural summer conditions. Effects of overtopping likely carry over into non-overtopped conditions, with a high level of soil saturation being one of these. When not overtopped, effects of both mainstem and upland groundwater sources are seen. Mainstem effects are evident in the seepage meter data from the slough mouth, and in much of the groundwater data. As in Slough 8A, groundwater dominates the low precipitation periods, but high surface runoff may occur during periods of high precipitation.

c. Slough 11

Slough 11 is the simplest of the sloughs studied, with no direct surface tributaries. Since its upstream berm is overtopped only at relatively high flows (42,000 cfs), no surface water contributes to slough discharge for most of the year. Consequently, streamflow is maintained by bank seepage and upwelling throughout the year. Seepage and upwelling locations are mapped on Figure 4.6, and winter open leads are shown in Figure 4.7 (ADF&G, 1983b).

The relationship between slough flow and the mainstem is shown in Tables 4.1 through 4.4. The relationship is particularly good for the relationship based on weekly averages. Seepage meters, used to get an index of intragravel flow on the slough banks, also showed a strong relationship to the mainstem at both the lower ($R^2$ = 0.94) and upper ($R^2$ = 0.83) sites (APA 1984) (Figures 4.30, 4.31).

There was little effect on slough discharge from precipitation events. The analysis of the data from the September 1983 storm

event (Figure 4.36) showed no immediate response in slough discharge, and only a minimal response to the mainstem level. The lack of response is in keeping with the lack of tributary input and small drainage area for the slough. This is further illustrated in the monthly water balances (Table 4.6). Flow was stable through the summer, despite high precipitation in July and August.

Intragravel water temperatures in the slough were very stable year-round at about 3.6°C. Surface water temperatures were less constant and did not show a pattern similar to that for intragravel temperatures. Surface water temperatures were also dissimilar to mainstem temperatures (Figure 4.22).

All of the above relationships tend to confirm that Slough 11 flow is derived from mainstem recharge to the local groundwater aquifer. Responses to changes in the mainstem are minimized and delayed. The delay and buffering of the groundwater system explains the high value for the coefficient of determination for weekly averages in the slough mainstem relationship. The longer time period allows much greater delays to be taken into account. The delays and buffering also account for a very stable intragravel temperature and minimal response to the September 1983 storm.

d. Slough 21

The relationship between mainstem discharge and slough discharge appears to be different at Slough 21 than at other study sloughs. Seepage was negatively correlated to mainstem flow at one site (seepage increased as mainstem flow decreased), while no correlation existed between seepage and mainstem flow at a second site. The regression relationships between slough discharge and mainstem discharge (Table 4.1) were poor when all

data were used, but had a very good relationship for data obtained late in 1982 (September 22 - October 22), when little precipitation occurred.

Water temperature patterns were fairly complex (Figure 4.23 and 4.24). The intragravel water temperature in the upper slough ranged from a winter low of 2.0°C in October to a high of 8.6°C during much of the summer (ADF&G 1984a). Higher temperatures of up to 13.1°C were also seen during overtopping for short periods. Surface water temperature at the same location ranged from 0.7° to 9.2°C (with the same overtopping exception). Generally, surface water temperatures closely mirrored intragravel temperatures throughout the year. In the lower slough, intragravel temperatures were about 3.3°C in March (ADF&G 1984a). Upwelling locations are shown in Figure 4.8.

The geologic structure of the area around the slough helps explain the data. Above the east side of the slough there is a bench of old alluvial material at least $\frac{1}{4}$-mile wide. This bench may act as a large groundwater reservoir. It is a potential reason for the constant intragravel water temperature in the lower slough. The measurements from the seepage meters (Figures 4.32 and 4.33) may also be a function of local upland flow. The intragravel and surface water temperatures from the upper slough, on the other hand, seem to be more closely related to mainstem temperatures. Slough 21 may show the effects of different sources at different points along the slough.

## 4.5 With-Project Changes

Changes in flow through the Middle Reach, brought about by the completion of the Watana and Devil Canyon Dams, are expected to have some impacts on groundwater and upwelling. Project operations which

change the mean annual temperature in the river are likely to change the groundwater temperature by a similar amount (Acres American 1983) as a result of the temperature-stabilizing effects of the soil framework.

Upwelling is expected to change, but by a variable amount, depending on the relative input of mainstem-influenced and upland groundwater sources. Some sloughs, such as Slough 11, would respond fairly directly to changes in mainstem discharge. Slough 11 has no tributary streams, and its upstream berm is rarely overtopped. Most slough discharge is directly correlated to mainstem discharge.

Groundwater upwelling in Slough 9 will be reduced because of the reduction in mainstem discharge. However, significant surface runoff is contributed from the nearby slopes. The small tributary (Tributary B) flows across a large alluvial fan and meadow, losing flow to the groundwater system when the water table is low. This water probably appears further down the slough as upwelling.

Most sloughs are similar to Slough 8A, with a complex relationship between surface runoff and the mainstem and upland sources of groundwater. Slough discharge will be reduced due to the reduction in mainstem discharge, but will have the same contributions of flow due to upland groundwater and local surface runoff.

Where upland sources provide a substantial volume of the slough flow, access to spawning areas may not be hindered, despite expected lower groundwater input from the mainstem with-project.

An analysis of estimated with-project slough flows at sloughs 8A and 9 was performed by R&M Consultants (1985a). The results (Tables 4.10 through 4.14) show the results of the analysis for dry (93% exceedance) normal (61% exceedance), and wet (20% (exceedance) conditions. While these are only estimates, they are of some help in analyzing the types of changes that can be expected under with-project conditions. The results suggest

that access may be more limited to sloughs, but flow peaks from upland sources would still provide access under most conditions.

More detailed predictions on with-project changes cannot be made. The number of variations, both within and between sloughs, and the large number of sloughs and other affected habitats, limit the predictions. Within these constraints, it appears that there will not be major impacts to groundwater upwelling from changes in mainstem characteristics.

TABLE 4.1 LINEAR REGRESSION EQUATIONS
FOR SLOUGH DISCHARGE VS. MAINSTEM DISCHARGE (1982-83)

| Slough | Year | Regression Equation | $R^2$ | Comments |
|---|---|---|---|---|
| 8A | 1983 | S = -3.83 + 0.000526 G | 0.103 | All values. |
| | | S = 5.10 + 0.0000377 G | 0.001 | Excluding overtopping flows, G > 30,000 |
| | | S = 0.155 + 0.000117 G | 0.086 | June 6 - August 7 only; excluding G > 30,000 |
| | | S = -0.627 + 0.000128 G | 0.631 | June 6 - August 7 only; excluding G > 30,000, S > 3 |
| 9 | 1983 | S = -149.7 + 0.010008 G | 0.264 | All values. |
| | | S = 2.94 + 0.000307 G | 0.089 | Excluding overtopping flows, G > 16,000 |
| | | S = 1.97 + 0.000351 G | 0.805 | Excluding G > 16,000, S > 8 |
| 11 | 1983 | S = 1.51 + 0.000102 G | 0.766 | All values. |
| | 1982 | S = 2.15 + 0.000104 G | 0.504 | All values. |
| 21 | 1982 | S = -7.62 + 0.00105 G | 0.543 | All values. |
| | | S = -0.570 + 0.000445 G | 0.405 | Excluding overtopping flows, G > 24,700 |
| | | S = -2.71 + 0.000803 G | 0.916 | September 22 - October 22 only; excluding G > 24,700 |

Notes: S = Slough discharge, cfs; G = Mainstem discharge at Gold Creek, cfs

Source: Beaver (1984)

TABLE 4.2

REGRESSION EQUATIONS FOR
SLOUGH DISCHARGE VS. MAINSTEM DISCHARGE (1984)

| Slough | Period | Regression Equation | $R^2$ | Points | Comments |
|---|---|---|---|---|---|
| 8A | July 3 - October 30, 1984 (excl. 8/23-8/28) | Q8 = - 0.08 + .00017 QGC | 0.53 | 115 | Flow range (2,200-27,900 cfs) |
| | | log Q8 = -5.0 + 1.29 log QGC | 0.79 | 115 | |
| | September 1 - October 20, 1984 | Q8 = -.67 + .00025 QGC | 0.73 | 61 | Low runoff period. (2,200-12,500 cfs) |
| | | log Q8 = -7.13 + 1.85 log QGC | 0.91 | 61 | |
| 9 | September 8 - October 30, 1984 | Q9 = -.62 + .00039 QGC | 0.82 | 56 | Flow range (2,200-11,400 cfs) |
| | | log Q9 = -4.1 + 1.15 log QGC | 0.84 | 56 | |
| 11 | June 1 - October 30, 1984 | Q11 = 1.3 + .000072 QGC | 0.68 | 153 | Flow range (2,200-40,600 cfs) |
| | | log Q11 = -1.5 + 0.45 log QGC | 0.76 | 153 | |

Source: R&M (1985a)

TABLE 4.3

LINEAR REGRESSION EQUATIONS
FOR SLOUGH DISCHARGE VS. MAINSTEM STAGE (1982-83)

| Slough | Year | Regression Equation | $R^2$ | Comments |
|---|---|---|---|---|
| 8A | 1983 | S = -2149.8 + 3.698W1 | 0.065 | All values |
| | | S = -92.3 + 0.1683W1 | 0.000 | Excluding overtopping flows, G > 30,000 |
| | | S = -740.96 + 1.2737W1 | 0.626 | June 6 - August 7 only; excluding G > 30,000, S > 3 |
| 9 | 1983 | S = -32801 + 54.380W2 | 0.228 | All values |
| | | S = -769.1 + 1.2871W2 | 0.085 | Excluding overtopping flows, G > 16,000 |
| | | S = -877.21 + 1.4658W2 | 0.755 | Excluding G > 16,000, S > 8 |
| 11 | 1983 | S = -367.04 + 0.54004W3 | 0.783 | All values |
| | 1982 | S = -327.05 + 0.48278W3 | 0.531 | All values |
| 21 | 1982 | S = -4400.2 + 5.8554W4 | 0.491 | All values |
| | | S = -1810.6 + 2.4130W4 | 0.391 | Excluding overtopping flows, G > 24,700 |
| | | S = -3244.1 + 4.3212W4 | 0.938 | September 22 - October 22 only; excluding G > 24,700 |

NOTES: S = Slough discharge, cfs.
G = Mainstem discharge at Gold Creek, cts.
W1 = Mainstem stage at RM 127.1. ft.
W2 = Mainstem stage at RM 129.3. ft.
W3 = Mainstem stage at RM 136.68. ft.
W4 = Mainstem stage at RM 142.2. ft.

Source: Beaver (1984)

TABLE 4.4

LINEAR REGRESSION EQUATIONS FOR THE MAINSTEM COMPONENT OF GROUNDWATER UPWELLING TO SLOUGHS AS A FUNCTION OF MAINSTEM STAGE (1984)

| Slough | Year | Regression Equation | $R^2$ |
|---|---|---|---|
| 8A | 1984 | S = -368.211 + 0.6356W1 | 0.78 |
| 9 | 1984 | S = -171.8788 + 0.28892W2 | 0.84 |
| 11 | 1984 | S = -335.39272 + 0.49209W3 | 0.96 |
| 21 | | No relationship | |

NOTES: Discharge and stage data are average weekly values.

S = apparent mainstem - related component of slough discharge.

W1 = mainstem water-surface elevation (WSEL) at river mile (RM) 127.1.

W2 = WSEL at RM 129.3.

W3 = WSEL at RM 136.68.

Source: Beaver (1985).

TABLE 4.5

STORM RUNOFF ANALYSES
SLOUGH 9 TRIBUTARY

| | Slough 9 Tributary, Upper Site | | Slough 9, Tributary Lower Site | |
|---|---|---|---|---|
| Precipitation Period (1984) | 08/17-08/25 | 09/15-09/20 | 08/17-08/25 | 09/15-09/20 |
| Runoff Period | 08/17-09/06 | 09/15-09/28 | 08/17-09/06 | 09/15-09/28 |
| Total Precipitation (Inches) | 6.46 | 1.40 | 6.46 | 1.40 |
| Max. Daily Precipitation (Inches) | 2.05 | 0.61 | 2.05 | 0.61 |
| Total Precipitation Volume (million cubic feet) | 10.96 | 2.37 | 21.91 | 4.75 |
| Total Runoff Volume (million cubic feet) | 6.468 | 1.081 | 12.181 | 0.149 |
| Baseflow Volume (million cubic feet) | 1.034 | 0.798 | 0.272 | 0.073 |
| Storm Runoff Volume (million cubic feet) | 5.434 | 0.283 | 11.909 | 0.076 |
| % Runoff | 50% | 12% | 54% | 1.6% |
| Groundwater Level, Well 9-3 | | | 606.8 | 604.8 |
| Maximum Daily Flow Susitna River at Gold Creek | | | 31,700 | 11,400 |

SOURCE: Table reproduced from R & M (1985a)

TABLE 4.6

1984 MONTHLY WATER BALANCES
SLOUGHS 8A AND 11

| | June | July | August | September | October |
|---|---|---|---|---|---|
| Slough 8A | | | | | |
| Flow, Q (cfs) | | 2.98 | 9.19 | 1.70 | 0.63 |
| (million cu. ft.) | | 7.46 (3-31) | 24.62 | 4.41 | 1.69 |
| Precipitation, P (inches) | | 5.46 | 8.16 | 2.52 | 0.78 |
| (million cu. ft.) | | 19.14 | 28.61 | 8.85 | 2.72 |
| Evaporation, E (inches) | | 2.02 | 2.49 | 0.80 | 0 |
| (million cu. ft.) | | 7.07 (3-31) | 8.72 | 2.80 | 0 |
| (P-E) | | 12.07 | 19.89 | 6.05 | 2.72 |
| Q/(P-E) | | 0.62 | 1.24(1) | 0.73 | 0.62 |
| Slough 11 | | | | | |
| Flow, Q (cfs) | 3.17 | 2.82 | 2.75 | 2.44 | 1.45 |
| (million cu. ft.) | 8.21 | 7.58 | 7.35 | 6.32 | 3.75 |
| Precipitation, P (inches) | 1.49 | 4.72 | 6.78 | 2.15 | 0.65 |
| (million cu. ft.) | 3.93 | 18.55 | 26.60 | 8.44 | 2.56 |
| Evaporation, E (inches) | 5.66 | 2.21 | 2.49 | 0.80 | 0 |
| (million cu. ft.) | 22.14 | 8.68 | 9.76 | 3.13 | 0 |
| (P-E) (million cu. ft.) | -18.21 | 9.87 | 16.84 | 5.31 | 2.56 |
| Q/(P-E) | -0.17 | 0.77 | 0.44 | 1.19 | 1.47 |

(1) Slough 8A likely overtopped in late August.

SOURCE: Table reproduced from R & M (1985a)

Table 4.7

1984 MONTHLY WATER BALANCE
SLOUGH 9, TRIBUTARY 9B

| | July | August | September | October |
|---|---|---|---|---|
| Slough 9 Tributary (Upper Site) | | | | |
| Flow, Q (cfs) | - | 2.62 | 0.91 (1) | 0.50 |
| (million cu. ft.) | - | 7.02 | 2.54 | 1.34 |
| Precipitation, P (inches) | - | 7.44 | 2.11 | 0.87 |
| (million cu. ft.) | - | 12.62 | 3.58 | 1.48 |
| Evaporation, E (inches) | - | 2.49 | 0.80 | |
| (million cu. ft.) | - | 4.21 | 1.35 | 0 |
| P-E, Precipitation-Evaporation | - | 8.41 | 2.19 | 1.48 |
| Q/(P-E) | - | 0.83 | 1.16 (1) | 0.91 |
| Slough 9 Tributary (Lower Site) | | | | |
| Flow, Q (cfs) | 1.21 | 4.97 | 0.30 | 0.07 |
| (million cu. ft.) | 3.23 | 13.31 | 0.78 | 0.19 |
| Precipitation, P (inches) | 5.25 | 7.44 | 2.11 | 0.87 |
| (million cu. ft.) | 17.81 | 25.24 | 7.16 | 2.95 |
| Evaporation, E (inches) | 2.21 | 2.49 | 0.80 | 0 |
| (million cu. ft.) | 7.50 | 8.43 | 2.71 | 0 |
| (P-E), Precipitation-Evaporation | 10.31 | 16.81 | 4.45 | 2.95 |
| Q/(P-E) | 0.31 | 0.79 | 0.18 | 0.06 |

(1) Affected by runoff from storm in late August.

SOURCE: Table reproduced from R & M (1985a)

TABLE 4.8

PRECIPITATION COEFFICIENTS
FOR TRANSFER OF RECORDED DATA

| Site | Continuous Station | | |
|---|---|---|---|
| | Talkeetna | Sherman | Devil Canyon |
| Curry | 1.5 | 1.2 | 1.7 |
| Slough 8A | 1.3 | 1.07 | |
| Slough 9 (Sherman) | 1.2 | 1.0 | 1.4 |
| Gold Creek | 1.07 | 0.9 | 1.3 |

To obtain precipitation estimate for above sites, multiply precipitation at the continuous station by the appropriate multiplier.

SOURCE: Table reproduced from R & M (1985a)

TABLE 4.9

FALLING HEAD TEST RESULTS
SLOUGH 9 - BOREHOLES

| Borehole | Well I.D. (ft) | Depth of Screen (ft) | Date of Test | Transmissivity $Ft^2/Day$ | Comments |
|---|---|---|---|---|---|
| 9-1 | 0.146 | 24-27 | 07/17/84 | 3.5 | Good curve fit |
| 9-1 | 0.146 | 24-27 | 07/31/84 | 5.4 | Good curve fit, retest |
| 9-1 | 0.146 | 24-27 | 08/15/84 | 3.4 | Good curve fit, retest |
| 9-1 | 0.063 | 9.4-10.7 | 08/15/84 | 0.2 | Good curve fit |
| 9-1 | 0.063 | 9.4-10.7 | 08/29/84 | 0.2 | Good curve fit, retest |
| 9-2 | 0.146 | 7-10 | 08/13/84 | 50 | Sparse data, poor curve fit |
| 9-2 | 0.146 | 7-10 | 08/15/84 | 92 | Sparse data, poor curve fit, retest |
| 9-2 | 0.146 | 7-10 | 08/29/84 | 12 | Poor curve fit, retest |
| 9-2 | 0.063 | 10.7-12.1 | 08/15/84 | -- | No curve fit |
| 9-2 | 0.063 | 10.7-12.1 | 08/25/84 | 2.6 | Poor curve fit, retest |
| 9-3 | 0.146 | 37-40 | 07/31/84 | 3.4 | Good curve fit |
| 9-3 | 0.146 | 37-40 | 08/14/84 | 3.6 | Retest |
| 9-3 | 0.146 | 37-40 | 08/14/84 | 2.4 | Retest after surging well. Value probably affected by previous testing. |
| 9-4 | 0.063 | 11.7-13.1 | 08/13/84 | -- | No useable data |
| 9-4 | 0.063 | 11.7-13.1 | 08/13/84 | -- | No useable data, retest |

Source: R&M (1985a)

TABLE 4.10
ESTIMATED DAILY RUNOFF, SLOUGH 8A
HIGH RAINFALL PATTERN(1)

| Date | Daily Precipitation(2) (inches) | Measured Flow(3) (cfs) | Estimated Groundwater Flow(4) (cfs) | Estimated Surface Runoff (cfs) | Estimated With-Project Groundwater Flow(5) (cfs) | Estimated With-Project Slough Flow (cfs) |
|---|---|---|---|---|---|---|
| 1 | | 5.9 | 5.1 | 0.8 | 1.6 | 2.4 |
| 2 | | 5.6 | 4.7 | 0.9 | 1.6 | 2.5 |
| 3 | 0.4 | 5.2 | 4.3 | 0.9 | 1.6 | 2.5 |
| 4 | | 4.8 | 4.2 | 0.6 | 1.6 | 2.2 |
| 5 | .51 | 4.8 | 4.5 | 0.3 | 1.6 | 1.9 |
| 6 | | 4.4 | 4.4 | 0 | 1.6 | 1.6 |
| 7 | | 4.1 | 4.1 | 0 | 1.6 | 1.6 |
| 8 | .55 | 3.8 | 3.8 | 0 | 1.6 | 1.6 |
| 9 | | 4.4 | 4.4 | 0 | 1.6 | 1.6 |
| 10 | | 4.1 | 4.1 | 0 | 1.6 | 1.6 |
| 11 | | 3.6 | 3.6 | 0 | 1.6 | 1.6 |
| 12 | | 3.2 | 3.2 | 0 | 1.6 | 1.6 |
| 13 | | 2.6 | 2.6 | 0 | 1.6 | 1.6 |
| 14 | | 2.4 | 2.4 | 0 | 1.6 | 1.6 |
| 15 | | 2.2 | 2.2 | 0 | 1.6 | 1.6 |
| 16 | | 2.0 | 2.0 | 0 | 1.6 | 1.6 |
| 17 | 0.7 | 1.7 | 1.7 | 0 | 1.6 | 1.6 |
| 18 | 1.35 | 2.6 | 2.6 | 0 | 1.6 | 1.6 |
| 19 | .58 | 4.1 | 3.6 | 0.5 | 1.6 | 2.1 |
| 20 | .31 | 4.8 | 3.8 | 1.0 | 1.6 | 2.6 |
| 21 | .06 | 5.2 | 4.2 | 1.0 | 1.6 | 2.6 |
| 22 | .64 | 5.9 | 4.0 | 1.9 | 1.6 | 3.5 |
| 23 | .37 | 8.0 | 3.8 | 4.2 | 1.6 | 5.8 |
| 24 | 2.19 | 34 | 5.0 | 29 | 1.6 | 3.1 |
| 25 | 1.33 | 65 | 6.9 | 58 | 1.6 | 6.0 |
| 26 | | 44 | 7.3 | 37 | 1.6 | 34 |
| 27 | | 17 | 6.3 | 11 | 1.6 | 13 |
| 28 | | 11 | 4.7 | 6.3 | 1.6 | 7.9 |
| 29 | | 8.0 | 3.7 | 4.3 | 1.6 | 5.9 |
| 30 | | 5.9 | 3.3 | 2.6 | 1.6 | 4.2 |
| 31 | | 4.8 | 2.7 | 2.1 | 1.6 | 3.7 |

(1) 20% exceedance probability
(2) August 1984 precipitation. Data are from Talkeetna through day 21, from Sherman after day 21. All data are adjusted to Slough 8A.
(3) August 1984
(4) Q8 = -0.67 + 0.00025 Q6C
(5) Assumes flow at Gold Creek is 9,000 cfs

Source: R&M (1985a)

TABLE 4.11
ESTIMATED DAILY RUNOFF, SLOUGH 8A
MODERATE RAINFALL PATTERN(1)

| Date | Daily Precipitation(2) (inches) | Measured Flow(3) (cfs) | Estimated Groundwater Flow(4) (cfs) | Estimated Surface Runoff (cfs) | Estimated With-Project Groundwater Flow(5) (cfs) | Estimated With-Project Slough Flow (cfs) |
|---|---|---|---|---|---|---|
| 1 | .08 | 7.7 | 5.7 | 2.0 | 1.6 | 3.6 |
| 2 | | 20.8 | 5.7 | 15.1 | 1.6 | 16.7 |
| 3 | | 17.0 | 5.2 | 11.8 | 1.6 | 13.4 |
| 4 | | 15.3 | 4.6 | 10.7 | 1.6 | 12.3 |
| 5 | | 11.6 | 3.9 | 7.7 | 1.6 | 9.3 |
| 6 | | 9.3 | 3.3 | 6.0 | 1.6 | 9.6 |
| 7 | | 7.7 | 3.0 | 4.7 | 1.6 | 6.3 |
| 8 | 0.7 | 6.4 | 2.8 | 3.6 | 1.6 | 5.2 |
| 9 | .39 | 6.0 | 2.6 | 3.4 | 1.6 | 5.0 |
| 10 | .07 | 5.3 | 2.5 | 2.8 | 1.6 | 4.4 |
| 11 | | 4.6 | 2.4 | 2.2 | 1.6 | 3.8 |
| 12 | | 4.0 | 2.2 | 1.8 | 1.6 | 3.4 |
| 13 | | 3.3 | 2.1 | 1.2 | 1.6 | 2.8 |
| 14 | .39 | 3.3 | 2.0 | 1.3 | 1.6 | 2.9 |
| 15 | .74 | 3.0 | 2.0 | 1.0 | 1.6 | 2.6 |
| 16 | | 2.8 | 2.0 | 0.8 | 1.6 | 2.4 |
| 17 | | 2.4 | 1.8 | 0.6 | 1.6 | 2.2 |
| 18 | | 2.2 | 1.7 | 0.5 | 1.6 | 2.1 |
| 19 | | 2.1 | 1.6 | 0.5 | 1.6 | 2.1 |
| 20 | | 2.2 | 1.7 | 0.5 | 1.6 | 2.1 |
| 21 | .04 | 2.8 | 2.0 | 0.8 | 1.6 | 2.4 |
| 22 | .30 | 3.8 | 2.7 | 1.1 | 1.6 | 2.7 |
| 23 | .13 | 3.5 | 3.5 | 0 | 1.6 | 1.6 |
| 24 | | 2.1 | 2.1 | 0 | 1.6 | 1.6 |
| 25 | | 1.6 | 1.6 | 0 | 1.6 | 1.6 |
| 26 | | 1.5 | 1.5 | 0 | 1.6 | 1.6 |
| 27 | | 3.8 | 1.7 | 2.1 | 1.6 | 3.7 |
| 28 | .21 | 19.8 | 1.6 | 18.2 | 1.6 | 19.8 |
| 29 | 1.46 | 25.3 | 1.7 | 23.6 | 1.6 | 25.2 |
| 30 | .42 | 19.8 | 2.2 | 17.6 | 1.6 | 19.2 |

(1) 61% exceedance probability.
(2) September 1983 Talkeetna precipitation adjusted to Slough 8A.
(3) September 1983
(4) Q8 = -0.67 + 0.00025 QGC
(5) Assumes flow at Gold Creek is 9,000 cfs.

Source: R&M (1985a)

TABLE 4.12
ESTIMATED DAILY RUNOFF, SLOUGH 8A
LOW RAINFALL PATTERN(1)

| Date | Daily Precipitation(2) (inches) | Measured Flow(3) (cfs) | Estimated Groundwater Flow(4) (cfs) | Estimated Surface Runoff (cfs) | Estimated With-Project Groundwater Flow(5) (cfs) | Estimated With-Project Slough Flow (cfs) |
|---|---|---|---|---|---|---|
| 1 | | 4.1 | 2.5 | 1.6 | 1.6 | 3. |
| 2 | | 3.2 | 2.3 | 0.9 | 1.6 | 2.5 |
| 3 | | 2.6 | 2.1 | 0.5 | 1.6 | 2.1 |
| 5 | | 2.0 | 1.9 | 0.1 | 1.6 | 1.7 |
| 6 | | 1.7 | 1.7 | 0 | 1.6 | 1.6 |
| 7 | .11 | 1.5 | 1.5 | 0 | 1.6 | 1.6 |
| 8 | | 1.4 | 1.4 | 0 | 1.6 | 1.6 |
| 9 | | 1.2 | 1.2 | 0 | 1.6 | 1.6 |
| 10 | | 1.2 | 1.2 | 0 | 1.6 | 1.6 |
| 11 | | 1.0 | 1.0 | 0 | 1.6 | 1.6 |
| 12 | .24 | 1.0 | 1.0 | 0 | 1.6 | 1.6 |
| 13 | .18 | 1.0 | 1.0 | 0 | 1.6 | 1.6 |
| 14 | | 0.9 | 0.9 | 0 | 1.6 | 1.6 |
| 15 | .02 | 0.8 | 0.8 | 0 | 1.6 | 1.6 |
| 16 | .12 | 0.9 | 0.9 | 0 | 1.6 | 1.6 |
| 17 | .04 | 0.9 | 0.9 | 0 | 1.6 | 1.6 |
| 18 | .61 | 1.2 | 1.2 | 0 | 1.6 | 1.6 |
| 19 | .65 | 1.7 | 1.7 | 0 | 1.6 | 1.6 |
| 20 | .05 | 2.2 | 1.9 | 0.3 | 1.6 | 1.9 |
| 21 | | 2.2 | 2.2 | 0 | 1.6 | 1.6 |
| 22 | | 2.2 | 1.9 | 0.3 | 1.6 | 1.9 |
| 23 | | 2.2 | 1.6 | 0.6 | 1.6 | 2.1 |
| 24 | | 2.0 | 1.4 | 0.6 | 1.6 | 2.2 |
| 25 | .13 | 2.0 | 1.3 | 0.7 | 1.6 | 2.3 |
| 26 | | 1.7 | 1.2 | 0.5 | 1.6 | 2.1 |
| 27 | | 1.5 | 1.2 | 0.3 | 1.6 | 1.9 |
| 28 | | 1.5 | 1.1 | 0.4 | 1.6 | 2.0 |
| 29 | .02 | 1.4 | 1.1 | 0.3 | 1.6 | 1.9 |
| 30 | .05 | 1.4 | 1.2 | 0.2 | 1.6 | 1.8 |

(1) 93% exceedance probability
(2) September 1984 Sherman percipitation, adjusted to Slough 8A
(3) September 1984
(4) Q8 = -0.67 + 0.00025 QGC
(5) Assumes flow at Gold Creek is 9,000 cfs

Source: R&M (1985a)

TABLE 4.13
ESTIMATED DAILY RUNOFF, SLOUGH 9
MODERATE RAINFALL PATTERN(1)

| Date | Daily Precipitation(2) (inches) | Measured Flow(3) (cfs) | Estimated Groundwater Flow(4) (cfs) | Estimated Surface Runoff (cfs) | Estimated With-Project Groundwater Flow(5) (cfs) | Estimated With-Project Slough Flow (cfs) |
|---|---|---|---|---|---|---|
| 1 | | | | | | |
| 2 | | | | | | |
| 3 | | | | | | |
| 4 | | | | | | |
| 5 | | | | | | |
| 6 | | 8.3 | 5.6 | 2.7 | 2.9 | 5.6 |
| 7 | | 7.8 | 5.2 | 2.6 | 2.9 | 5.5 |
| 8 | | 7.1 | 4.7 | 2.4 | 3.9 | 5.3 |
| 9 | | 6.8 | 4.5 | 2.3 | 2.9 | 5.2 |
| 10 | | 6.4 | 4.3 | 2.1 | 2.9 | 5.0 |
| 11 | | 6.1 | 4.1 | 2.0 | 2.9 | 4.9 |
| 12 | | 5.7 | 3.9 | 1.8 | 2.9 | 4.7 |
| 13 | | 5.5 | 3.7 | 1.8 | 2.9 | 4.7 |
| 14 | | 5.3 | 3.6 | 1.7 | 2.9 | 4.6 |
| 15 | | 5.5 | 3.5 | 2.0 | 2.9 | 4.9 |
| 16 | | 5.3 | 3.5 | 1.8 | 2.9 | 4.7 |
| 17 | | 5.3 | 3.3 | 2.0 | 2.9 | 4.9 |
| 18 | | 5.1 | 3.0 | 1.9 | 2.9 | 4.8 |
| 19 | | 5.1 | 2.9 | 2.2 | 2.9 | 5.1 |
| 20 | | 5.5 | 3.0 | 2.5 | 2.9 | 5.4 |
| 21 | | 5.7 | 3.5 | 2.2 | 2.9 | 5.1 |
| 22 | | 6.1 | 4.7 | 1.4 | 2.9 | 4.3 |
| 23 | | 6.6 | 6.2 | 0.4 | 2.9 | 3.3 |
| 24 | | 7.3 | 5.3 | 2.0 | 2.9 | 4.4 |
| 25 | | 6.1 | 4.1 | 2.0 | 2.9 | 4.9 |
| 26 | | 5.9 | 3.5 | 2.1 | 2.9 | 5.3 |
| 27 | | 5.7 | 3.1 | 2.6 | 2.9 | 5.5 |
| 28 | | 5.7 | 2.9 | 2.8 | 2.9 | 5.7 |
| 29 | | 8.1 | 3.0 | 5.1 | 2.9 | 8.0 |
| 30 | | 14.2 | 3.9 | 10.3 | 2.9 | 13.2 |

(1) 61% exceedance probability
(2) September 1984 Sherman percipitation, adjusted to Slough 8A
(3) September 1984
(4) Q8 = -0.67 + 0.00025 QGC
(5) Assumes flow at Gold Creek is 9,000 cfs

Source: R&M (1985a)

TABLE 4.14
ESTIMATED DAILY RUNOFF, SLOUGH 9
LOW RAINFALL PATTERN(1)

| Date | Daily Precipitation(2) (inches) | Measured Flow(3) (cfs) | Estimated Groundwater Flow(4) (cfs) | Estimated Surface Runoff (cfs) | Estimated With-Project Groundwater Flow(5) (cfs) | Estimated With-Project Slough Flow (cfs) |
|---|---|---|---|---|---|---|
| 1 | | | | | | |
| 2 | | | | | | |
| 3 | | 11 | 3.7 | 7.3 | 2.9 | 10.2 |
| 4 | | 9.5 | 3.6 | 5.9 | 2.9 | 8.8 |
| 5 | | 7.1 | 3.4 | 3.7 | 2.9 | 6.6 |
| 6 | | 5.6 | 3.4 | 2.2 | 2.9 | 5.1 |
| 7 | .10 | 4.8 | 3.5 | 1.3 | 2.9 | 4.2 |
| 8 | | 4.2 | 3.6 | 0.6 | 2.9 | 3.5 |
| 9 | | 3.6 | 3.5 | 0.1 | 2.9 | 3.0 |
| 10 | | 3.2 | 3.2 | 0 | 2.9 | 2.9 |
| 11 | | 3.8 | 3.0 | 0 | 2.9 | 2.9 |
| 12 | .22 | 2.4 | 2.9 | 0 | 2.9 | 2.9 |
| 13 | .17 | 2.4 | 2.9 | 0 | 2.9 | 2.9 |
| 14 | | 2.1 | 2.8 | 0 | 2.9 | 2.9 |
| 15 | .02 | 2.1 | 2.7 | 0 | 2.9 | 2.9 |
| 16 | .11 | 2.1 | 2.6 | 0 | 2.9 | 2.9 |
| 17 | .04 | 2.1 | 25 | 0 | 2.9 | 2.9 |
| 18 | .57 | 2.7 | 2 6 | 0.1 | 2.9 | 3.0 |
| 19 | .61 | 3.2 | 3.0 | 0.2 | 2.9 | 3.1 |
| 20 | .05 | 3.6 | 3.4 | 0.2 | 2.9 | 3.1 |
| 21 | | 4.2 | 3.8 | 0.4 | 2.9 | 3.3 |
| 22 | | 3.6 | 3.4 | 0.2 | 2.9 | 3.1 |
| 23 | | 3.2 | 2.9 | 0.3 | 2.9 | 3.2 |
| 24 | | 2.8 | 2.6 | 0.2 | 2.9 | 3.1 |
| 25 | .12 | 3.3 | 2.5 | 0.8 | 2.9 | 3.7 |
| 26 | | 3.3 | 2.4 | 0.9 | 2.9 | 3.8 |
| 27 | | 2.8 | 2.3 | 0.5 | 2.9 | 3.4 |
| 28 | | 2.4 | 2.2 | 0.2 | 2.9 | 3.1 |
| 29 | .02 | 2.4 | 2.2 | 0.2 | 2.9 | 3.1 |
| 30 | 0.5 | 2.1 | 2.3 | 0 | 2.9 | 2.9 |

(1) 93% exceedance probability
(2) September 1984 Sherman percipitation, adjusted to Slough 8A
(3) September 1984
(4) Q8 = -0.67 + 0.00025 QGC
(5) Assumes flow at Gold Creek is 9,000 cfs

Source: R&M (1985a)


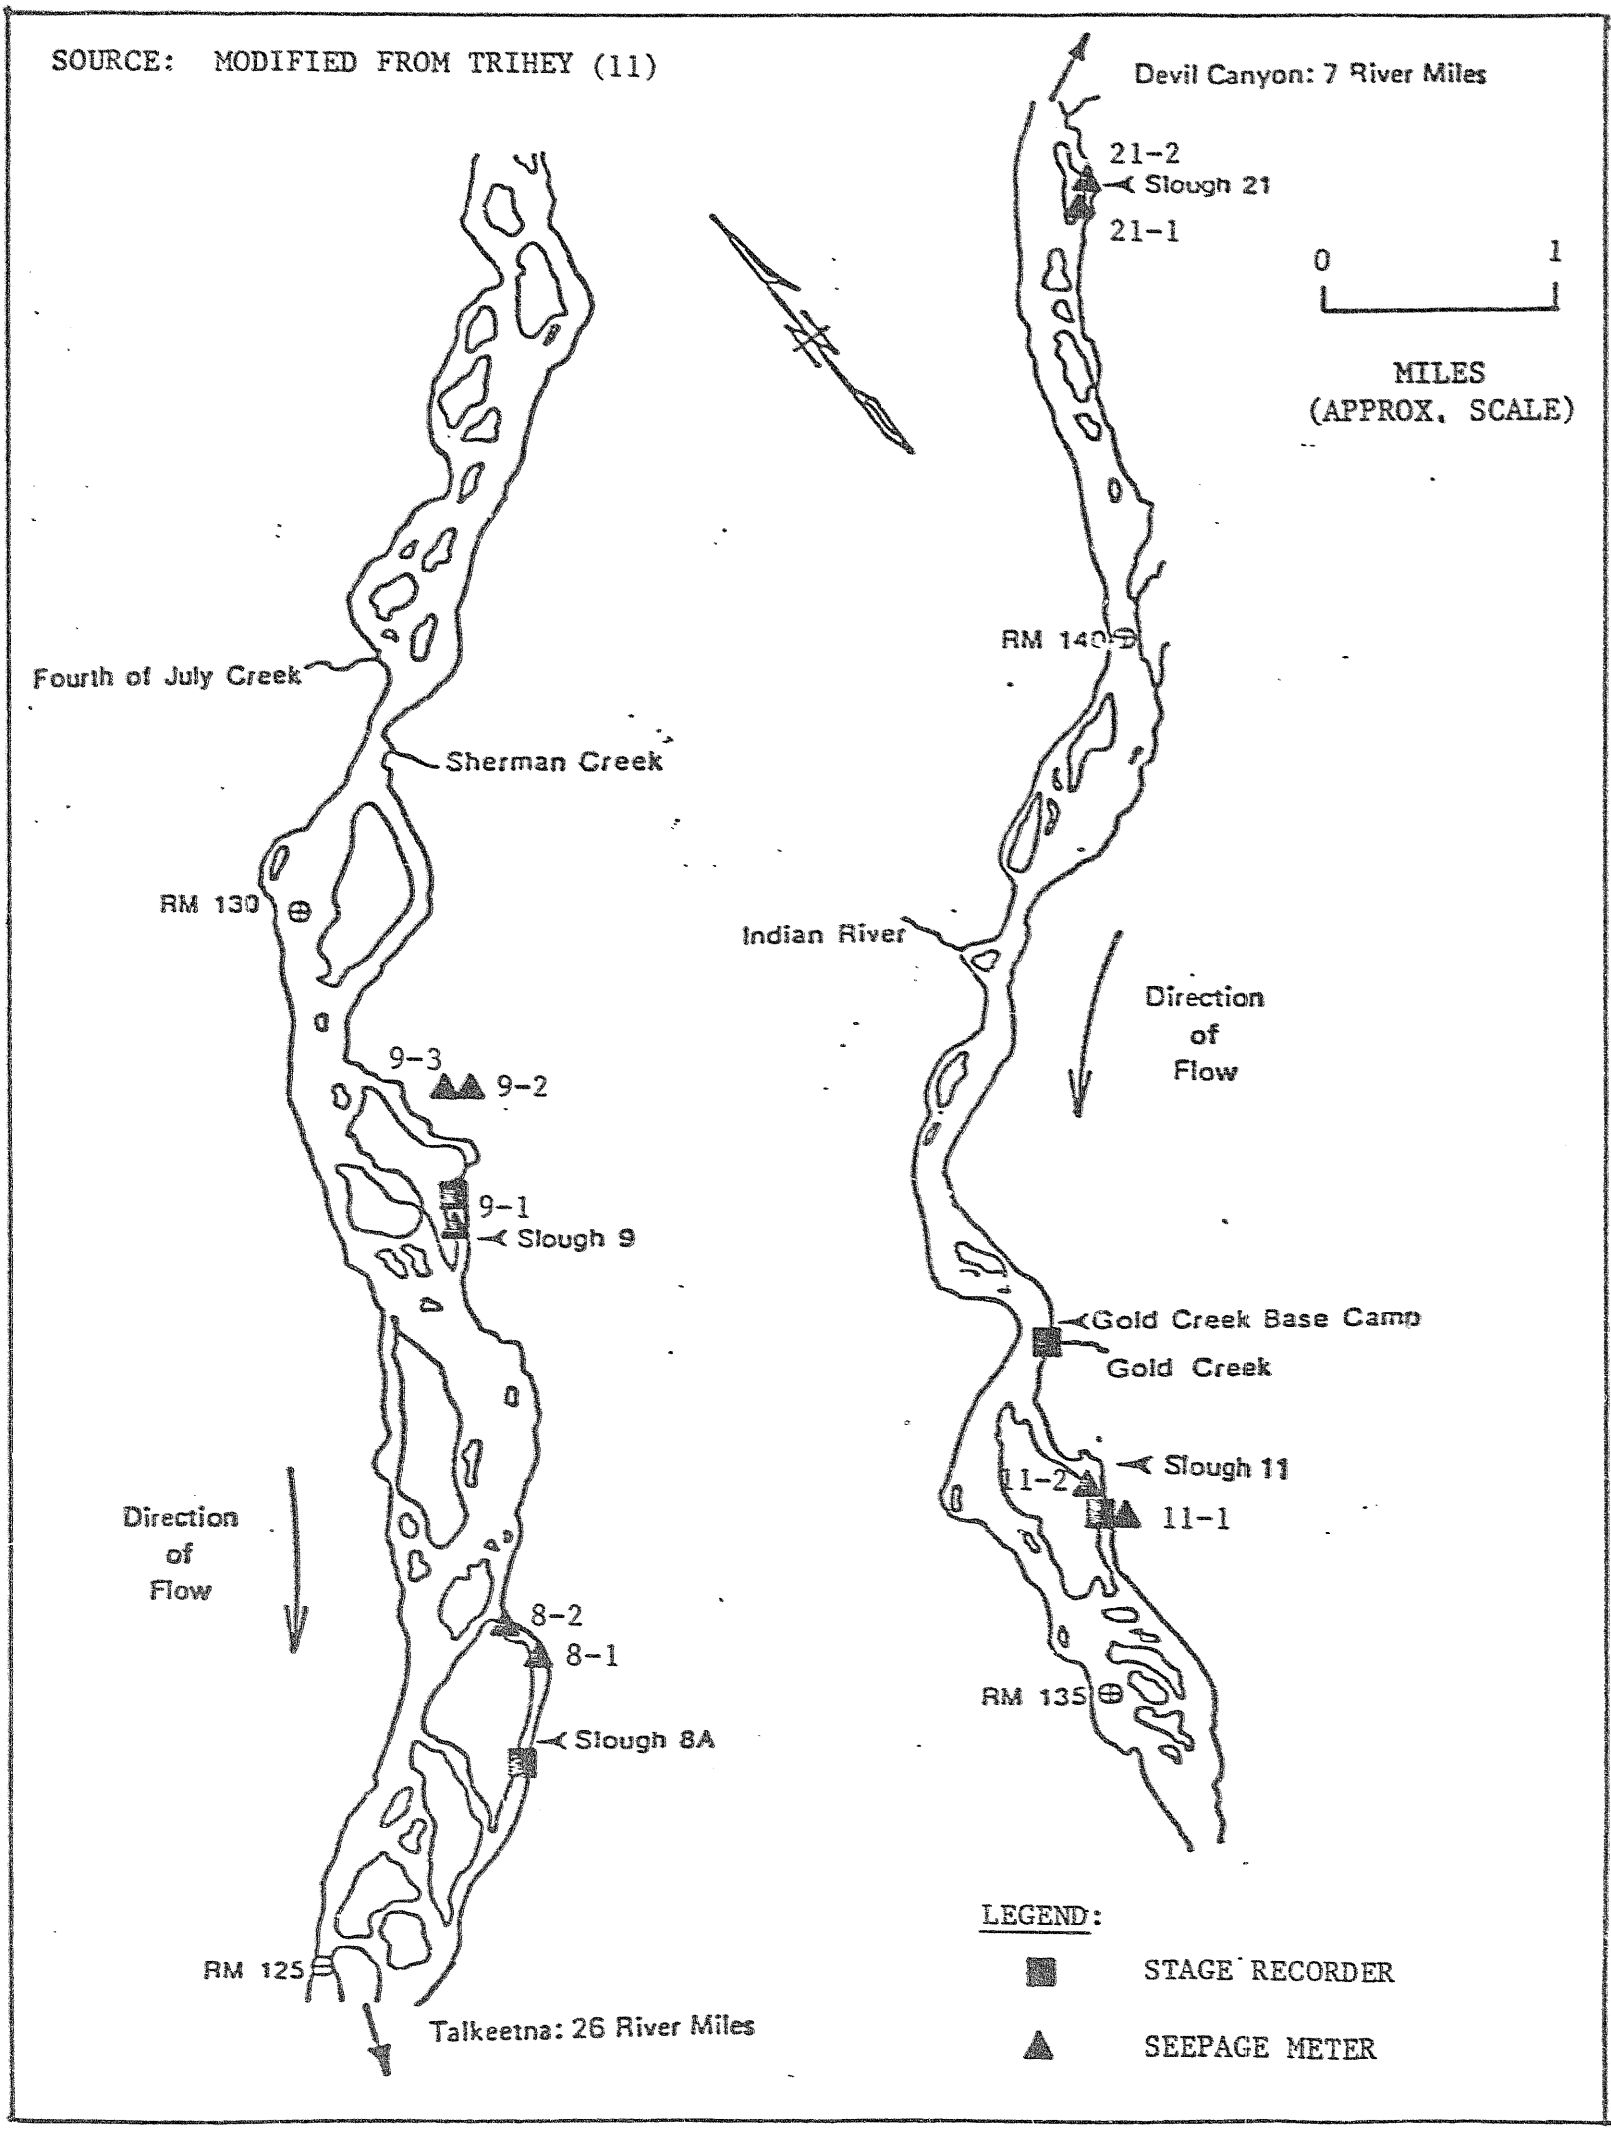




FIGURE 4.1 APPROXIMATE LOCATIONS OF DATA COLLECTION POINTS - STAGE RECORDERS AND SEEPAGE METERS

(Figure reprod
from APA (1984

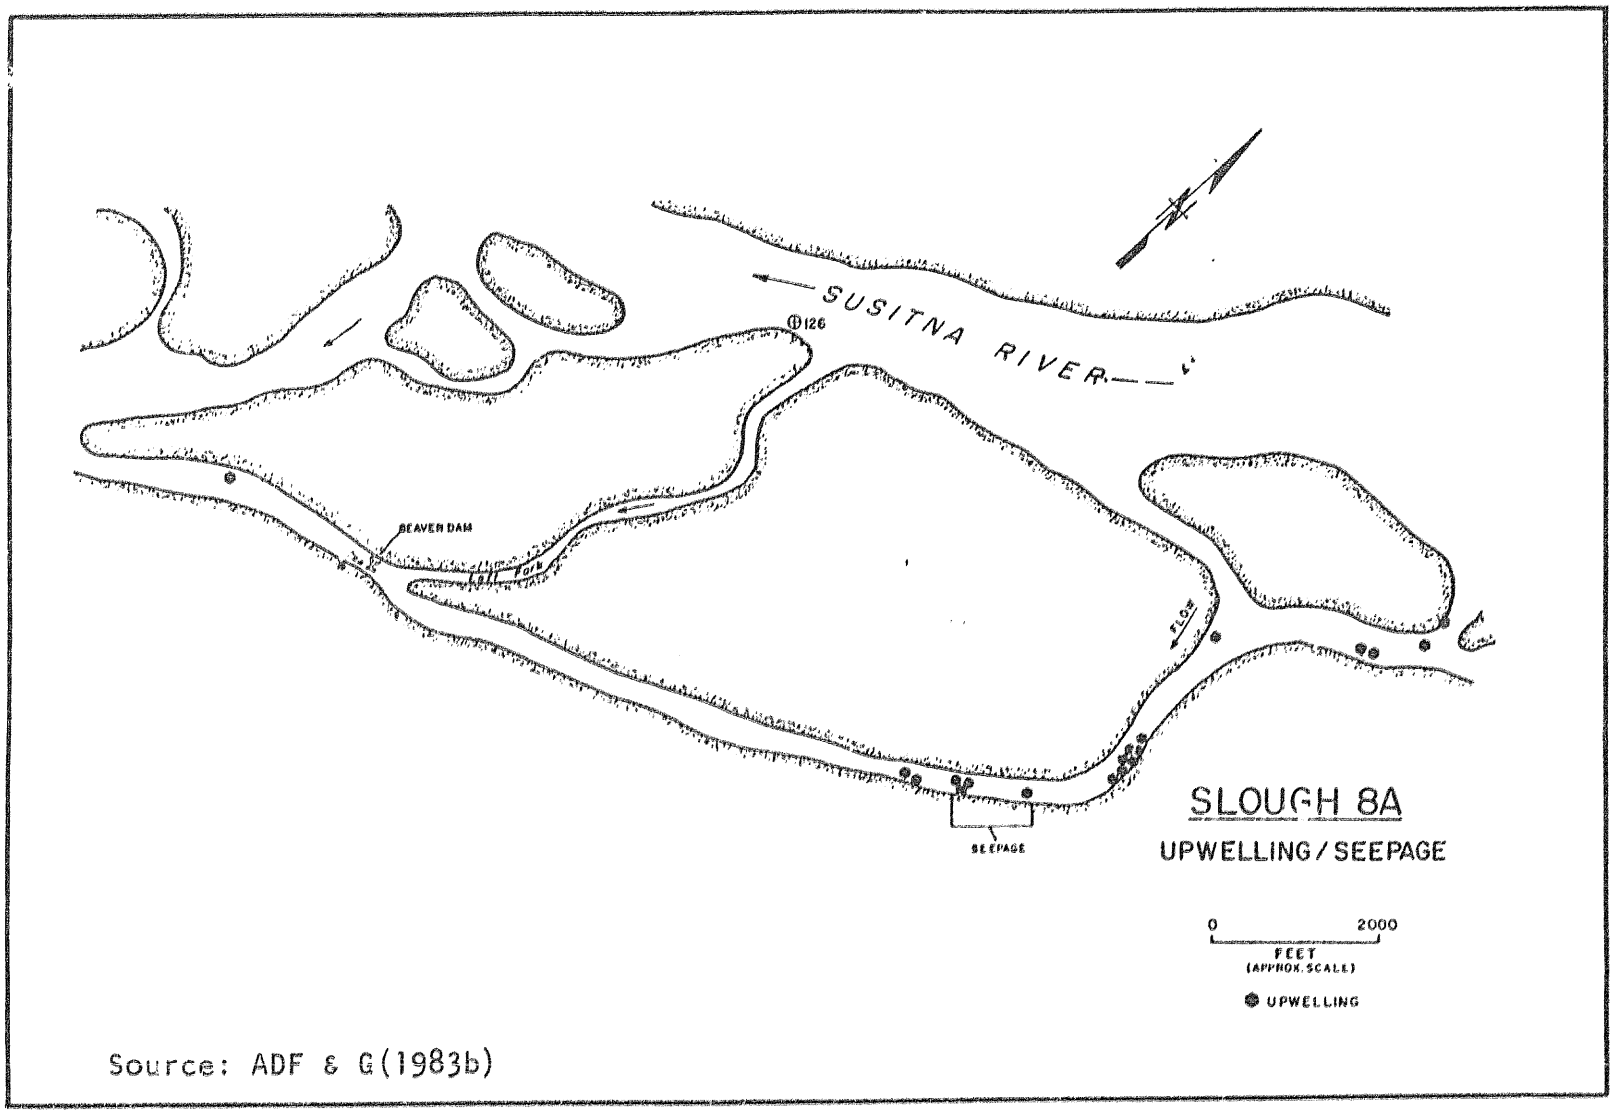


Source: ADF & G(1983b)

Figure 4.2 Slough 8A upwelling/seepage, 1982.

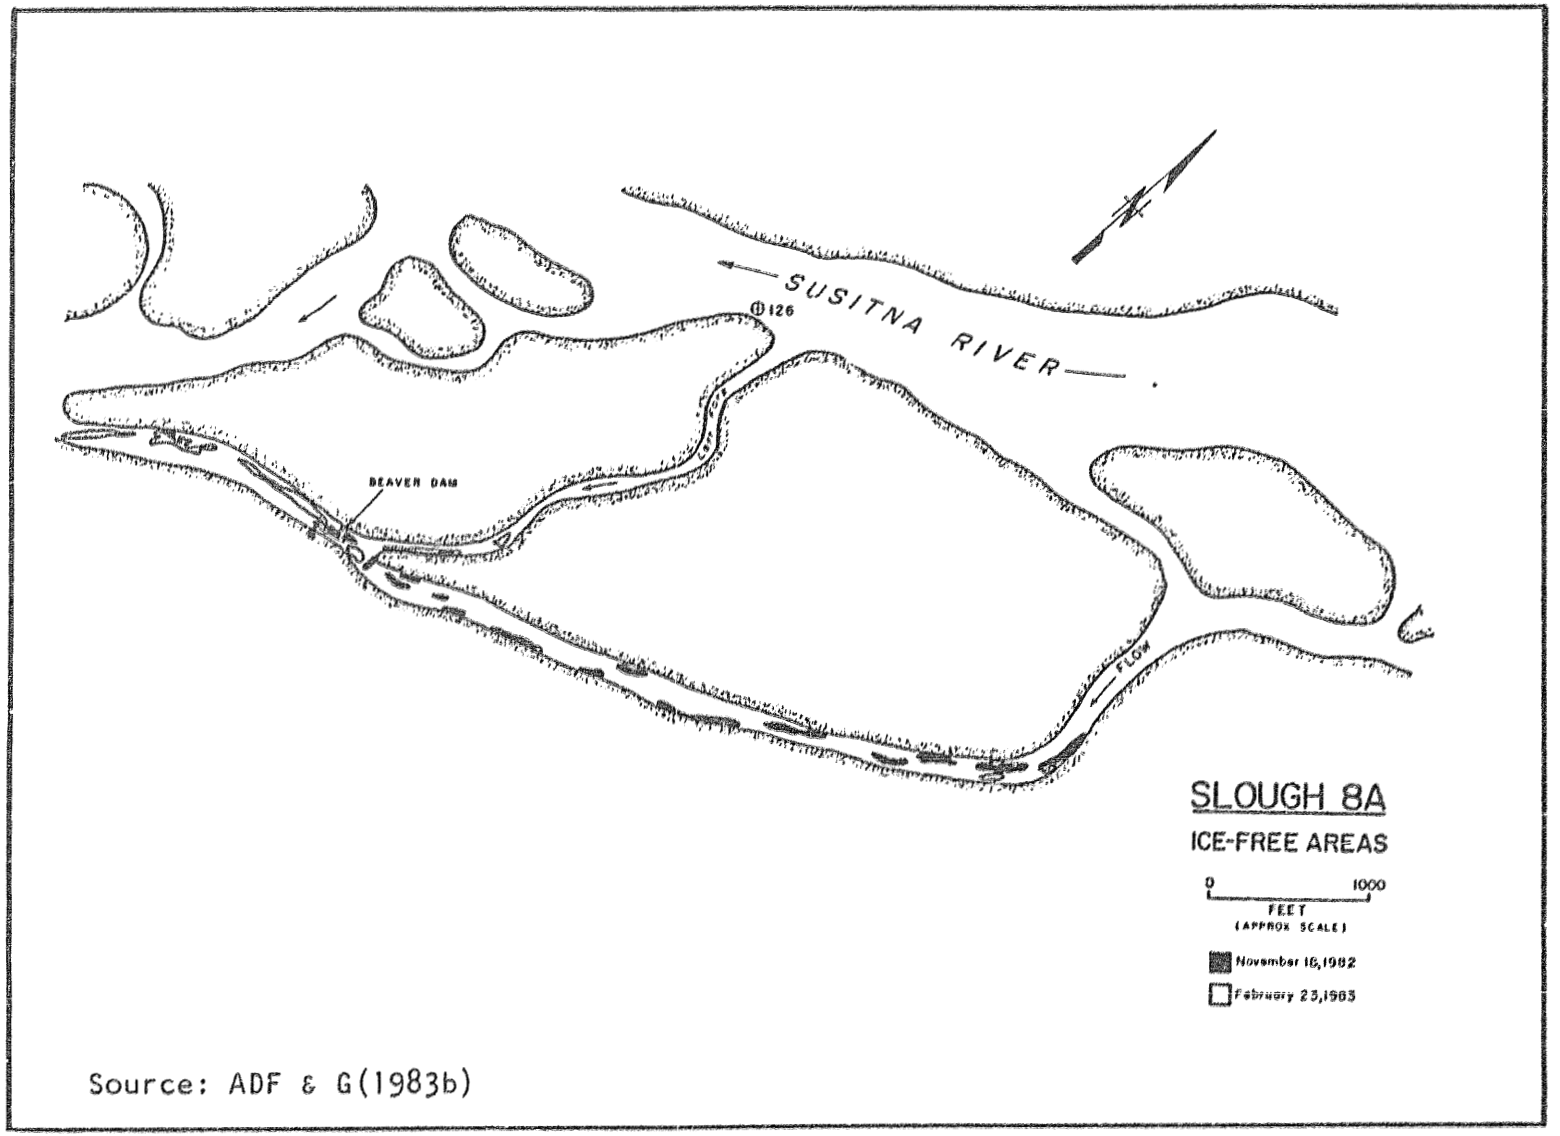


Source: ADF & G(1983b)

Figure 4.3 Slough 8A ice-free areas, winter 1982-83.

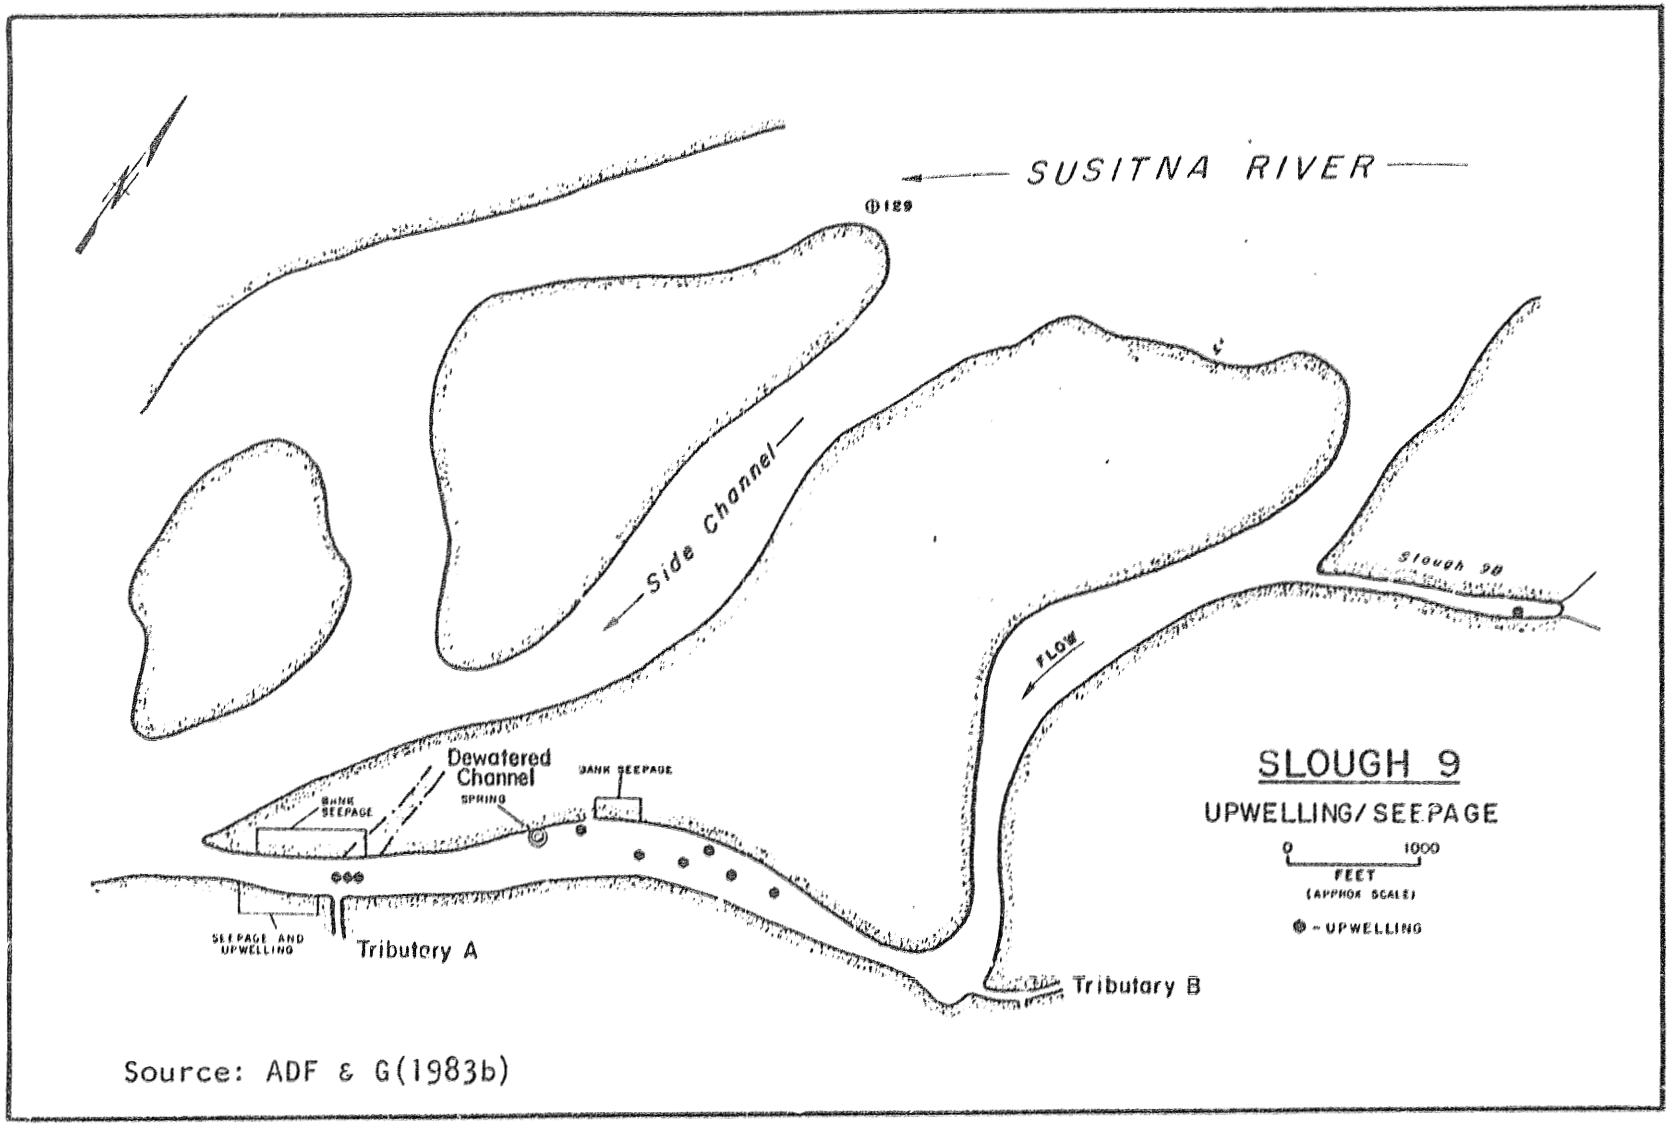



Figure 4.4 Slough 9 upwelling/seepage, 1982.


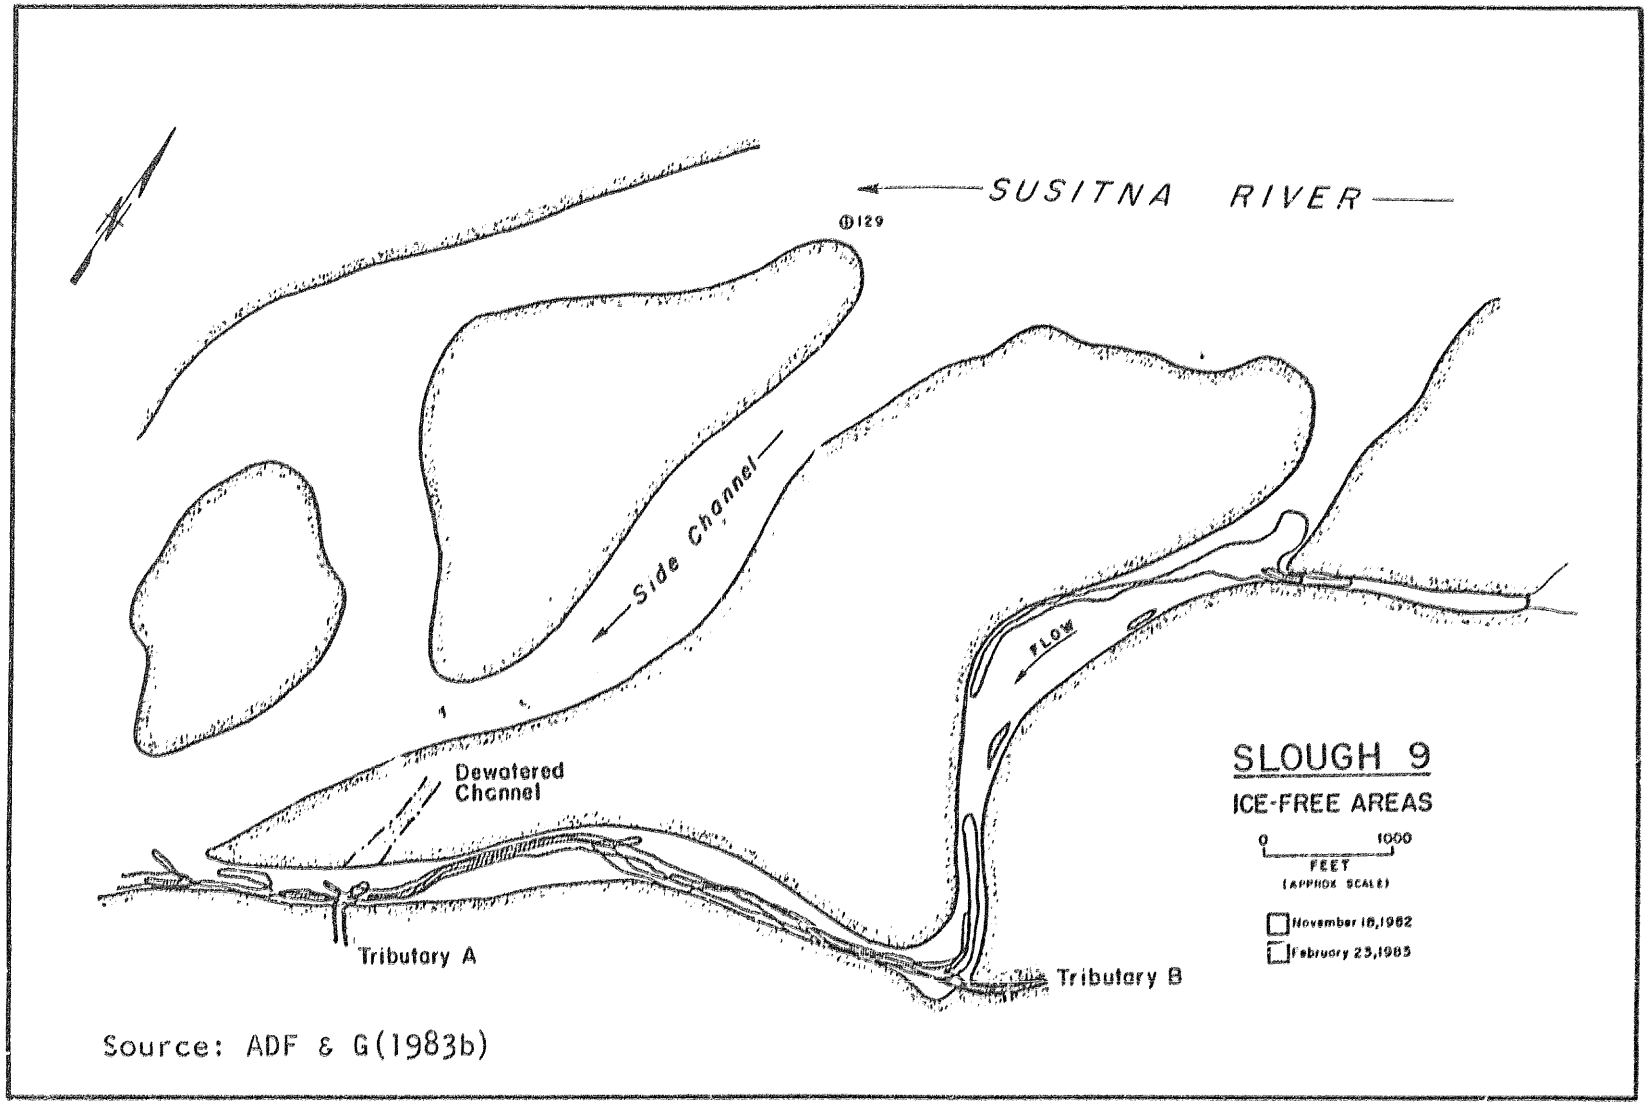



Figure 4.5 Slough 9 ice-free areas, winter 1982-83.

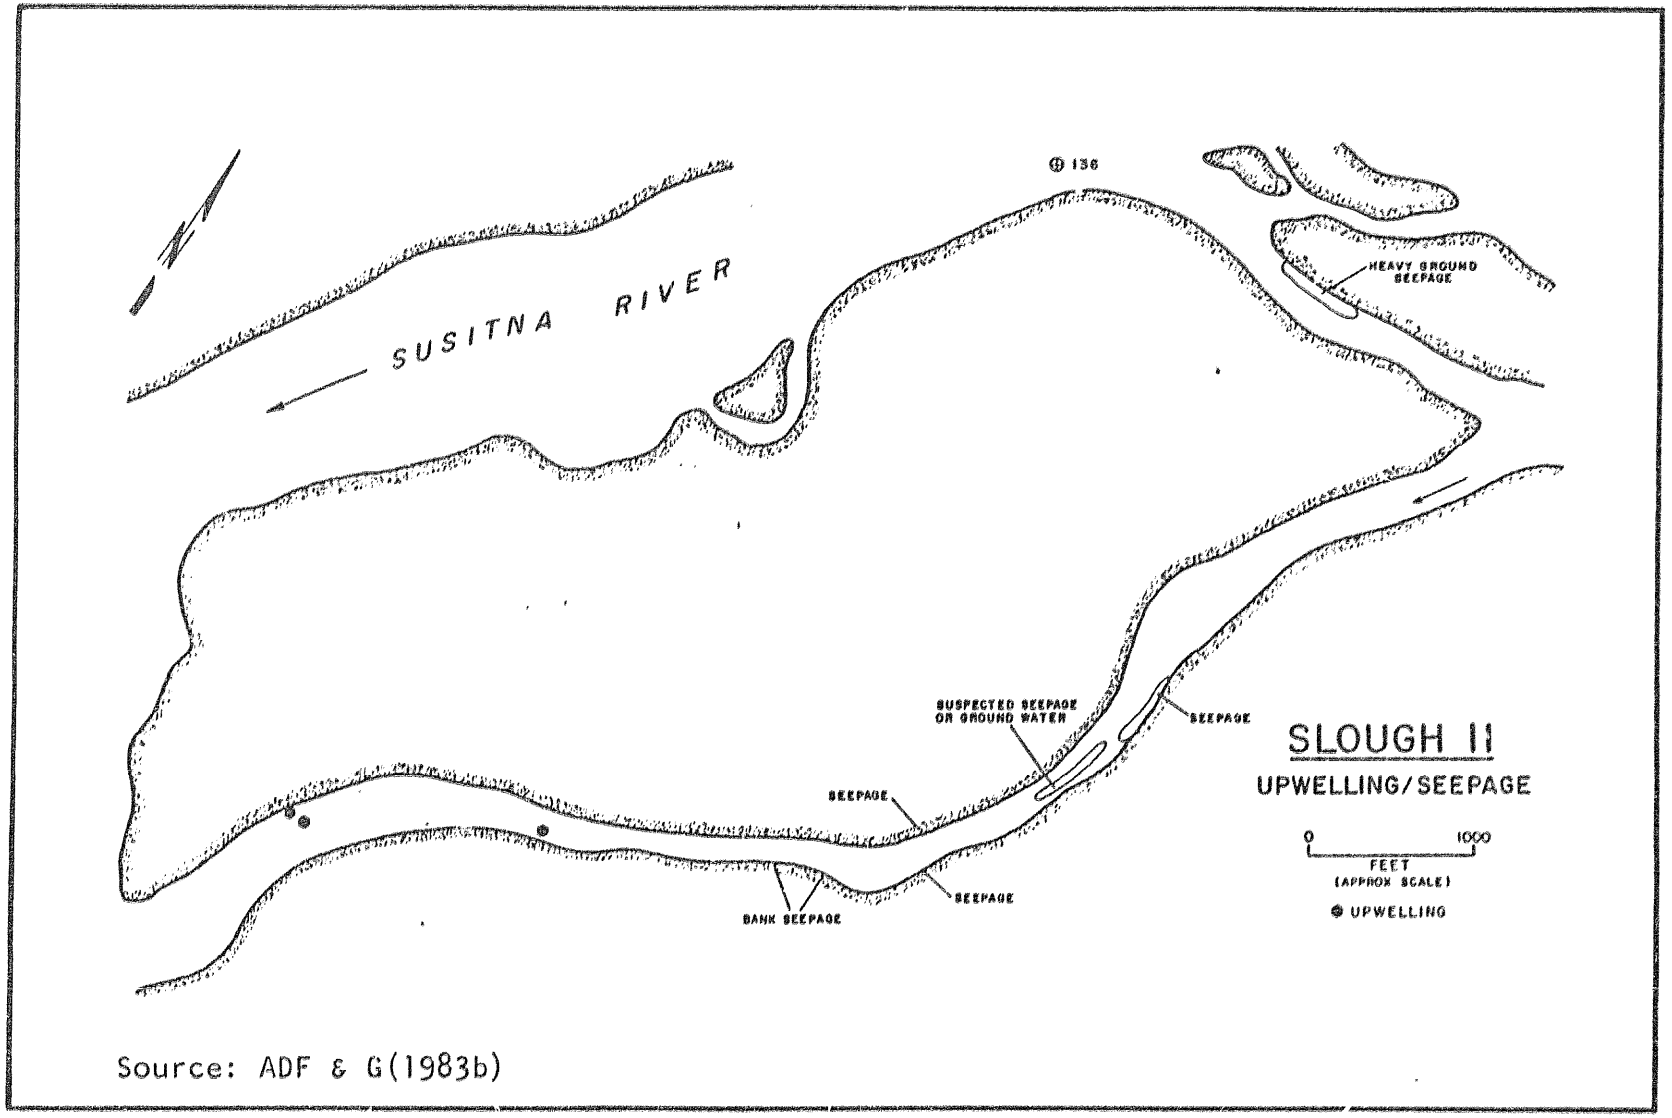


Source: ADF & G(1983b)

Figure 4.6 Slough 11 upwelling/seepage, 1982.

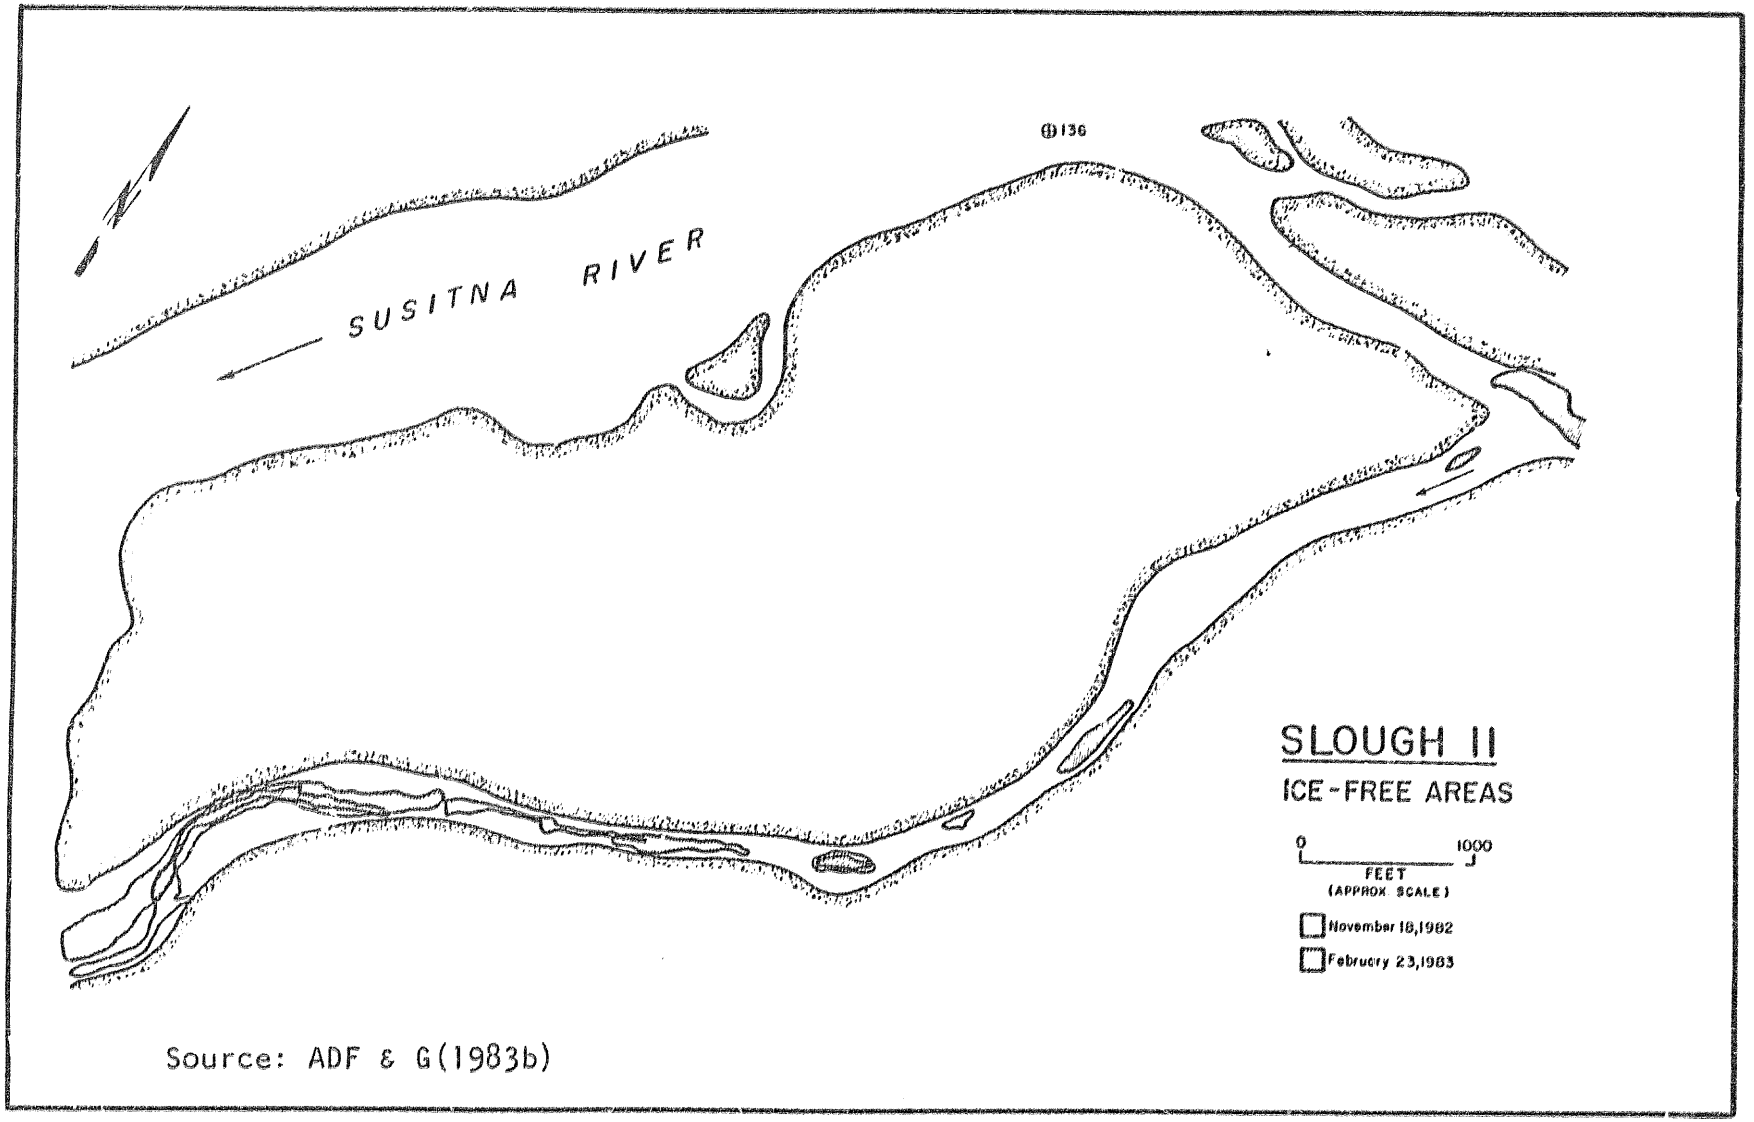



Figure 4.7 Slough 11 ice-free areas, winter 1982-83.

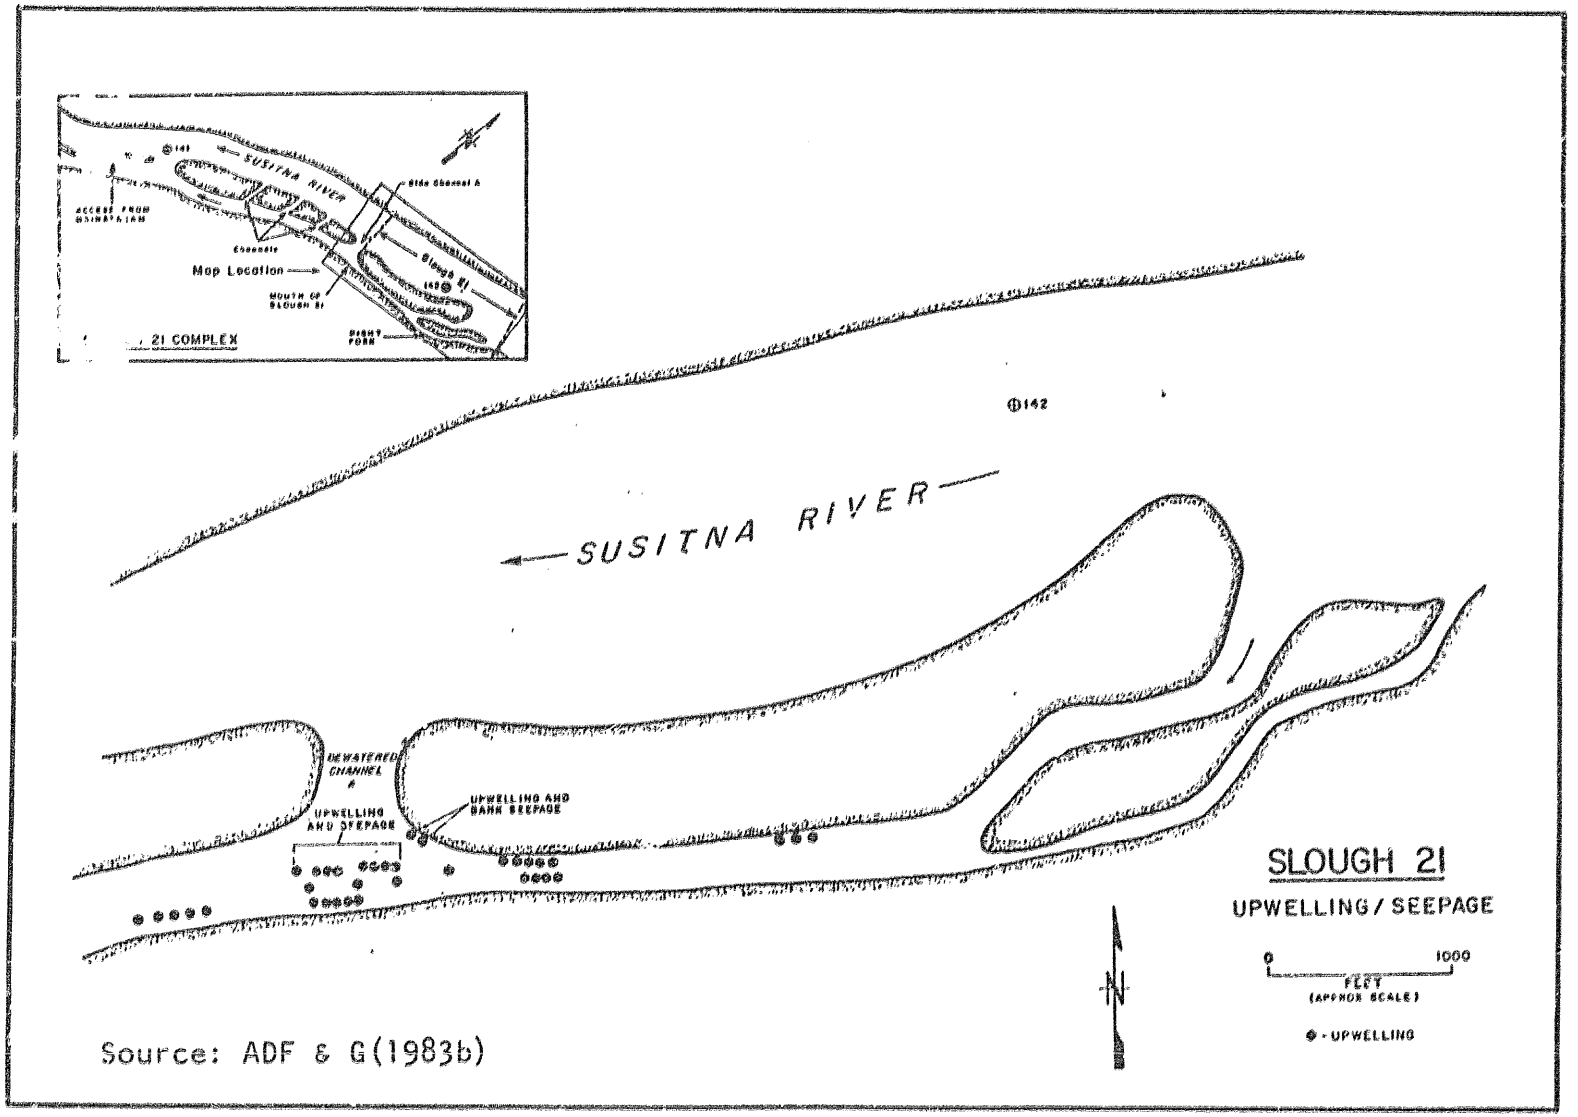



Figure 4.8 Slough 21 upwelling/seepage, 1982.


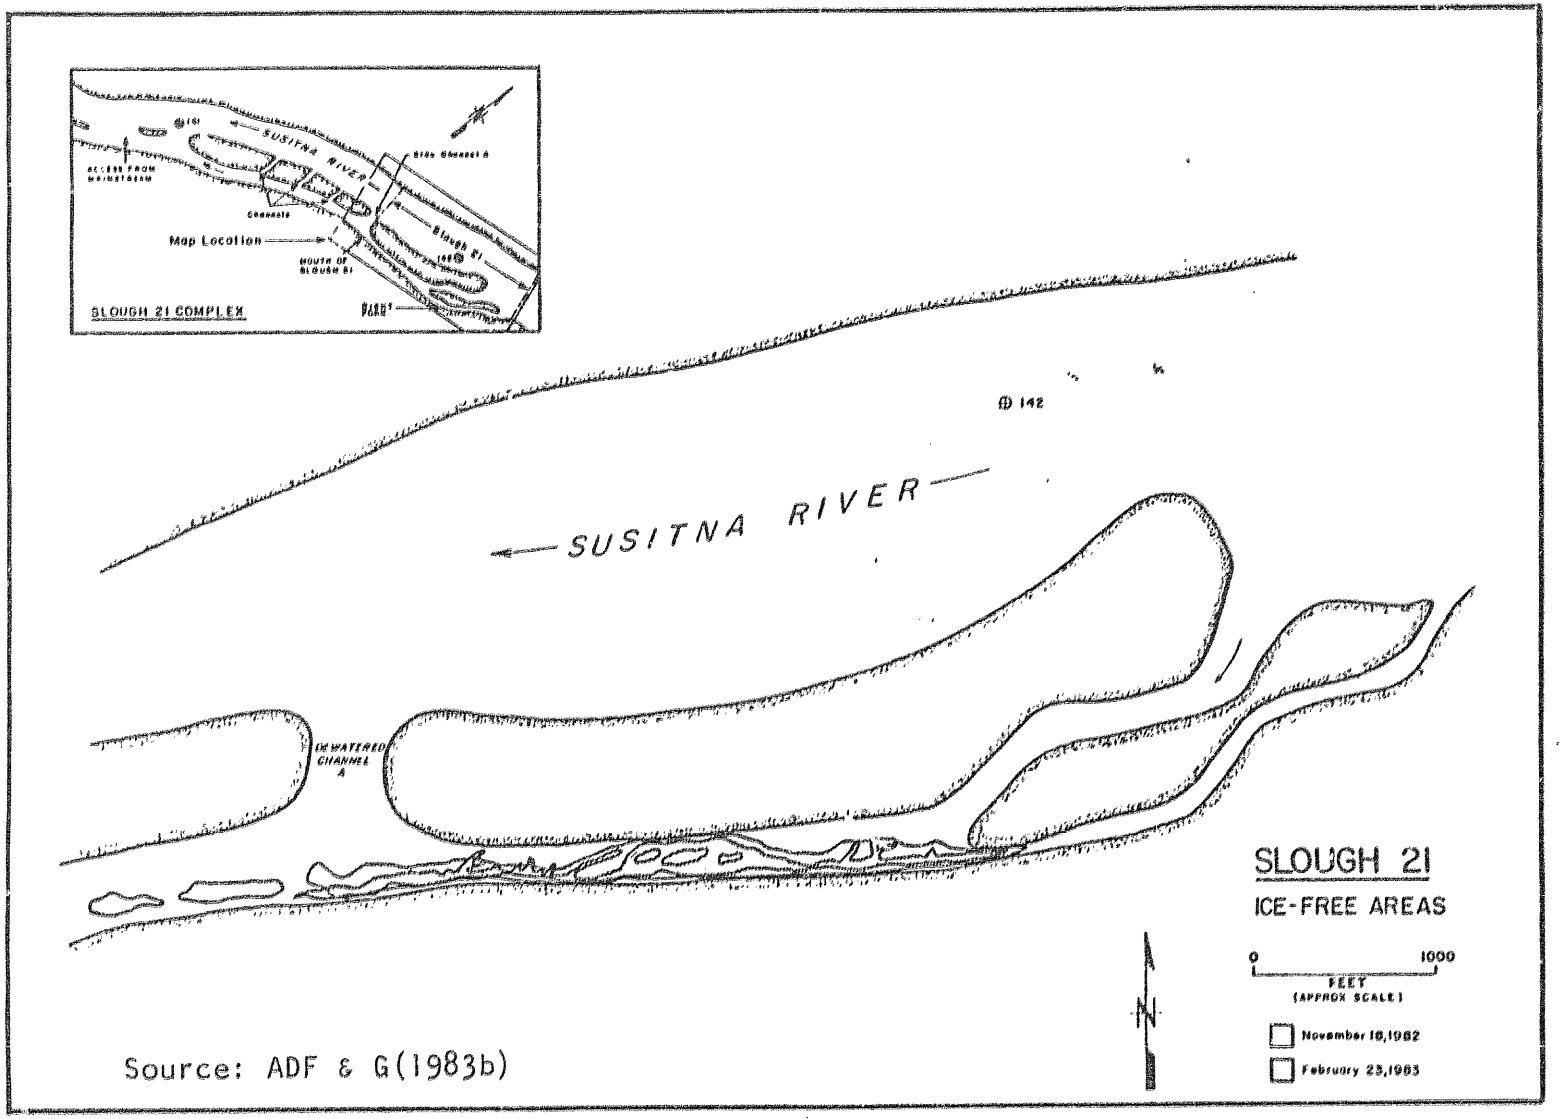



Figure 4.9 Slough 21 ice-free areas, winter 1982-83.

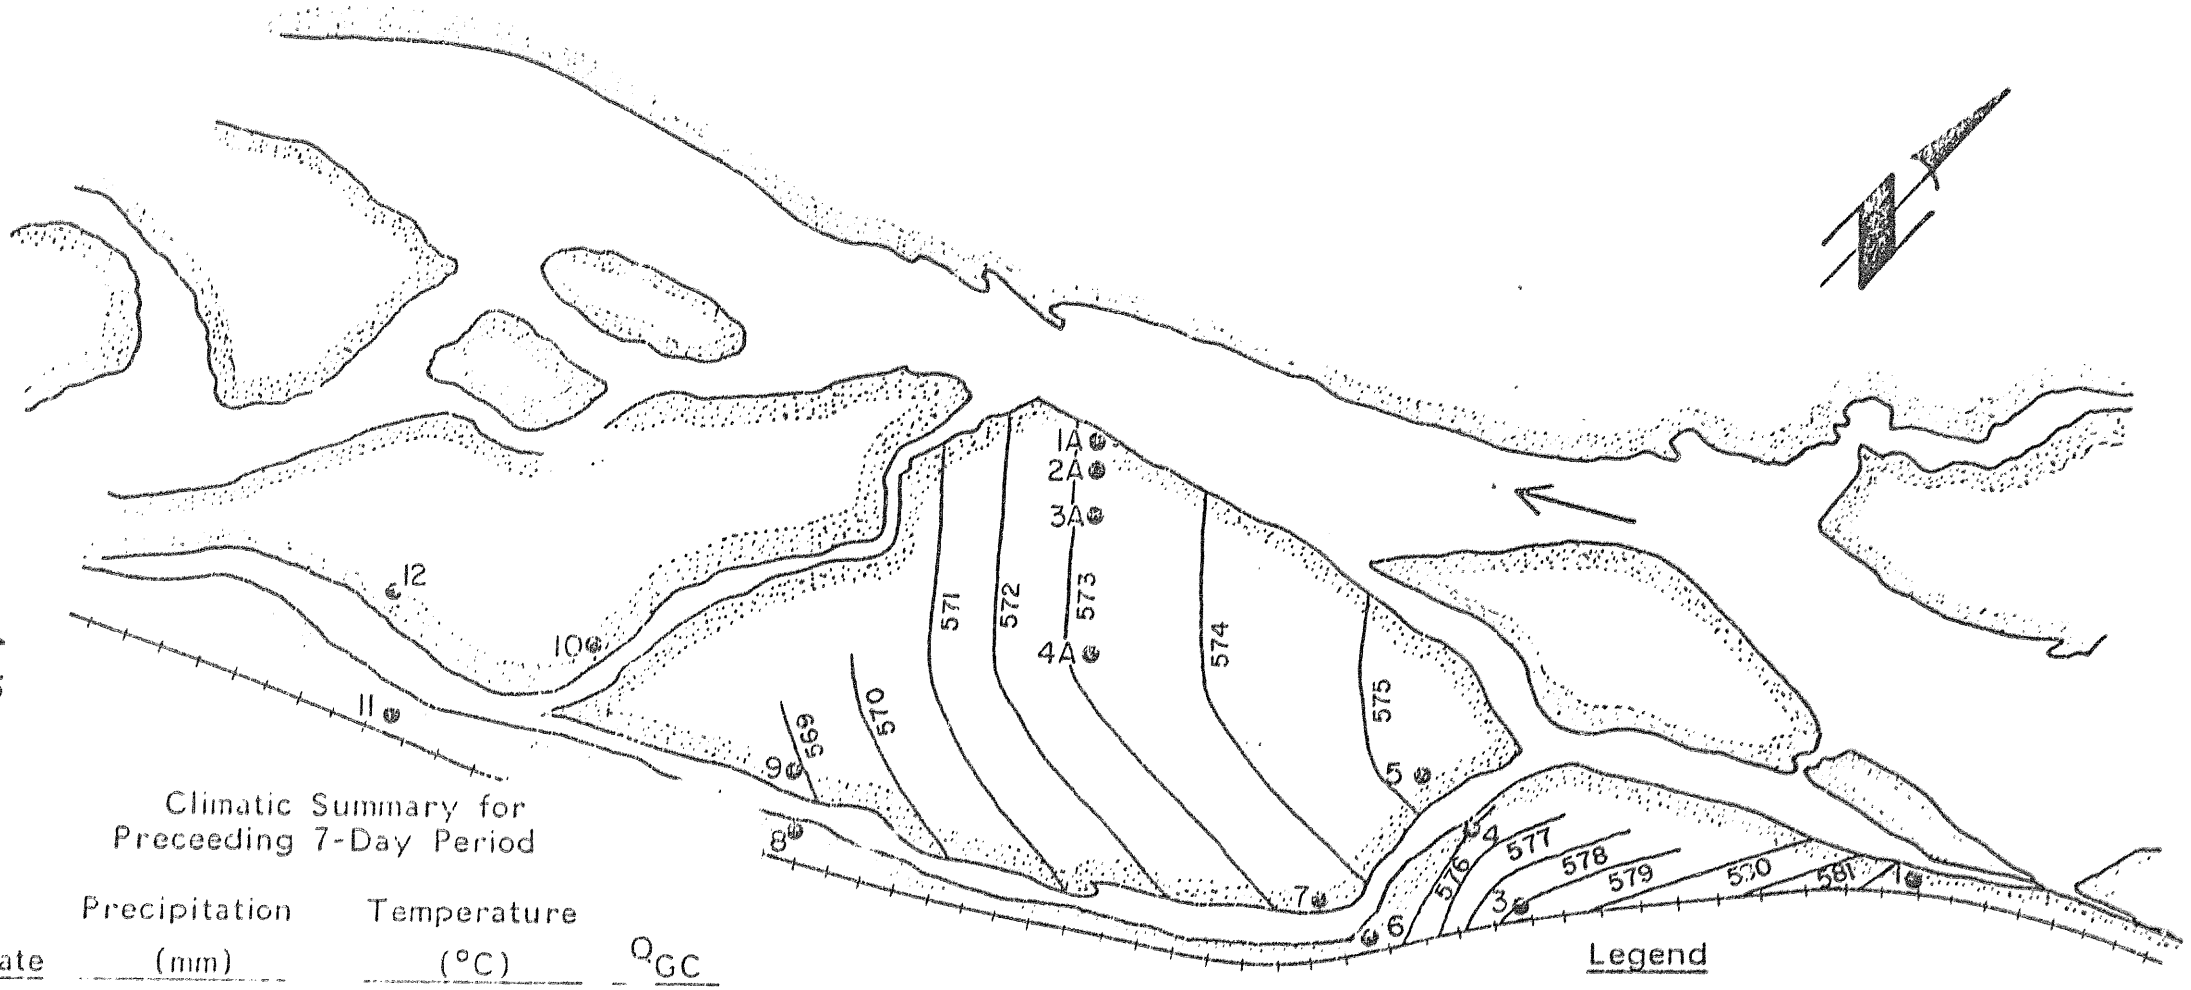


Climatic Summary for Preceeding 7-Day Period

| Date | Precipitation (mm) | Temperature (°C) | $Q_{GC}$ |
|---|---|---|---|
| 9-14 | 19.0 | 8.9 | 20,200 |
| 9-15 | 29.8 | 12.2 | 28,200 |
| 9-16 | 11.2 | 8.6 | 32,500 |
| 9-17 | 9.4 | 5.4 | 32,000 |
| 9-18 | 10.0 | 7.9 | 27,500 |
| 9-19 | 18.6 | 7.7 | 24,100 |
| 9-20 | 6.0 | 7.5 | 24,000 |

Legend

- ● observation well
- "600" groundwater elevation


Date: 9-20-82

$Q_{GC}$: 24,000

Source: R & M (1982g)

**FIG. 4.10** **GROUNDWATER CONTOURS SUSITNA RIVER AT SLOUGH 8A**

SCALE: 1"=1000'

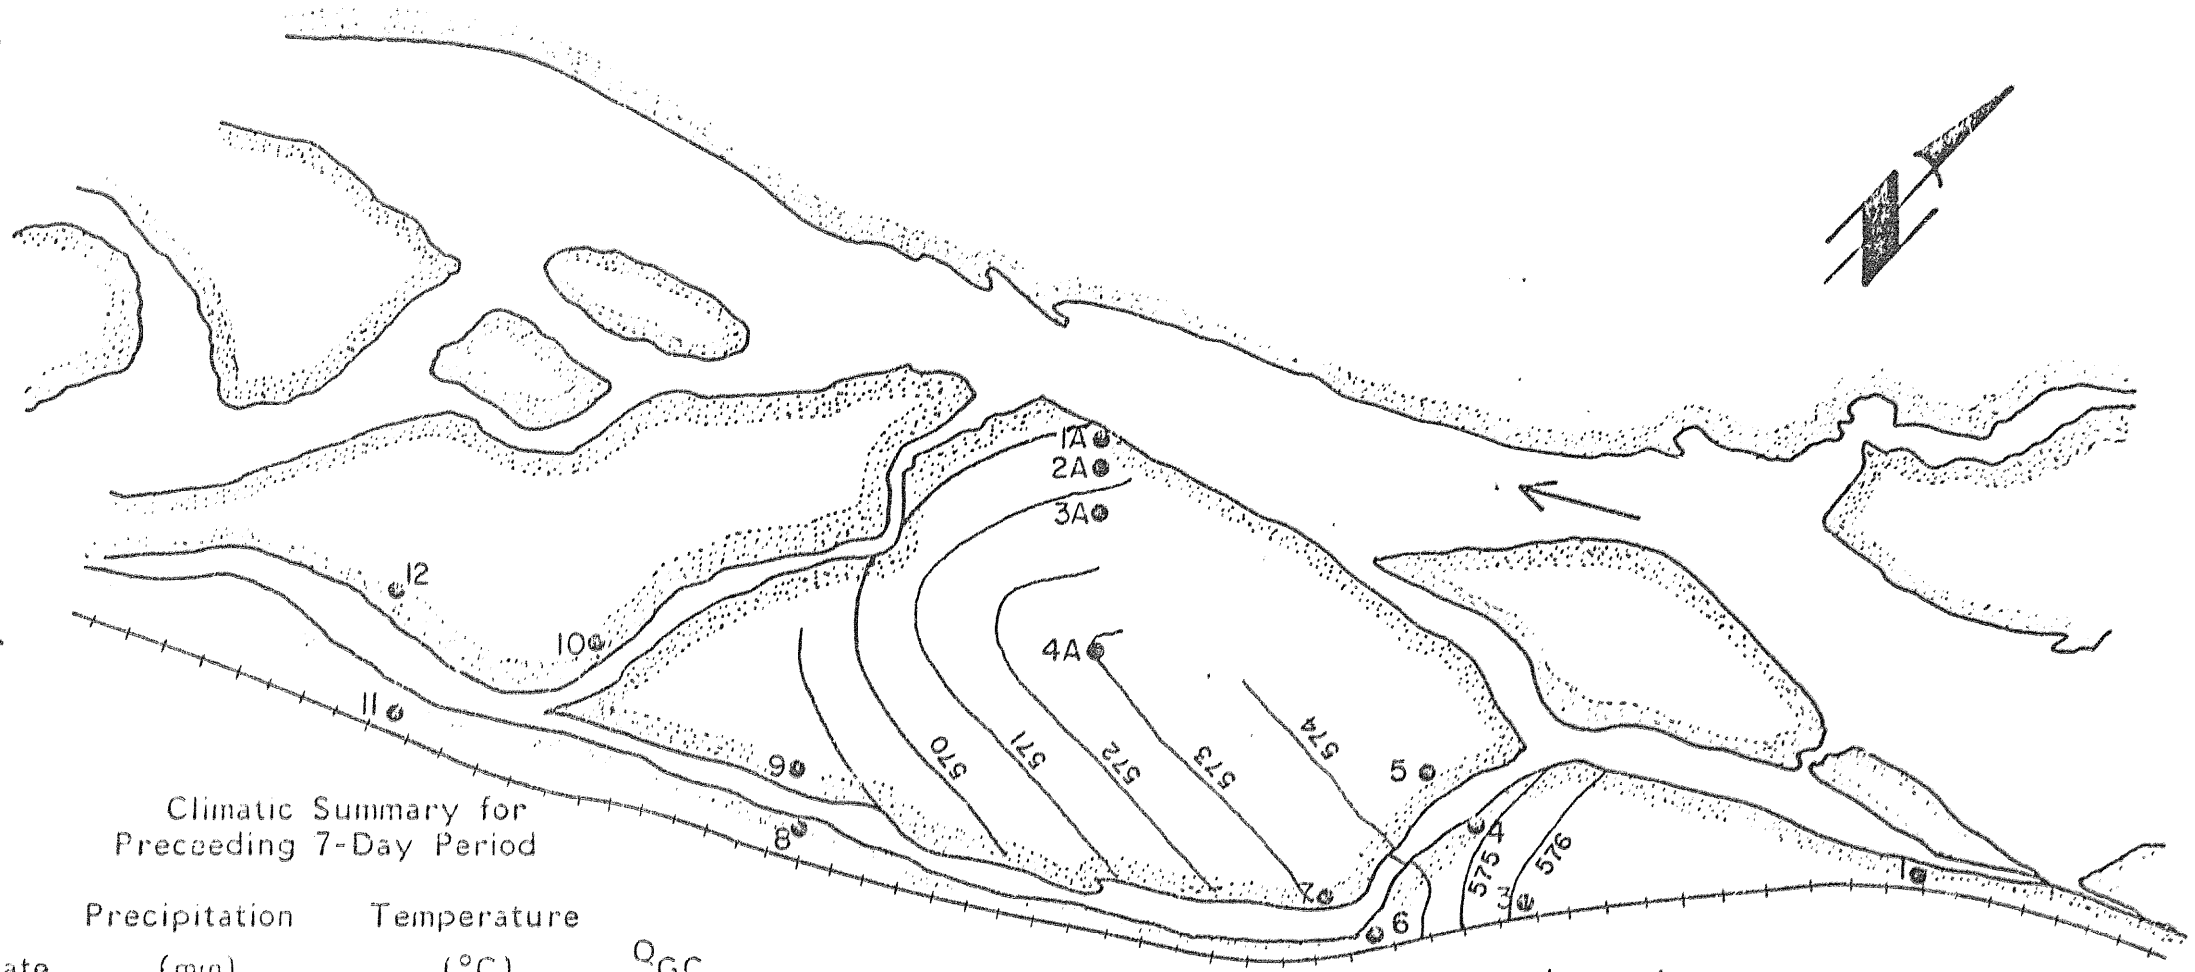


Climatic Summary for Preceeding 7-Day Period

| Date | Precipitation (mm) | Temperature (°C) | $Q_{GC}$ |
|---|---|---|---|
| 9-29 | 7.4 | 6.0 | 12,400 |
| 9-30 | 8.4 | 4.9 | 12,500 |
| 10-1 | - | 2.2 | 12,400 |
| 10-2 | - | 3.3 | 11,700 |
| 10-3 | - | 2.8 | 11,000 |
| 10-4 | - | 1.3 | 10,500 |
| 10-5 | - | 0.1 | 9,800 |

Legend

- ● observation well
- "600" groundwater elevation


Date: 10-5-82

$Q_{GC}$: 8,300

Source: R & M (1982g)

**FIG. 4.11**

**GROUNDWATER CONTOURS**
**SUSITNA RIVER AT SLOUGH 8A**
SCALE: 1"= 1000'

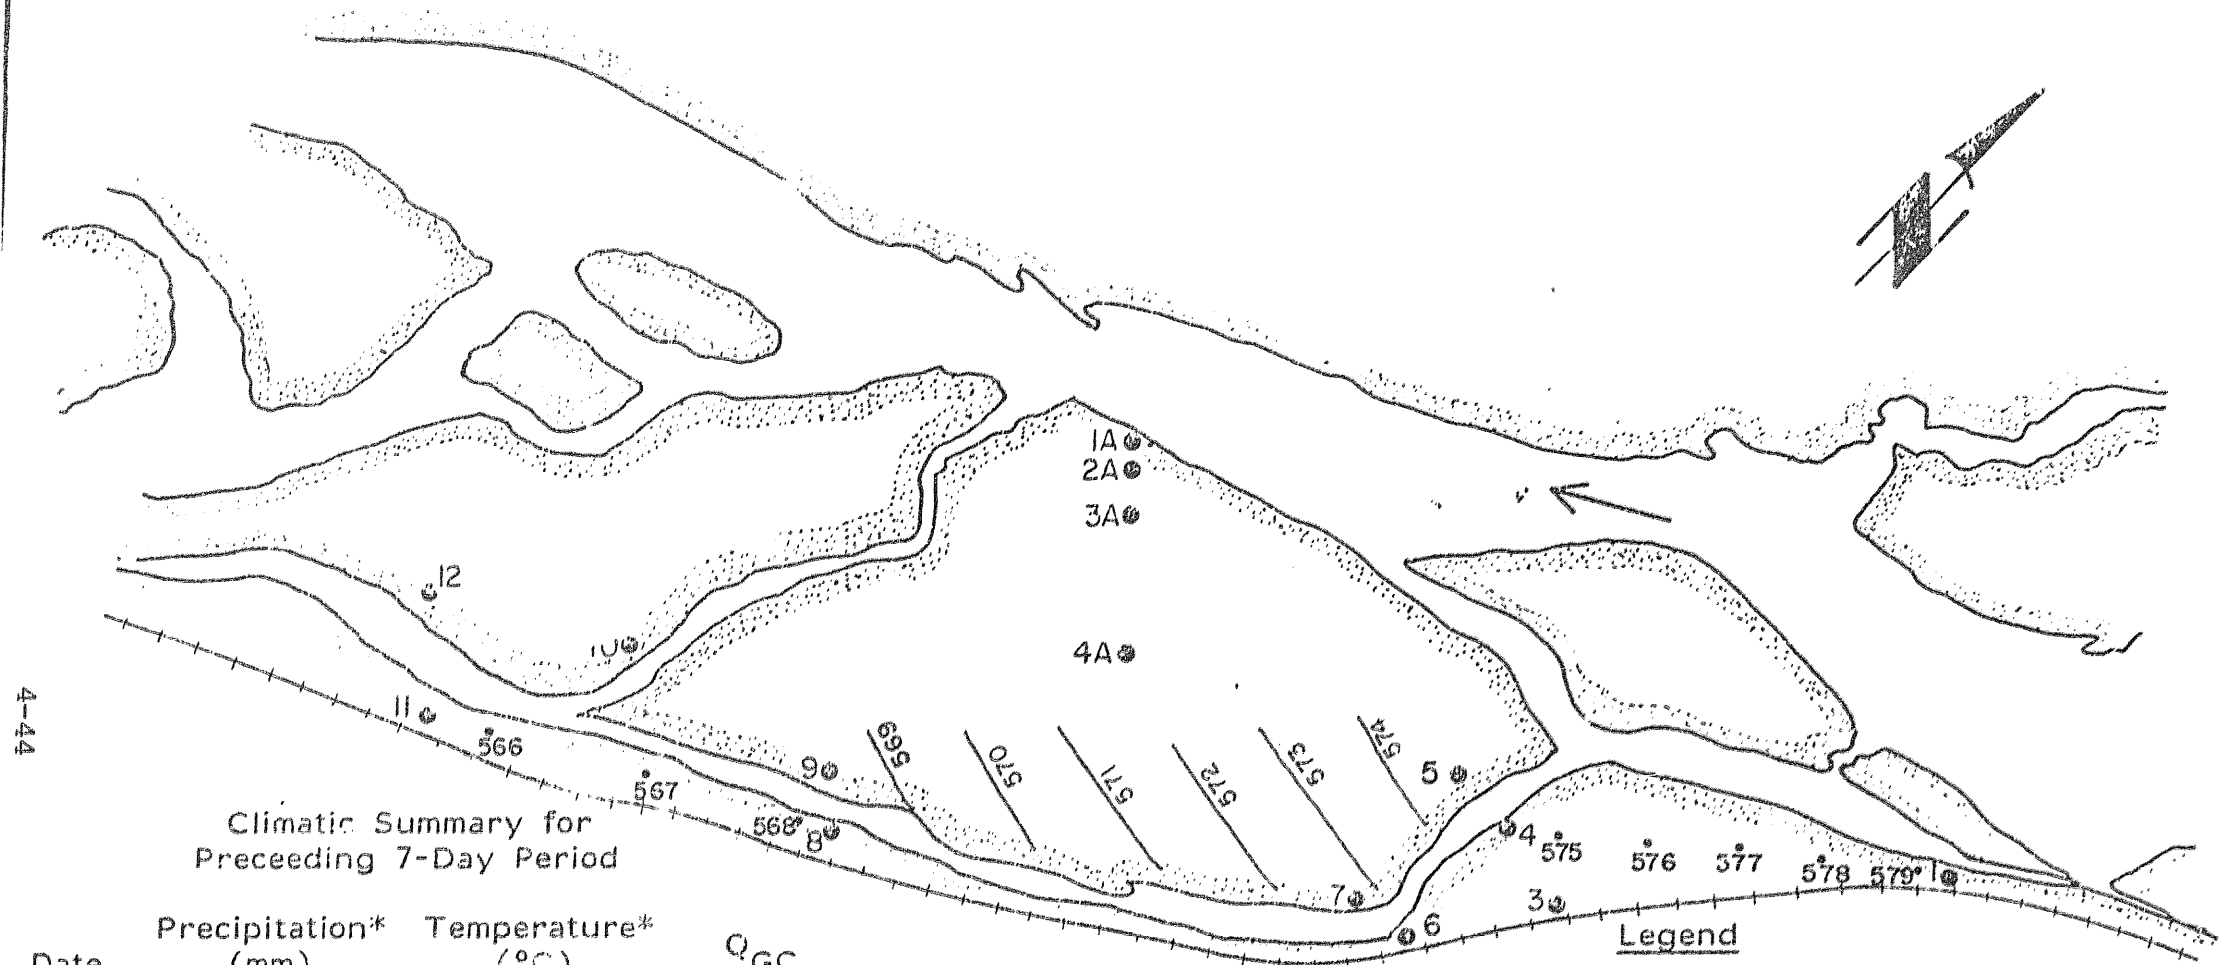


Climatic Summary for Preceeding 7-Day Period

| Date | Precipitation* (mm) | Temperature* (°C) | $Q_{GC}$ |
|---|---|---|---|
| 4-20 | 7.0 | 1.7 | Ice cover |
| 4-21 | 0.0 | 1.5 | Ice cover |
| 4-22 | 0.0 | 1.2 | Ice cover |
| 4-23 | 0.0 | 0.1 | Ice cover |
| 4-24 | 1.6 | 1.1 | Ice cover |
| 4-25 | 0.0 | 4.4 | Ice cover |
| 4-26 | 0.0 | 1.0 | Ice cover |

* Precip. and temp. data from Devil Canyon Climate Stations.

Legend

o observation well

"600" groundwater elevation


Date: 4-26-82

$Q_{GC}$: Ice Cover

Source: R & M (1982g)

**FIG. 4.12** **GROUNDWATER CONTOURS SUSITNA RIVER AT SLOUGH 8A**

SCALE: 1"= 1000'

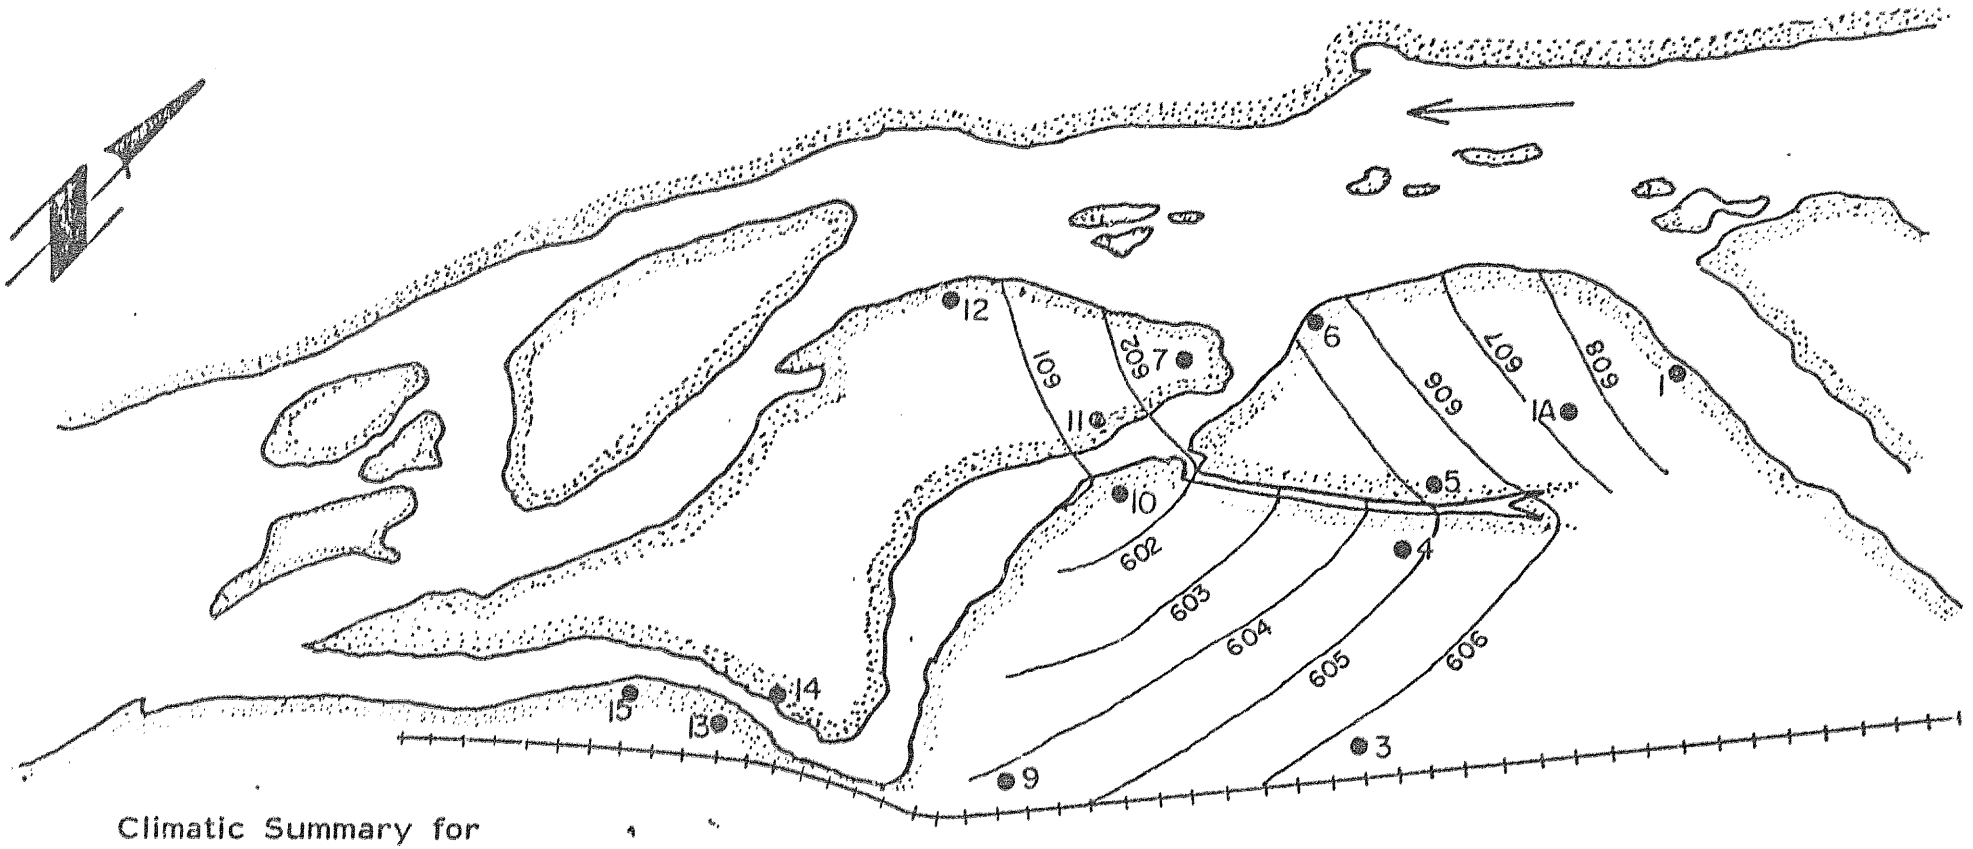


Climatic Summary for
Preceeding 7-Day Period

| Date | Precipitation (mm) | Temperature (°C) | $Q_{GC}$ |
|---|---|---|---|
| 6-25 | 2.0 | 16.5 | 25,000 |
| 6-26 | 0.0 | 15.9 | - |
| 6-27 | 0.0 | 14.9 | - |
| 6-28 | 0.8 | 12.7 | - |
| 6-29 | 0.0 | 13.0 | 27,000 |
| 6-30 | 9.2 | 13.6 | 24,000 |
| 7-1 | 1.6 | 10.1 | 25,000 |

Legend

- ● observation well
- "600" groundwater elevation


Date: 7-1-82

$Q_{GC}$: 25,000

Source: R & M (1982g)

**FIG 4.13**

**GROUNDWATER CONTOURS**
**SUSITNA RIVER AT SLOUGH 9**
SCALE: 1" = 1000'

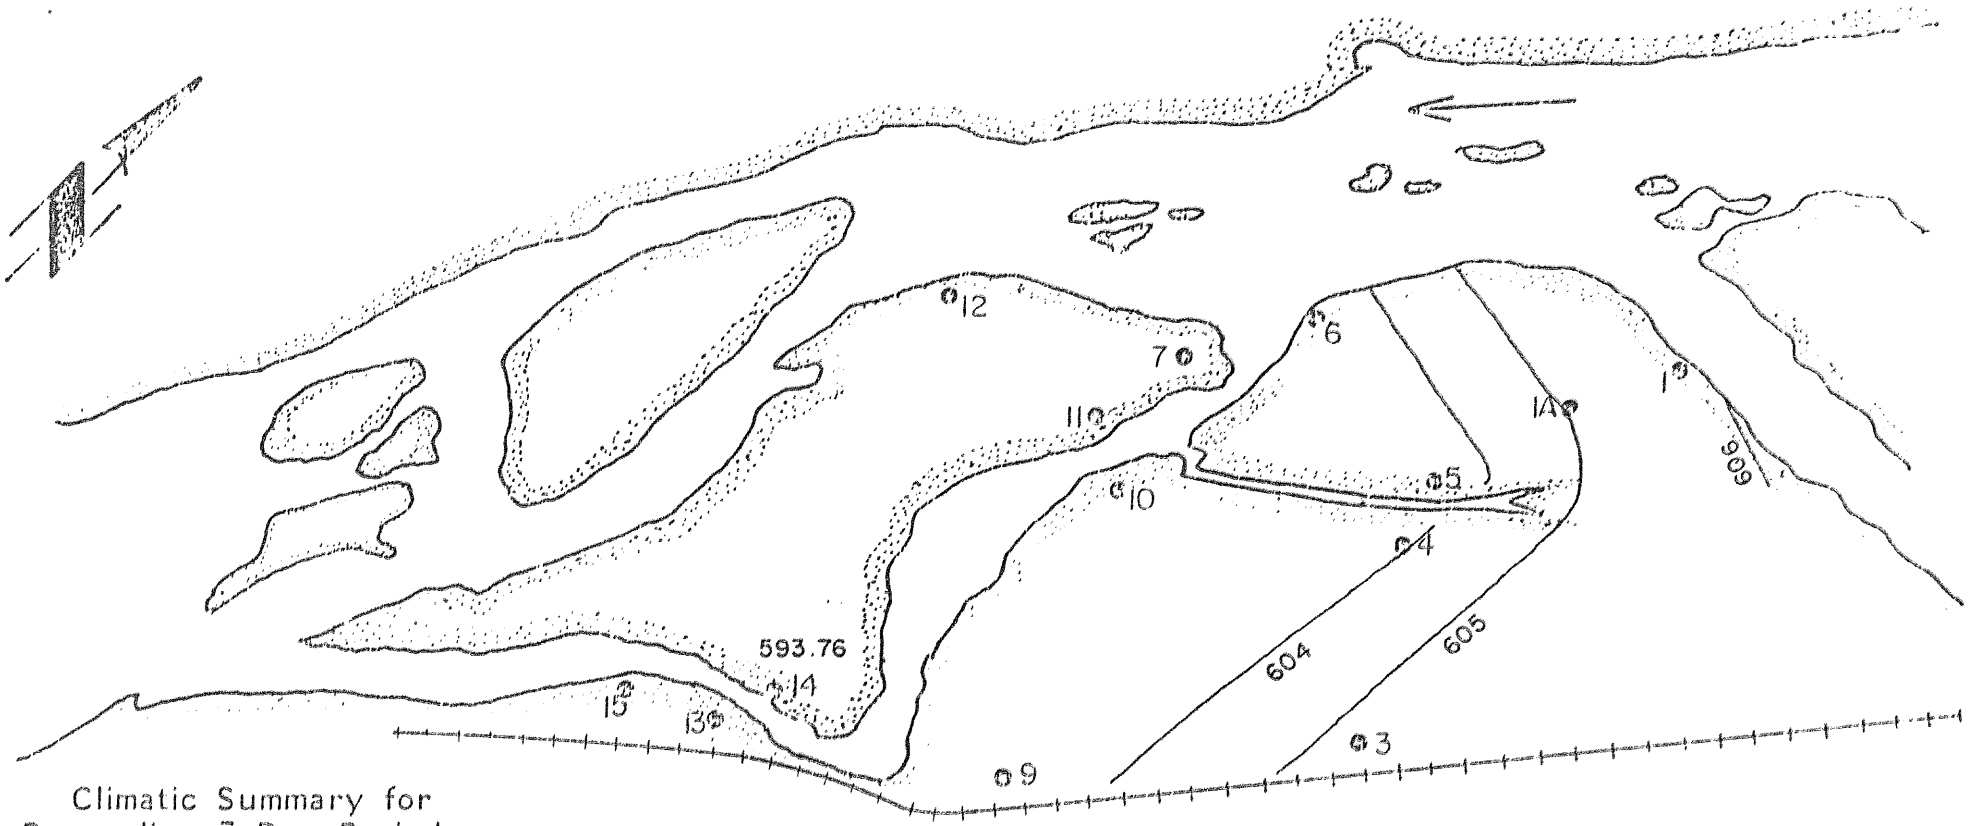


Climatic Summary for
Preceeding 7-Day Period

| Date | Precipitation (mm) | Temperature (°C) | $Q_{GC}$ |
|---|---|---|---|
| 10-1 | - | 2.2 | 12,400 |
| 10-2 | - | 3.3 | 11,700 |
| 10-3 | - | 2.8 | 11,000 |
| 10-4 | - | 1.3 | 10,500 |
| 10-5 | - | 0.1 | 9,800 |
| 10-6 | - | 2.3 | 8,960 |
| 10-7 | - | 0.5 | 8,480 |

Legend

| | |
|---|---|
| ● | observation well |
| "600" | groundwater elevation |


Date: 10-7-82

$Q_{GC}$: 8,480

Source: R & M (1982g)

**FIG. 4.14**

**GROUNDWATER CONTOURS**
**SUSITNA RIVER AT SLOUGH 9**
SCALE: 1"= 1000'

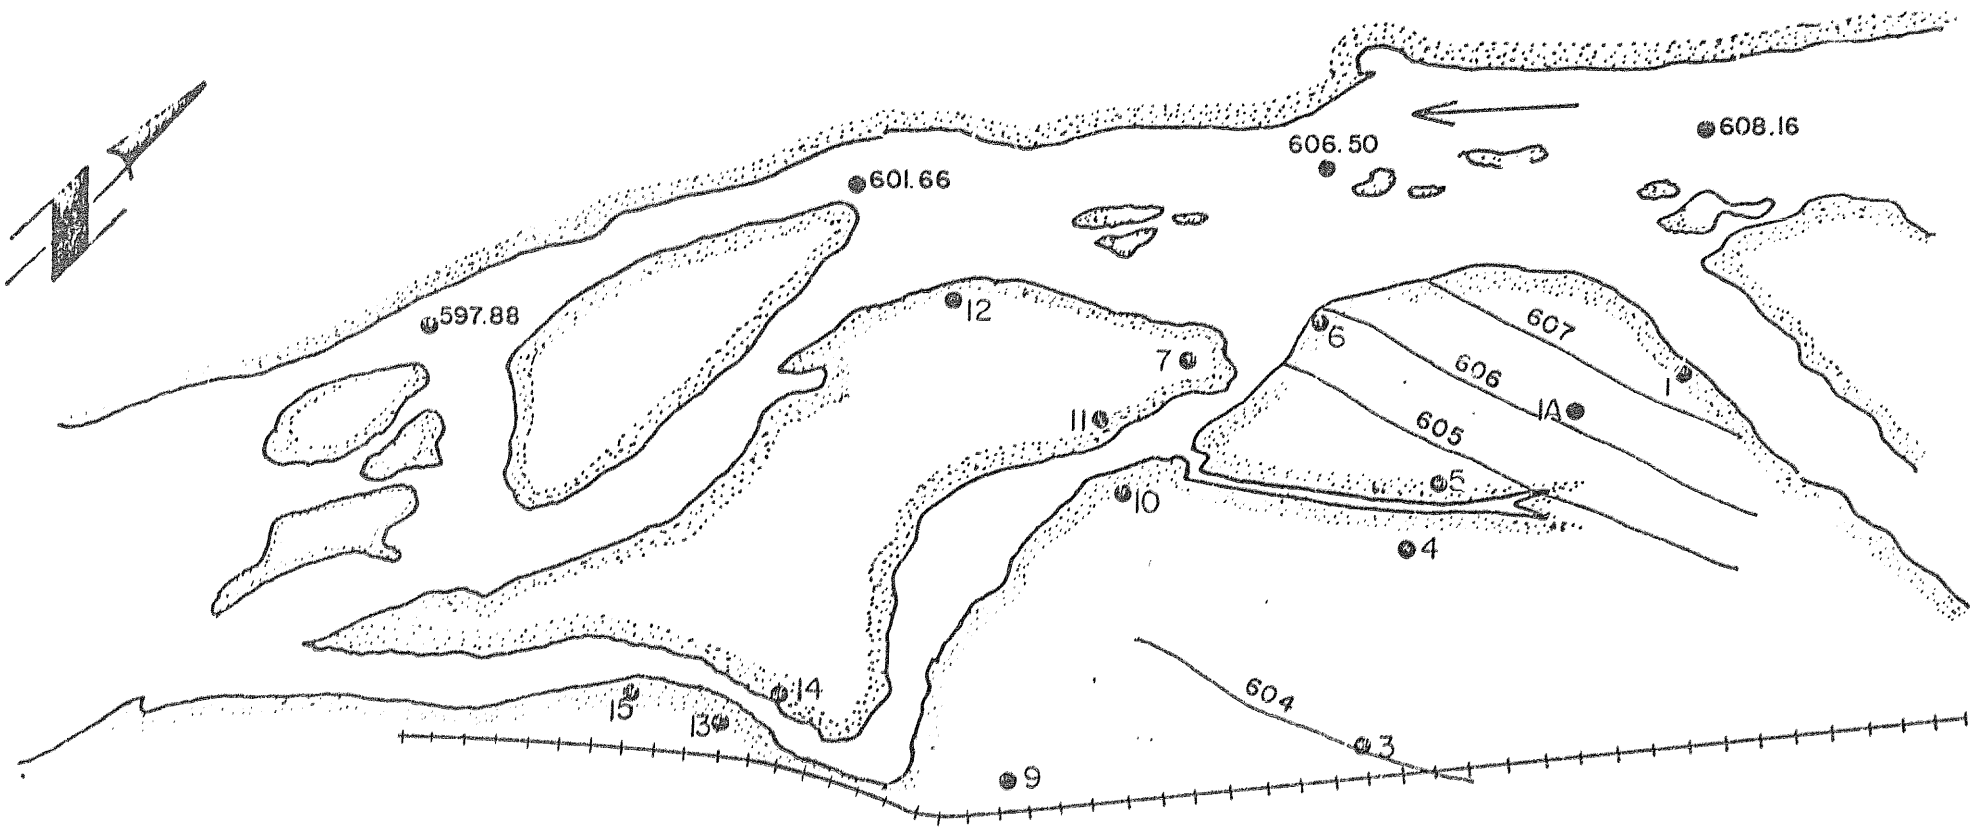


Date: 12-22-82

Note: Winter flow, Ice cover on mainstem

Legend

● observation well

"600" groundwater elevation

Source: R & M (1982g)

**FIG. 4.15** **GROUNDWATER CONTOURS SUSITNA RIVER AT SLOUGH 9**


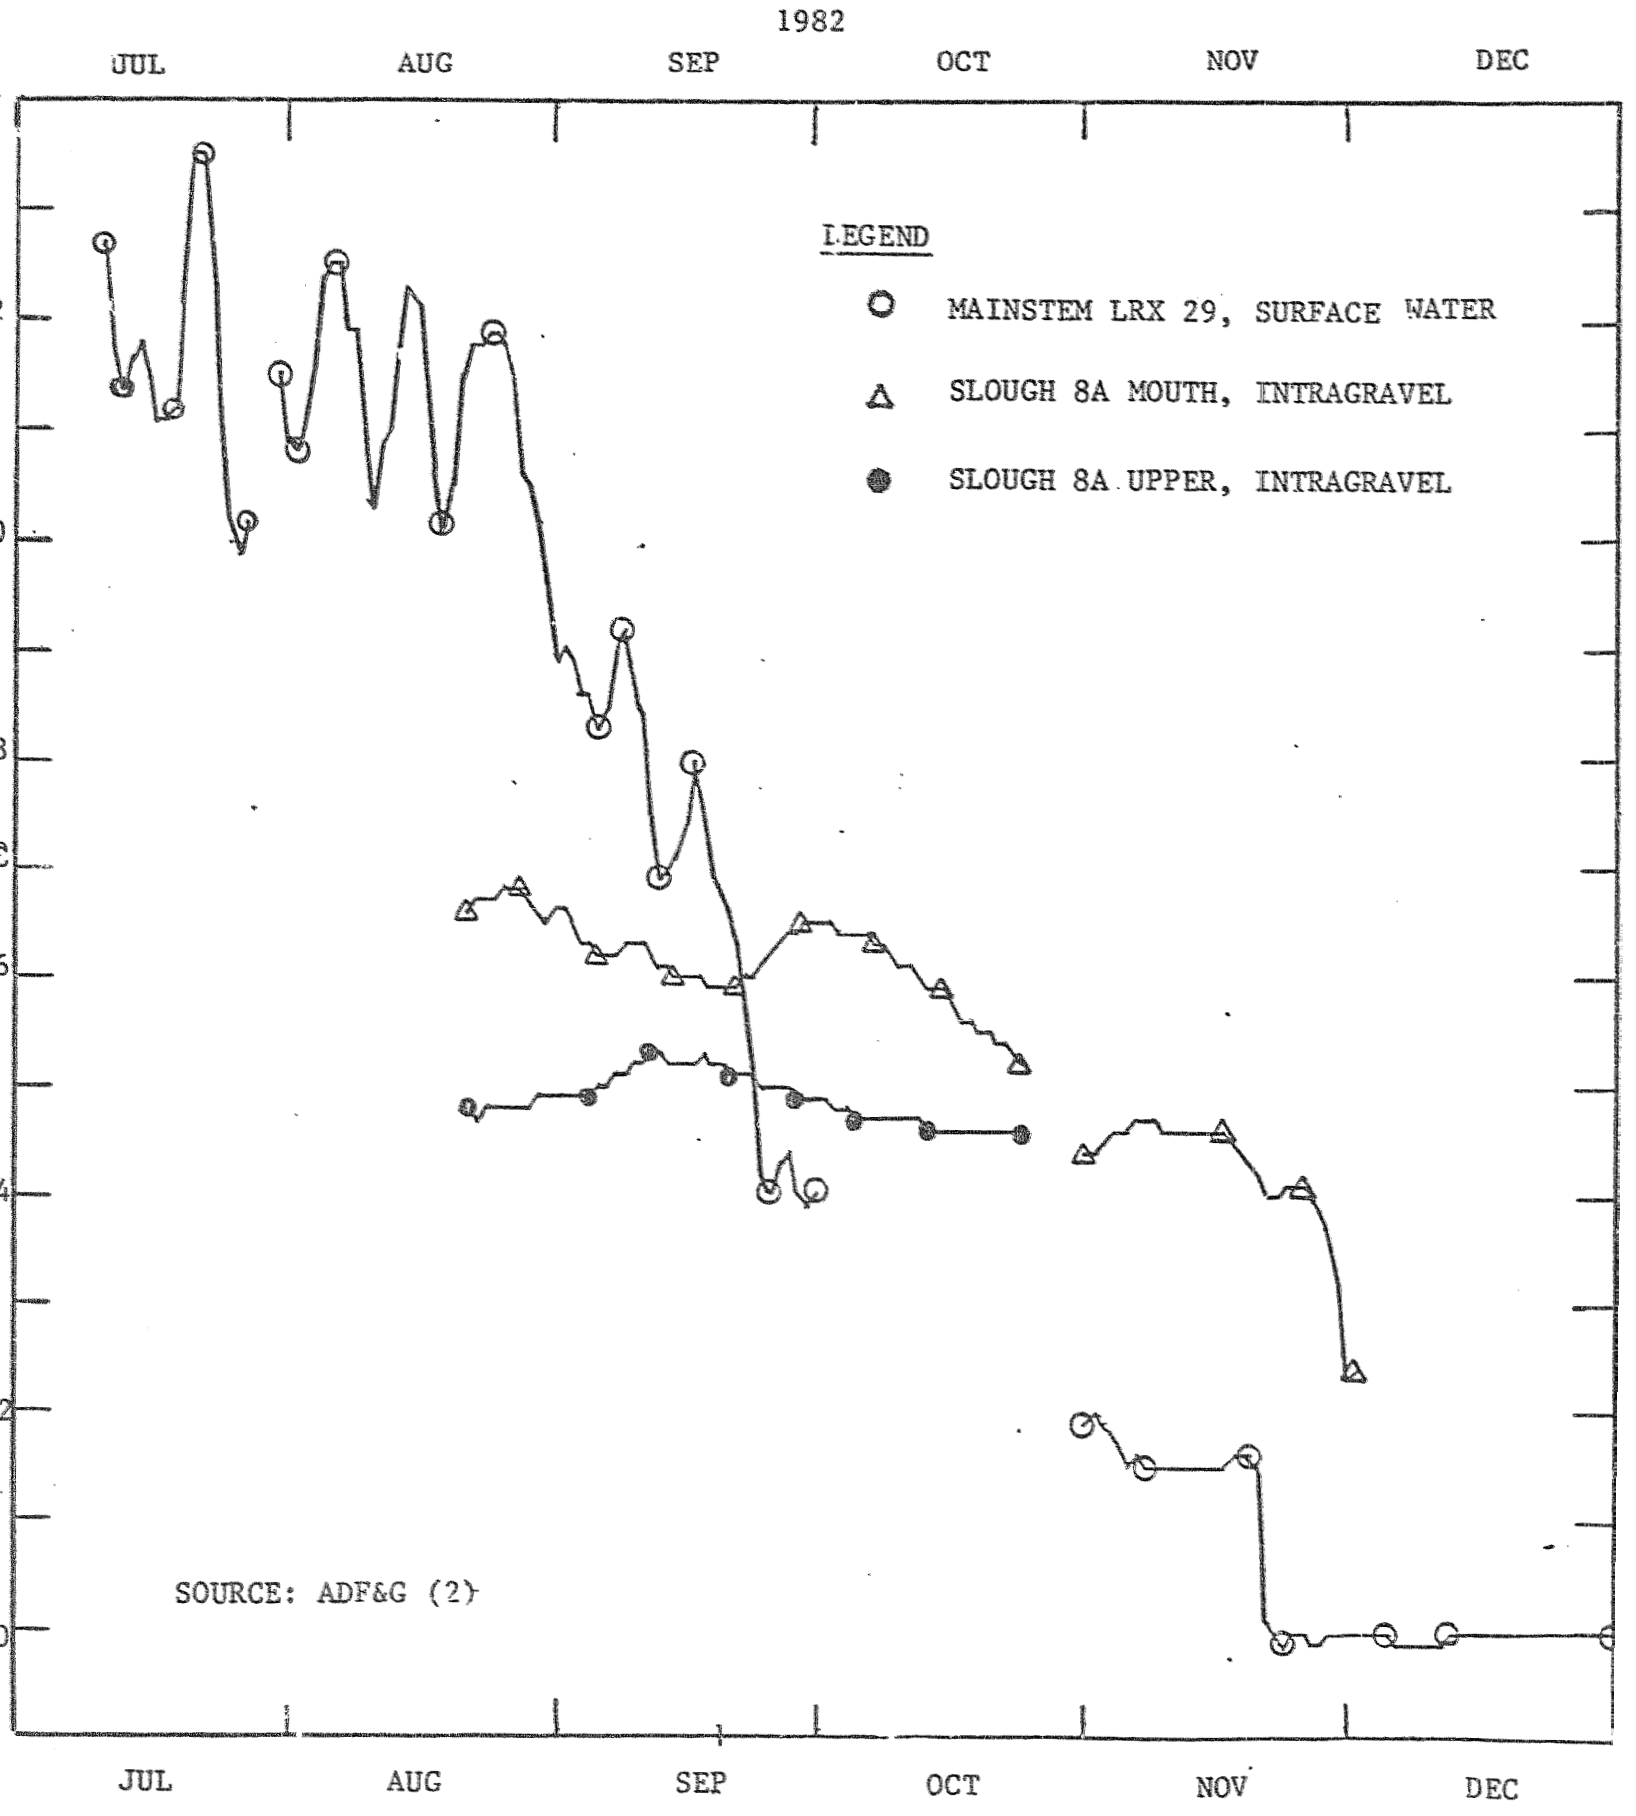



FIGURE 4.16 SLOUGH 8A WATER TEMPERATURES, 1982.

(Figure reproduced from APA (1984b).)

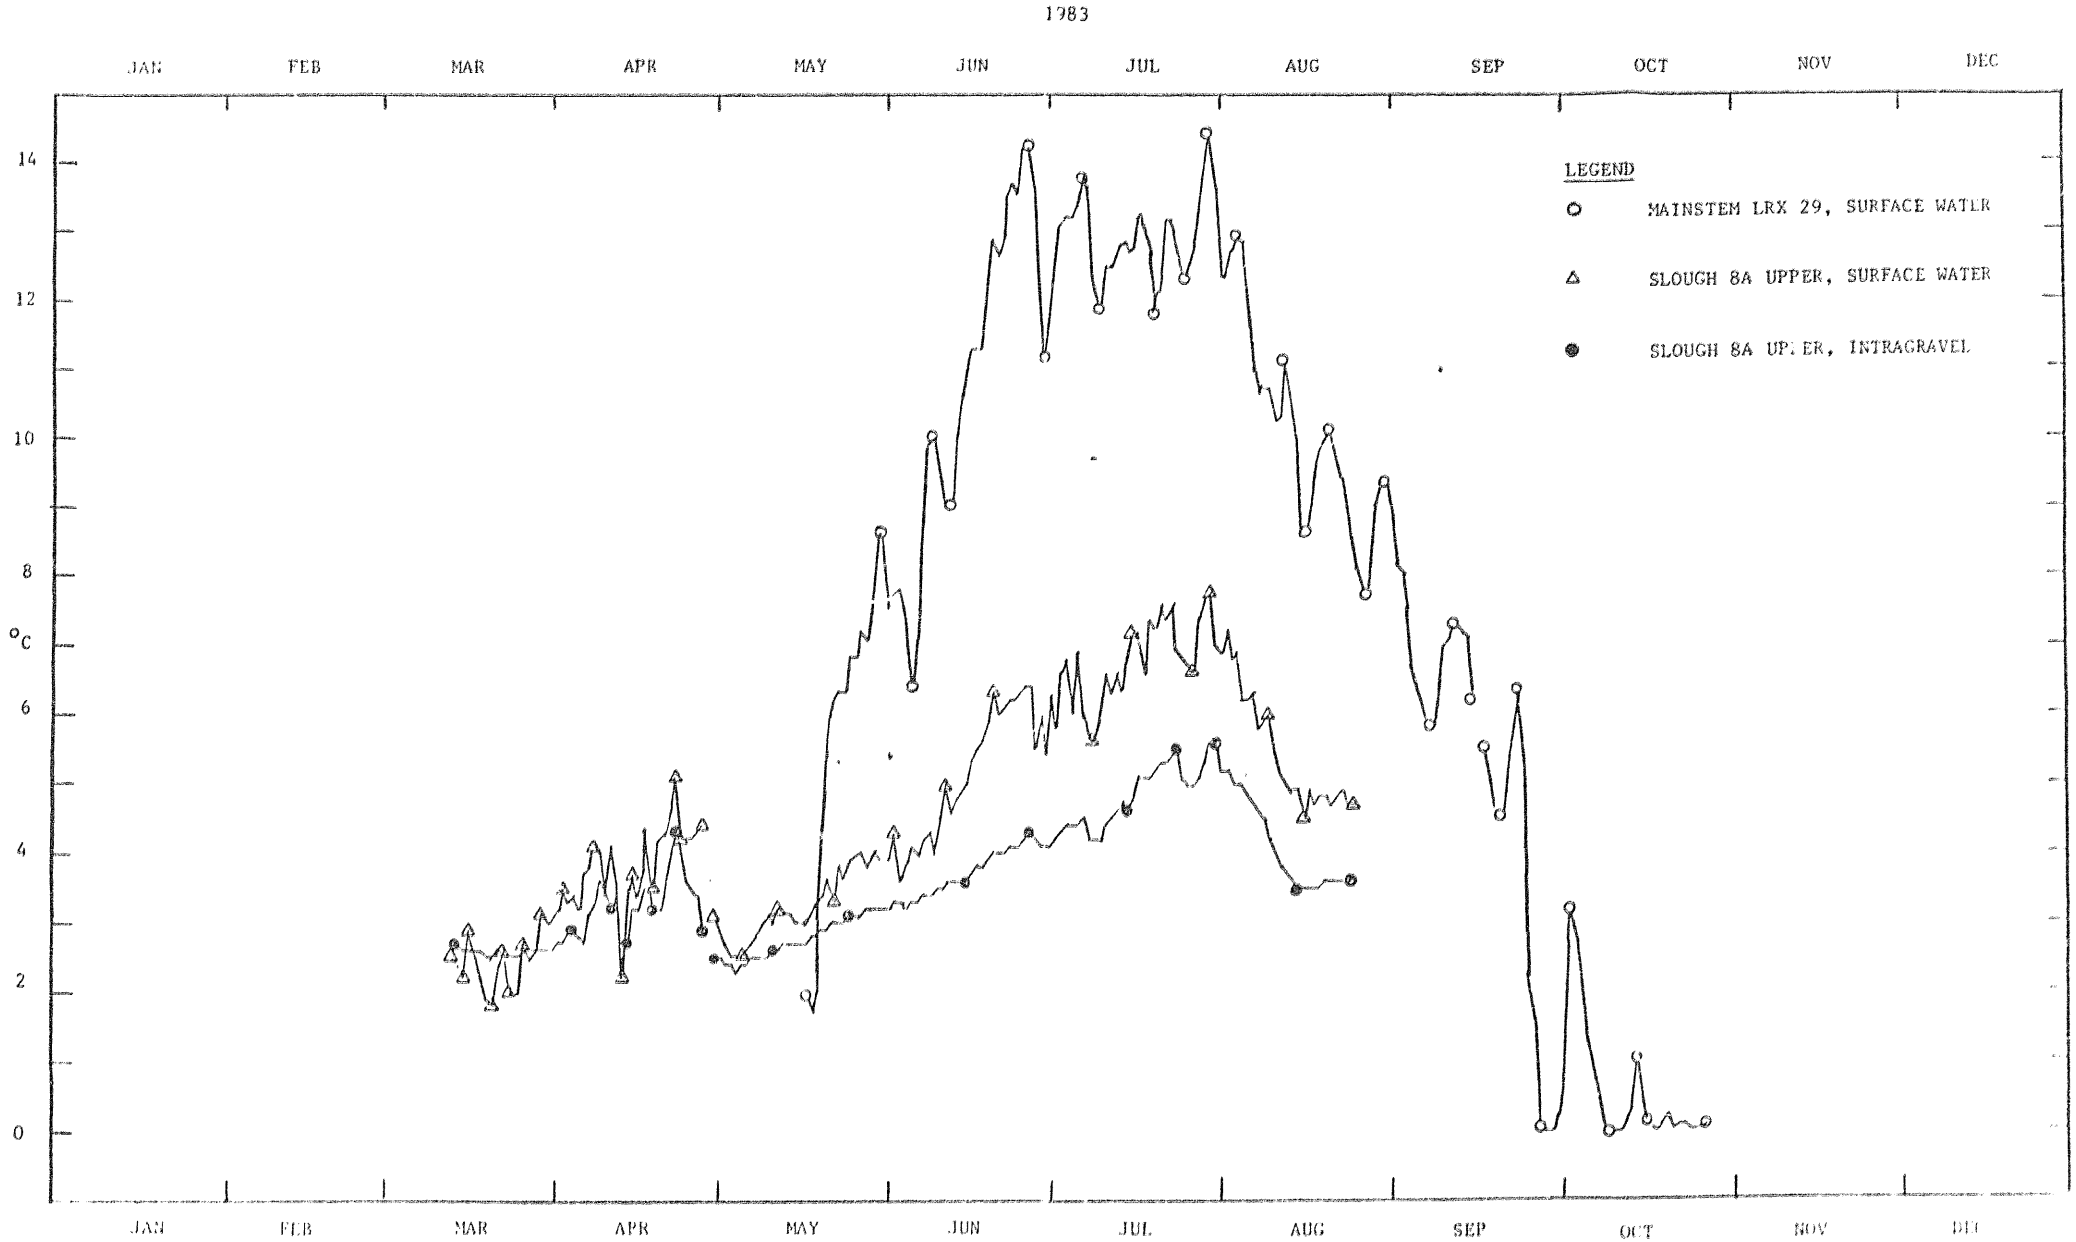


SOURCES: ADF&G (3)
ADF&G PROVISIONAL 1983 DATA } as presented in APA (1984b)

FIGURE 4.17 SLOUGH 8A WATER TEMPERATURES, 1983


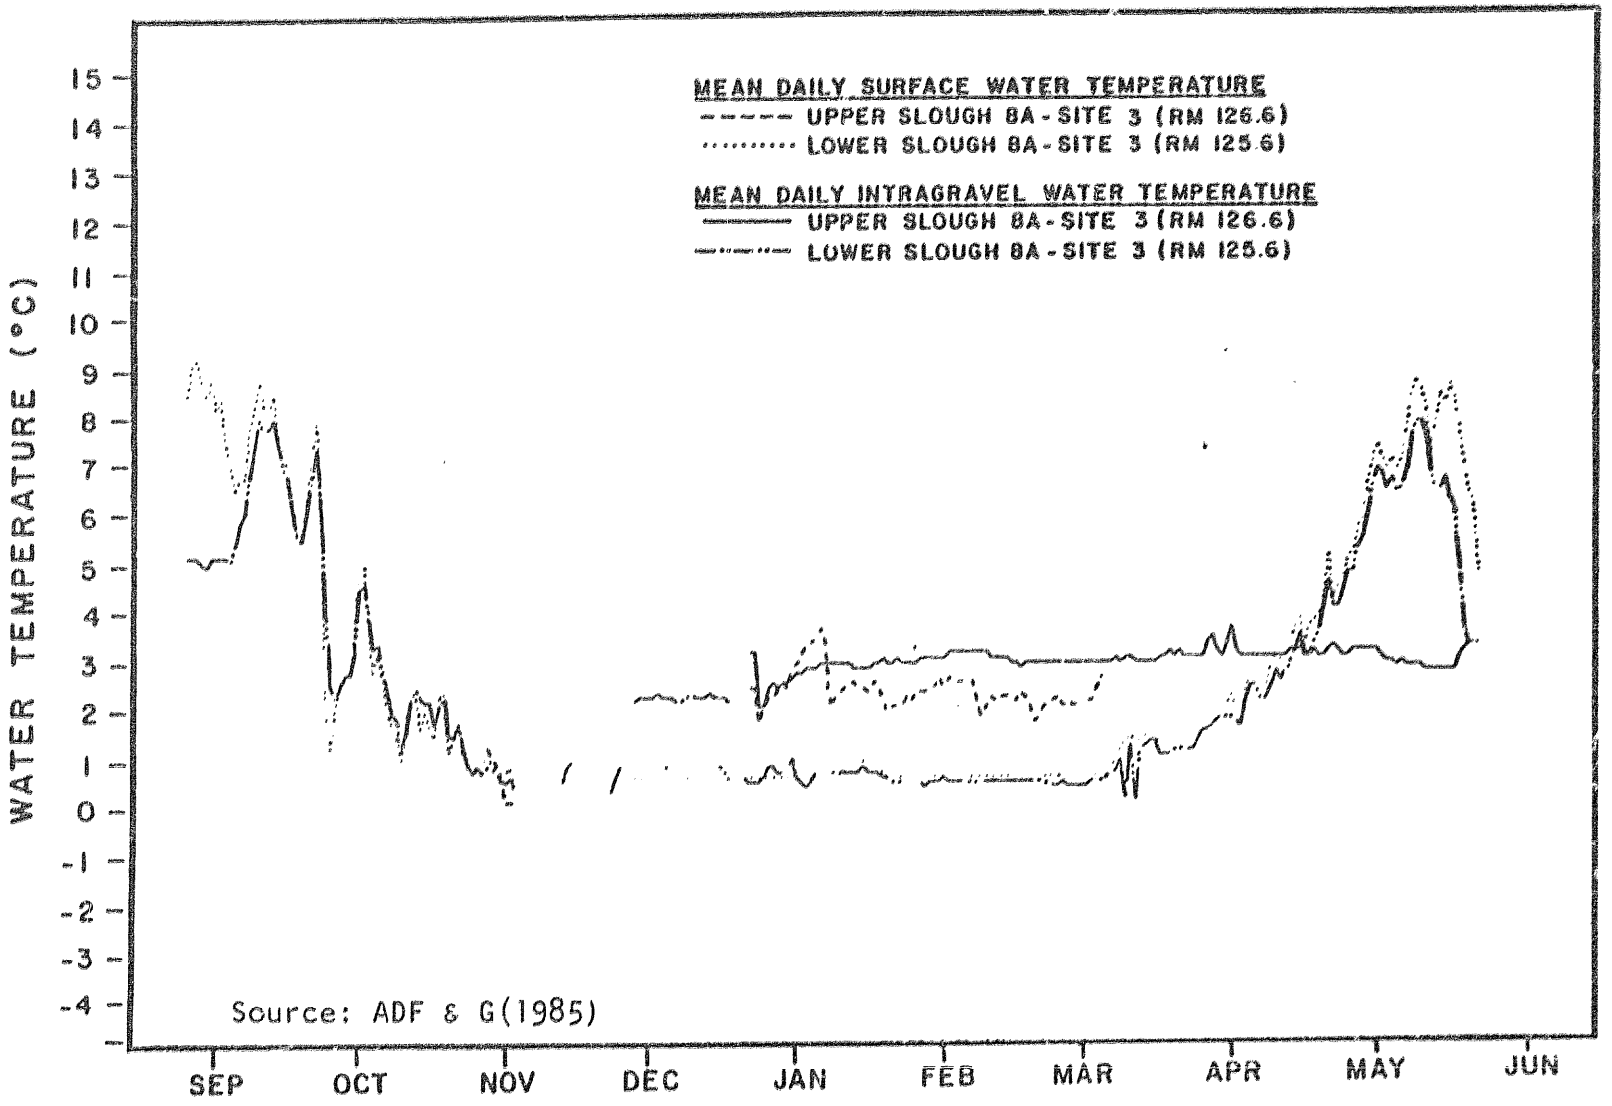



Figure 4.18 Mean daily surface and intragravel water temperatures recorded at Lower Slough 8A - Site 3 (RM 125.6) and Upper Slough 8A - Site 3 (RM 126.6) during the 1983-84 winter season.

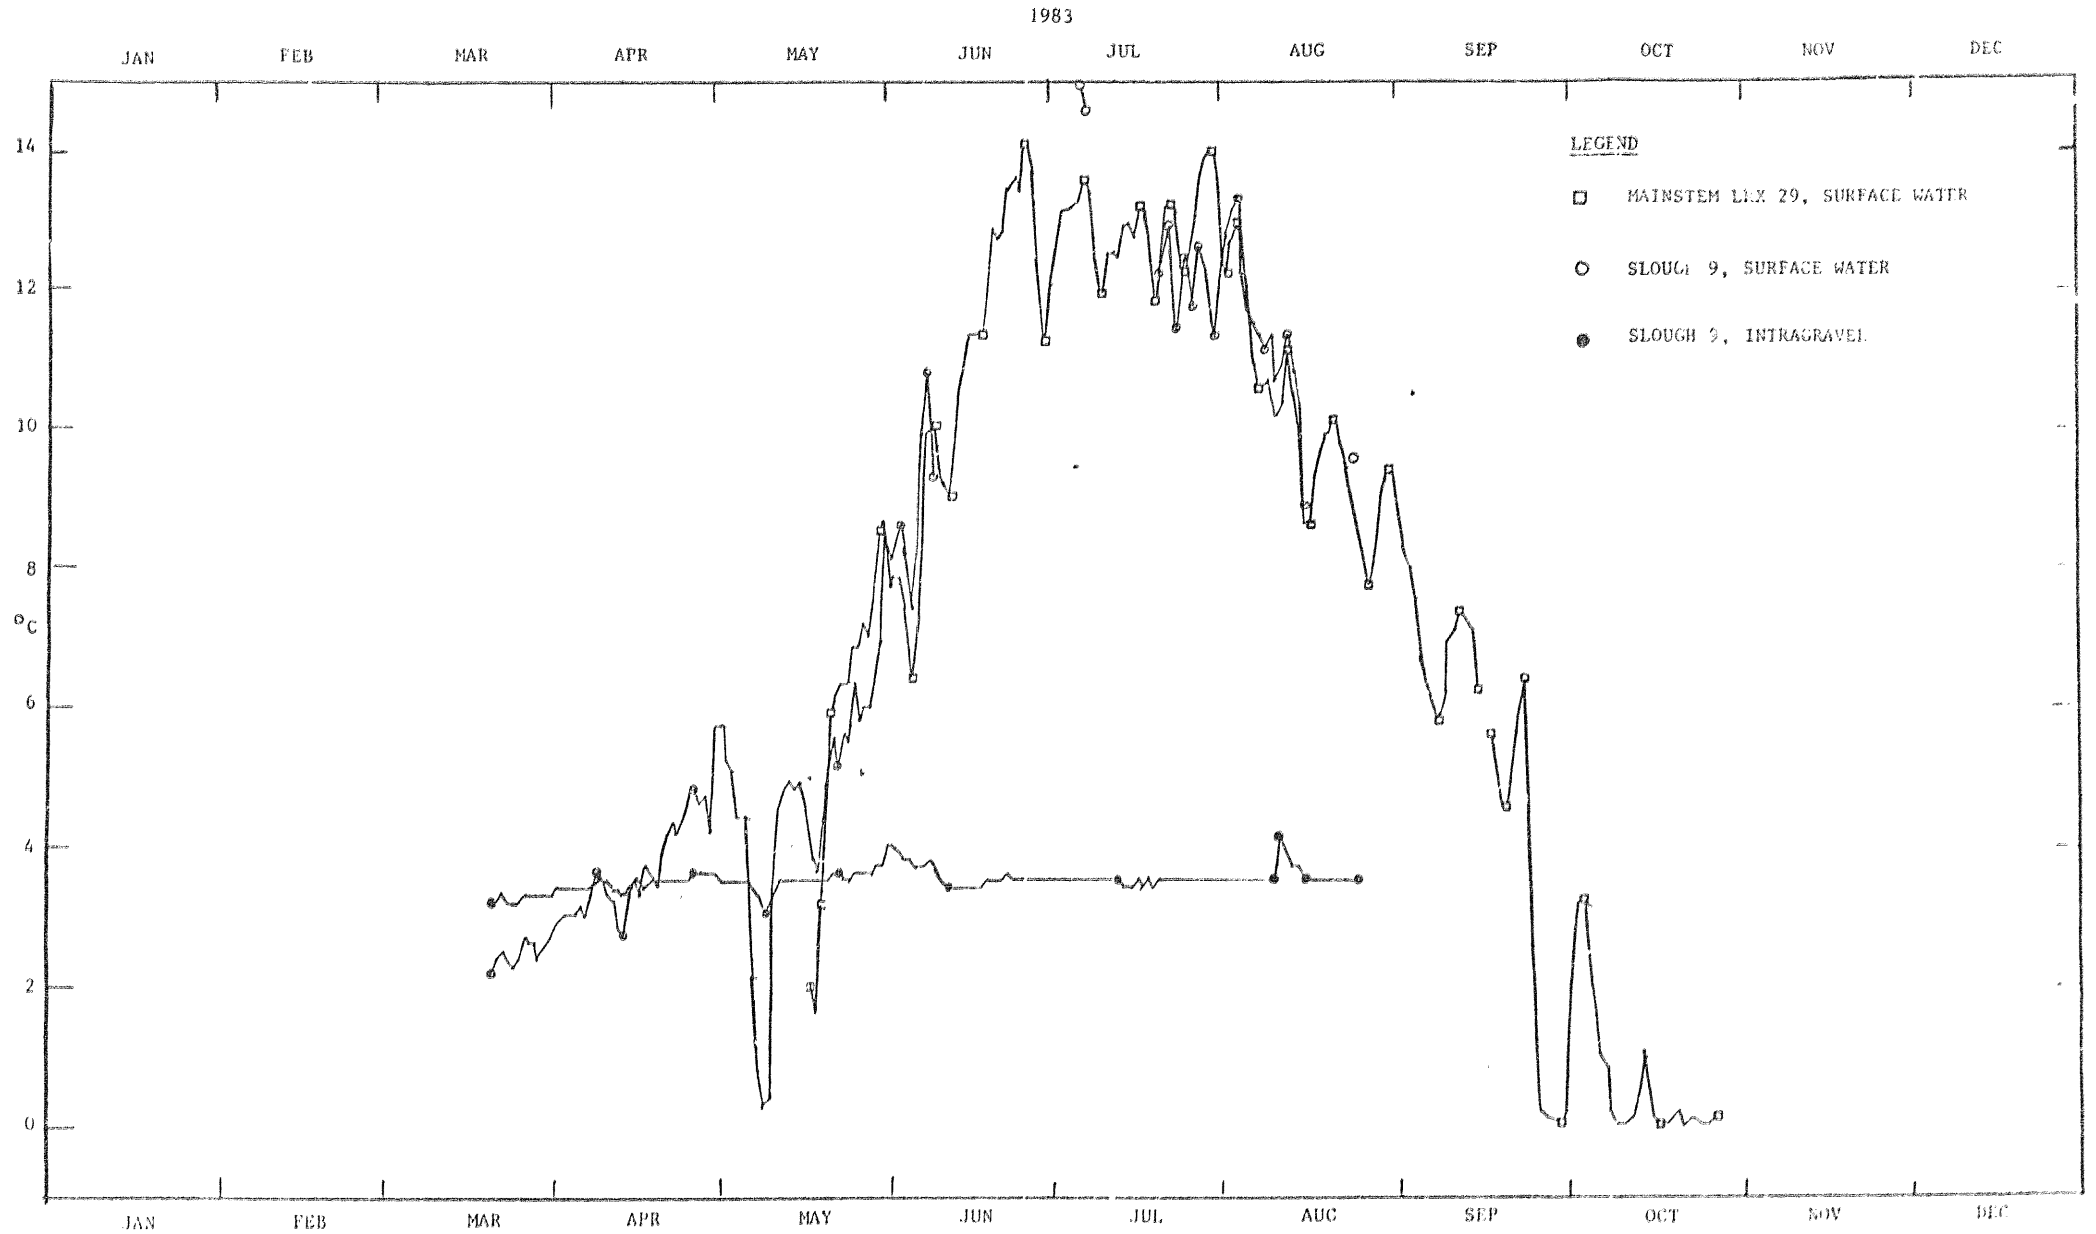


SOURCES: ADF&G (3)
ADF&C PROVISIONAL 1983 DATA
} as presented in APA (1984b)

FIGURE 4.19 SLOUGH 9 WATER TEMPERATURES, 1983


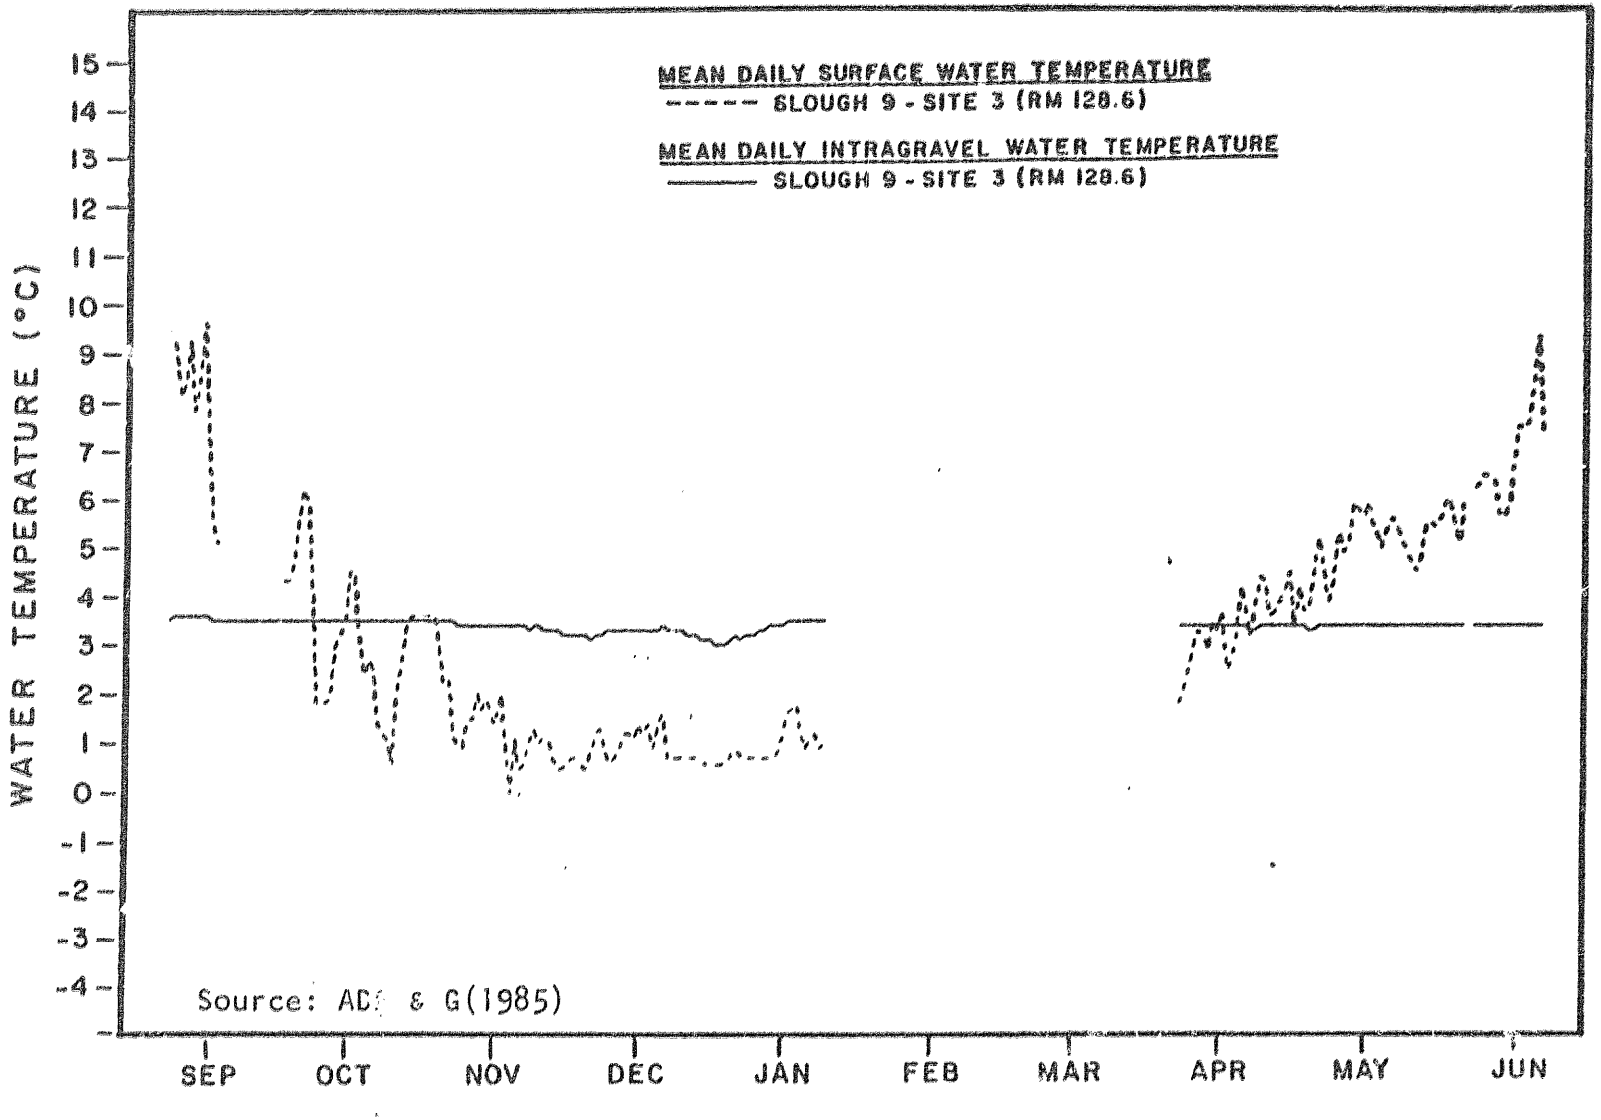




Figure 4.20 Mean daily surface and intragravel water temperatures recorded at Slough 9 - Site 3 (RM 128.6) during the 1983-84 winter season.

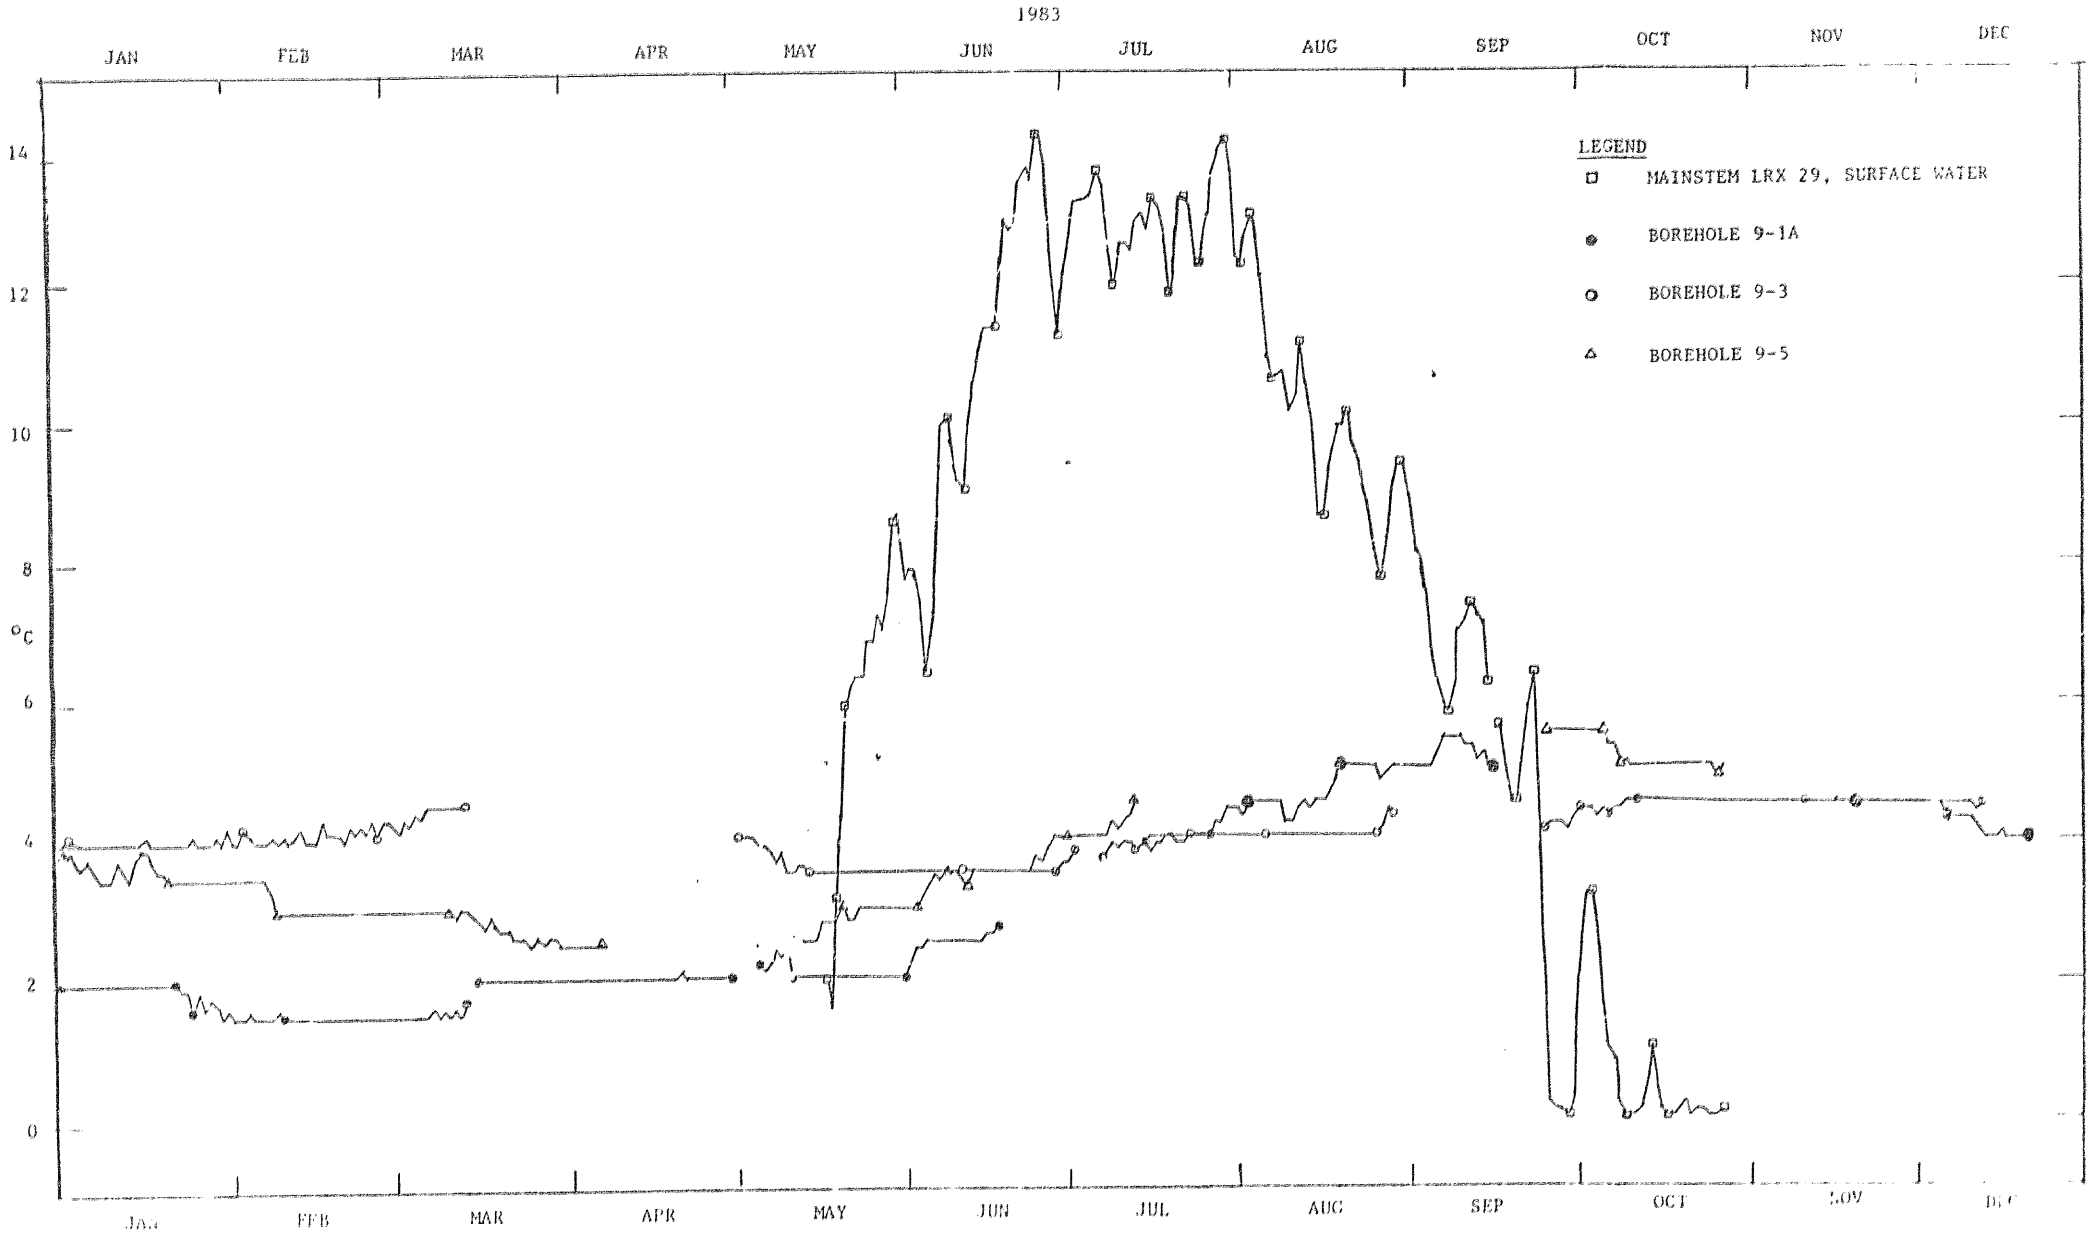


SOURCES: ADFSG (A)
ADFSG PROVISIONAL 1983 DATA
P.E. CONSULTANTS PROVISIONAL 1983 DATA


} as presented in APA (1984b)

FIGURE 4.21

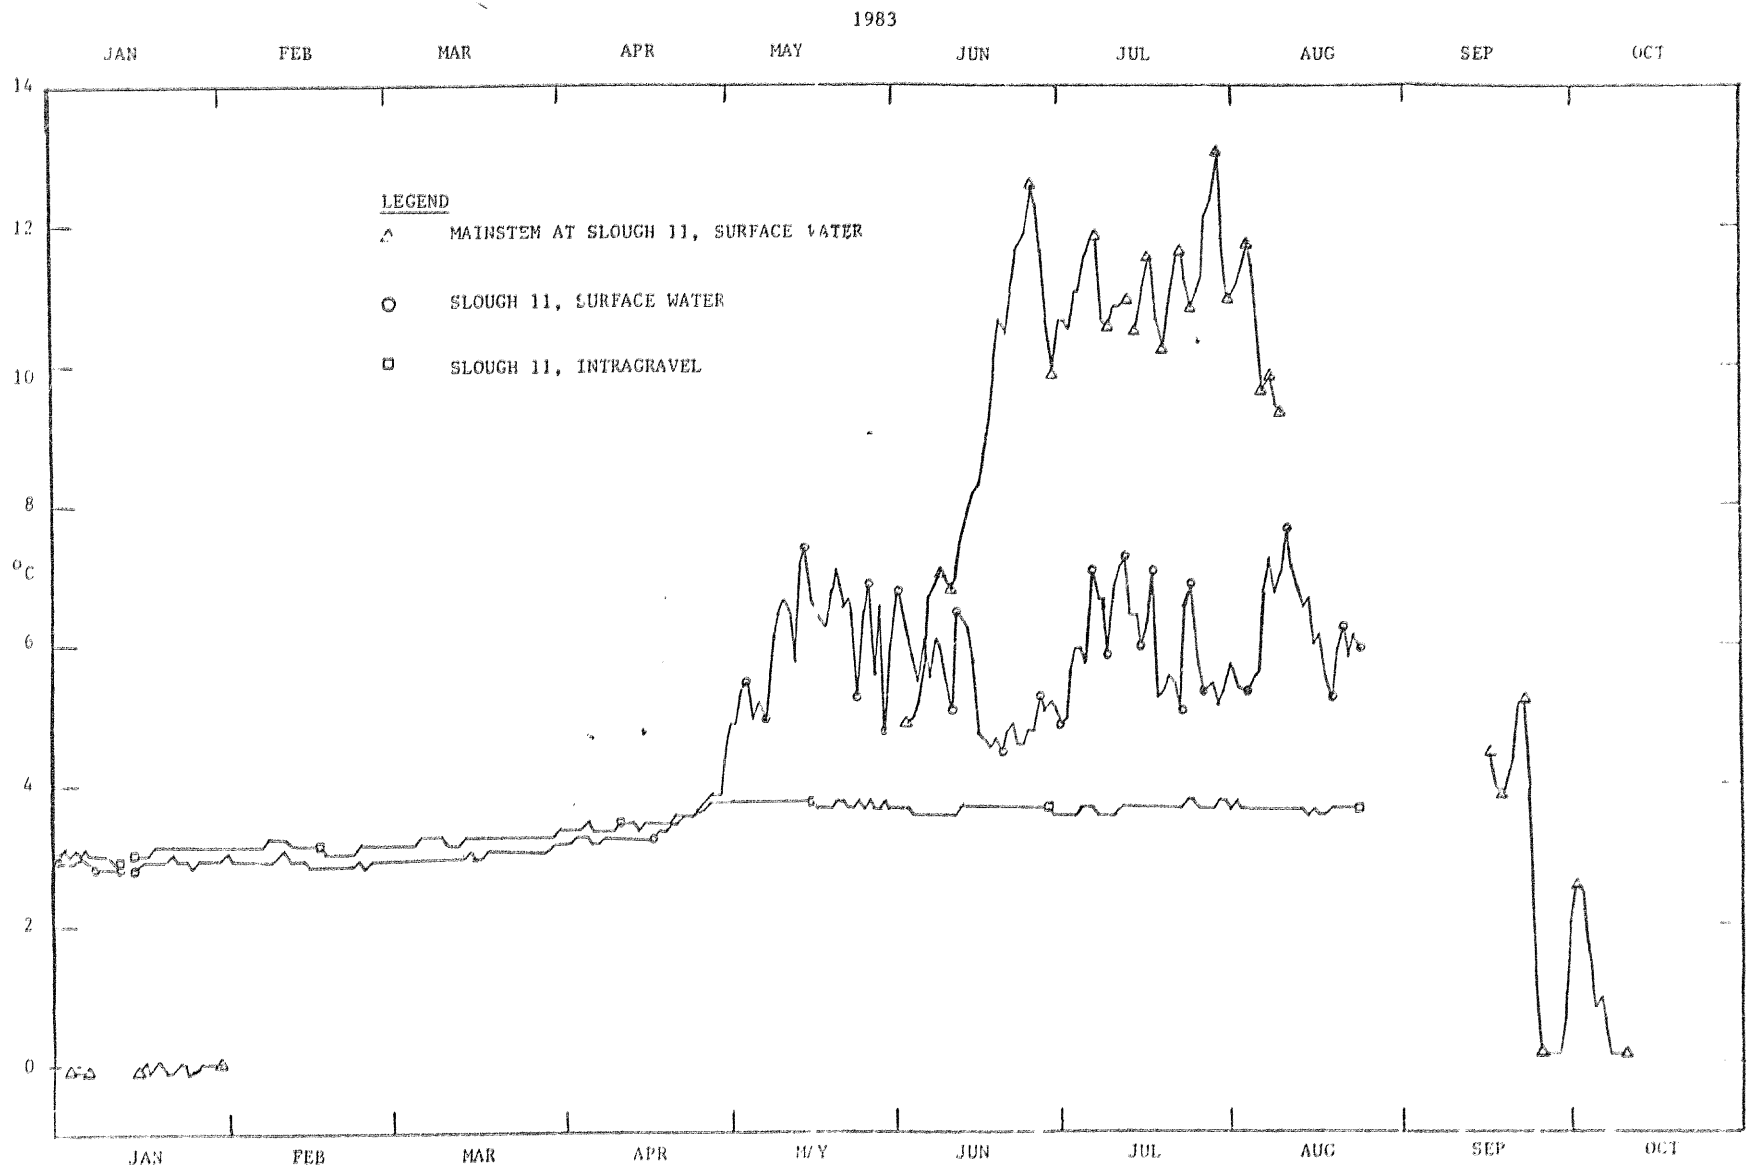


SOURCES: ADF&G ( 3 )
ADF&G PROVISIONAL 1983 DATA
} as presented in APA (1984b)


FIGURE 4.22 SLOUGH 11
WATER TEMPERATURES, 1983

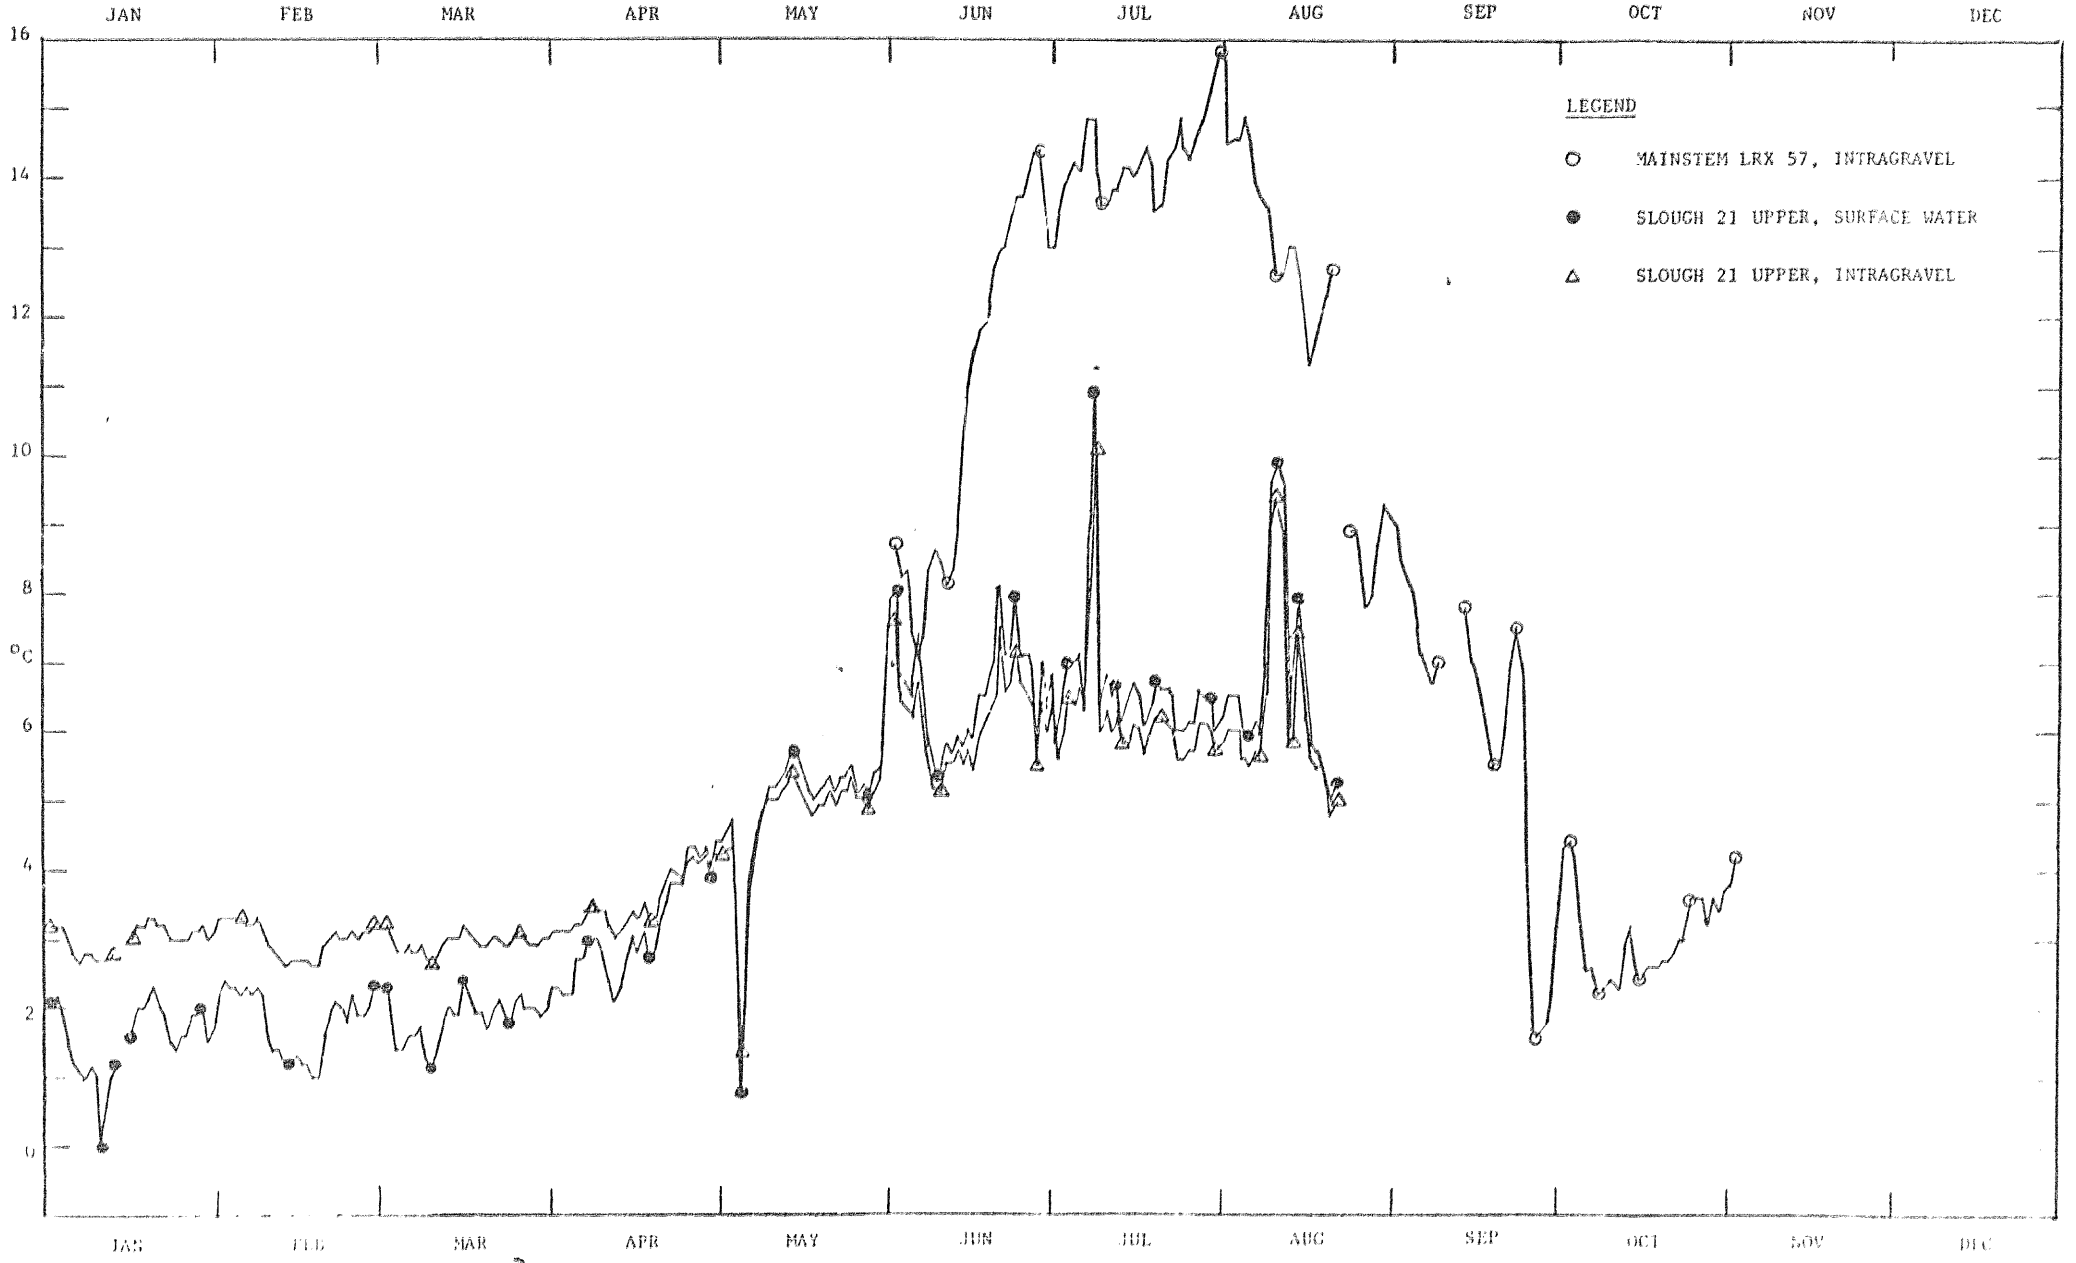


SOURCES: SDSU (3)
ADF&G PROVISIONAL 1983 DATA

as presented in APA (1984b)

FIGURE 4.23 SLOUGH 21 WATER TEMPERATURES, 1983

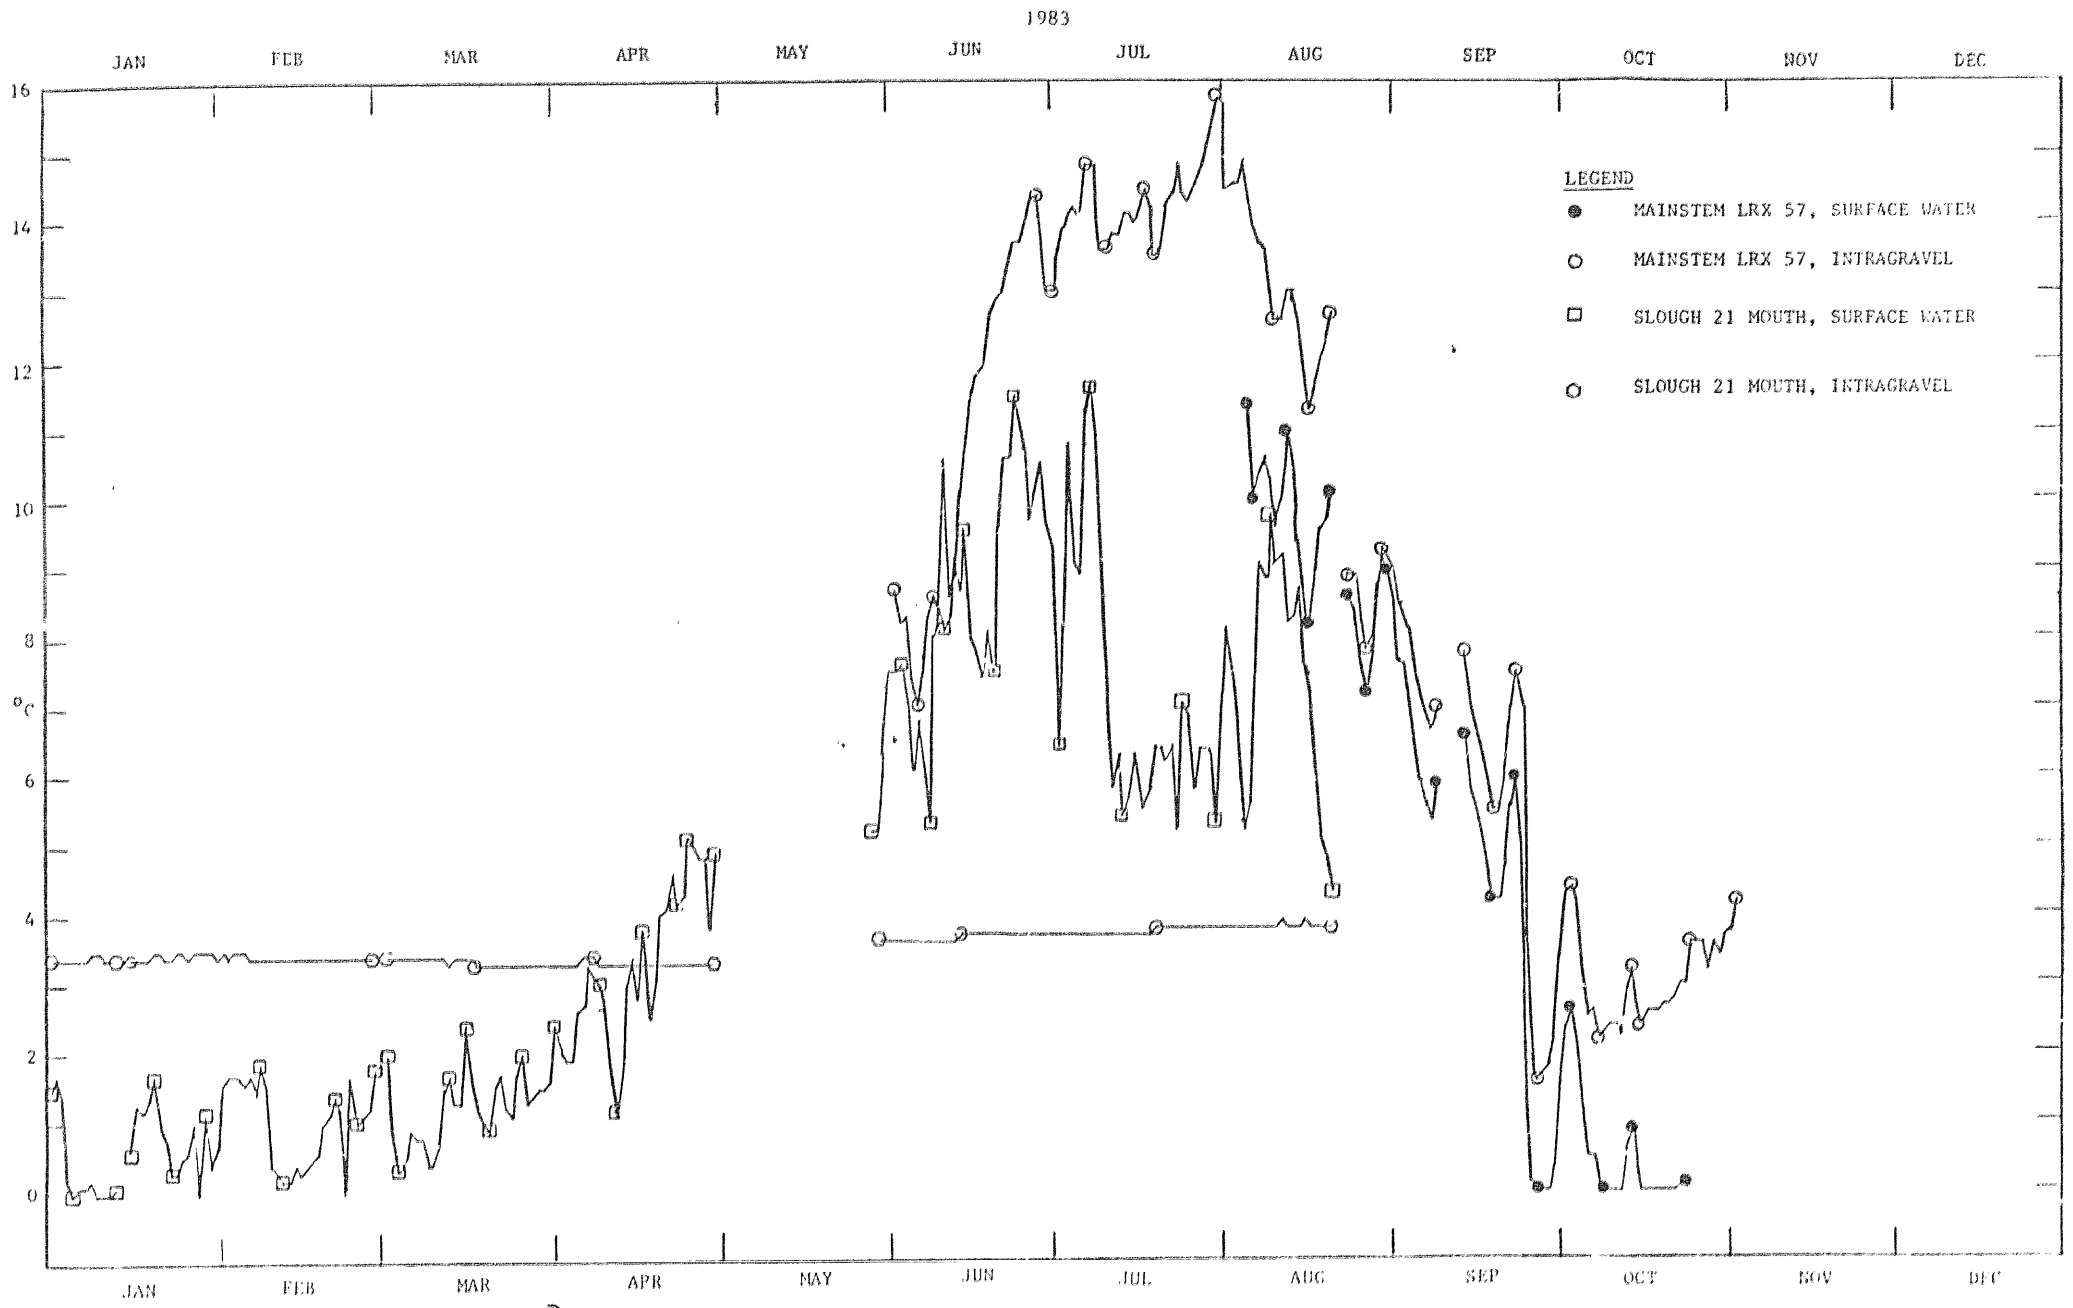


SOURCES: ADF&G (3)
ADF&G PROVISIONAL 1983 DATA
} as presented in APA (1984b)

FIGURE 4.24 SLOUGH 21 WATER TEMPERATURES, 1983

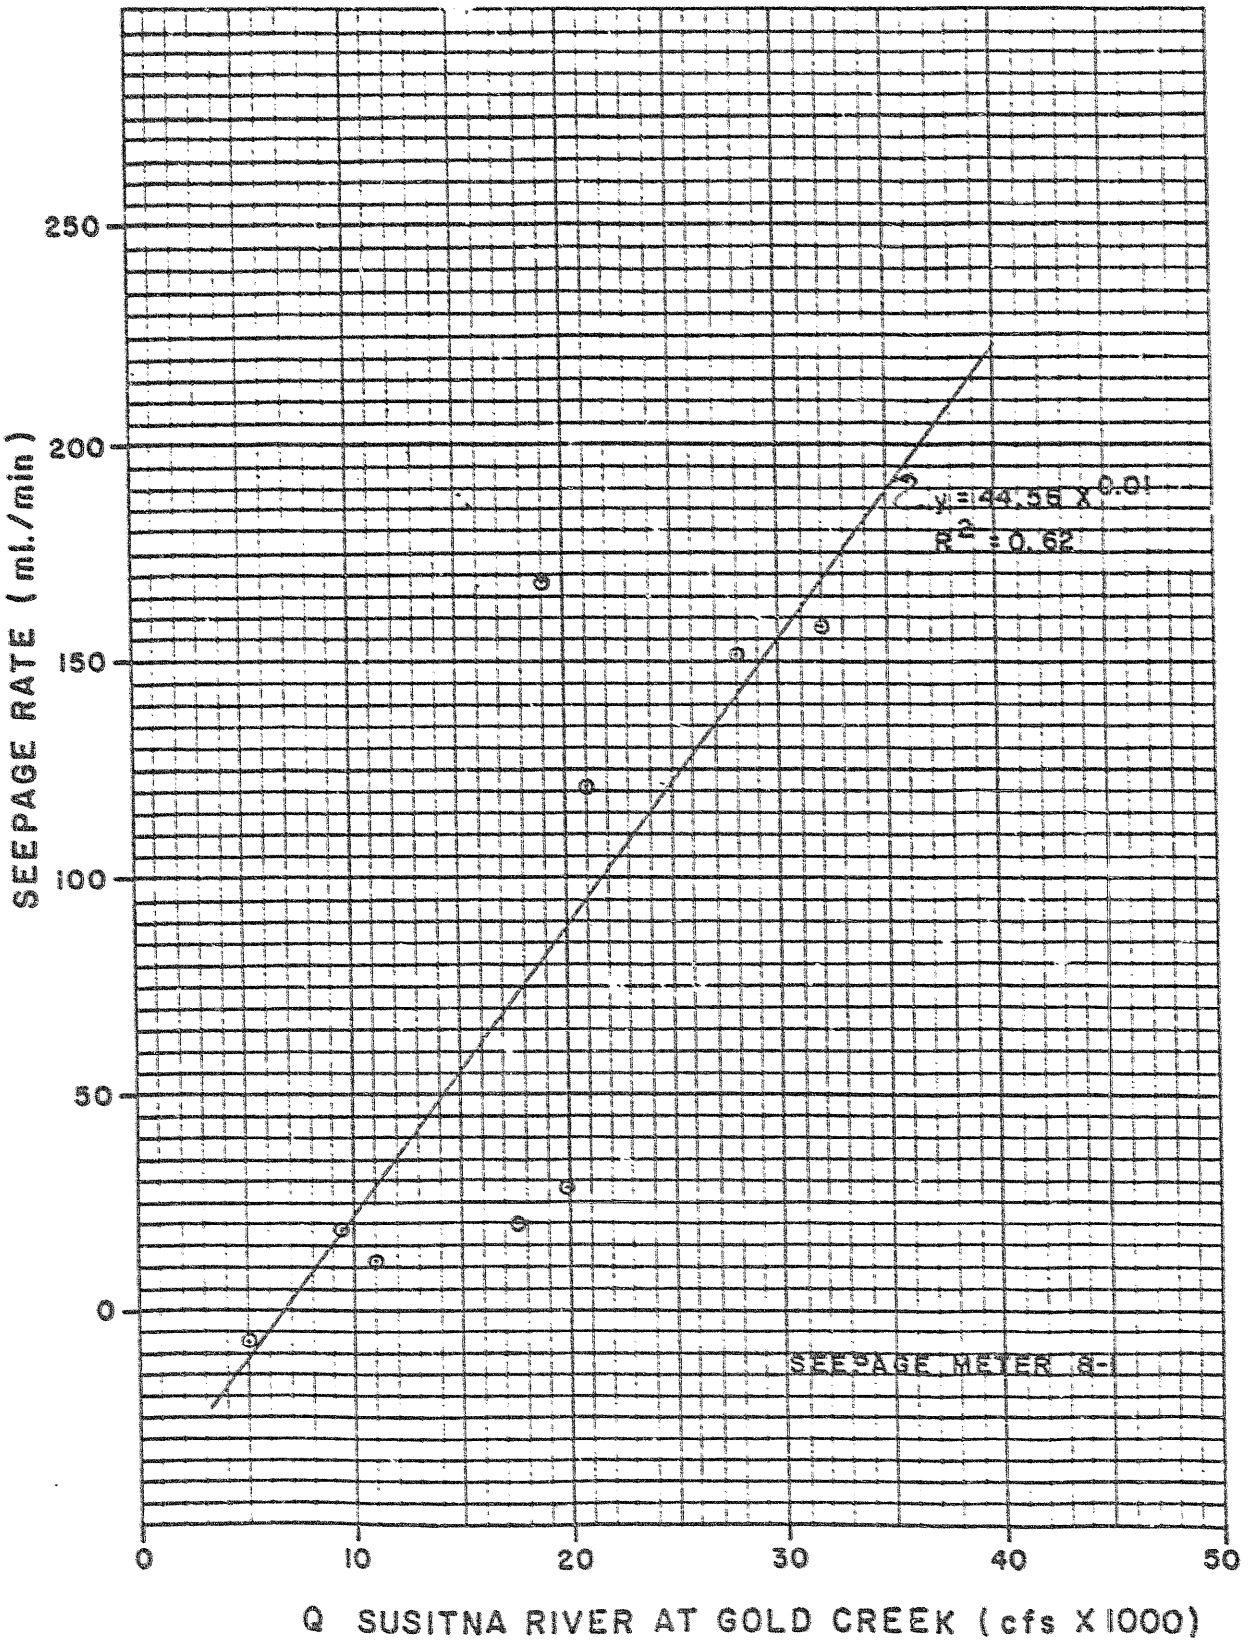



FIGURE 4.25 SEEPAGE RATE VS. MAINSTEM DISCHARGE, SEEPAGE METER 8-1.

Source: APA (1984b)

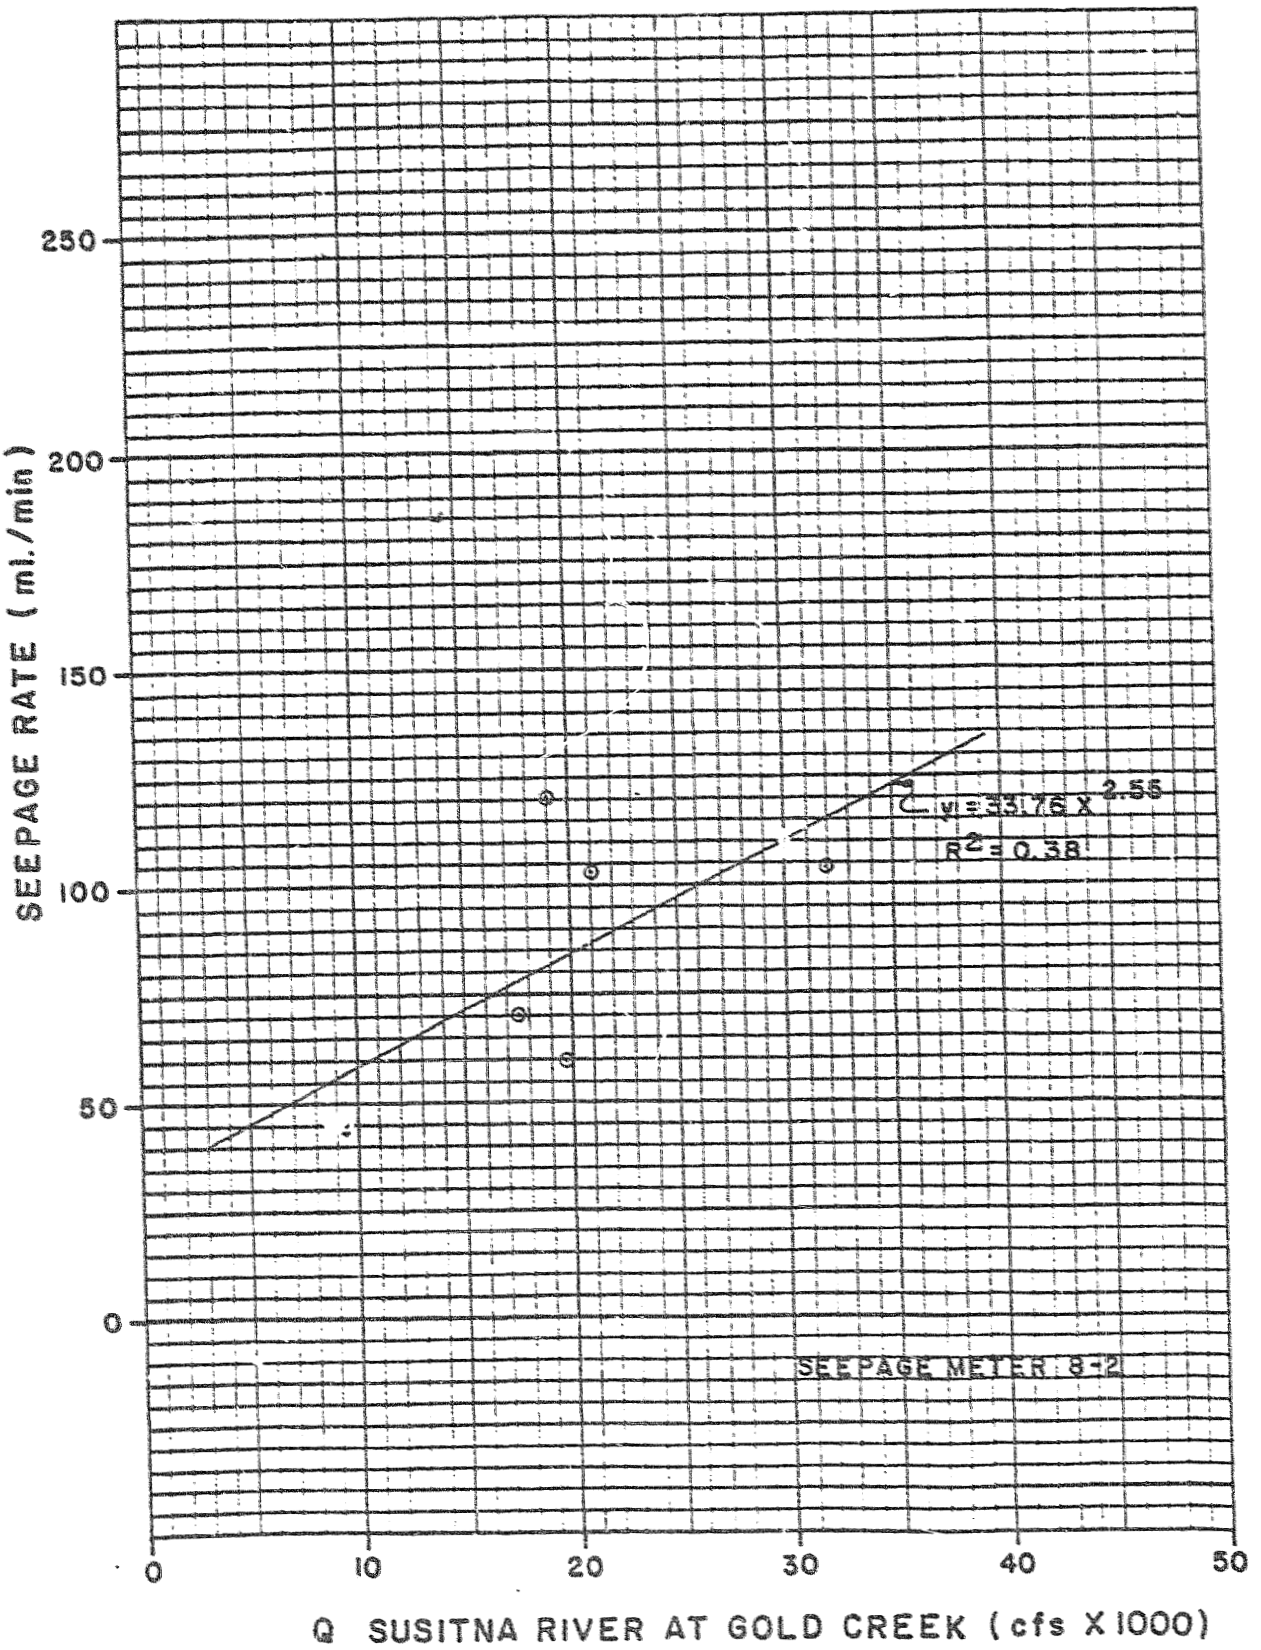



FIGURE 4.26 SEEPAGE RATE VS. MAINSTEM DISCHARGE, SEEPAGE METER 8-2.

Source: APA (1984b)

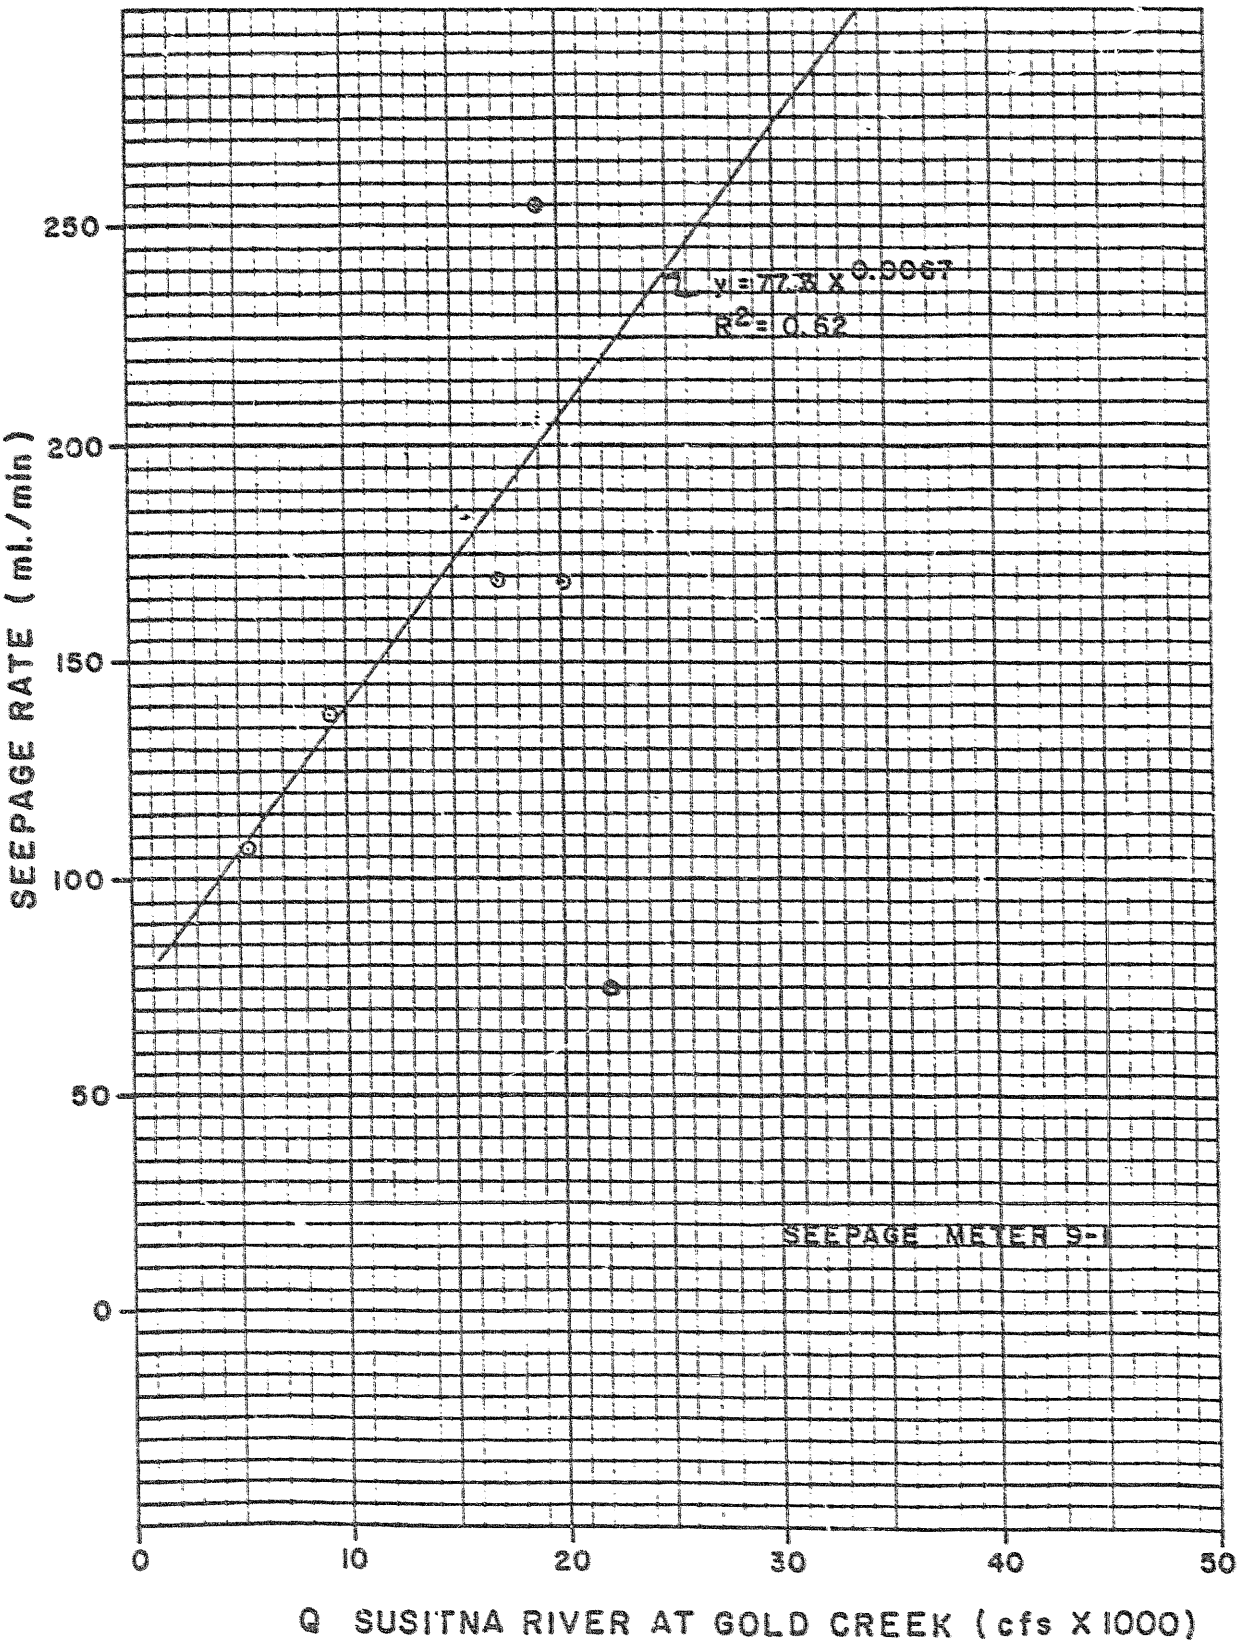



FIGURE 4.27 SEEPAGE RATE VS. MAINSTEM DISCHARGE, SEEPAGE METER 9-1.

Source: APA (1984b)

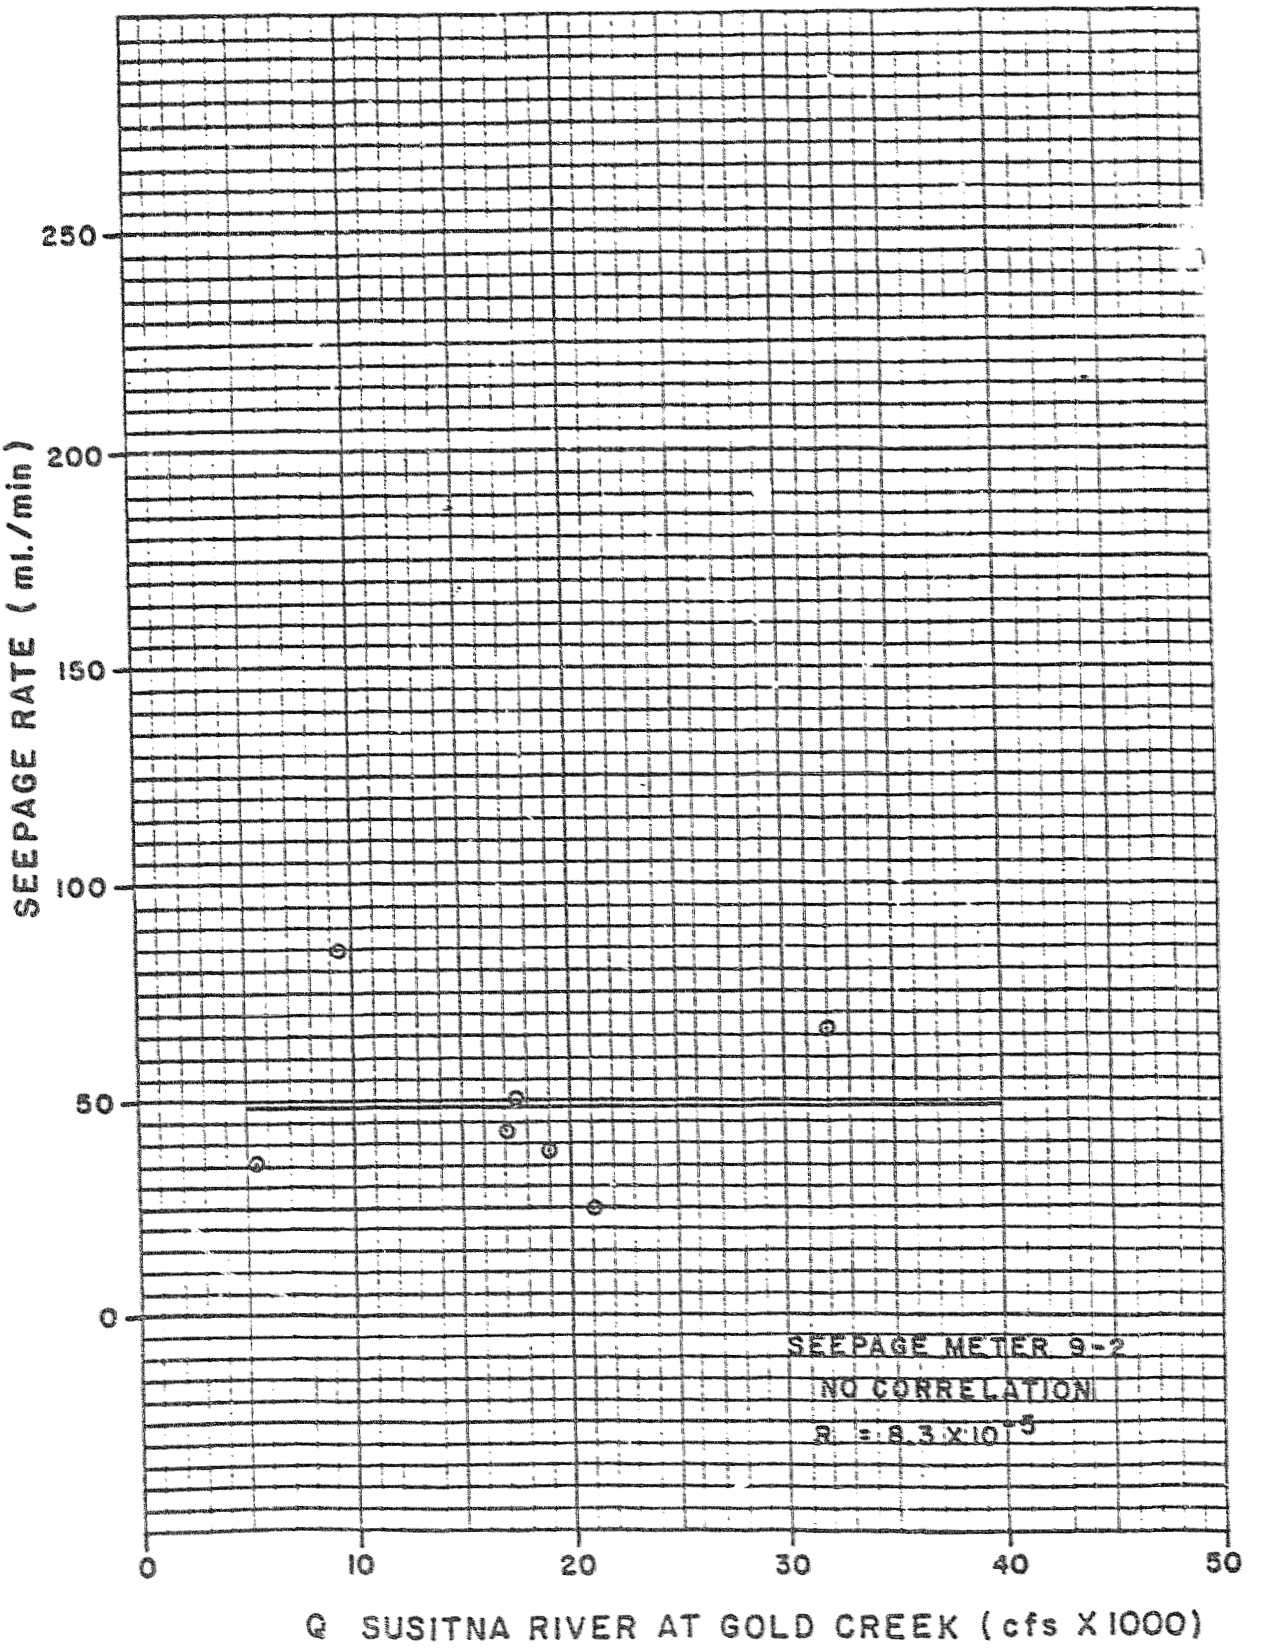



FIGURE 4.28 SEEPAGE RATE VS. MAINSTEM DISCHARGE, SEEPAGE METER 9-2.

Source: APA (1984b)

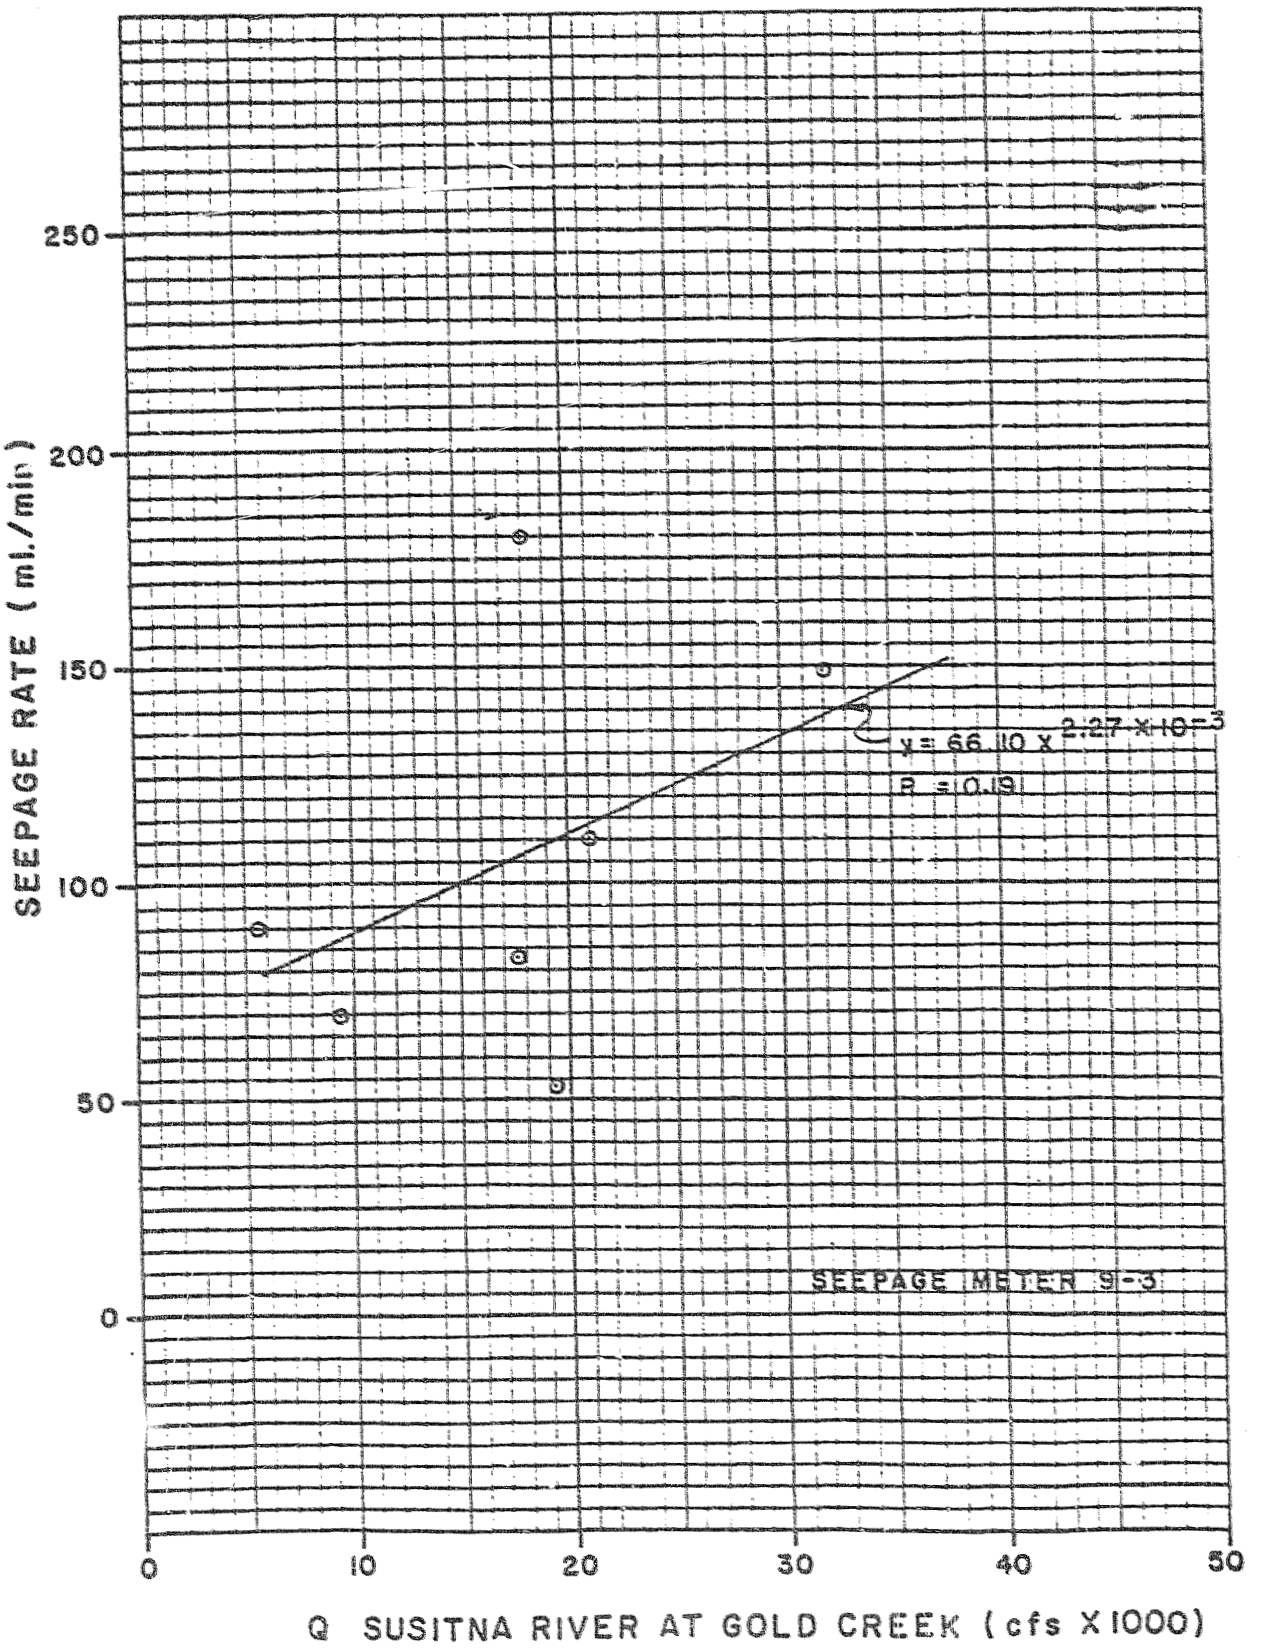



FIGURE 4.29 SEEPAGE RATE VS. MAINSTEM DISCHARGE, SEEPAGE METER 9-3.

Source: APA (1984b)

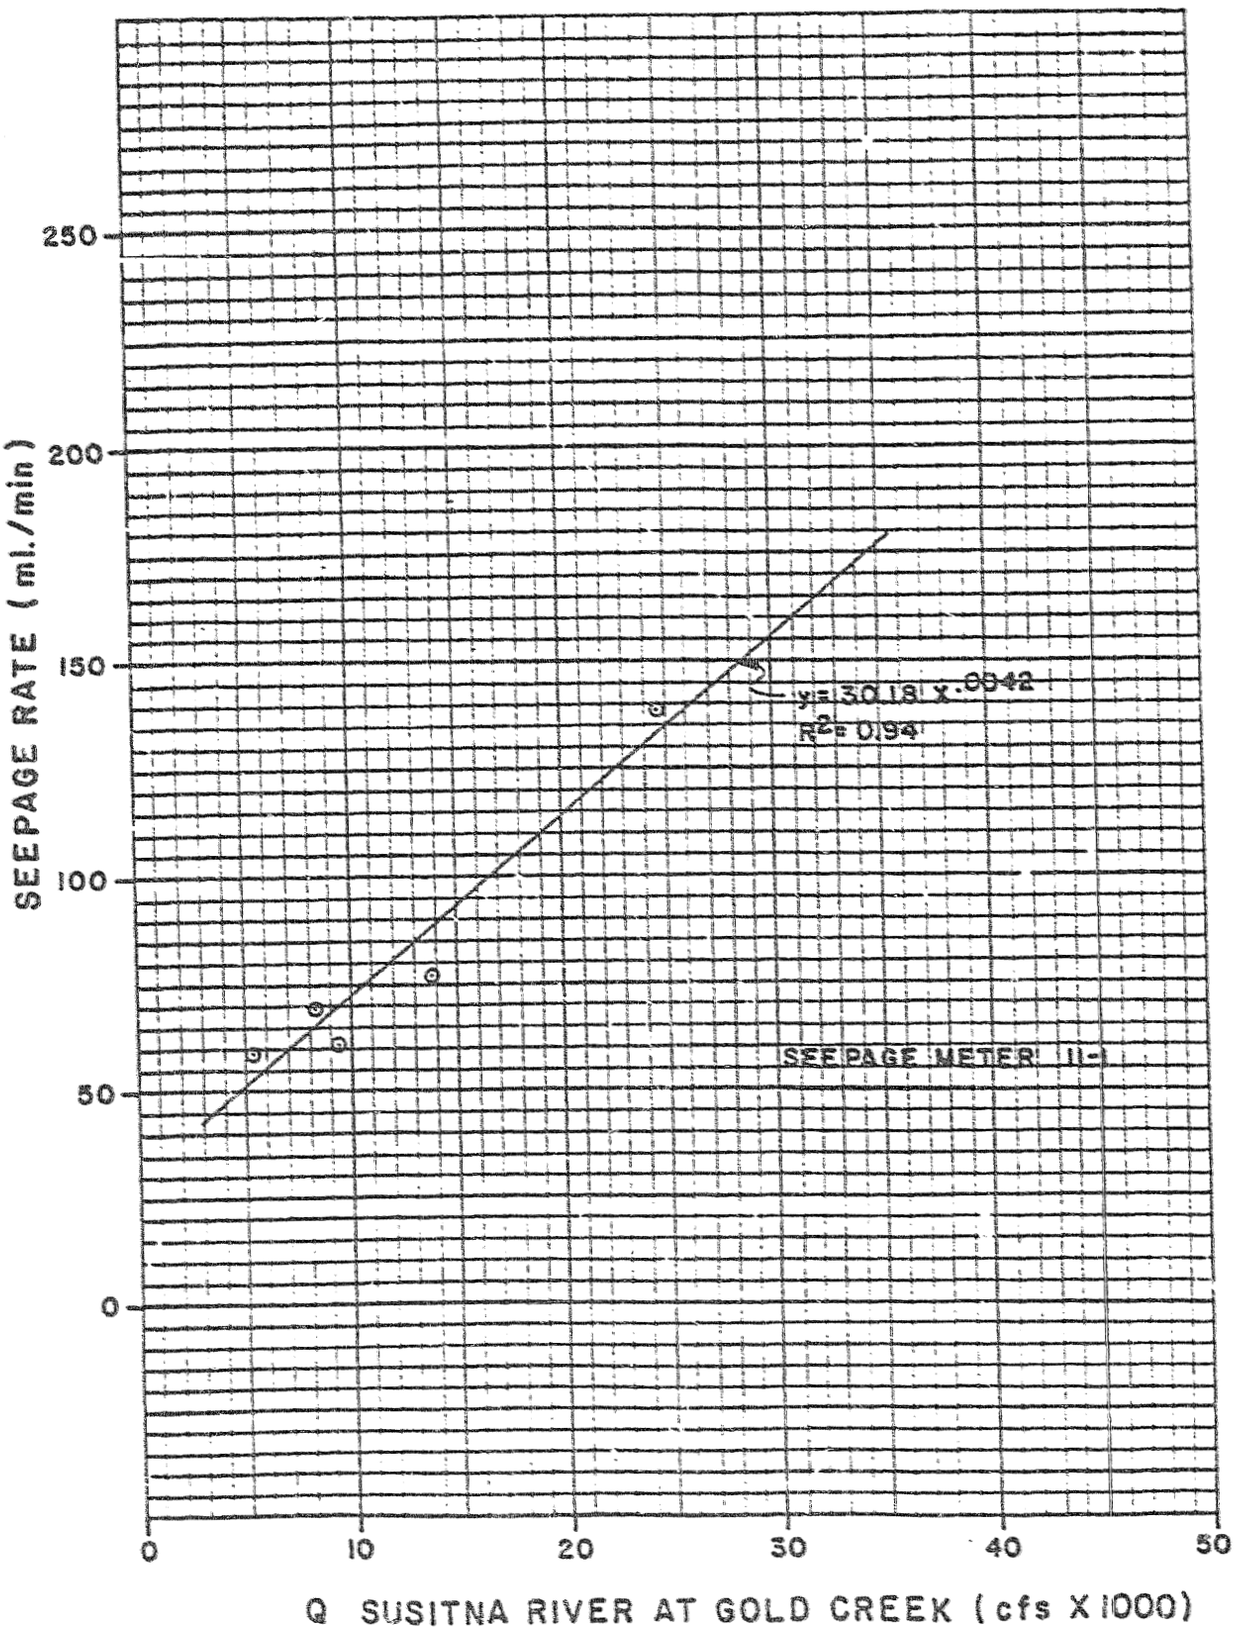



FIGURE 4.30 SEEPAGE RATE VS. MAINSTEM DISCHARGE, SEEPAGE METER 11-1.

Source: APA (1984b)

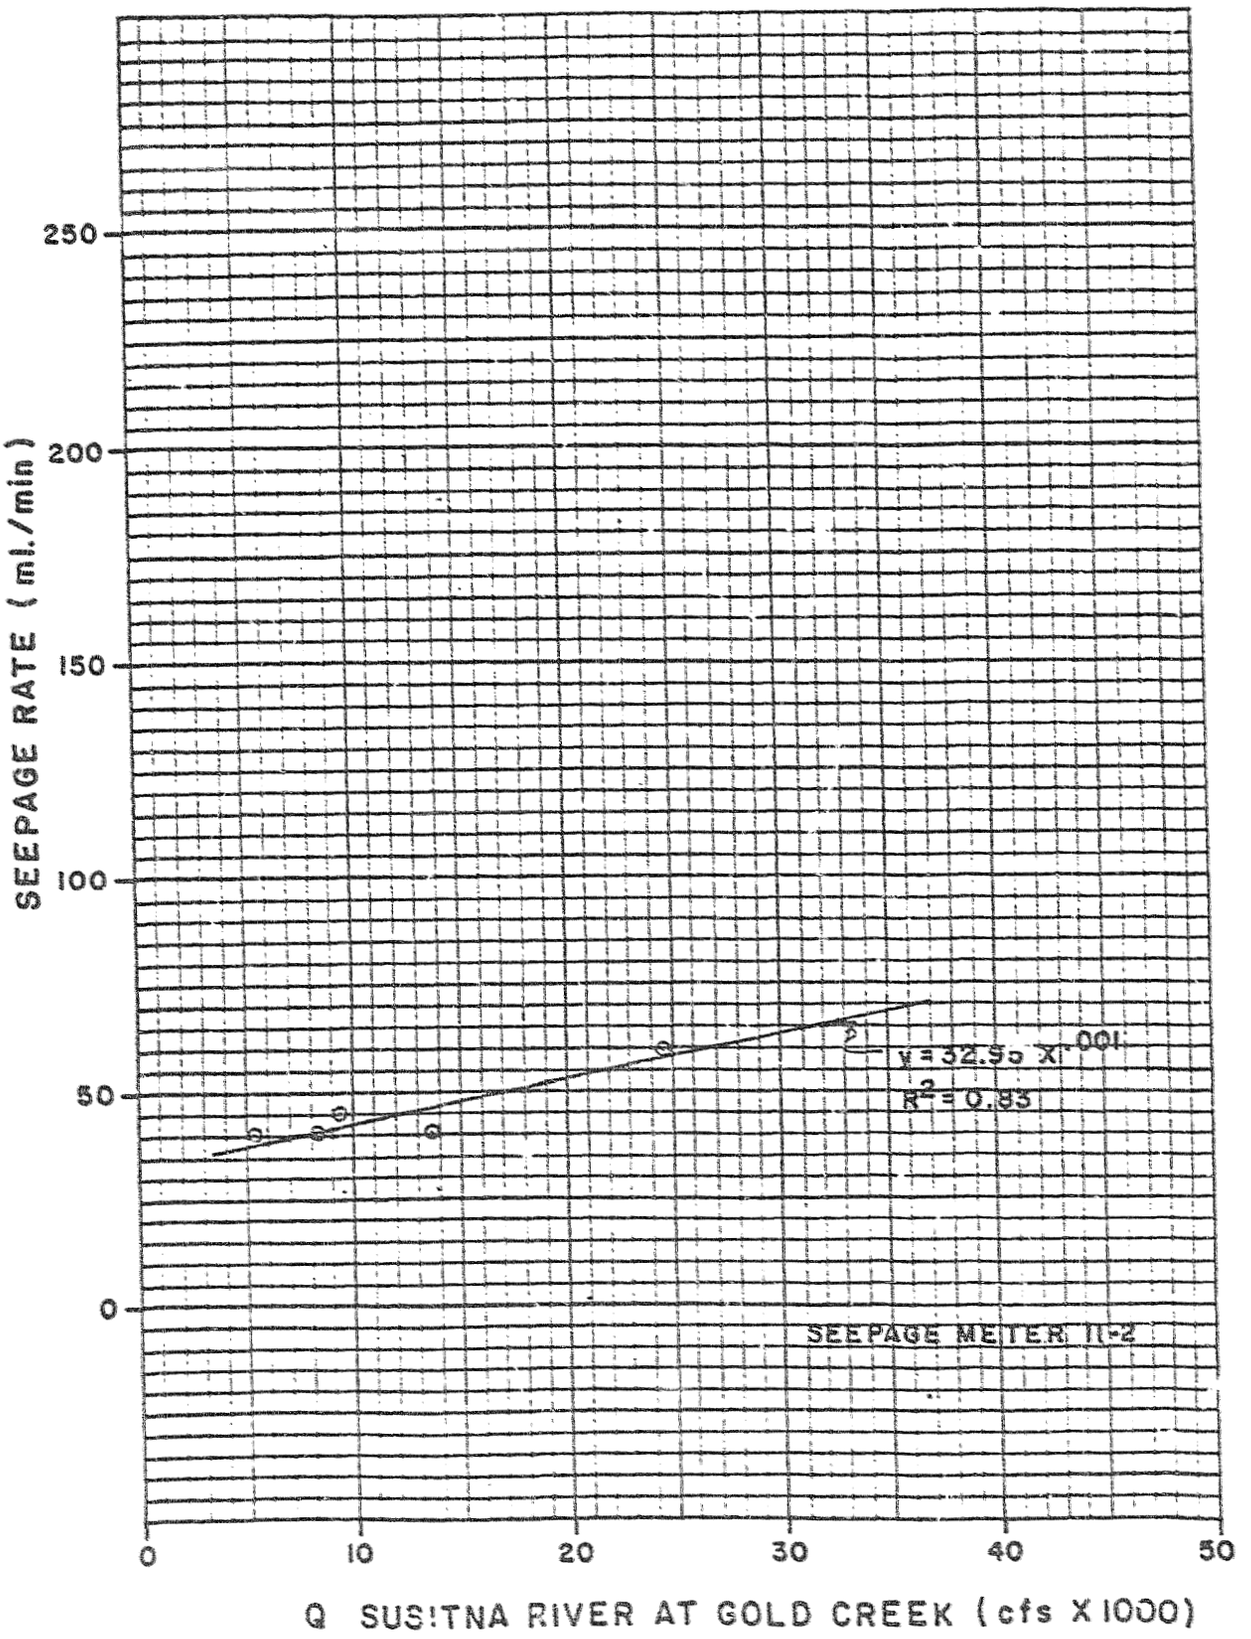



FIGURE 4.31 SEEPAGE RATE VS. MAINSTEM DISCHARGE, SEEPAGE METER 11-2.

Source: APA (1984b)

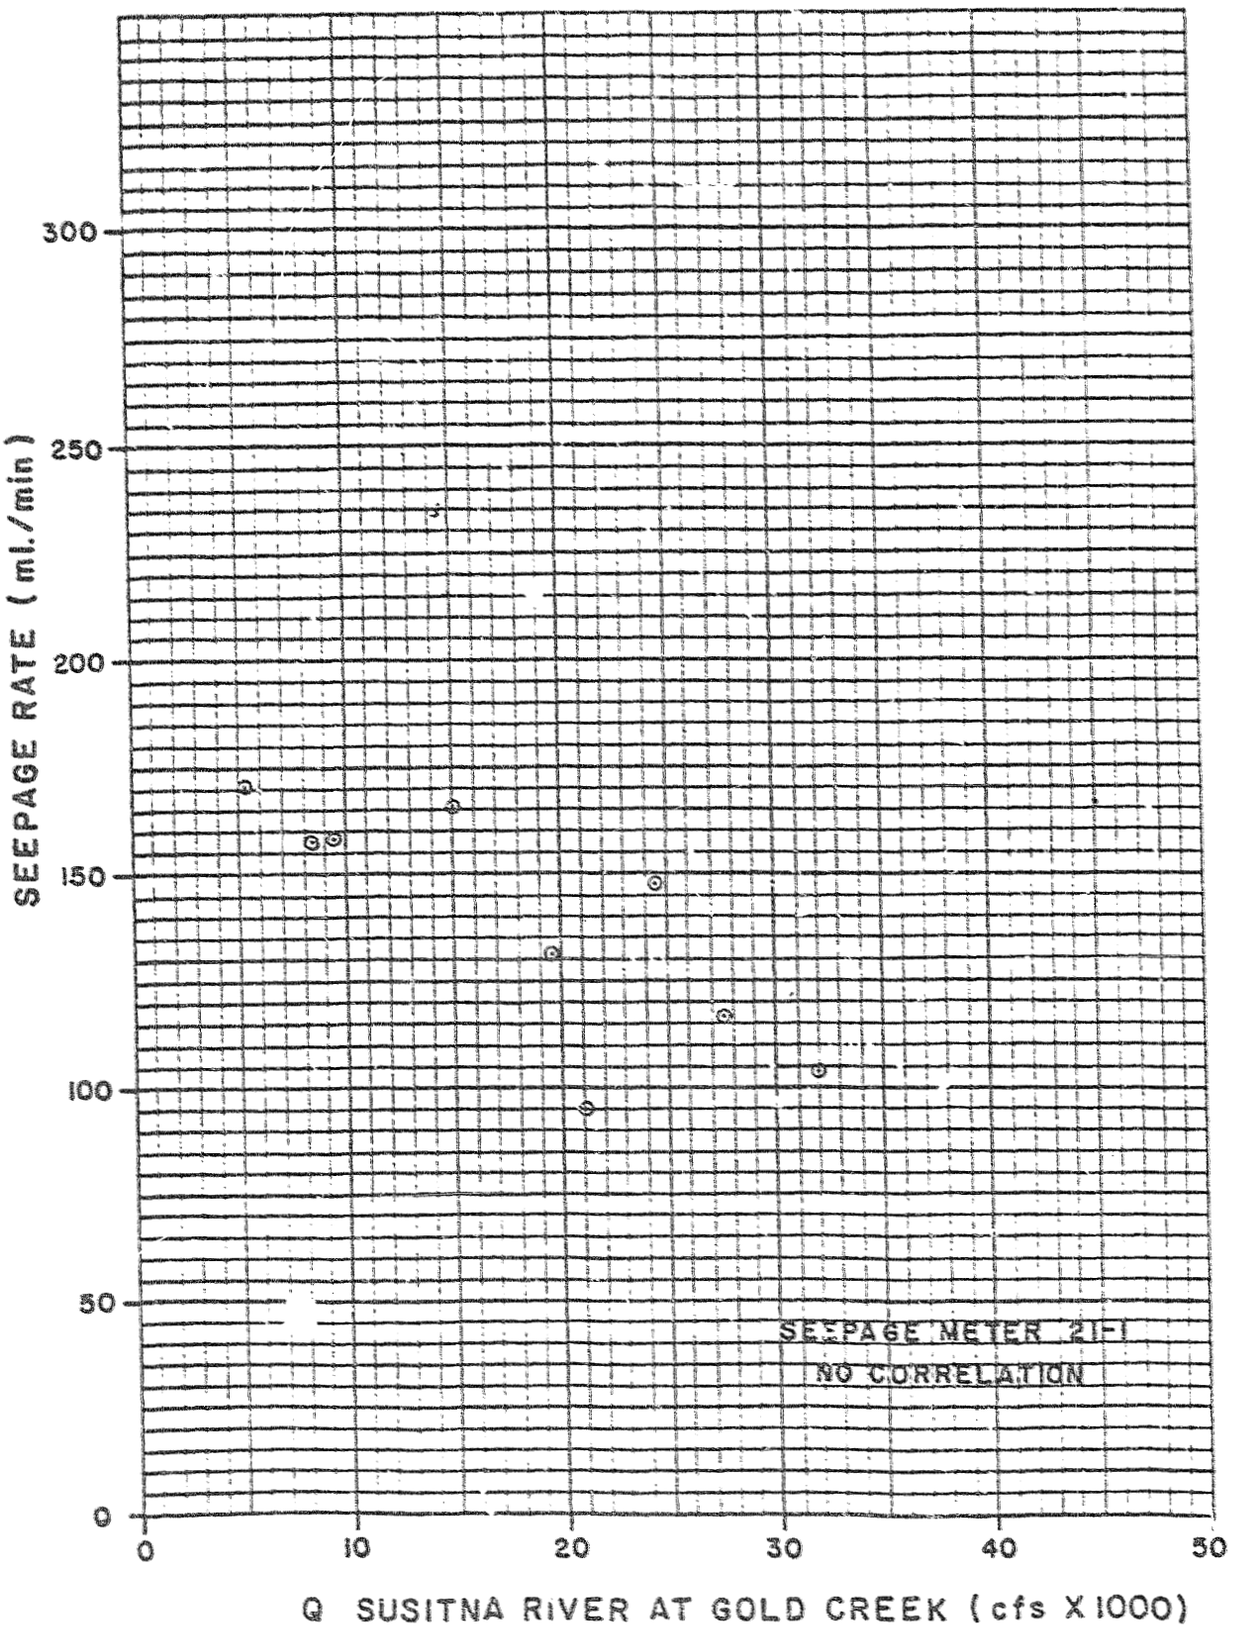



FIGURE 4.32 SEEPAGE RATE VS. MAINSTEM DISCHARGE, SEEPAGE METER 21-1.

Source: APA (1984b)


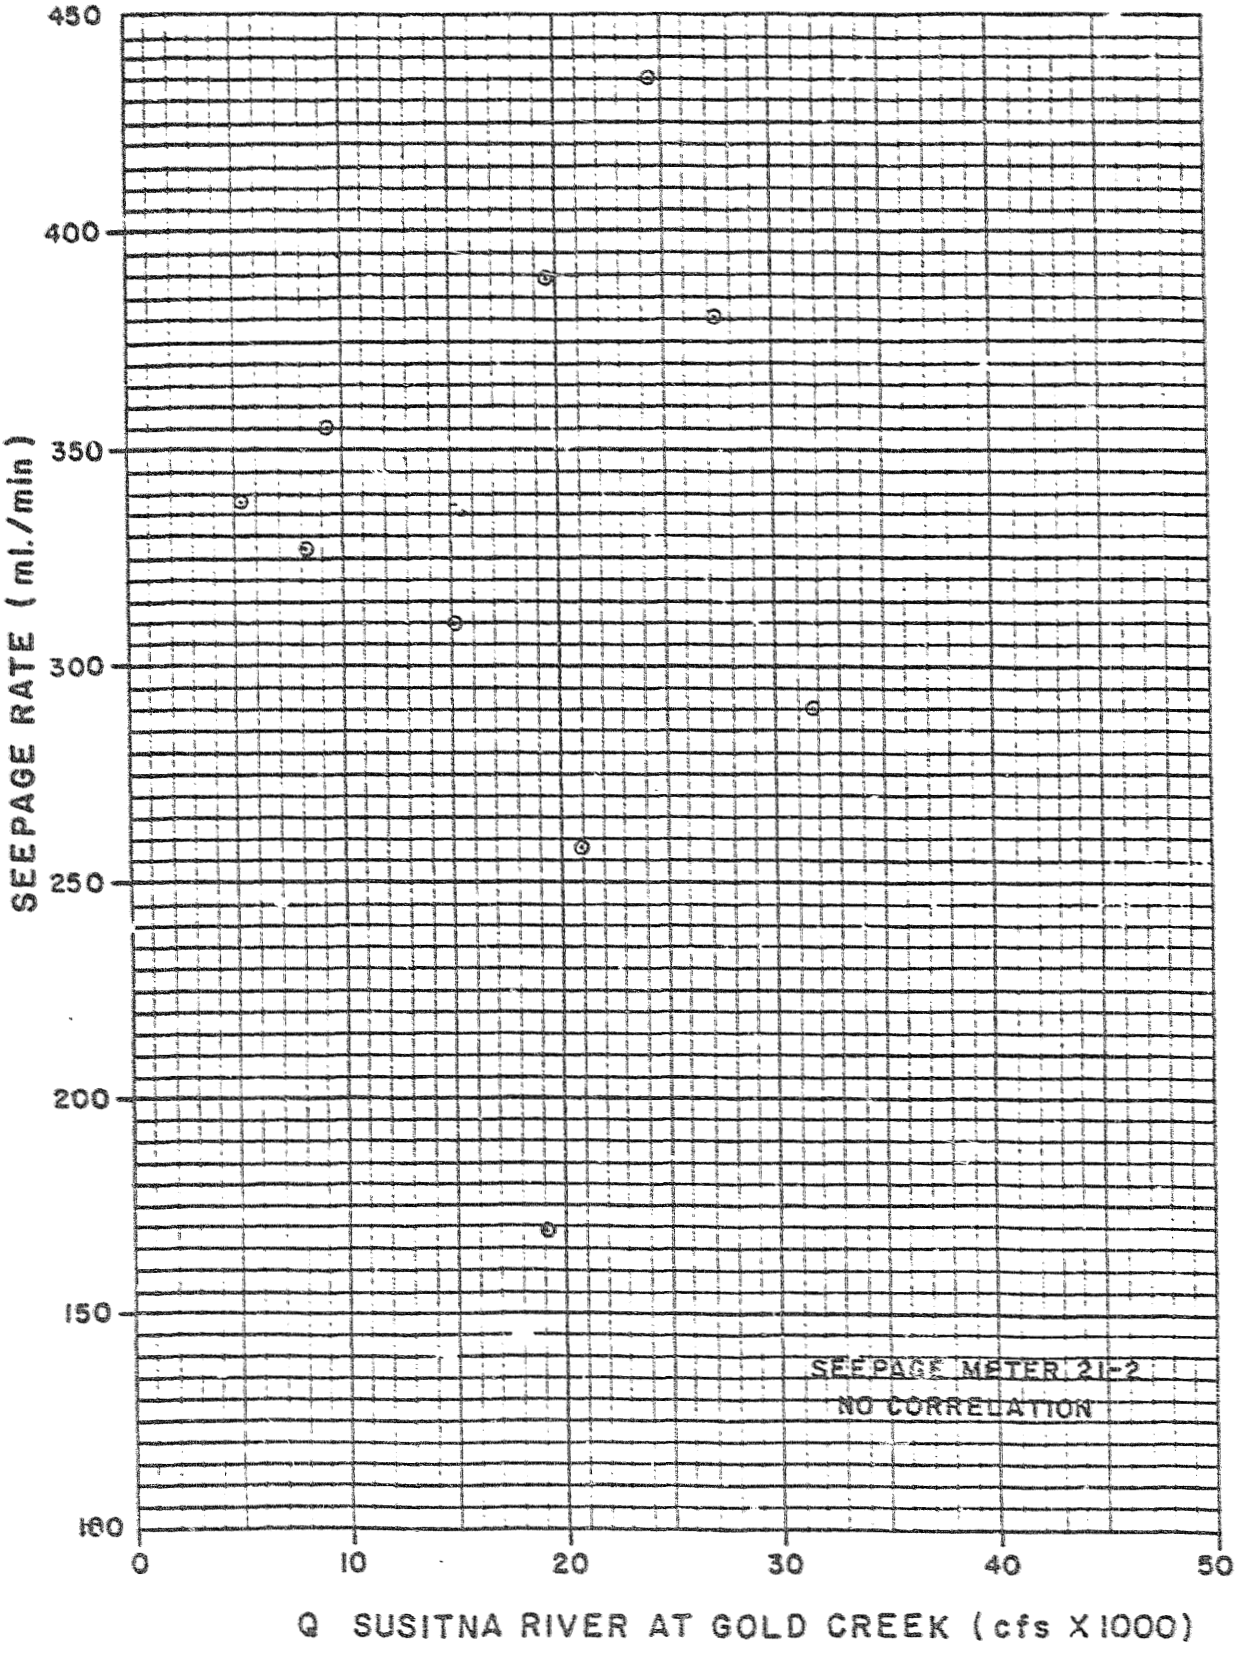




FIGURE 4.33 SEEPAGE RATE VS. MAINSTEM DISCHARGE, SEEPAGE METER 21-2.

Source: APA (1984b)


# FIGURE 4.34 RESPONSE OF MAINSTEM AND SLOUGH 8A DISCHARGES TO SEPTEMBER 1983 STORM

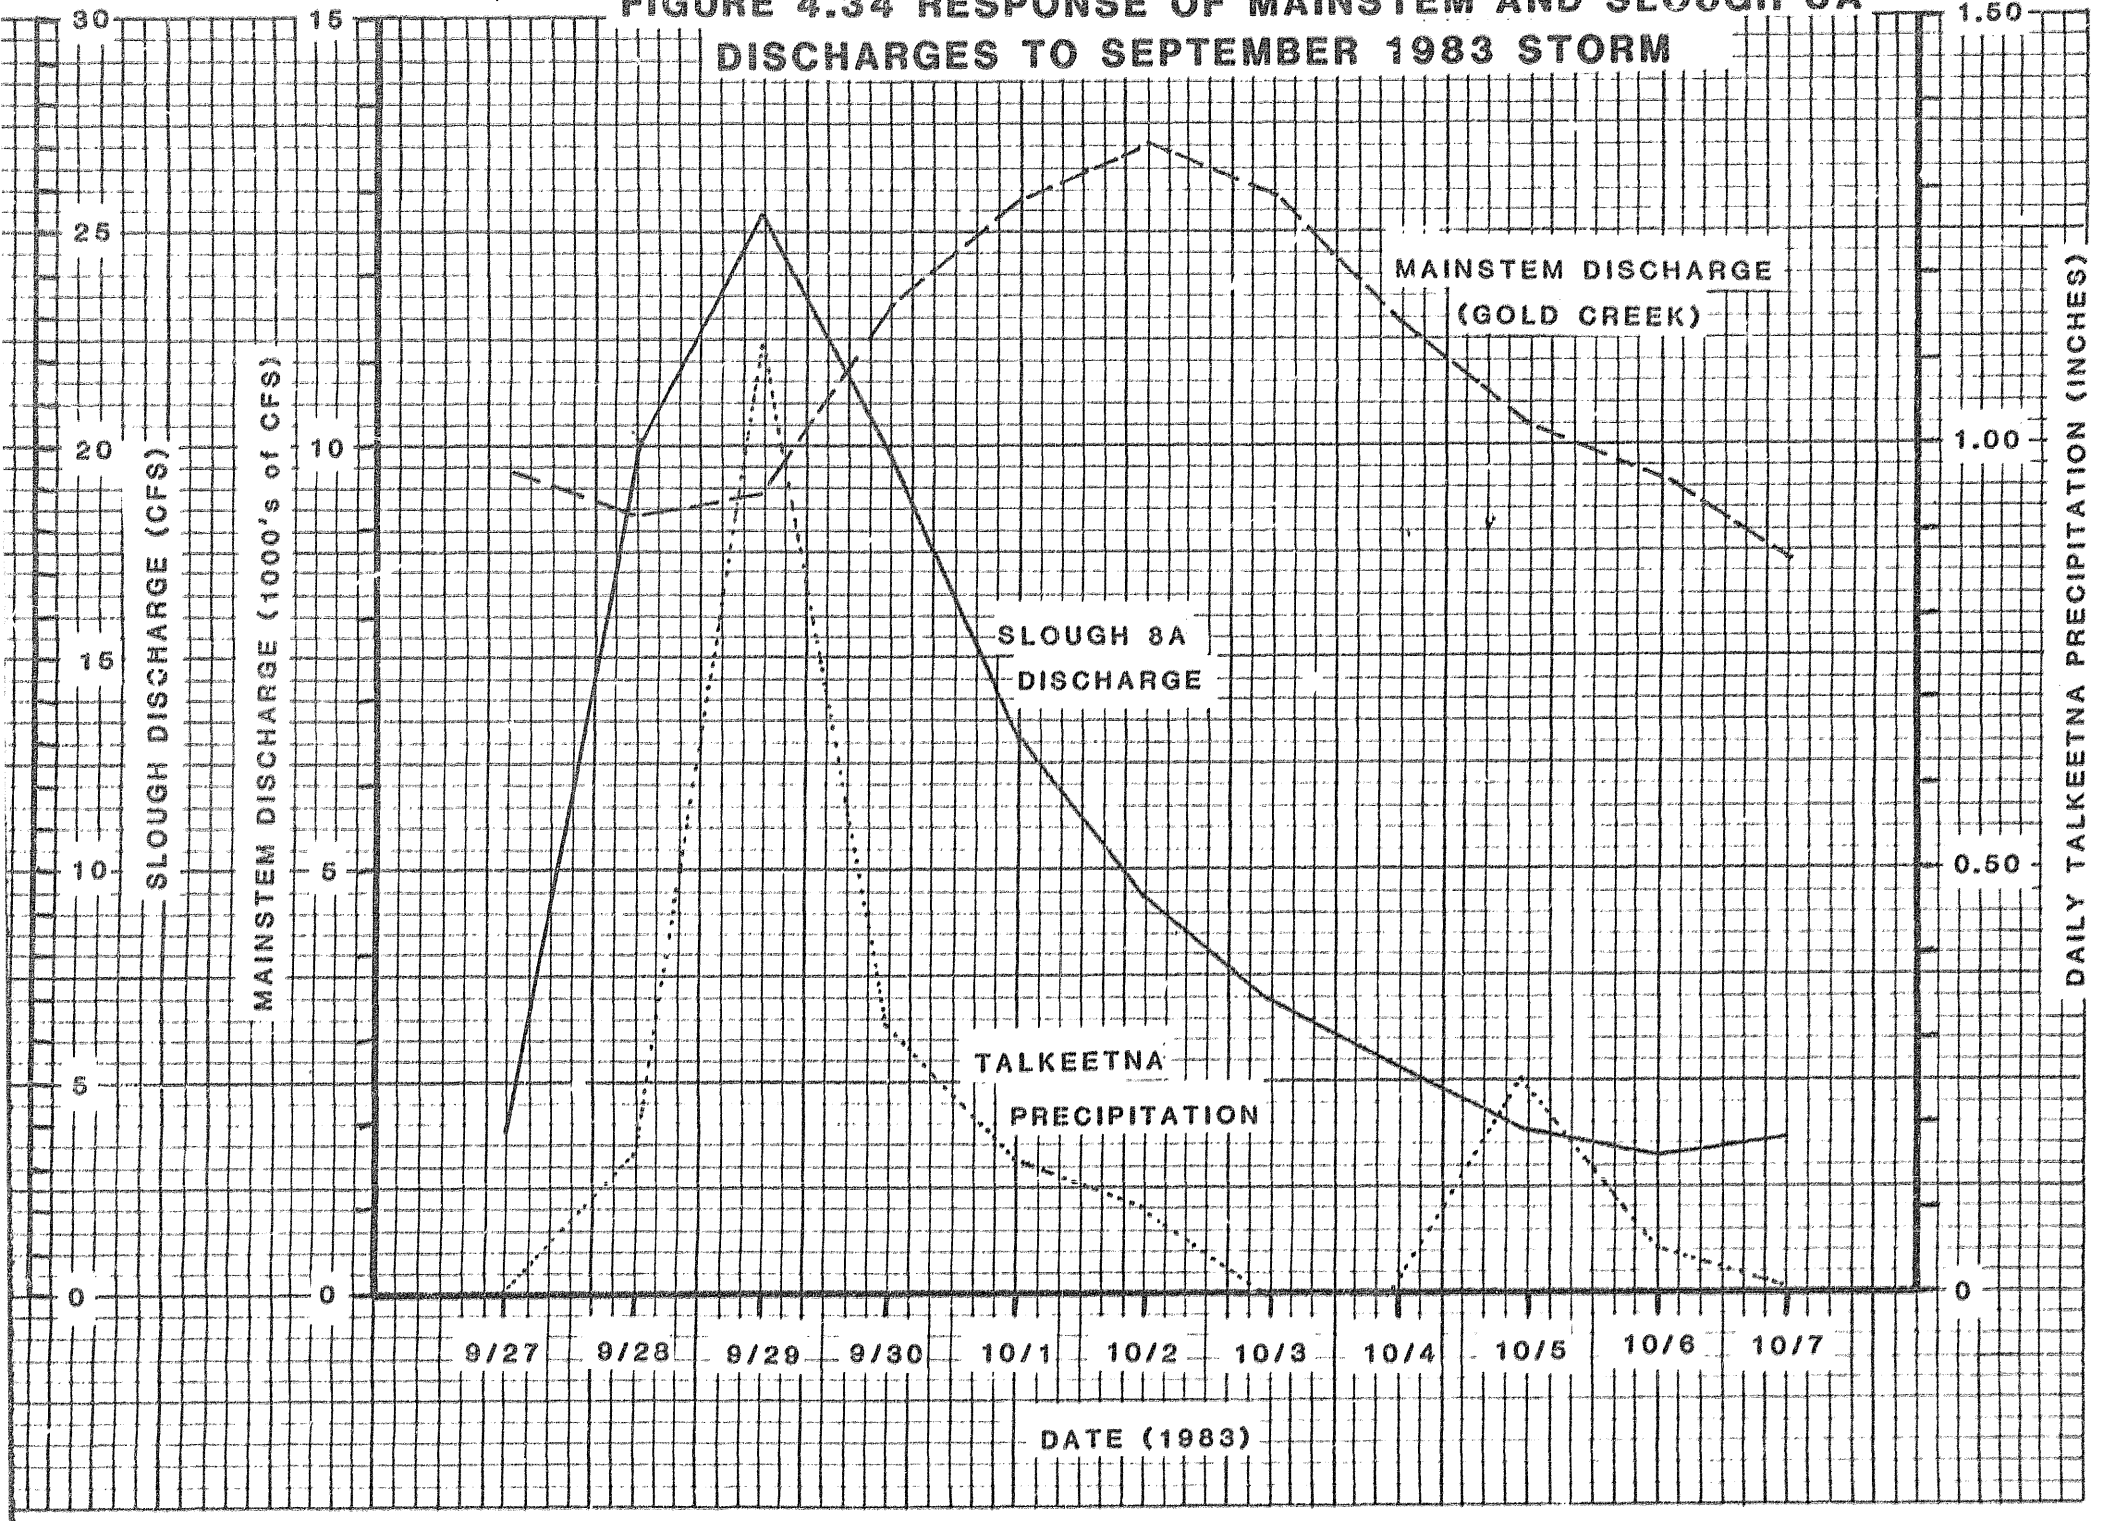

# FIGURE 4.35 RESPONSE OF MAINSTEM AND SLOUGH 9 DISCHARGES TO SEPTEMBER 1983 STORM

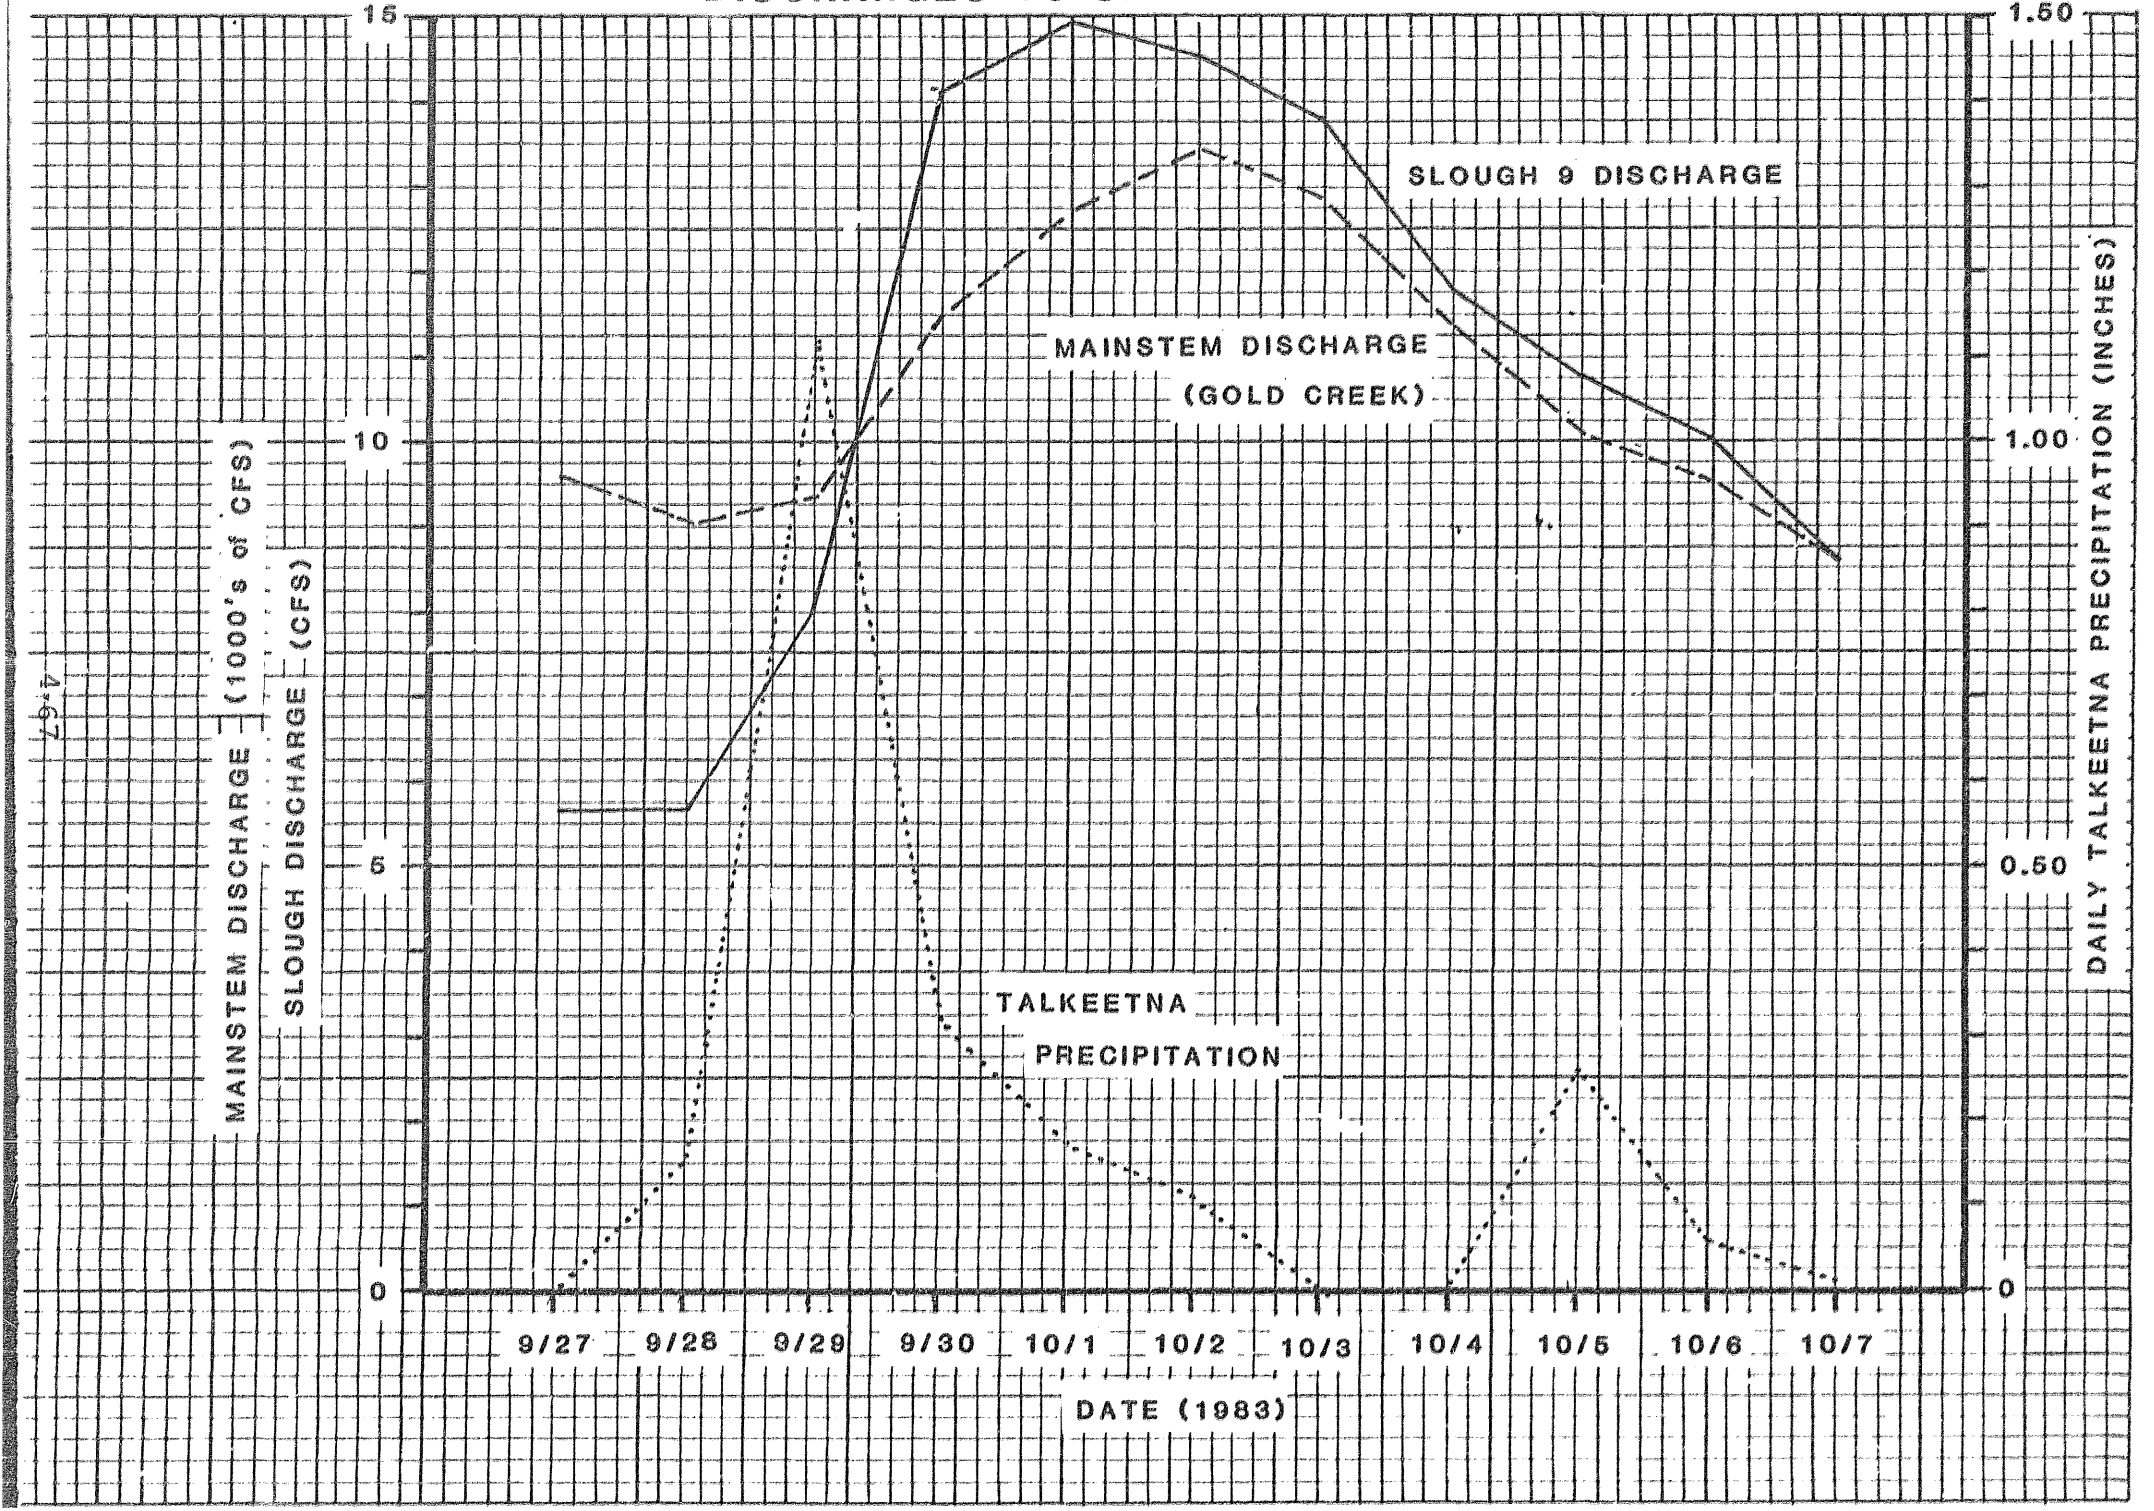

# FIGURE 4.36 RESPONSE OF MAINSTEM AND SLOUGH 11 DISCHARGES TO SEPTEMBER 1983 STORM

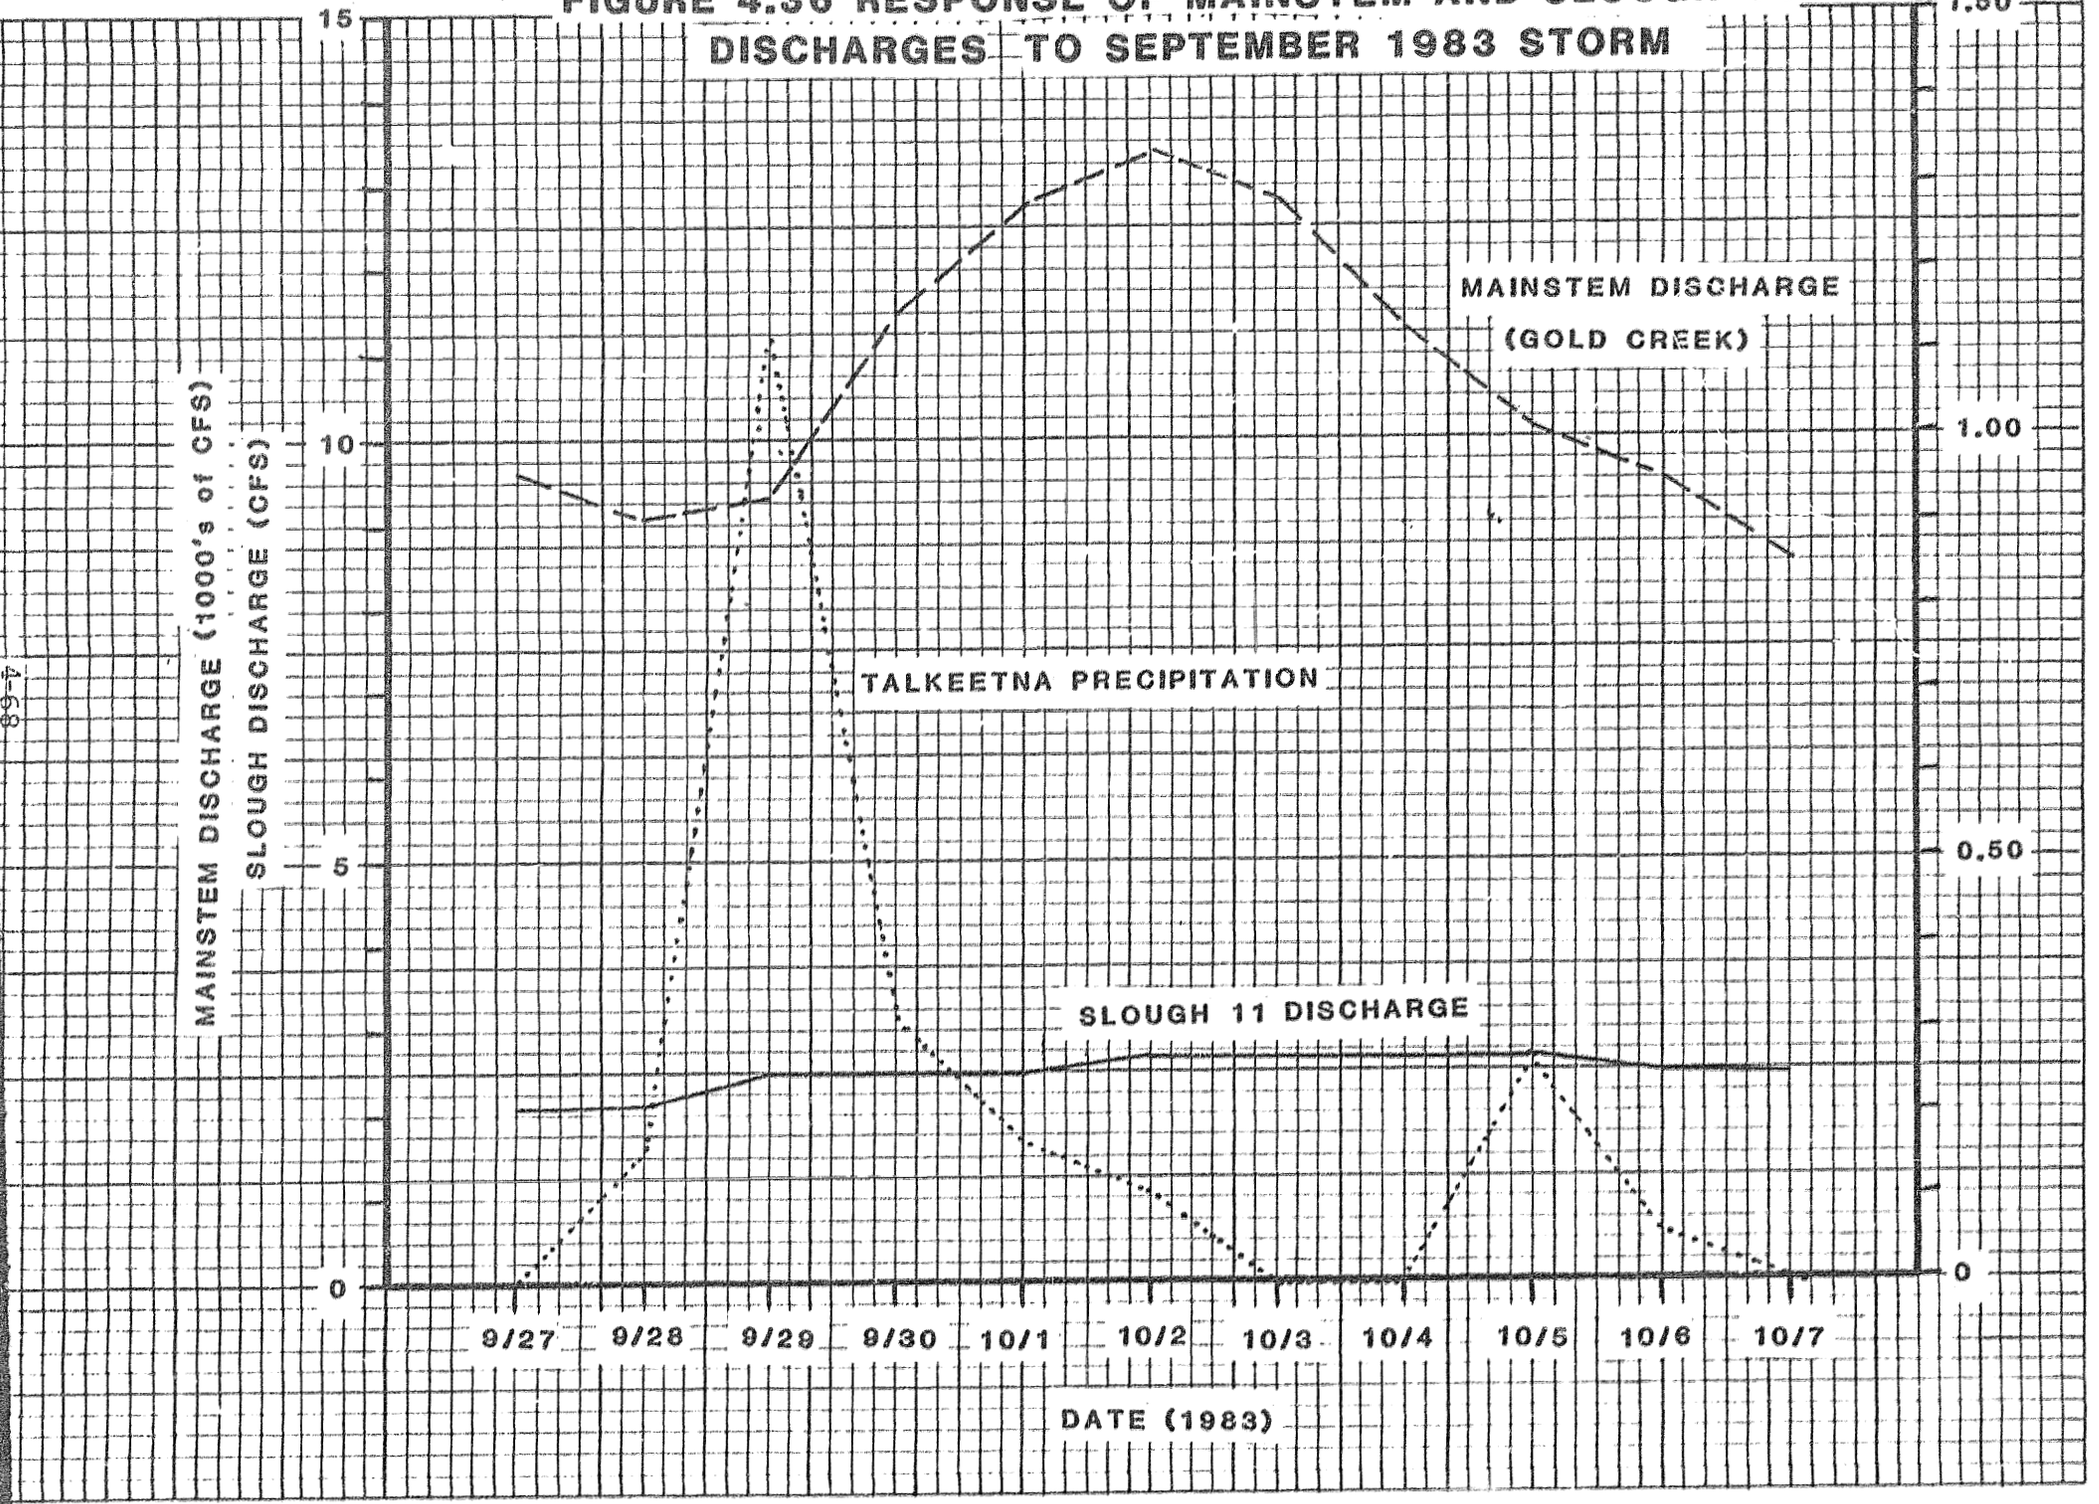

## 5.0 SUMMARY

Construction and operation of the Susitna Hydroelectric Project will affect several of the physical processes which produce and regulate the aquatic habitats in the Middle Susitna River. Changes will occur in the river sedimentation processes, in the channel stability, and in the groundwater upwelling processes. The specific project effects are reviewed below, in relation to their effect on habitat.

The river sedimentation processes will change from strictly river-type to combined lake-type and river-type. A large proportion of the sediment reaching the impoundment zone from upstream will be trapped in the reservoirs, with only the fine suspended particles (smaller than about 3-4 microns) passing through to the river downstream. This will have some direct effects on the stability of the river channel below the project.

The reservoir releases will be transporting less sediment than comparable flows under natural conditions, and will consequently have capacity to transport additional sediment. The flows will thus have a tendency to pick up finer particles from the riverbed. However, with-project flows will also be smaller than naturally-occurring summer flows, with reduced ability to transport sediment. The net result of project construction and operation is that the mainstem in the Middle Reach is expected to degrade from zero to 1 foot. The median size of particles in the mainstem is likely to increase, making the channel more stable. The beds of sloughs and side channels may degrade from zero to 0.5 foot.

Local aggradation in the mainstem, primarily due to bifurcation of the streamflow between the mainstem and other channels, is not expected to be significant. The side channels and sloughs will still require larger mainstem flows to overtop them, on the order of 8,000 cfs higher than naturally, due to degradation of the main river. Intrusion of fine sediments into the gravel beds of sloughs and side channels may occur at pools and backwater areas, potenially causing problems for spawning and

incubation. As a mitigative measure, the project may release larger flows to flush out the deposited fine sediments, or "Gravel Gerties" may be used. Jack Long, Sherman, and Deadhorse Creeks, three tributaries used by salmon, are likely to aggrade, possibly restricting access.

Project effects on slough hydrology relate to likely changes in flow levels and water temperatures. There is considerable variation between sloughs as to the nature of their dependence on the mainstem. Sloughs similar to Slough 11, whose flows are strongly related to the mainstem water level, are likely to experience a decrease in groundwater upwelling under with-project conditions. These sloughs may also have problems with fish access or with environmental conditions for incubating embryos, including freezing, shortage of oxygen, or change in development time. Mitigative measures may be required in such cases. Other sloughs which derive significant inflow from upland sources or from local surface flow will be affected to a lesser extent. Flow peaks from the local sources will still allow access under most conditions.

## 6.0 REFERENCES

Aaserude, B. 1985. Transmittal of preliminary data on overtopping flows for sloughs and side channels. E.W. Trihey & Associates, Anchorage, Alaska. April.

Acres American, Inc. 1982. Reservoir slope stability. Appendix K in 1980-81 Geotechnical Report by Acres American, Inc. Prepared for Alaska Power Authority.

Acres American, Inc. 1983. Susitna Hydroelectric Project, Slough Hydrogeology Report. Prepared for Alaska Power Authority, Anchorage, Alaska.

Alaska Department of Fish and Game (ADF&G). 1983a. Susitna Hydro aquatic Studies Phase II Data Report: Winter Aquatic Studies (October 1982 - May 1983). Prepared for Alaska Power Authority. Alaska Department Fish and Game Susitna Hydro Aquatic Studies, Anchorage, Alaska.

Alaska Department of Fish and Game. 1983b. Susitna Hydro Aquatic Studies Phase II Basic Data Report. Volume 4 (3 parts): Aquatic Habitat and Instream Flow Studies, 1982. Prepared for Alaska Power Authority. Alaska Department of Fish and Game, Susitna Hydro Aquatic Studies, Anchorage, Alaska.

Alaska Department of Fish and Game. 1984a. Susitna Hydro Aquatic Studies, Report. No. 3, Aquatic Habitat and Instream Flow Investigations (May-October 1983): Chapter 3. Continuous Water Temperature investigations. Prepared for Alaska Power Authority. Alaska Department of Fish and Game, Susitna Hydro Aquatic Studies, Anchorage, Alaska.

Alaska Department of Fish and Game. 1984b. Susitna Hydro Aquatic Studies, Report No. 3, Aquatic Habitat and Instream Flow Investigations (May-October 1983): Chapter 1. Stage and Discharge Measurements. Prepared for Alaska Power Authority. Alaska Department of Fish and Game, Susitna Hydro Aquatic Studies, Anchorage, Alaska.

Alaska Department of Fish and Game. 1984c. Susitna Hydro Aquatic Studies, Report No. 1; Adult Anadromous Fish Investigations (May-October 1983). Prepared for Alaska Power Authority. Alaska Department of Fish and Game, Susitna Hydro Aquatic Studies, Anchorage, Alaska.

Alaska Department of Fish and Game. 1984d. Susitna Hydro Aquatic Team Studies, Report No. 2; Resident and Juvenile Anadromous Fish Investigations (May - October 1983). Prepared for Alaska Power Authority. Alaska Department of Fish and Game, Susitna Hydro Aquatic Studies, Anchorage, Alaska.

Alaska Department of Fish and Game. 1985. Susitna Hydro Aquatic Studies, Report No. 5, Winter Aquatic Investigations (September 1983 - May 1984), Volume 2, Appendix F: Winter Temperature Data. Prepared for Alaska Power Authority. Alaska Department of Fish and Game, Susitna Hydro Aquatic Studies, Anchorage, Alaska.

Alaska Power Authority (APA). 1983a. Application for license for major project, Susitna Hydroelectric Project, before the FERC. Exhibit E, Chapter 2. Prepared by Acres-American, Inc. February.

Alaska Power Authority. 1983b. Supplemental response 2-31, in response to the FERC April 12, 1983 request for supplemental information on the proposed Susitna Hydroelectric Project license application, project number 7114-000, filed with FERC on July 11, 1983.

Alaska Power Authority. 1984a. Evaluation of Alternative Flow Requirements. Prepared by Harza-Ebasco Susitna Joint Venture for Alaska Power Authority. November.

Alaska Power Authority. 1984b. Alaska Power Authority Comments on the Federal Energy Regulatory Commission Draft Environmental Impact Statement of May 1984. Vol. 9, Appendix VII - Slough Geohydrology Studies. Alaska Power Authority, Anchorage, Alaska. August.

Arctic Environmental Information and Data Center (AEIDC). 1984. Geomorphic change in the Devil Canyon to Talkeetna reach of the Susitna River since 1949, preliminary report. Draft. Submitted to Harza-Ebasco Susitna Joint Venture for Alaska Power Authority. May.

Baxter, R.M. and Glaude, P. 1980. Environmental Effects of Dams and Impoundments in Canada, Experience and Prospects. Department of Fisheries and Oceans, Bulletin 205, Ottawa.

Beaver, D. 1984. Memorandum to E. Gemperline, Harza-Ebasco Susitna Joint Venture, dated October 12, 1984.

Beaver, D. 1985. Memorandum to E. Gemperline, Harza-Ebasco Susitna Joint Venture, dated April 5, 1985.

Bray, D.I. 1972. Generalized Regime-Type Analysis of Alberta Rivers. Ph.D. Thesis, presented to the University of Alberta, Edmonton, Canada, 232 p.

Bredthauer, S., 1984. Memo to J. Bizer: in Alaska Power Authority Comments on the Federal Energy Regulatory Commission Draft Environmental Impact Statement of May 1984, Vol. 9, Appendix VII - Slough Geohydrology Studies. Alaska Power Authority, Anchorage, Alaska.

Brune, G.M. 1953. Trap Efficiency of Reservoirs. Trans. Am. Geophys. Union, June. U.S. Department Agr. Misc. Publ. 970, p. 884.

Chow, V.T. 1964. Runoff. Section 14, in V.T. Chow (editor), Handbook of Applied Hydrology, McGraw-Hill Book Company, New York.

Dolan, R., Howard, A. and Gallenson, A. 1974. Man's Impact on the Colorado River in the Grand Canyon, American Scientist, 62 (4), pp. 392-401.

E. Woody Trihey and Associates (EWT&A) and Woodward-Clyde Consultants (WCC). 1985. Instream flow relationships report, Volume No. 1 (working draft). Alaska Power Authority, Susitna Hydroelectric Project. Prepared for Harza-Ebasco Susitna Joint Venture. February.

Gottschalk, L.C. 1964. Reservoir Sedimentation, in Chow, V.T. (Ed) Handbook of Applied Hydrology. McGraw-Hill, New York.

Harza-Ebasco Susitna Joint Venture. 1984a. Instream ice simulation study, Susitna Hydroelectric Project. Doc. No. 1986. Prepared for Alaska Power Authority. October.

Harza-Ebasco Susitna Joint Venture. 1984b. Middle and Lower Susitna River, Water Surface Profiles and Discharge Rating Curves, Volumes I and II Draft Report. Susitna Hydroelectric Project Document No. 481. Prepared for Alaska Power Authority. January.

Harza-Ebasco Susitna Joint Venture. 1984c. Reservoir and river sedimentation, Susitna Hydroelectric Project. Doc. No. 475. Prepared for Alaska Power Authority. April.

Harza-Ebasco Susitna Joint Venture. 1984d. Lower Susitna River sedimentation study: project effects on suspended sediment

concentration. Draft report. Prepared for Alaska Power Authority. November.

Harza-Ebasco Susitna Joint Venture. 1985. Middle Susitna River sedimentation study stream channel stability analysis of selected sloughs, side channels, and main channel locations. Draft report. Prepared for Alaska Power Authority. March.

Hey, R.D., J.C. Bathurst and C.R. Thorne (editors). 1982. Gravel-Bed Rivers; Fluvial Processes, Engineering and Management, John Wiley and Sons, New York.

Jokela, J.B., S.R. Bredthauer, and J.H. Coffin. 1983. Sedimentation in glacial lakes. Paper presented at Cold Regions Environmental Engineering Conference, May 18-20, 1983, Fairbanks, Alaska. Sponsored by University of Alaska, Fairbanks, and University of Alberta, Edmonton.

Kellerhals, R. 1982. Effect of river regulation on channel stability. In: Gravel-Bed Rivers: Fluvial Processes, Engineering and Management (R.D. Hey, J.C. Bathurst, and C.R. Thorne, eds.). John Wiley and Sons, New York, New York.

Kellerhals, R., Church, M., and Davies, L.B. 1977. Morphological Effects of Interbasin River diversions, in Third National Hydroelectrical Conference, Quebec, 30-31, May 1977, Canadian Society for Civil Engineering, pp. 833-851.

Kellerhals, R. and D. Gill. 1973. Observed and Potential Downstream Effects of Large Storage Projects in Northern Canada. Proceedings, 11th International Congress on Large Dams Madrid, pp. 731-754.

King, N.J. 1961. An Example of Channel Aggradation Induced by Flood Control. U.S. Geological Survey Prof. Papers 424B, 15, pp. 29-32.

Klinger, S. and W. Trihey. 1984. Response of aquatic habitat surface ares to mainstem discharge in the Talkeetna to Devil Canyon reach of the Susitna River, Alaska. Prepared for Alaska Power Authority, under contract to Harza-Ebasco Susitna Joint Venture. Doc. No. 1693. June.

Knott, J. M. and S.W. Lipscomb. 1983. Sediment discharge data for selected sites in the Susitna River basin, Alaska, 1981-82. U.S. Geological Survey Open-File Report 83-370. Prepared in cooperation with the Alaska Power Authority.

Knott, J.M. and S.W. Lipscomb. 1985. Sediment discharge data for selected sites in the Susitna River basin, Alaska, October 1982 to February 1984. U.S. Geological Survey Open-File Report 85-157. Prepared in cooperation with Alaska Power Authority.

Lane, E.W. 1955. The Importance of Fluvial Morphology in Hydraulic Engineering: Proc., ASCE, Vol. 21, No. 745, 17 p.

Leopold, L.B., and T. Maddock. 1953. The Hydraulic Geometry of Stream Channels and Some Physiographic Implications, USGS Prof. Paper 252, 57 p.

Leopold, L.B., Wolman, M.G. and Miller, J.P. 1964. Fluvial processes in geomorphology. W.H. Freeman and Company, San Francisco, 522 pp.

Mavis, F.T., and L.M. Laushey. 1948. A Reappraisal of the Beginning of Bed-Movement Competent Velocity, International Association for Hydraulic Research, Second Meeting, Stockholm. June.

Moore, C.M. 1969. Effects of Small Structures on Peak Flow, In Moore, C.M. and Morgan, C.W. (Eds.), Effects of Watershed Changes on Streamflow, University Texas Press, Austin, pp. 101-117.

Peratrovich, Nottingham, and Drage, Inc. (PN&D) and I.P.G. Hutchison. 1982. Susitna reservoir sedimentation and water clarity study. Prepared for Acres American, Inc. November.

Petts, G.E. 1977. Channel Response to Flow Regulation: the Case of the River Derwent, Derbyshire, in Gregory, K.J. (Ed.), River Channel Changes, John Wiley & Sons, New York, pp. 145-164.

Prince, B.L. 1964. The Alaska Railroad. Ken Wray's Print Shop. Anchorage, Alaska.

R&M Consultants, Inc. (R&M). 1981a. Hydrographic Surveys. Prepared for Acres American, Inc. for Alaska Power Authority. October.

R&M Consultants, Inc. 1981b. Ice Observations 1980-81. Prepared for Acres American, Inc. for Alaska Power Authority. August.

R&M Consultants, Inc. 1982a. Glacial lake studies interim report. Prepared for Acres American, Inc., for Alaska Power Authority. December.

R&M Consultants, Inc. 1982b. Hydraulic and ice studies. Prepared for Acres American, Inc. for Alaska Power Authority. March.

R&M Consultants, Inc. 1982c. 1982 Hydrographic surveys. Prepared for Acres American, Inc. for Alaska Power Authority. December.

R&M Consultants, Inc. 1982d. Reservoir Sedimentation. Prepared for Acres American Inc. for Alaska Power Authority. January.

R&M Consultants, Inc. 1982e. River Morphology. Prepared for Acres American, Inc. for Alaska Power Authority. Susitna Hydroelectric Project. January.

R&M Consultants, Inc. 1982f. Tributary stability analysis. Prepared for Acres American, Inc. for Alaska Power Authority, Susitna Hydroelectric Project. December.

R&M Consultants, Inc. 1982g. Susitna Hydroelectric Project Slough Hydrology Interim Report. Prepared for Alaska Power Authority, Anchorage, Alaska. December.

R&M Consultants, Inc. 1982h. Winter 1981-82 Ice Observations report. Prepared for Acres American, Inc. for Alaska Power Authority, Susitna Hydroelectric Project. December.

R&M Consultants, Inc. 1984a. Lower Susitna River aggradation study: field data. Draft report. Prepared for Alaska Power Authority under contract to Harza-Ebasco Susitna Joint Venture. December.

R&M Consultants, Inc. 1984b. Susitna River ice study, 1982-83. Prepared for Alaska Power Authority under contract to Harza-Ebasco Susitna Joint Venture. January.

R&M Consultants, Inc. 1985a. Water balance studies of the Middle Susitna River sloughs. Draft report. Prepared for Alaska Power Authority under contract to Harza-Ebasco Susitna Joint Venture. December.

R&M Consultants, Inc. 1985b. Glacial lake physical limnology studies: Eklutna Lake, Alaska. Draft report. Prepared for Alaska Power Authority under contract to Harza-Ebasco Susitna Joint Venture. May.

Santos-Cayudo, J. and D.B. Simons, 1972. River Response, Environmental Impact on Rivers, H.W. Shen, Editor, Chapter 1, Water Resources Publications, Fort Collins, Colorado.

Schumm, S.A., 1971. Fluvial Geomorphology. In: The Historical Perspective, River Mechanics, H.W. Shen, editor, Vol. I, Chapter 4, Water Resources Publications, Fort Collins, Colorado.

Shulits, S. 1934. Experience with Bed Degradation below Dams on European Rivers, Engineering News Rec., June, pp. 838-839.

Simons, D.B. and R.M. Li, 1978. Erosion and Sedimentation Analysis of San Juan Creek, New Conrock Gravel Pit, Orange County, California, Technial Report for Dames and Moore, Denver, Colorado.

Simons, D.B. and Senturk, F. 1977. Sediment transport technology, Water Resources Publications, Fort Collins, Colorado, p. 465.

Simons, Li and Associates. 1982. Engineering Analysis of Fluvial Systems. Published by Simons, Li and Associates, Inc. Fort Collins, Colorado.

Stabler, H. 1925. Does Desilting Affect Cutting Power of Stream? Engineering News Record, December 95, 24, p. 960.

Stanley, J.W. 1951. Retrogression of the Lower Colorado River after 1935. Discussion: T. Blench; E.W. Lane; J.W. Stanley, Transactions, American Society of Civil Engineers, Vol. 116, Paper No. 2453.

Taylor, K.V. 1978. Erosion downstream of dams. In Environmental Effects of Large Dams, edited by committee on Environmental Effects of the U.S. Committee on Large Dams, American Society of Civil Engineers. New York, New York.

Trihey, E.W., Alaska Department of Fish and Game, and Arctic Environmental Information and Data Center. 1982. 1982 Winter Temperature

Study - Open File Report. Prepared for Acres American Incorporated, Buffalo, New York.

Trihey, E.W. 1983. Preliminary Assessment of Access by Spawning Salmon into Portage Creek and Indian River. Prepared for Alaska Power Authority. March.

Tutt, D.B. 1979. Kootenay River Diversion Project River Regime and Morphology Studies, in Fourth National Hydroelectric Conference, River Basin Management, Vancouver, B.C., May 7-8, 1979, Canadian Society for Civil Engineering, pp. 530-554.

U.S. Bureau of Reclamation (U.S.B.R.). 1977. Design of Small Dams, 2nd edition, Revised Reprint, Denver, Colorado.

Vanoni, V.A. (Editor). 1975. Sedimentation Engineering, Chapter IV; ASCE Manuals and Reports on Engineering Practice - No. 54.

Wangaard, D.B., and C.V. Burger. 1983. Effects of Various Temperature Regimes on the Egg and Alevin Incubation of Susitna River Chum and Sockeye Salmon. National Fishery Research Center, U.S. Fish and Wildlife Service, Anchorage, Alaska.

Wang, B.H., S.R. Bredthauer, and E.A. Marchegiani. 1985. Design problems in gravel-bed rivers, Alaska. Paper prepared for presentation at International Workshop on Problems of Sediment Transport in Gravel-bed Rivers, August 12-17, 1985, at Colorado State University, Pingree Park Campus, Colorado.