Susitna-Watana Hydroelectric Project Document ARLIS Uniform Cover Page

Title:			
Fluvial geomorphology modeling below Watana Dam study, Study plan Section 6.6: Initial study report Part A: Figures		SuWa 223	
Author(s) – Personal:			
Author(s) – Corporate:			
Tetra Tech, Watershed GeoDynamics			
AEA-identified category, if specified:			
Initial study report			
AEA-identified series, if specified:			
Series (ARLIS-assigned report number):	Existing numbers on document:		
Susitna-Watana Hydroelectric Project document number 223			
,			
Published by:	Date published:		
[Anchorage : Alaska Energy Authority, 2014]	June 2014		
Published for:	Data ou data un	age of sources.	
Alaska Energy Authority	Date or date ra	inge of report.	
Volume and/or Part numbers:	Final or Draft status, as indicated:		
Document type:	Pagination:		
	iii pages a	nd pages 122-166	
Related work(s):	Pages added/c	hanged by ARLIS:	
The following parts of Section 6.6 appear in separate files: Part	. ages added/th	god by / maio.	
A; Part B; Part C; Appendices; Part A, Figures.			
Notes:			

All reports in the Susitna-Watana Hydroelectric Project Document series include an ARLIS-produced cover page and an ARLIS-assigned number for uniformity and citability. All reports are posted online at http://www.arlis.org/resources/susitna-watana/





PART A - FIGURES

Susitna-Watana Hydroelectric Project (FERC No. 14241)

Fluvial Geomorphology Modeling Study (6.6)

Part A - Figures

Initial Study Report

Prepared for

Alaska Energy Authority



Prepared by

Tetra Tech and

Watershed GeoDynamics

June 2014

LIST OF FIGURES

Figure 3.1-1. Current limits of the Fluvial Geomorphology Modeling Study and large-scale river segments
Figure 3.2-1. Location of Focus Areas in the Middle Susitna River Segment with geomorphic reaches shown.
Figure 4.1-1. Sketch of transect locations (identified as L, C and R) for surface sampling at sample location PRM 113.5 (left) and photograph of sample location, view downstream (right).
Figure 4.1-2. Example of completed field data form for coarse-grained surface samples 120
Figure 4.1-3. Three functions to calculate minimum sampling depth (dsample in ft) from the Dmax particle size (Modified from Figure 4.18 from Bunte and Abt, 2001)
Figure 4.1-4. Minimum sample weight for sediment with different Dmax sizes (Dmax = 0.1% of the sample weight for Dmax < 32mm, Dmax = 1% of the sample weight for Dmax < 128mm and Dmax = 5% of the sample weight for Dmax > 128mm (Modified from Figure 4.20 from Bunte and Abt, 2001)
Figure 4.1-5: Example of complete field data form for subsurface samples
Figure 4.1-6: Example of front and back of 2013 bank observation data sheets
Figure 4.1-7. 2011 Matanuska-Susitna Borough LiDAR collections and 2013 ground survey point locations
Figure 4.1-8. Example ground survey points displayed over aerial photography
Figure 4.1-9. Example ground survey points displayed over TIN derived from LiDAR point cloud
Figure 4.2-1 Fluvial Geomorphology Model Interdependencies
Figure 5.1-1. Cross Section Locations for Reach Scale 1-D Sediment-Transport Model 13-
Figure 5.1-2. Cross Section Locations for Reach Scale 1-D Sediment-Transport Model 13:
Figure 5.1-3. Cross Section Locations for Reach Scale 1-D Sediment-Transport Model 130
Figure 5.1-4. Cross Section Locations for Reach Scale 1-D Sediment-Transport Model 13
Figure 5.1-5. Cross Section Locations for Reach Scale 1-D Sediment-Transport Model 13
Figure 5.1-6. Cross Section Locations for Reach Scale 1-D Sediment-Transport Model 139
Figure 5.1-7. Cross Section Locations for Reach Scale 1-D Sediment-Transport Model 140

Figure 5.1-8. Cross Section Locations for Reach Scale 1-D Sediment-Transport Model 141
Figure 5.1-9. Merged Hydrographic Survey and LiDAR Survey at PRM 117.9
Figure 5.1-10. Triangular Irregular Network (TIN) Developed to Represent the Channel and Portions of the Overbanks at FA-104.
Figure 5.1-11. One-foot Interval Contour Mapping of FA-104 Developed from the TIN (Figure 5.1-10)
Figure 5.1-12. Two-foot Interval Contour Mapping Developed from the 2013 LiDAR Survey of FA-104.
Figure 5.1-13. Extents of the SRH-2D Habitat Mesh
Figure 5.1-14. Geomorphic surface mapping of FA-104 Whiskers Slough
Figure 5.1-15. Example of Habitat Areas at FA-104 Selected to Have a Fine Mesh Size (6.5 feet, 2 m). The Habitat Areas Were Identified by the Aquatic Habitat Team
Figure 5.1-16. Example of SRH-2D Mesh in Habitat Area at the Mouth of Whiskers Creek (in FA-104) Selected to Have a Fine Mesh Size (2 meters)
Figure 5.1-17. SRH-2D Bed Evolution Mesh. The Mesh Contains Approximately 10,000 Elements
Figure 5.1-18: Locations of Middle Susitna River Segment Focus Areas
Figure 5.1-19. Predicted Depth Distribution at FA-104 for 24,000 cfs
Figure 5.1-20. Predicted Velocity Distribution at FA-104 for 24,000 cfs
Figure 5.1-21. Predicted Depth Distribution at FA-104 for 100,000 cfs
Figure 5.1-22. Predicted Velocity Distribution at FA-104 for 100,000 cfs
Figure 5.1-23. Lower Susitna River Segment Tributary Locations Relative to Geomorphic Reaches
Figure 5.1-24. Middle Susitna River Segment Tributary Locations Relative to Geomorphic Reaches and Focus Areas
Figure 5.1-25: Sediment samples and bank observations collected at FA-104 (Whiskers Slough).
Figure 5.1-26. GoPro image from Whiskers Slough with lights, lasers, and scale in video mode.

Figure 5.1-27. GoPro image from ESS40 with lasers and the Brinkman Q-Beam Starfire II underwater fishing light.	. 159
Figure 5.1-28. GoPro image from ESS40 with lasers and without lights	. 160
Figure 5.1-29. 2013 LiDAR priority areas and collection.	. 161
Figure 6.1-1. Lower Susitna River Segment Bed Material Comparison.	. 162
Figure 6.1-2. Middle Susitna River Segment Bed Material Comparison.	. 163
Figure 6.1-3. Lower Susitna River Segment Screening of Coupled WSE and Flow Measurements.	. 164
Figure 6.1-4. Middle Susitna River Segment Screening of Coupled WSE and Flow Measurements.	. 165
Figure 6.1-5. ADCP Flow Measurement Locations at Whiskers Slough (FA-104)	. 166

10. FIGURES

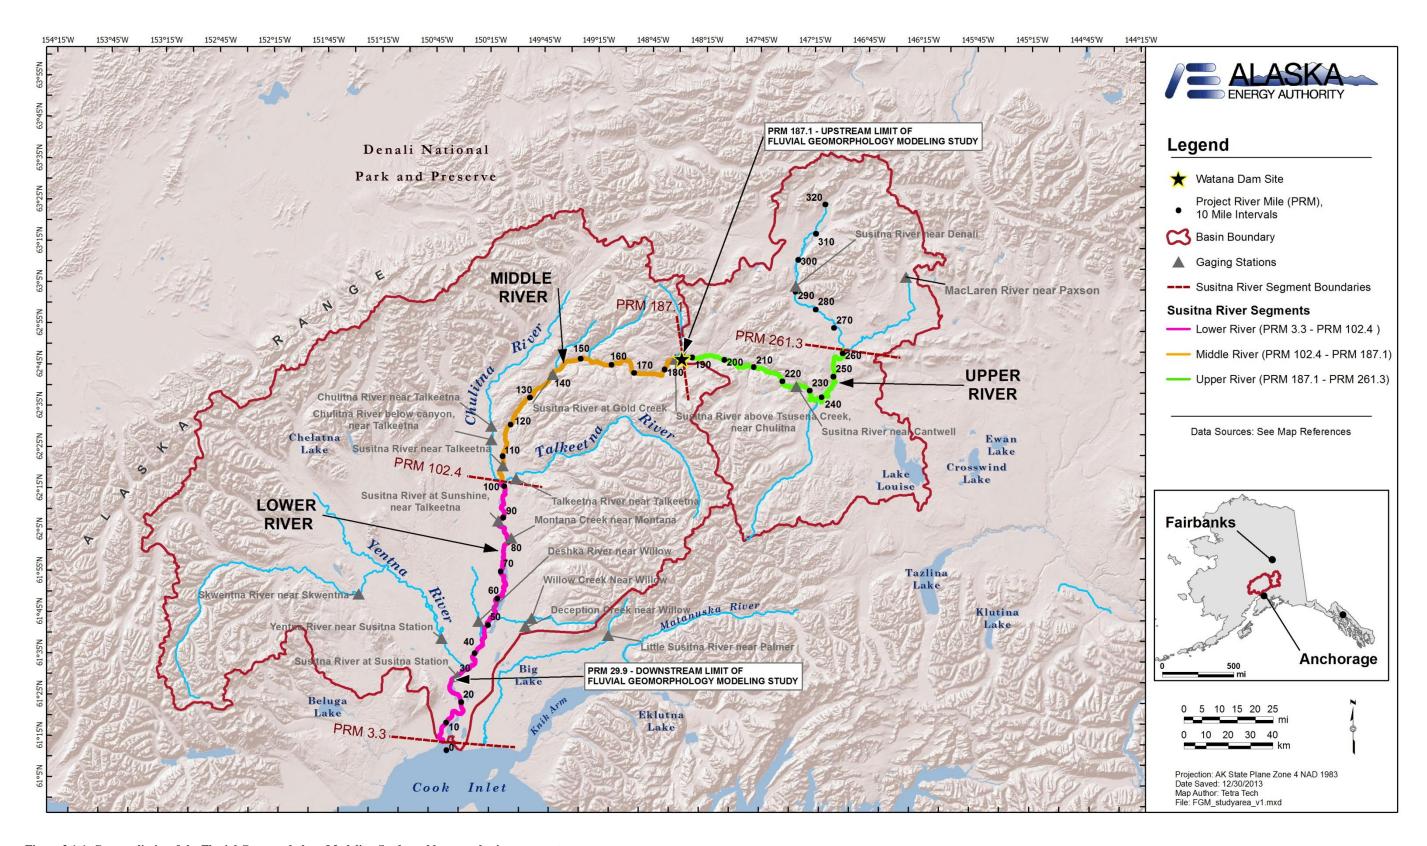


Figure 3.1-1. Current limits of the Fluvial Geomorphology Modeling Study and large-scale river segments.

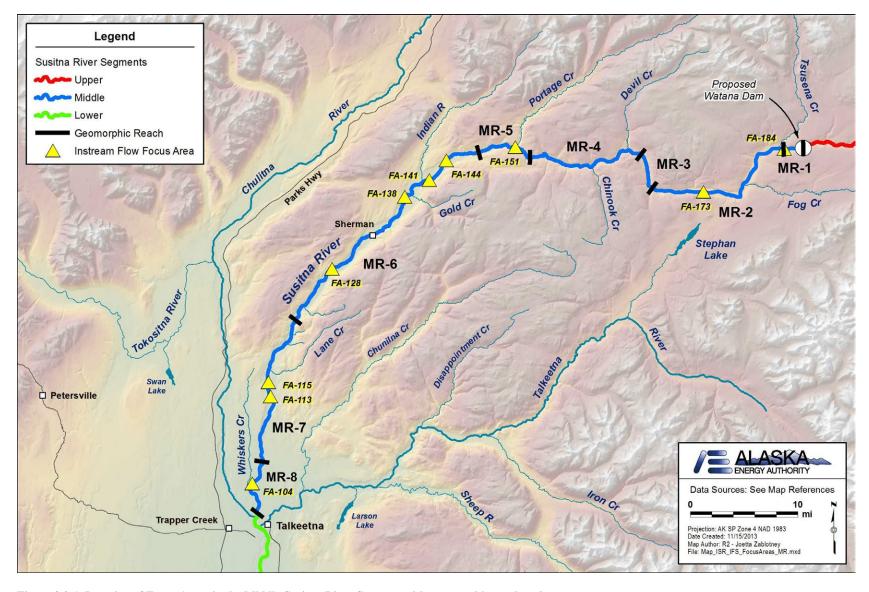


Figure 3.2-1. Location of Focus Areas in the Middle Susitna River Segment with geomorphic reaches shown.

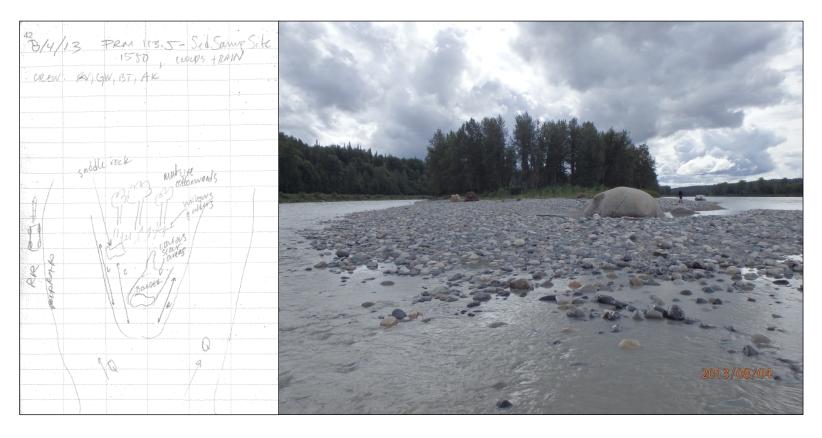


Figure 4.1-1. Sketch of transect locations (identified as L, C and R) for surface sampling at sample location PRM 113.5 (left) and photograph of sample location, view downstream (right).

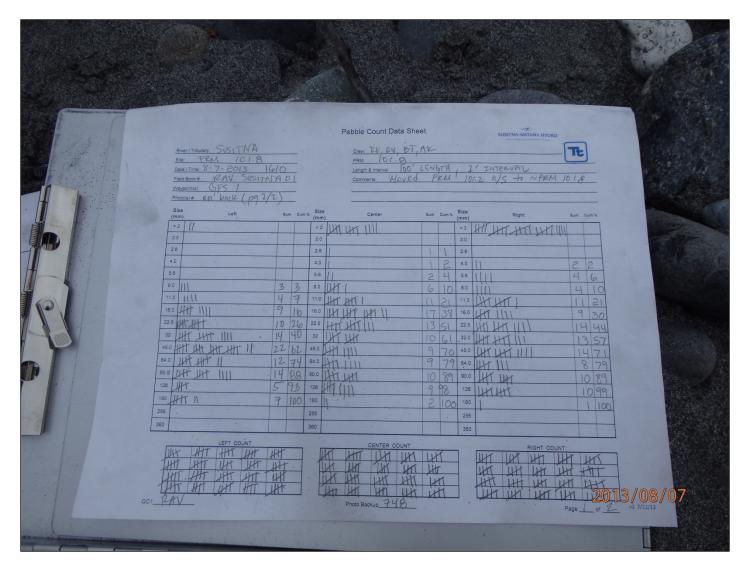


Figure 4.1-2. Example of completed field data form for coarse-grained surface samples.

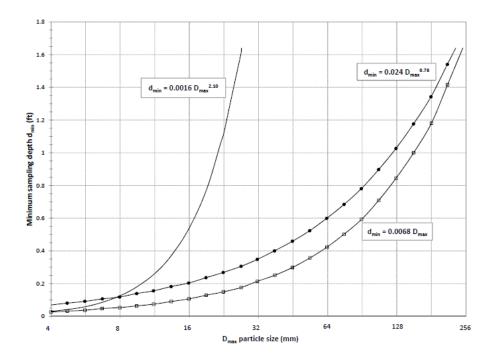


Figure 4.1-3. Three functions to calculate minimum sampling depth (dsample in ft) from the Dmax particle size (Modified from Figure 4.18 from Bunte and Abt, 2001).

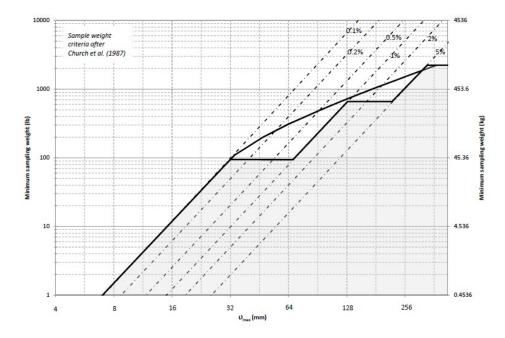


Figure 4.1-4. Minimum sample weight for sediment with different Dmax sizes (Dmax = 0.1% of the sample weight for Dmax < 32mm, Dmax = 1% of the sample weight for Dmax < 128mm and Dmax = 5% of the sample weight for Dmax > 128mm (Modified from Figure 4.20 from Bunte and Abt, 2001)

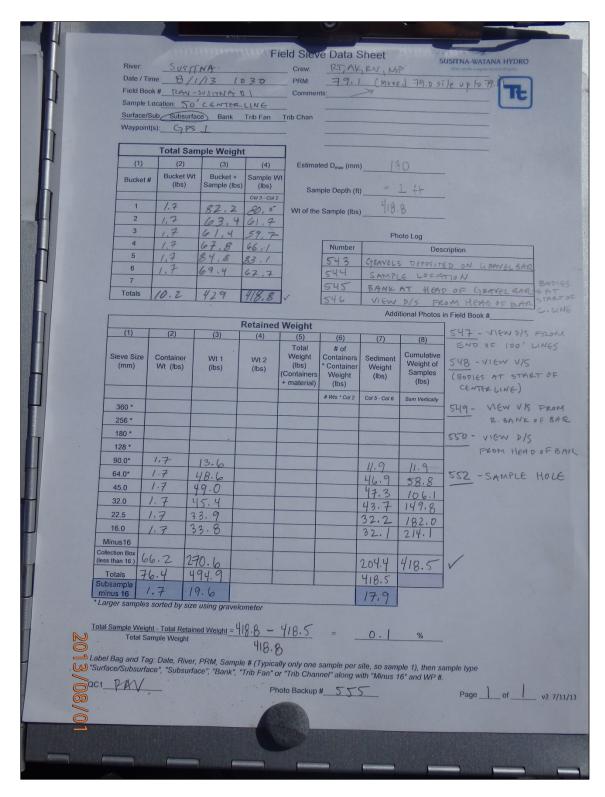


Figure 4.1-5: Example of complete field data form for subsurface samples.

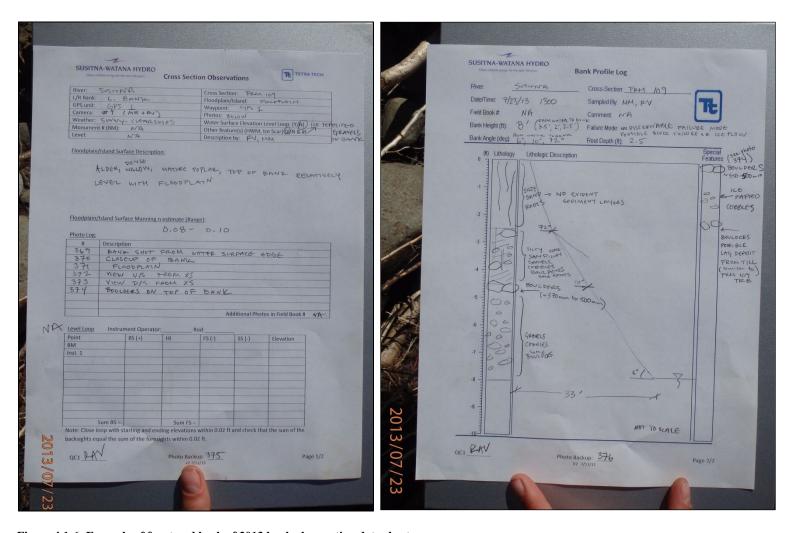


Figure 4.1-6: Example of front and back of 2013 bank observation data sheets.


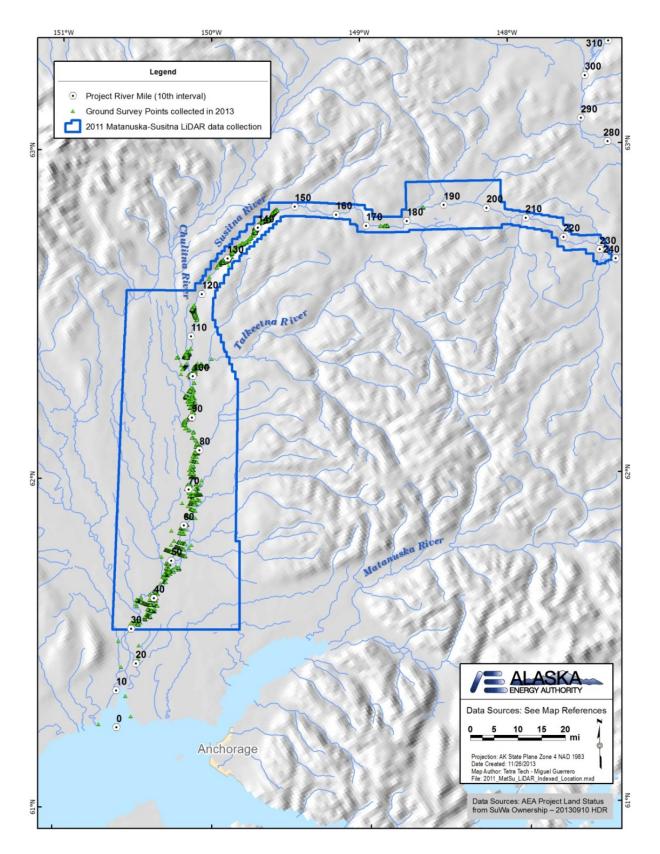


Figure 4.1-7. 2011 Matanuska-Susitna Borough LiDAR collections and 2013 ground survey point locations.



Figure 4.1-8. Example ground survey points displayed over aerial photography

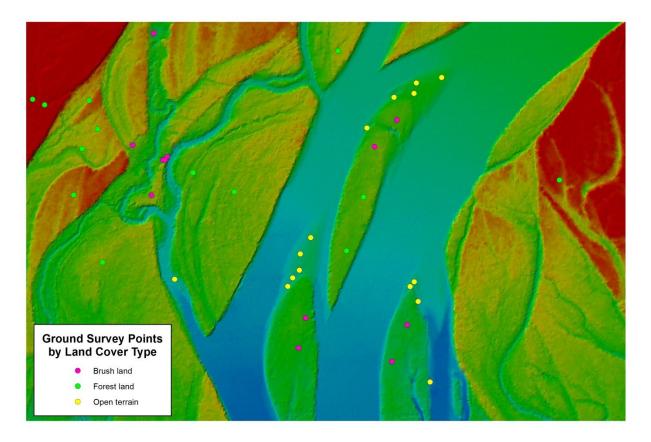

 $Figure \ 4.1-9. \ Example \ ground \ survey \ points \ displayed \ over \ TIN \ derived \ from \ LiDAR \ point \ cloud.$

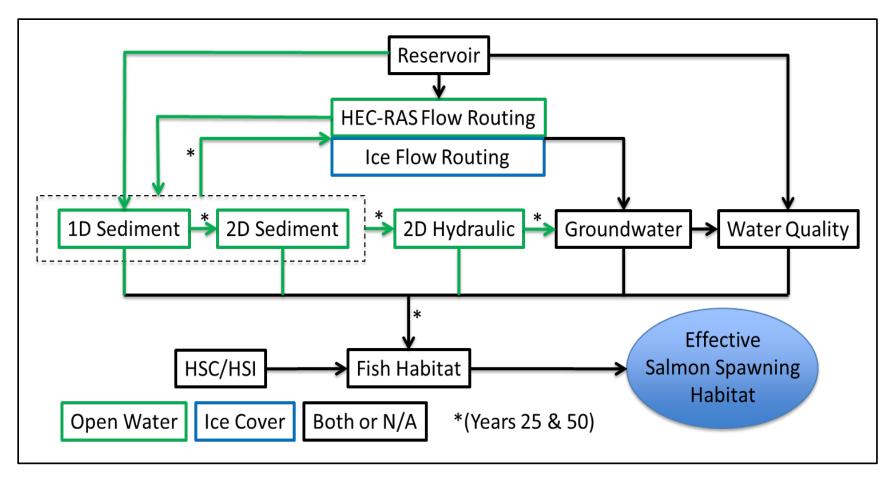


Figure 4.2-1 Fluvial Geomorphology Model Interdependencies.

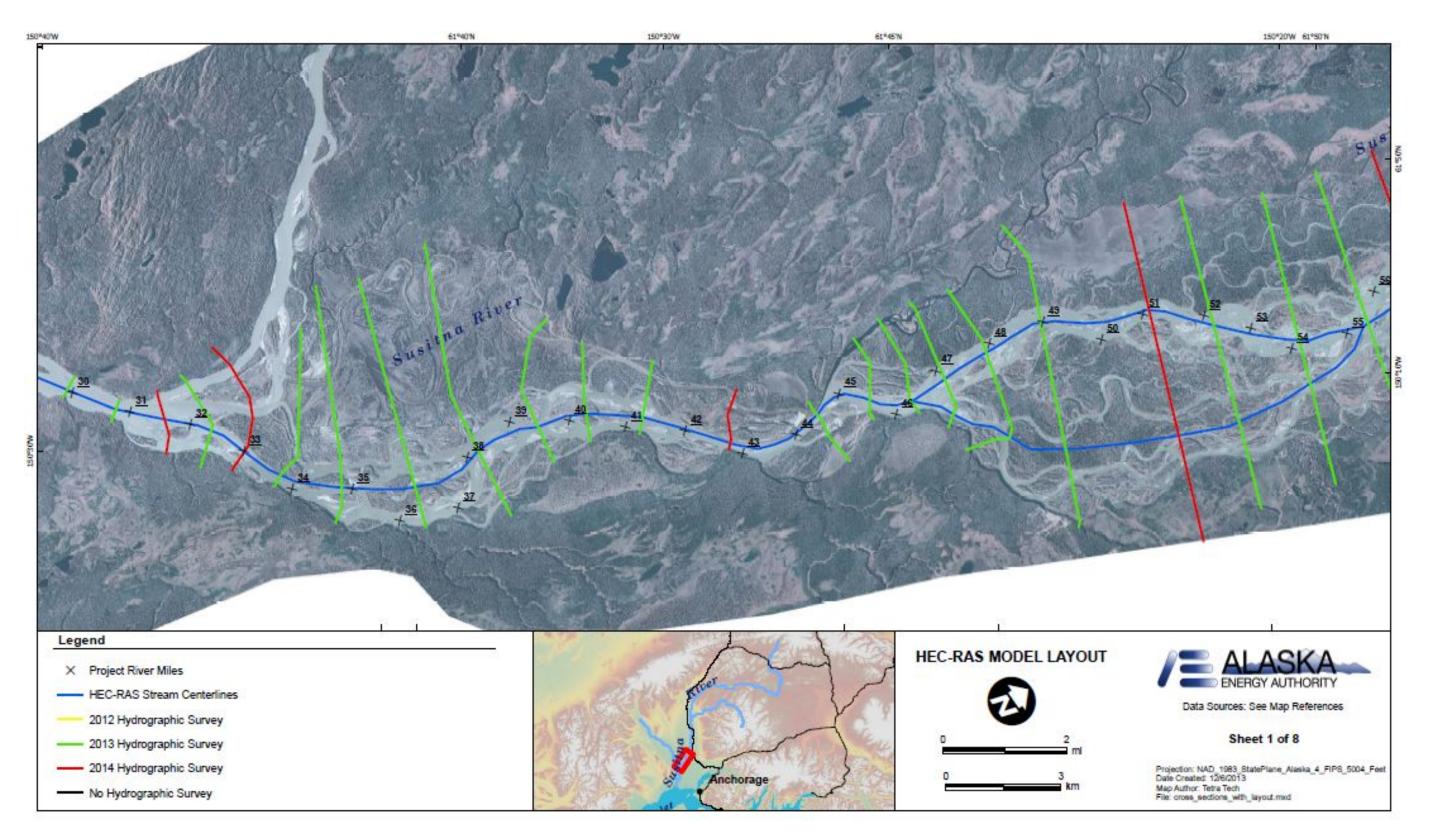


Figure 5.1-1. Cross Section Locations for Reach Scale 1-D Sediment-Transport Model

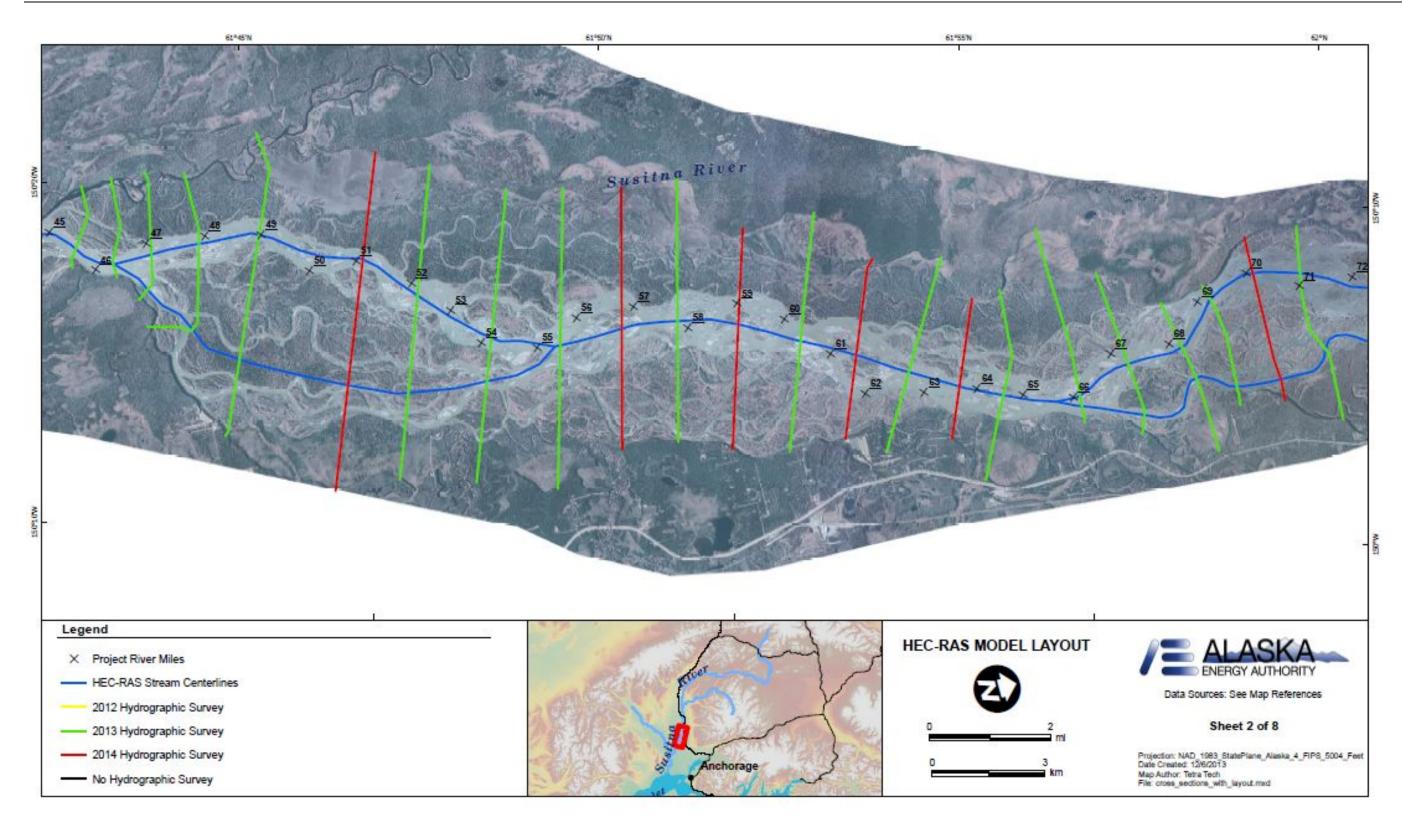


Figure 5.1-2. Cross Section Locations for Reach Scale 1-D Sediment-Transport Model

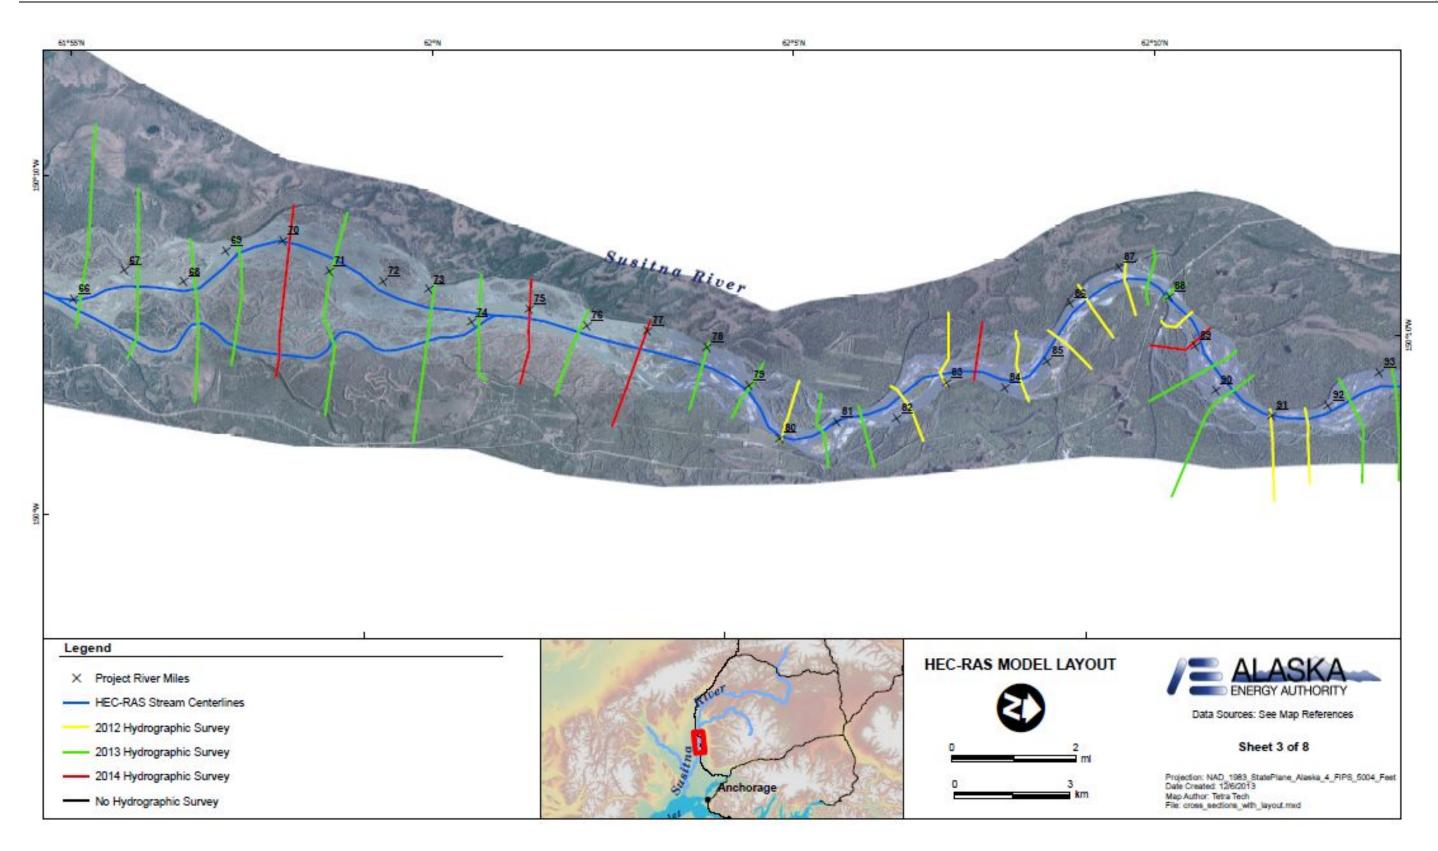


Figure 5.1-3. Cross Section Locations for Reach Scale 1-D Sediment-Transport Model

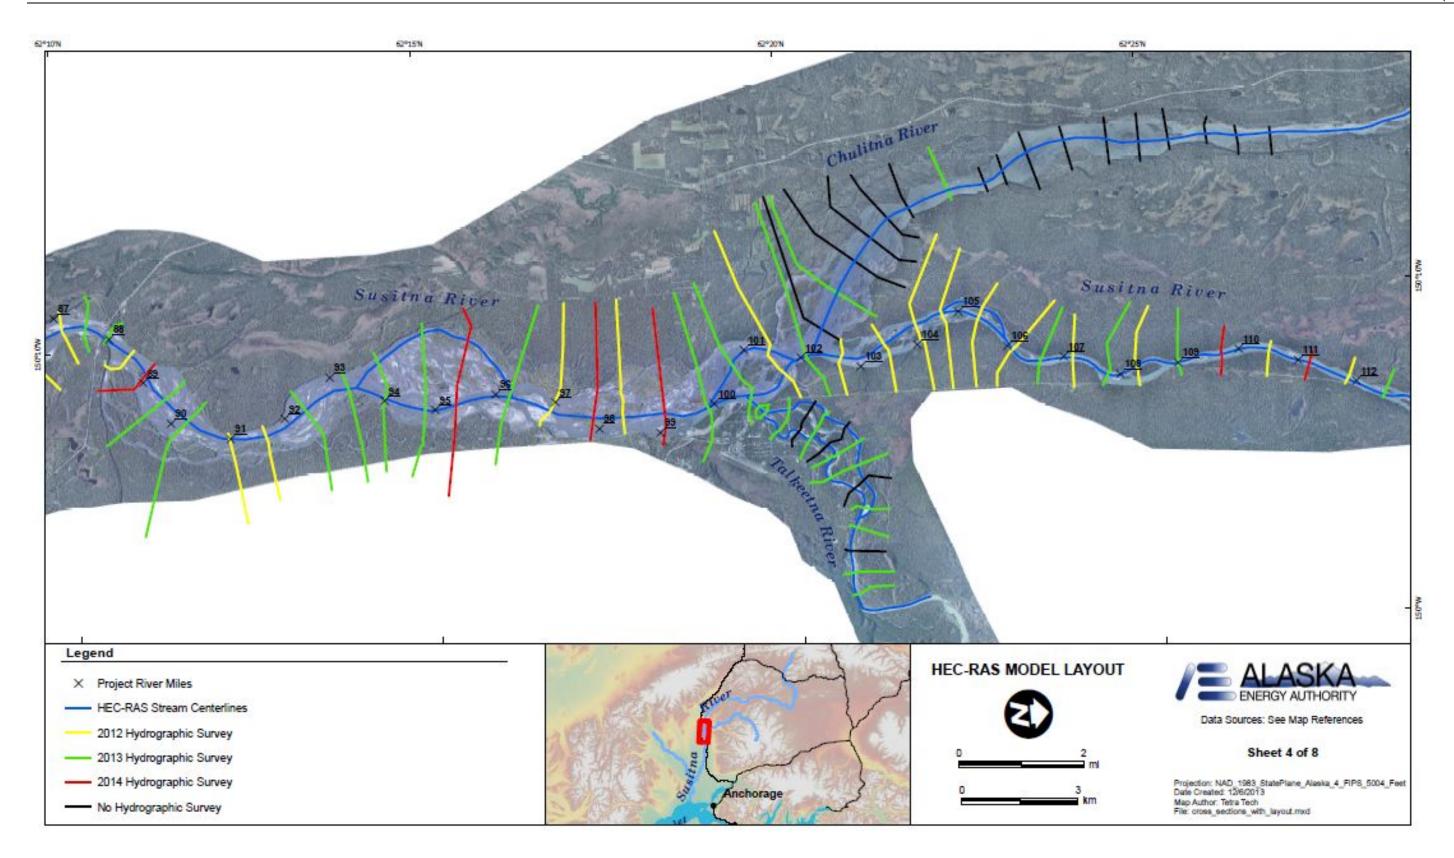


Figure 5.1-4. Cross Section Locations for Reach Scale 1-D Sediment-Transport Model

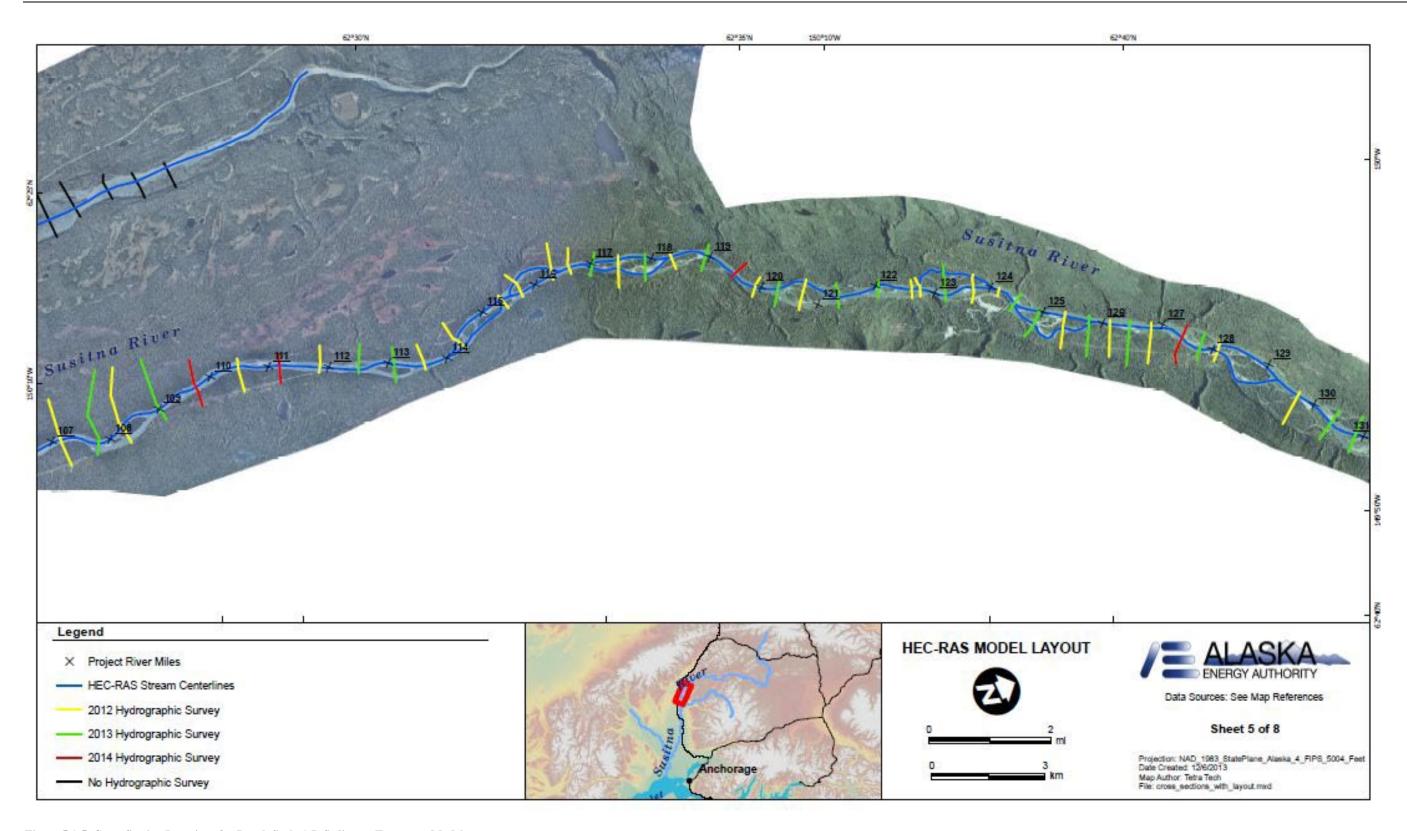


Figure 5.1-5. Cross Section Locations for Reach Scale 1-D Sediment-Transport Model

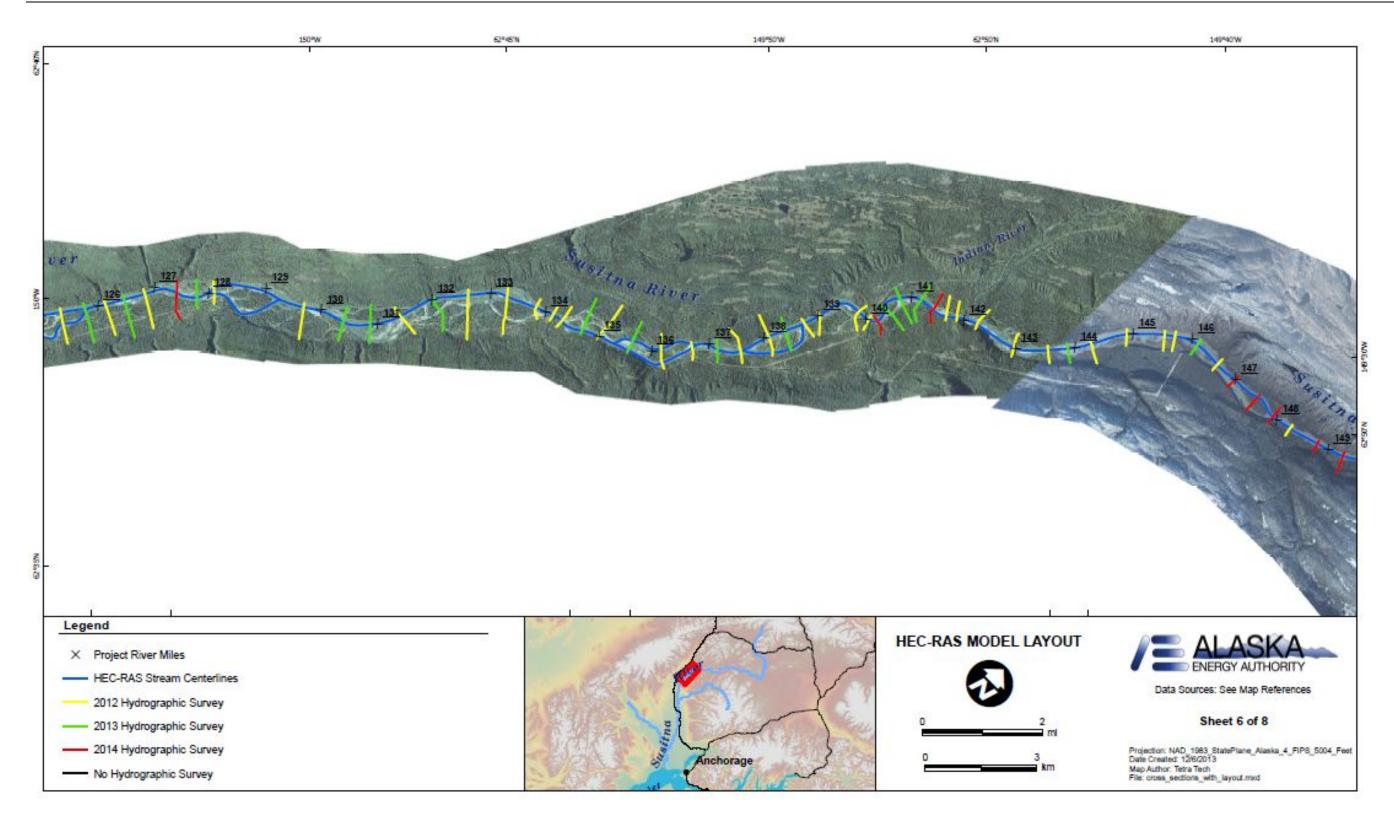


Figure 5.1-6. Cross Section Locations for Reach Scale 1-D Sediment-Transport Model

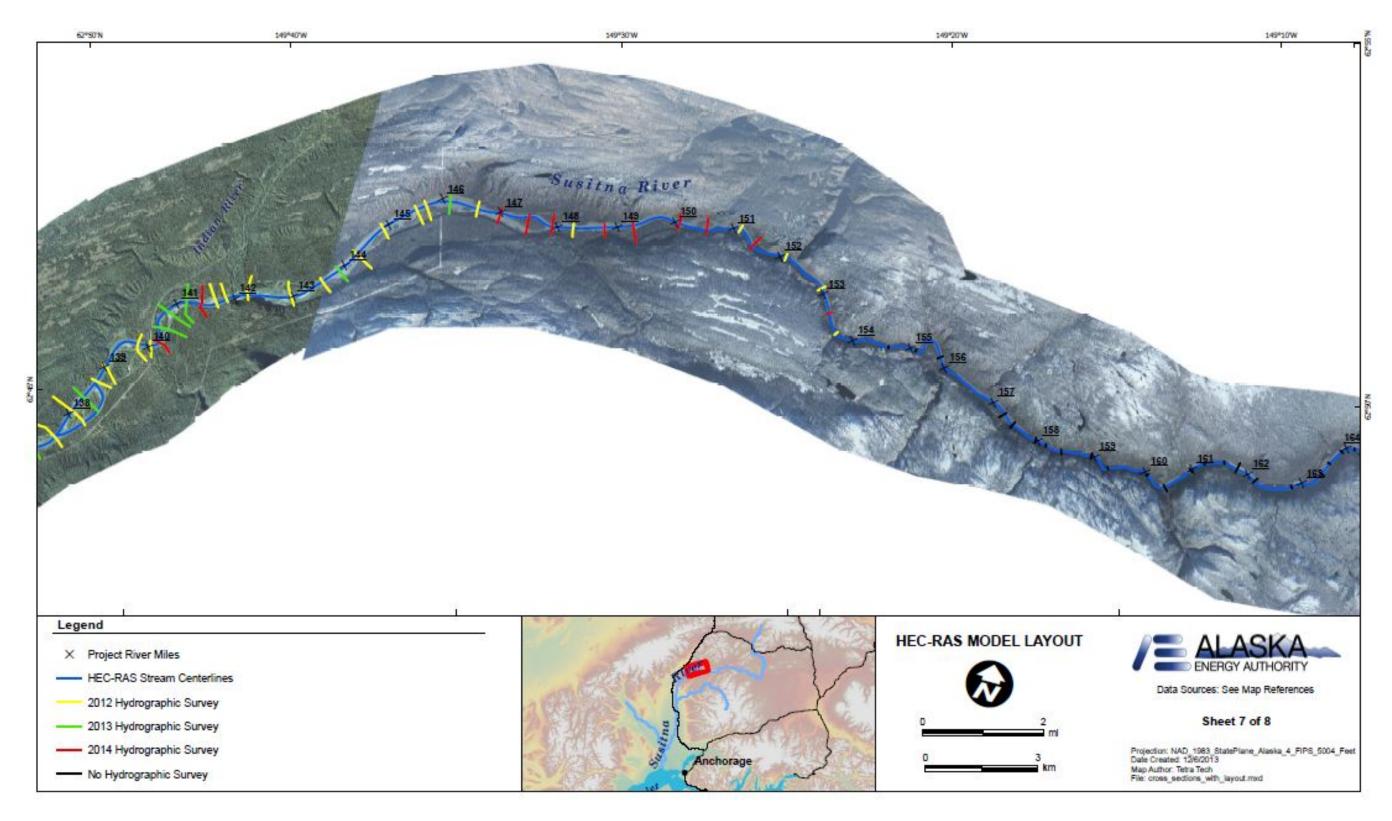


Figure 5.1-7. Cross Section Locations for Reach Scale 1-D Sediment-Transport Model

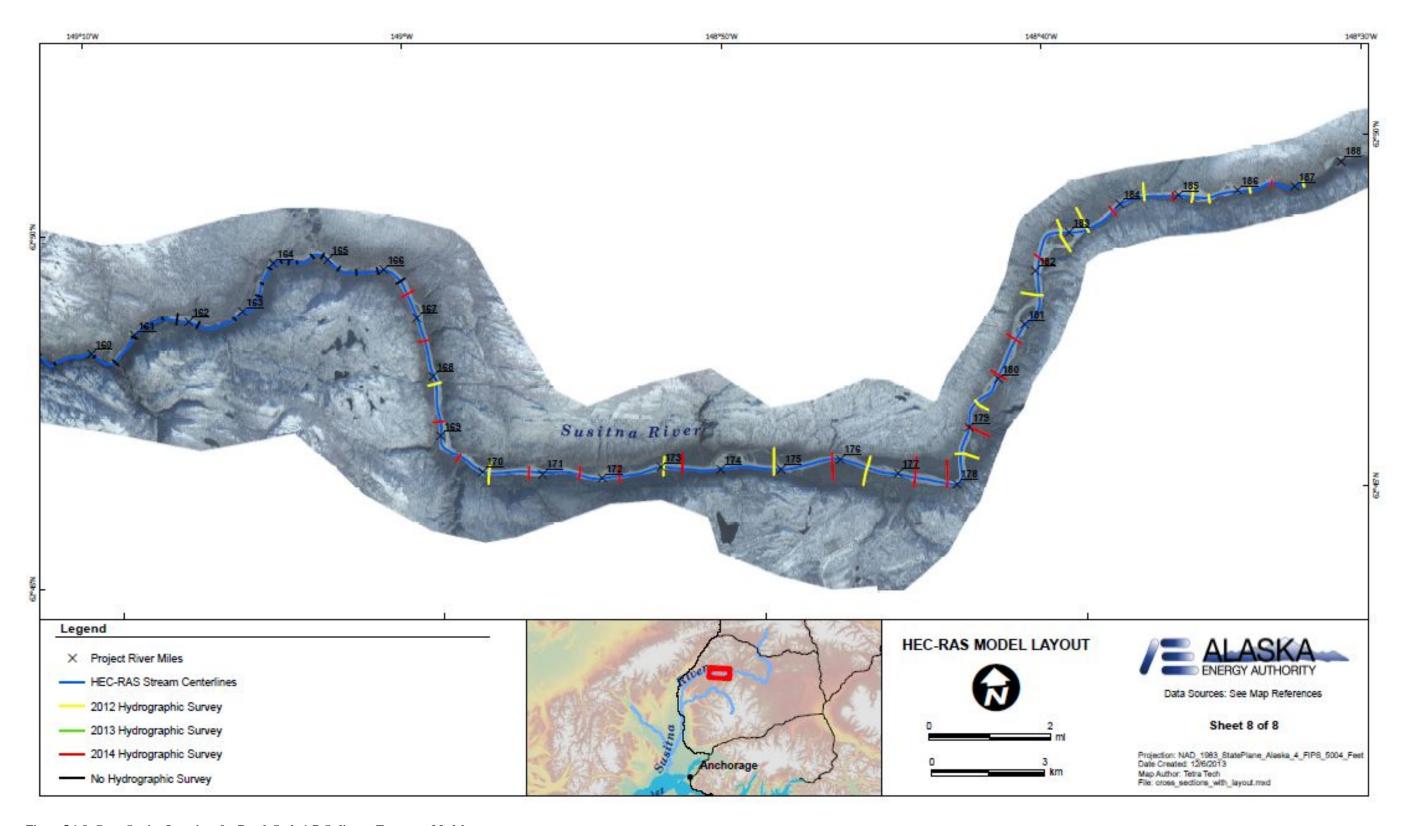


Figure 5.1-8. Cross Section Locations for Reach Scale 1-D Sediment-Transport Model.

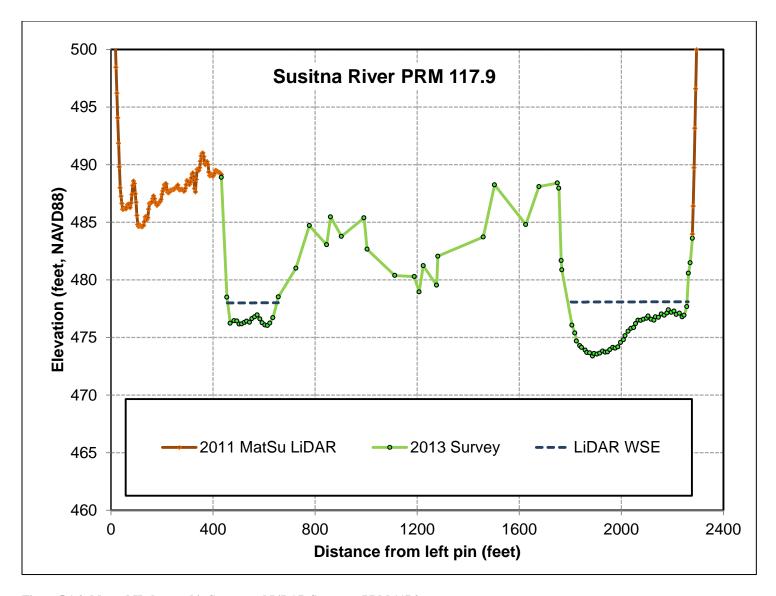


Figure 5.1-9. Merged Hydrographic Survey and LiDAR Survey at PRM 117.9.

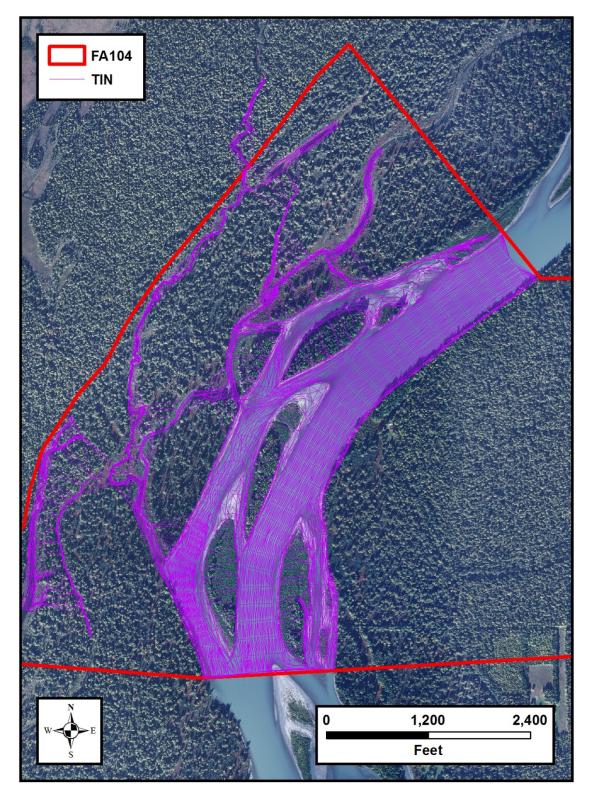


Figure 5.1-10. Triangular Irregular Network (TIN) Developed to Represent the Channel and Portions of the Overbanks at FA-104.

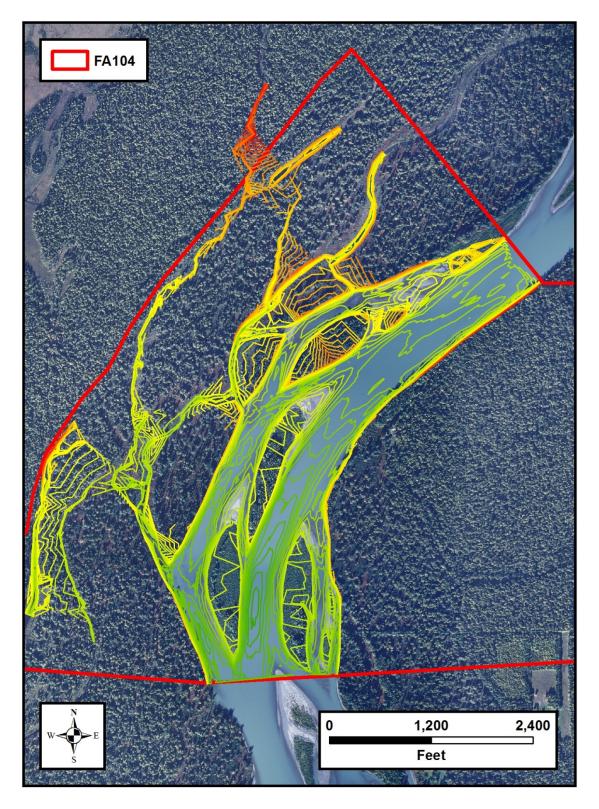


Figure 5.1-11. One-foot Interval Contour Mapping of FA-104 Developed from the TIN (Figure 5.1-10).

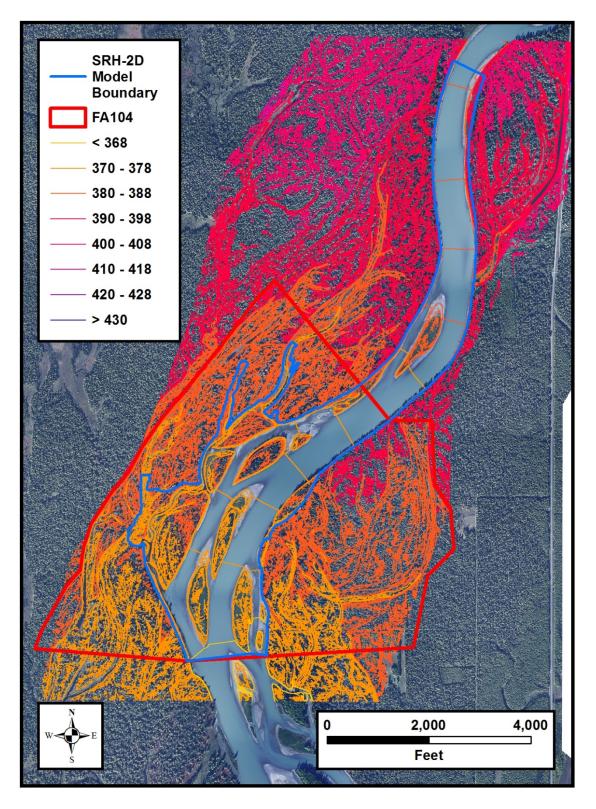


Figure 5.1-12. Two-foot Interval Contour Mapping Developed from the 2013 LiDAR Survey of FA-104.

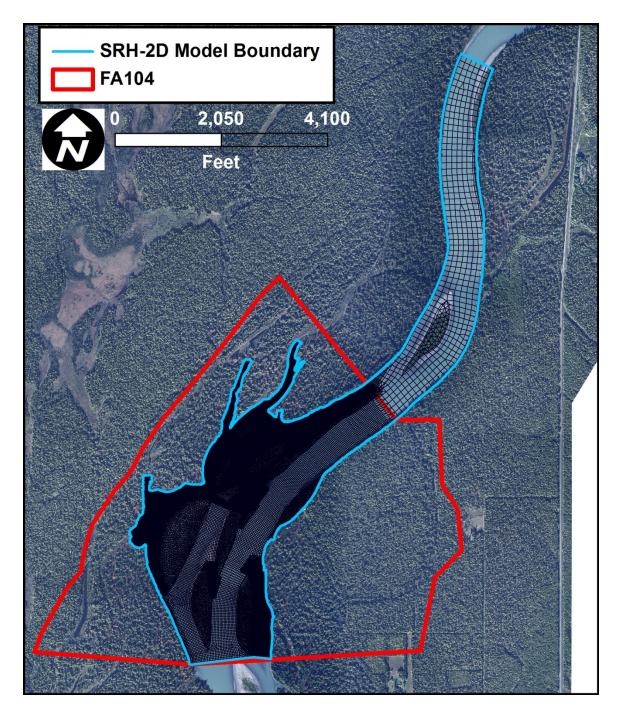


Figure 5.1-13. Extents of the SRH-2D Habitat Mesh. Note: the model contains approximately 164,000 elements and was extended upstream of the focus area to provide better prediction of the hydraulic conditions at the upstream end of the focus area and to evaluate the potential for overbank flows.

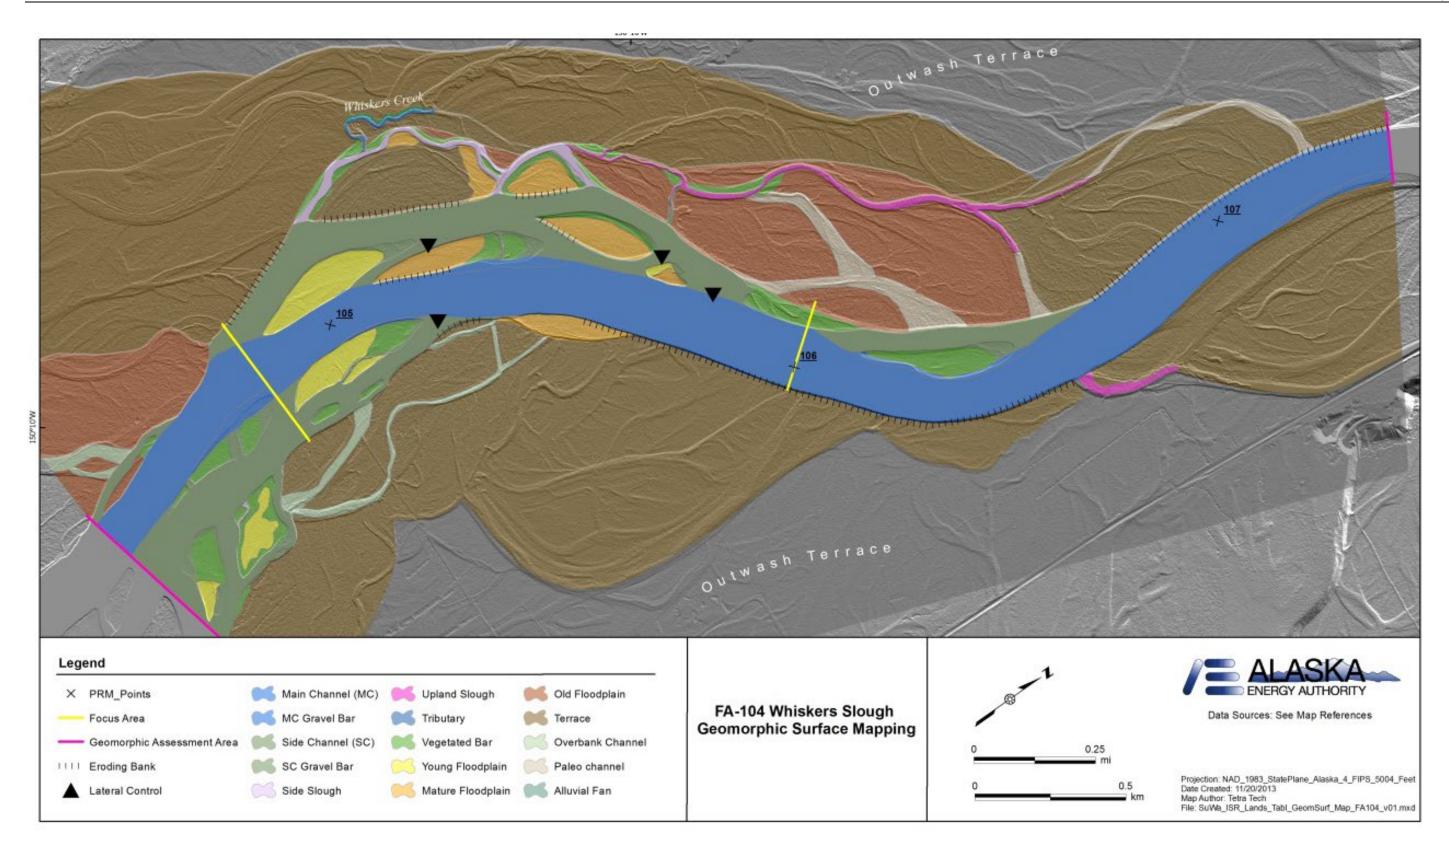


Figure 5.1-14. Geomorphic surface mapping of FA-104 Whiskers Slough.

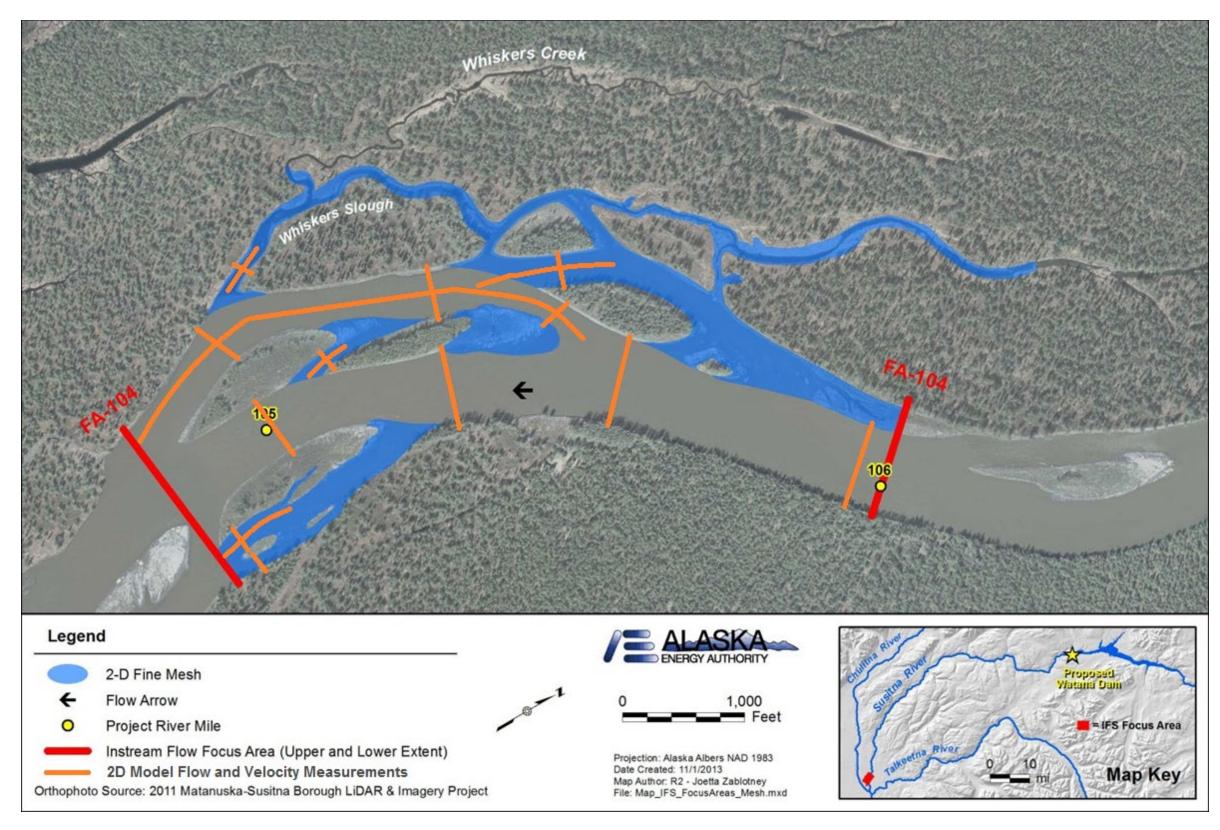


Figure 5.1-15. Example of Habitat Areas at FA-104 Selected to Have a Fine Mesh Size (6.5 feet, 2 m). The Habitat Areas Were Identified by the Aquatic Habitat Team.



Figure 5.1-16. Example of SRH-2D Mesh in Habitat Area at the Mouth of Whiskers Creek (in FA-104) Selected to Have a Fine Mesh Size (2 meters).

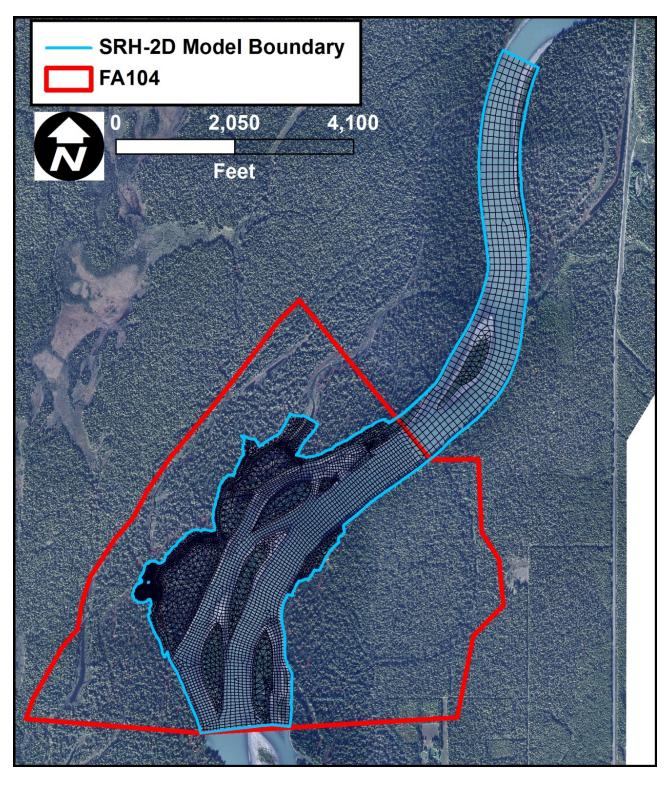


Figure 5.1-17. SRH-2D Bed Evolution Mesh. The Mesh Contains Approximately 10,000 Elements.

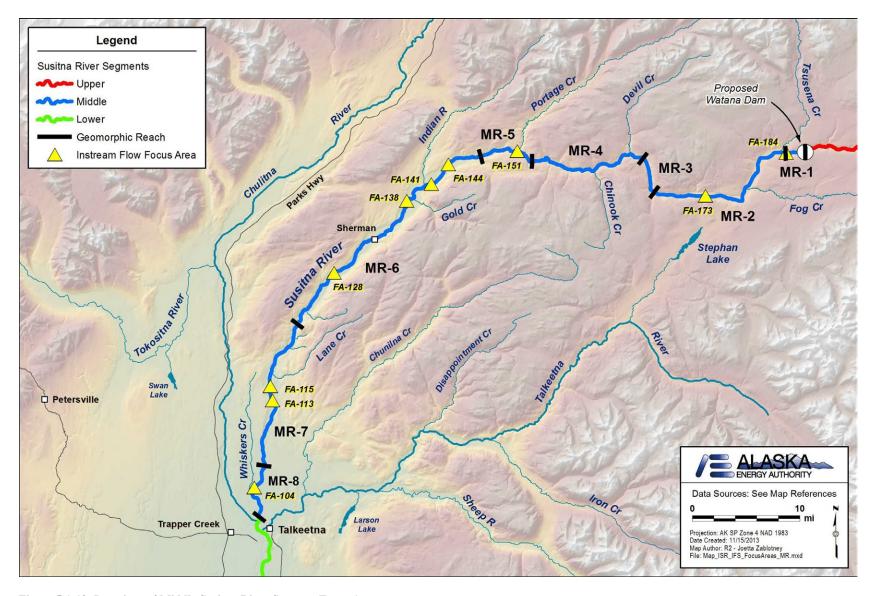


Figure 5.1-18: Locations of Middle Susitna River Segment Focus Areas.

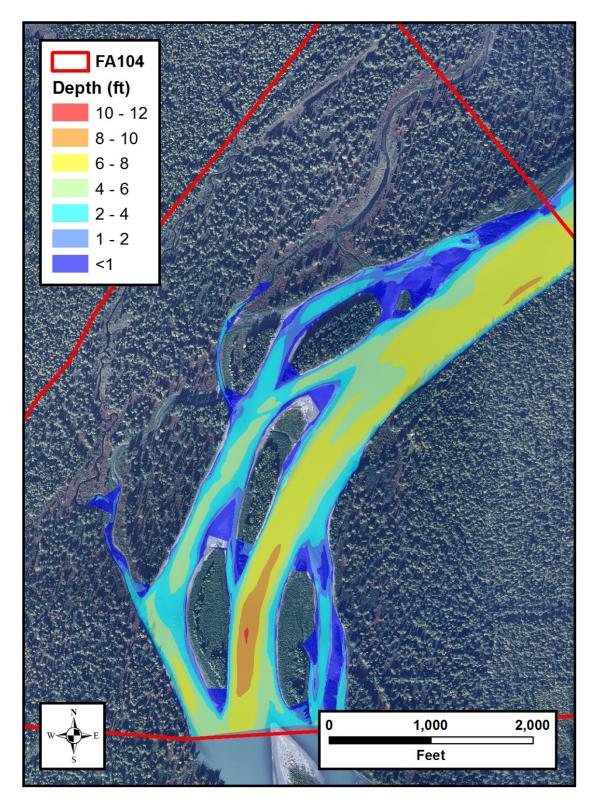


Figure 5.1-19. Predicted Depth Distribution at FA-104 for 24,000 cfs.

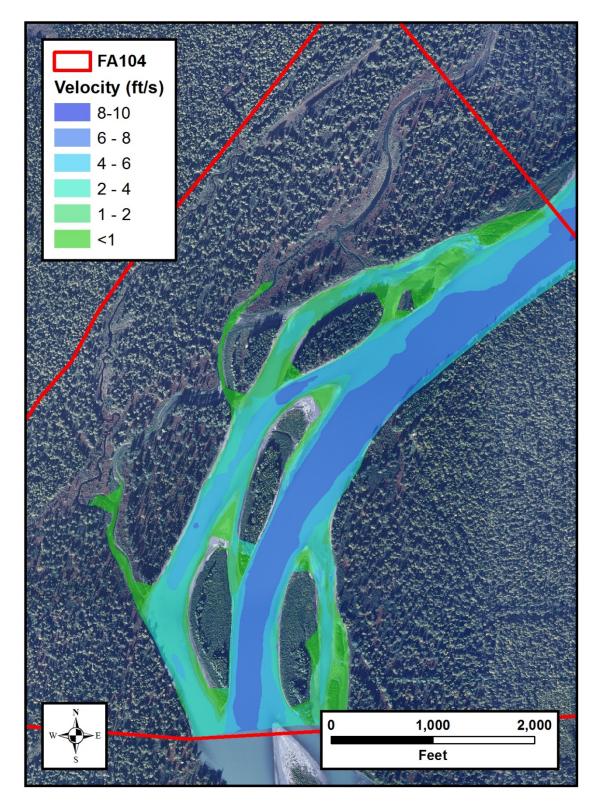


Figure 5.1-20. Predicted Velocity Distribution at FA-104 for 24,000 cfs.

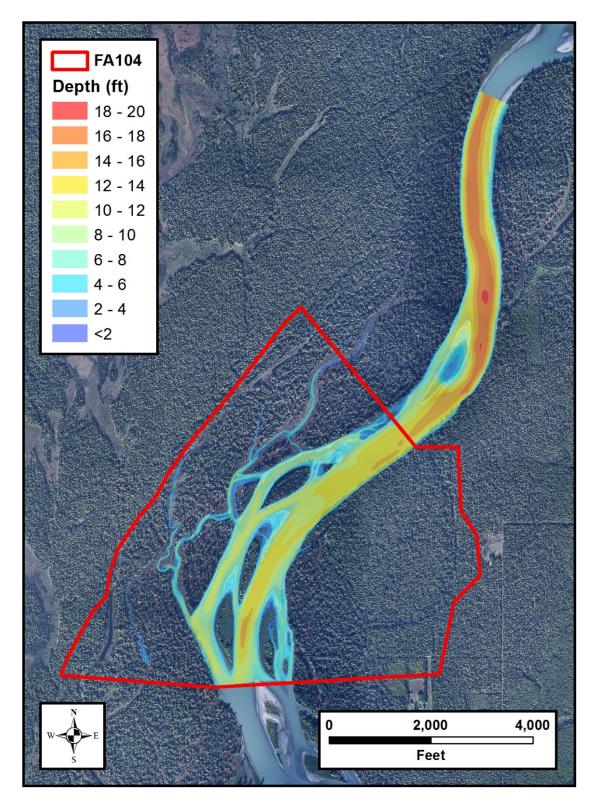


Figure 5.1-21. Predicted Depth Distribution at FA-104 for 100,000 cfs.

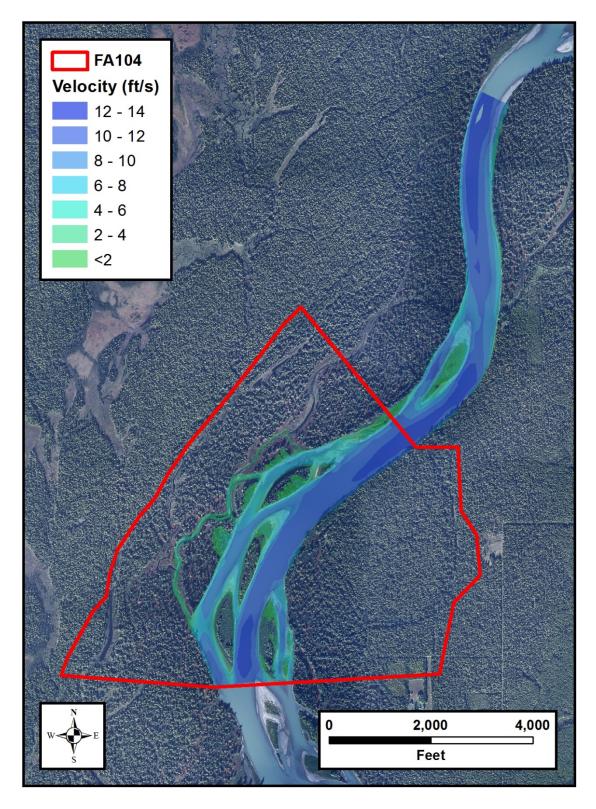


Figure 5.1-22. Predicted Velocity Distribution at FA-104 for 100,000 cfs.

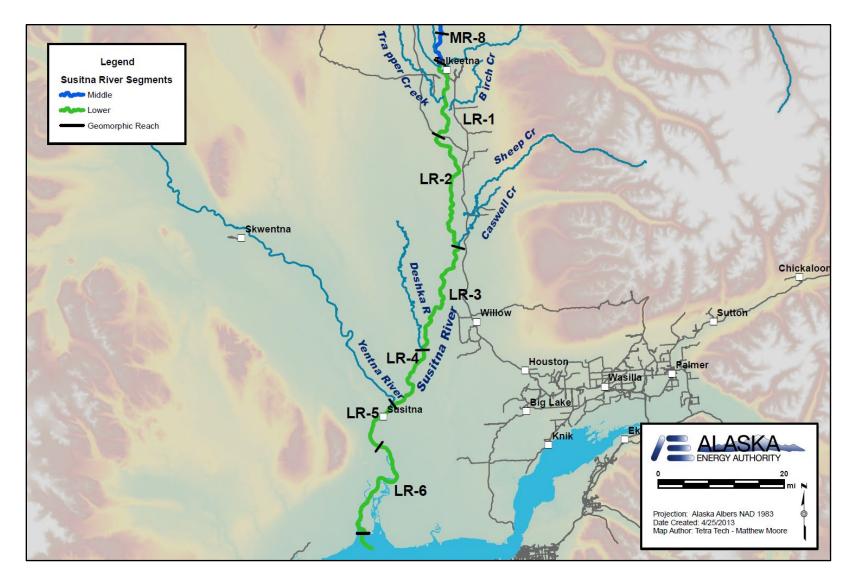


Figure 5.1-23. Lower Susitna River Segment Tributary Locations Relative to Geomorphic Reaches.

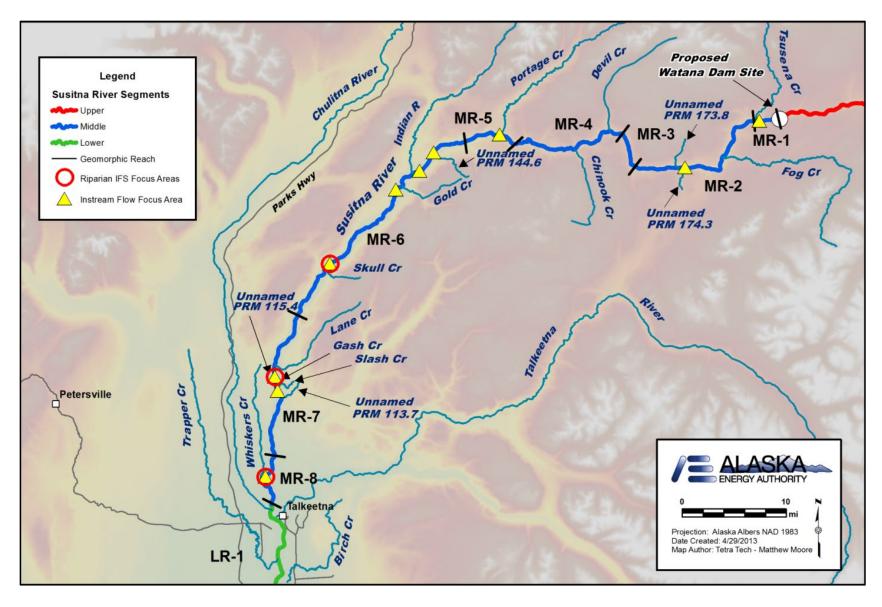


Figure 5.1-24. Middle Susitna River Segment Tributary Locations Relative to Geomorphic Reaches and Focus Areas.

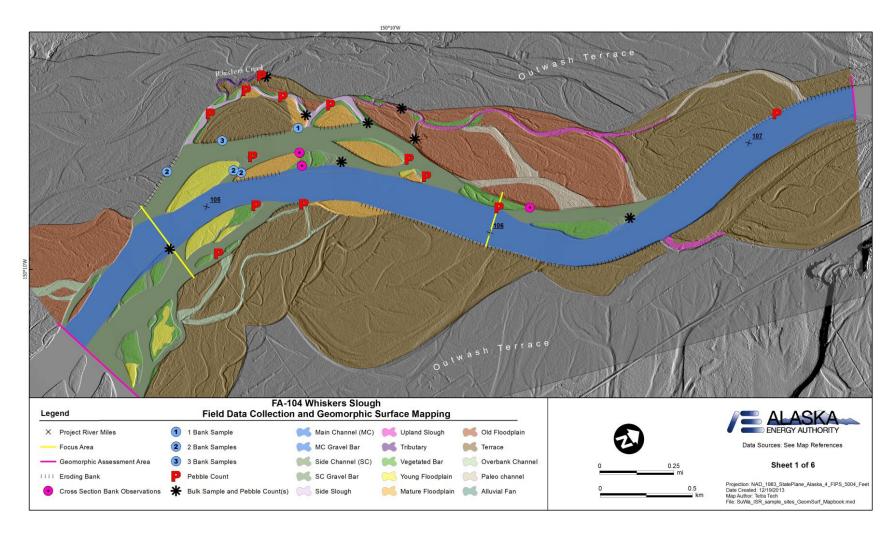


Figure 5.1-25: Sediment samples and bank observations collected at FA-104 (Whiskers Slough).

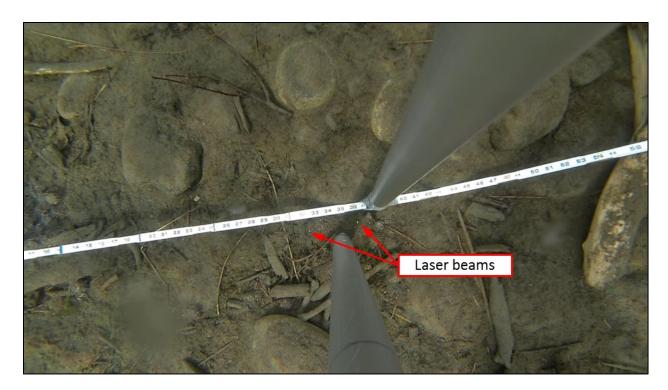


Figure 5.1-26. GoPro image from Whiskers Slough with lights, lasers, and scale in video mode.

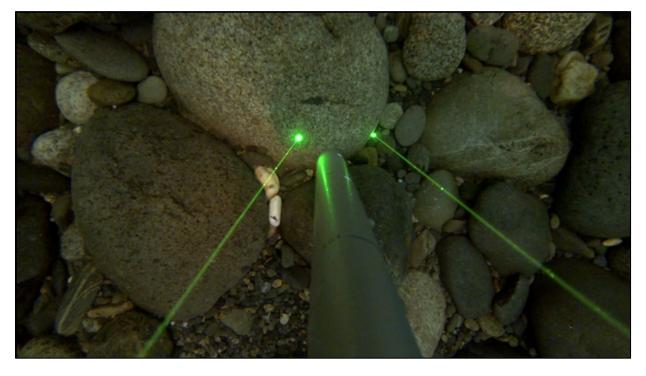


Figure 5.1-27. GoPro image from ESS40 with lasers and the Brinkman Q-Beam Starfire II underwater fishing light.

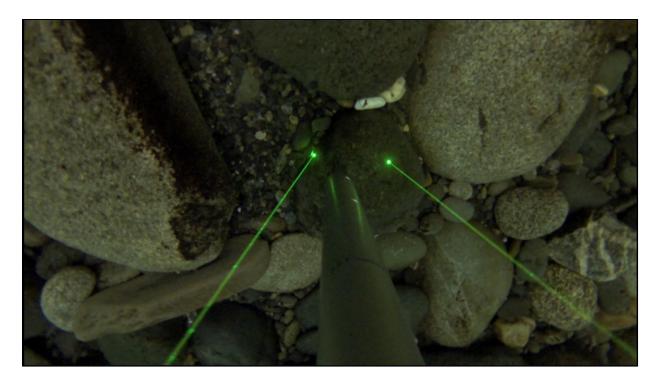


Figure 5.1-28. GoPro image from ESS40 with lasers and without lights

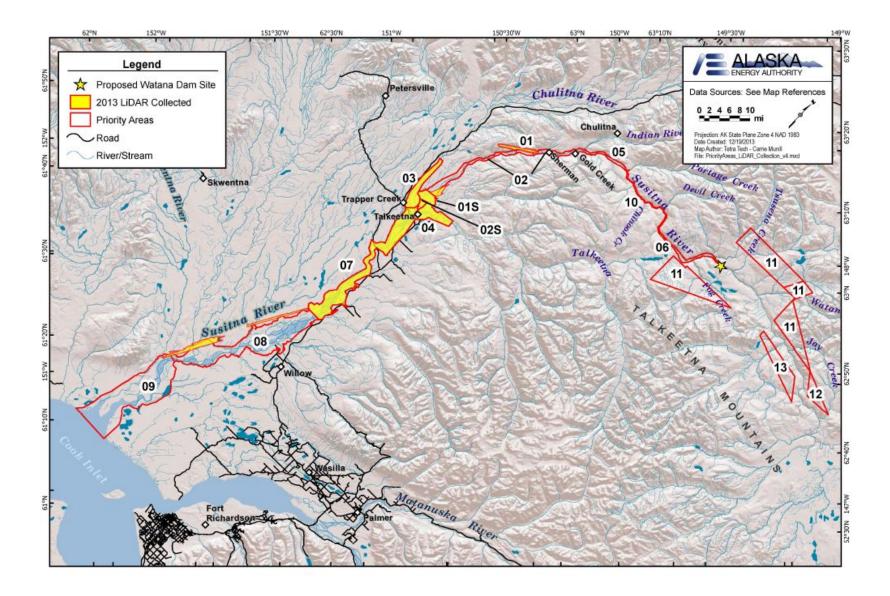


Figure 5.1-29. 2013 LiDAR priority areas and collection.

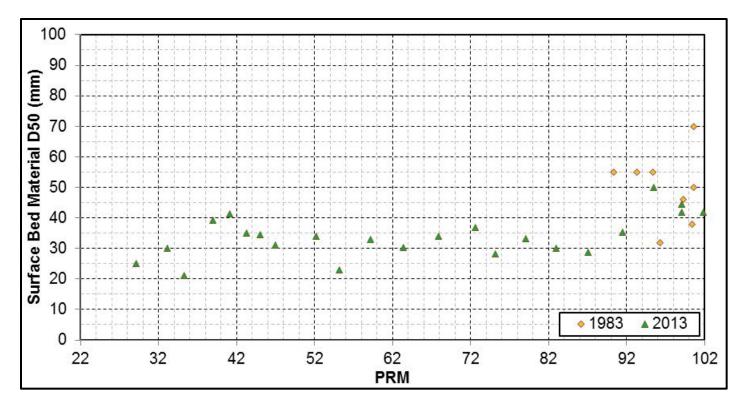


Figure 6.1-1. Lower Susitna River Segment Bed Material Comparison.

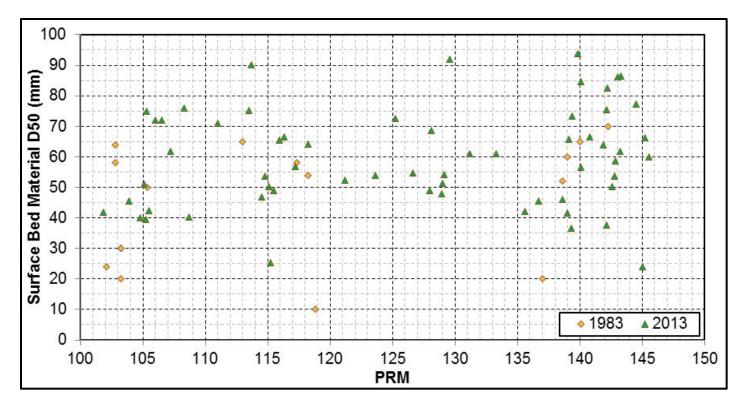


Figure 6.1-2. Middle Susitna River Segment Bed Material Comparison.

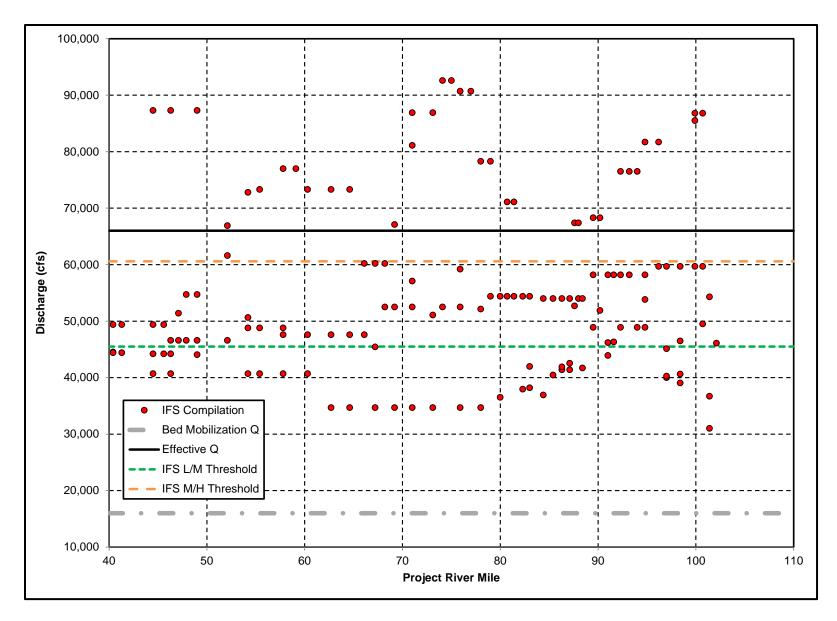


Figure 6.1-3. Lower Susitna River Segment Screening of Coupled WSE and Flow Measurements.

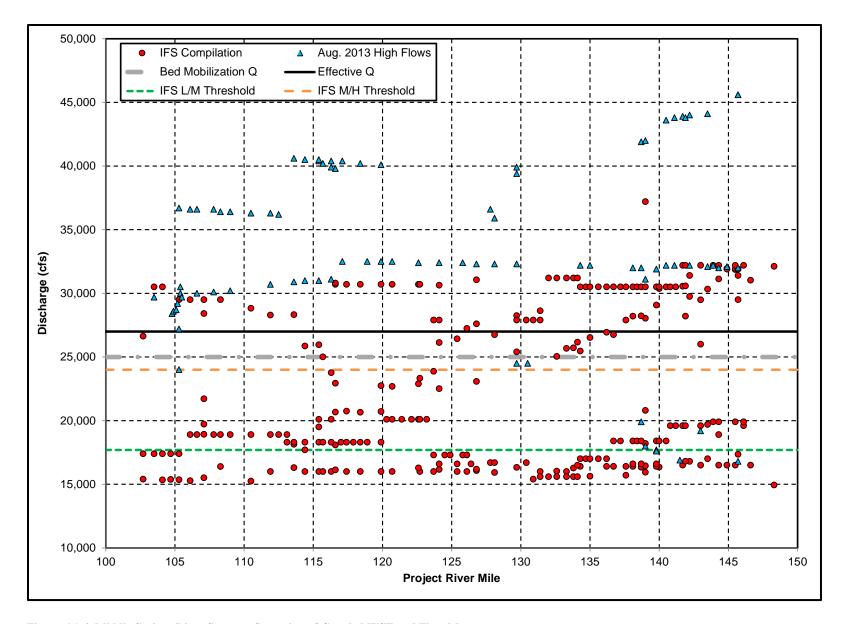


Figure 6.1-4. Middle Susitna River Segment Screening of Coupled WSE and Flow Measurements.

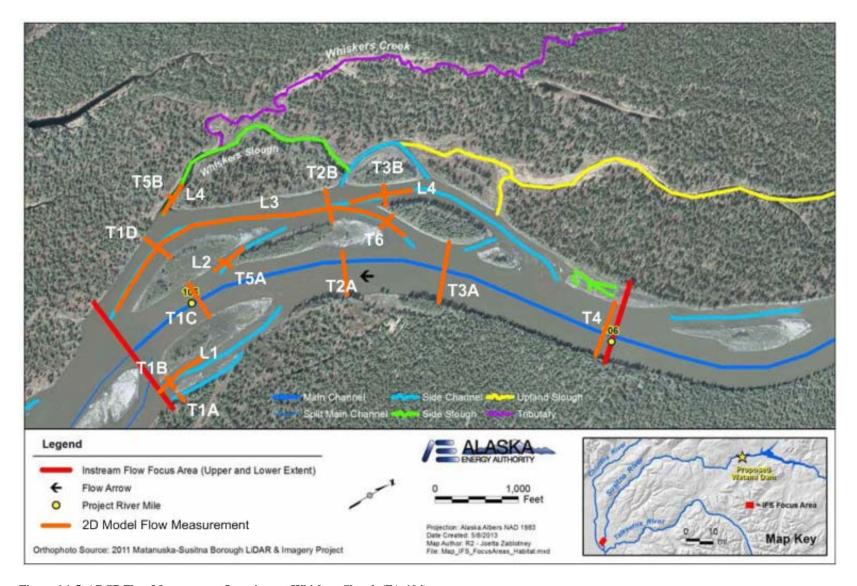


Figure 6.1-5. ADCP Flow Measurement Locations at Whiskers Slough (FA-104).